

Solid Wood Floor Lamp Instructions

Receiver parameters :

Input voltage: DC12-DC24V

Maximum current: 4Ax2

Maximum output power: 96W (12V) / 192W (24V)

Operating temperature: -20°C-60°C

Working voltage: 3V (two AAA batteries)

Operating frequency : 433.92MHz

Remote control distance: 30 meters in open space

Operating temperature: -20°C-60°C

Dimensions: L110xW53xH22 (mm)


Remote control parameters

1、Lighting assembly

1.1 First, insert the screws and washers into the holes of the base, align them with the holes at the bottom of the lamp, and tighten the screws.

1.2 Connect the power adapter to the foot switch and you can use it after powering on.

2、Remote Control Instructions

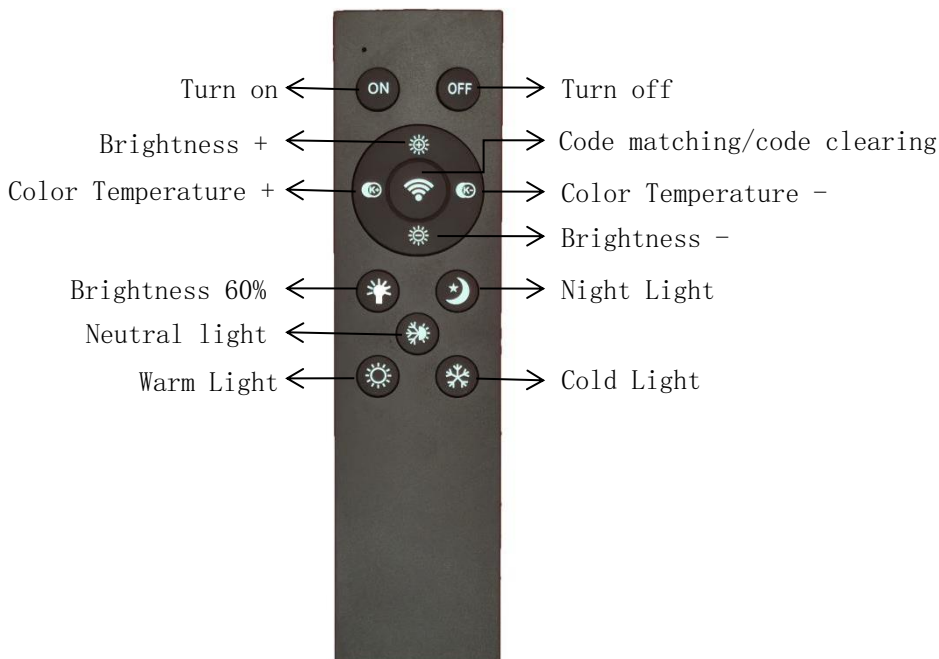

Instructions :

Power on: short press to turn on the light ;

Power off: short press to turn off the light ;

Brightness plus: short press or long press to increase the brightness, 10 levels of brightness ;

Brightness reduction : Short press or long press to lower the brightness, 10 levels of brightness;

Color temperature plus : short press or long press to increase the color temperature,

the highest color temperature is cold light, and the color temperature is 20 levels ;

Color temperature minus : short press or long press to reduce the color temperature, the lowest color temperature is warm light, color temperature 20 levels ;

Code pairing/clear code : within 5 seconds after power on, short press the code pairing button, it will flash 3 times for code pairing and 5 times for code clearing ;

Lighting mode : switch to neutral light with the button, default brightness is 60%;

Night light : Press the button to cycle through cold, warm and neutral light, the default brightness is 30%;

Warm light : warm light 100% brightness ;

Cold light: cold light 100% brightness;

3、Foot switch instructions

3.1 The foot switch is responsible for the on and off of the circuit. It has a control circuit and a receiver inside and can be used in conjunction with the remote control. If the light does not turn on when you press the remote control, you need to step on the foot switch to turn it on.

3.2 Press the foot switch slowly and continuously to switch the color temperature

3.3 This floor lamp has a memory function. After turning off the light, if the off time is greater than 10 seconds, the color temperature and brightness will be restored to the original state when the light is turned on next time.

3.4 The foot switch is not waterproof. Do not use it on wet surfaces or leave it in a humid environment for a long time.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction