


Swim Jet Remote

User Manual

1. How to Use the Remote	1
1.1 Power On	1
1.1.1 Operating Steps	1
1.1.2 Remote Placement	1
1.1.3 Bluetooth Connection Error Handling	1
1.1.4 Transmission Range Description	2
1.1.5 Water ingress treatment	2
1.2 Power Off	2
1.2.1 Operating Steps	2
1.3 Power Management	2
1.4 Storage Requirements	3
1.5 Bluetooth Re-Pairing	3
1.6 Product Specifications	3

1. How to Use the Remote

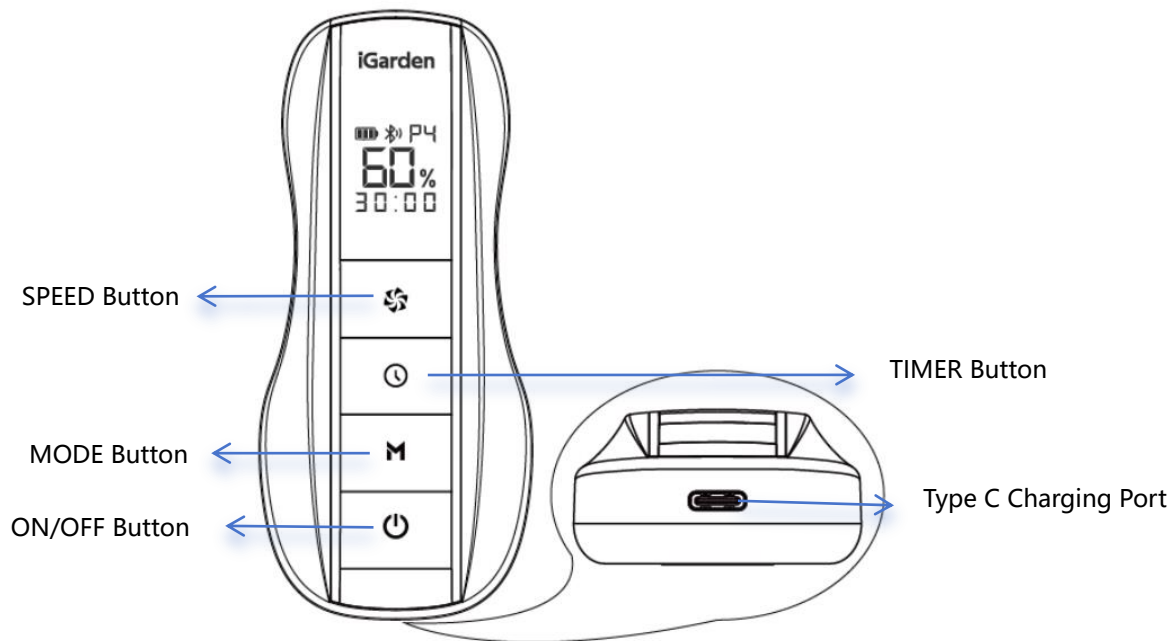

1.1 Power On

1.1.1 Operating Steps

- In the powered-off state, press and hold the Power On/Off button  for 2 seconds. The remote screen will light up and display .
- After successful Bluetooth pairing, the screen will synchronize and display real-time information from the controller (e.g., current flow rate intensity, operating time, current mode, Bluetooth connection status).

1.1.2 Remote Placement

- The remote can be magnetically attached to the right side of the controller and the wire upper cover. Both locations have dedicated magnetic attachment points and are marked with stickers for easy identification and placement.

1.1.3 Bluetooth Connection Error Handling

- If the Bluetooth connection fails, the screen will freeze on the current interface, and the Bluetooth icon will flash rapidly, indicating that the device cannot be controlled. At this time, move closer to the controller (signal source) to allow automatic Bluetooth reconnection. Once connected, the interface of controller information will be displayed synchronously.
- When powered on, the button of remote operations function the same as the controller, and their information remains synchronized in real time.

1.1.4 Transmission Range Description

- The effective Bluetooth transmission range between the remote and the controller is 20 meters(≤ 20 meters) (in an ideal unobstructed environment-there is no obstruction between the remote and the controller). Actual range may be reduced due to obstacles or signal interference. It is recommended to keep the devices within line of sight during use.

1.1.5 Water ingress treatment

- Water ingress treatment: If the remote falls into the swimming pool, take it out as soon as possible and follow the steps below to handle it.

1. Shake off water: Gently shake the remote (opening facing downward) to remove water from ports/gaps.

2. Wipe the surface: Use a dry cloth to absorb moisture from the casing, charging port, etc.

Note: Do not turn on or charge the device if there is any residual moisture, and do not use high temperature drying.

1.2 Power Off

1.2.1 Operating Steps

- Press and hold the Power On/Off button  for 2 seconds until the screen turns off.
- If the controller is on, turning off the remote will also trigger the controller to shut down.

1.3 Power Management

The power status display bar has 3 battery grids. Please charge in time when the power is low (only one grid left).

a. Charging method: Please use the Type-C charging cable for charging. Plug one end of the charging cable into the charging port of the remote (the bottom directly below the remote) and the other end into the power adapter. Make sure the charging cable is firmly connected.

b. Charging process: During the charging process, the power status display bar will show the charging progress. When the battery is fully charged, the charging indicator will show the full power grid.

c. Charging temperature: Do not charge in high or low temperature environments. The charging environment temperature range is: 0~45°C.

d. Continuous charging time: The battery cannot be charged continuously for more than 24 hours.

1.4 Storage Requirements

To ensure the performance and life of the remote, please store it within the following temperature range:

- Short-term storage (within 1 month): -20°C to 45°C.
- Medium-term storage (within 3 months): -20°C to 35°C.
- Long-term storage (within 1 year): -20°C to 25°C.

Note: If the remote is stored for more than 3 months in the factory state, it is recommended to charge it once, and the charging capacity can be maintained at 75% (2 grids) to keep the battery healthy.

1.5 Bluetooth Re-Pairing

If you replace the remote or controller, you must re-pair them according to the following instructions:

- Before replacing the new remote, make sure that the old remote is not within the effective signal range, or clear the pairing information of the old remote.
- Clearing the pairing information of the old remote: With the controller turned off, press and hold the MODE button  + TIMER button  simultaneously for 2 seconds to clear the pairing information of the remote.

Pairing steps:

- a. After powering on the supply unit, press and hold the MODE button  + TIMER button  for 2 seconds to enter Bluetooth pairing mode.
 - b. Ensure the remote is within the transmission range (20m).
 - c. On the remote, press and hold the MODE button  + TIMER button  for 2 seconds to enter pairing mode.
- During pairing, the Bluetooth icon flashes slowly. Once paired, the icon stays lit. If pairing fails within 1 minute, the icon flashes rapidly again.
- If pairing is not completed within 1 minute, the Bluetooth icon will return to the rapid flashing state.

1.6 Product Specifications

- Communication method: Bluetooth BLE
- Battery type: lithium battery
- Charging interface: Type-C
- Operating temperature: -20-60 °C
- Storage temperature: -20-60 °C

FCC Warning:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.