


We Care About Your Experience

Thank you for choosing our product! Your feedback and satisfaction mean a lot to us.

If you have any questions, suggestions, or need support, please feel free to contact us at our official support email:

smartliving.global101@gmail.com


We promise to respond promptly and provide you with friendly and helpful service. Your satisfaction is our top priority.

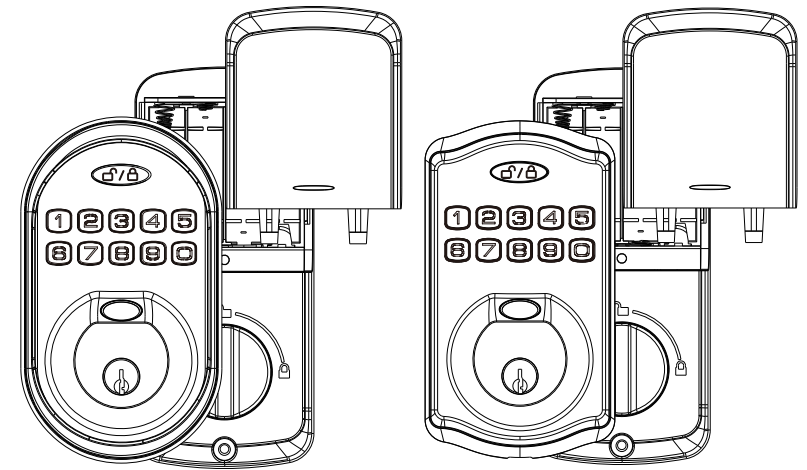



Reference image
please refer to the actual product


Installation Overview

⚠ Read this manual carefully before installing and operating!

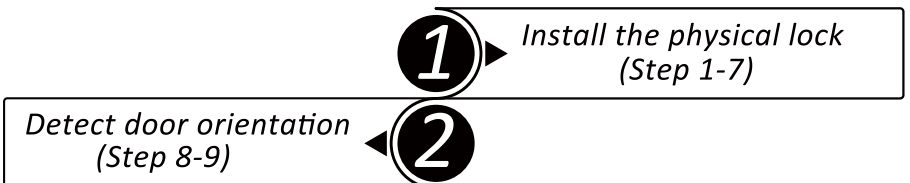

Contents

Latch A 	Strike B 	Exterior Assembly C 	Mounting Plate D 	Interior Assembly E 
Battery Cover F 	Interior Assembly Screws G x 2  J x 1 	Latch & Strike Screws H x 4 	Mounting Plate Screws I x 2 	Backup Key K x 2 


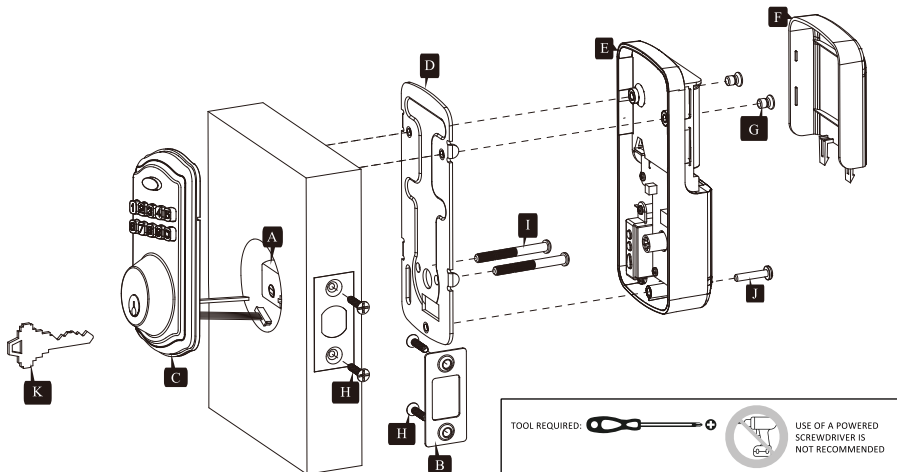


Installation

STEP

1


Prepare the door and check dimensions

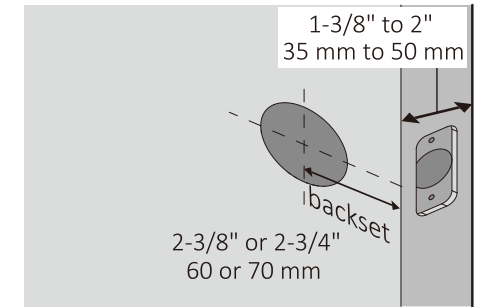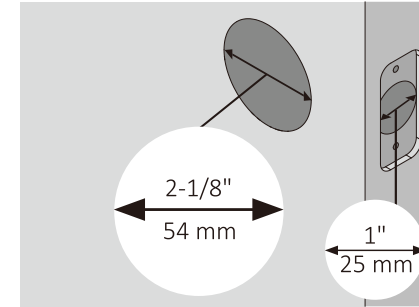

STEP

2


Determine backset and adjust the latch

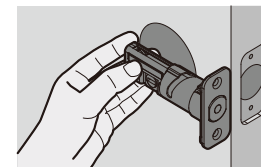

Hold the latch in front of the door hole, with the latch face flush against the door edge.


Is the slotted hole centered?

YES

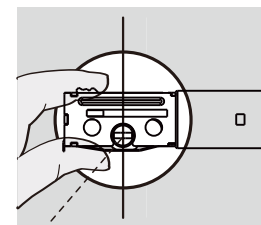


Slotted hole is centered.
No adjustment is required.
Proceed to next step.

NO

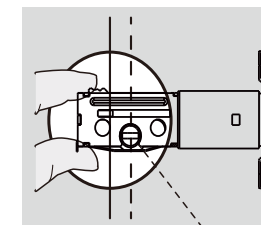


Slotted hole is NOT centered.


Rotate and pull the latch as shown to extend latch.

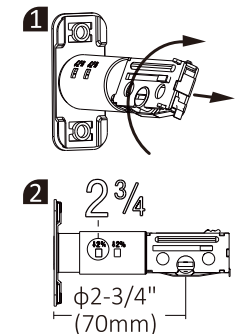


STEP 3 Install the latch

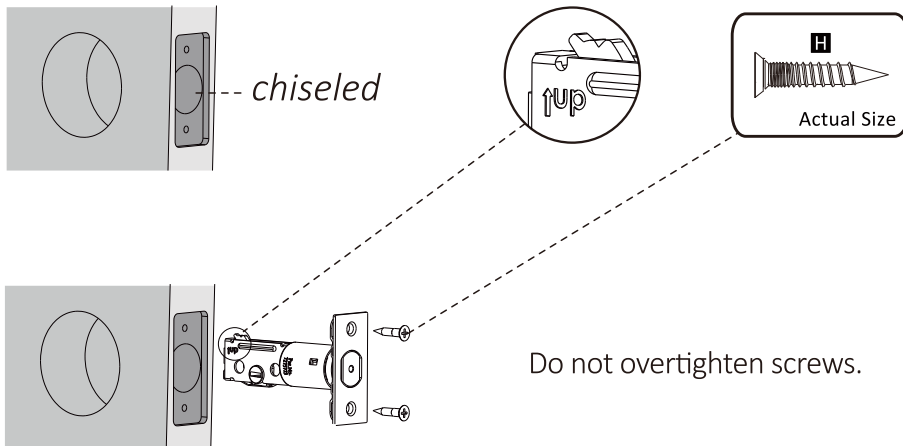

STEP 4 Install strike and test alignment

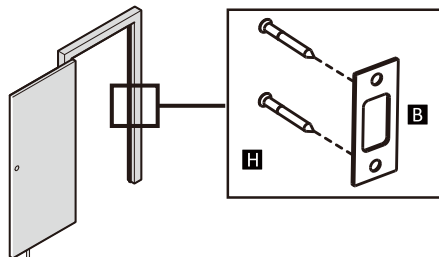

IMPORTANT: Make sure the hole in the door frame is drilled at a minimum of 1" (25 mm) deep.

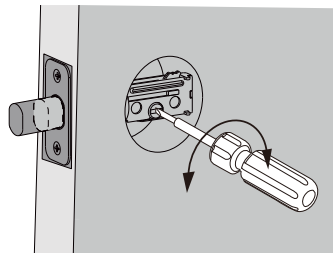


1. With the door closed, use a flat-head screwdriver to test if deadbolt works smoothly.

2. Check alignment between the latch and the strike, making sure when the deadbolt is extended, it is going into the bolt hole and not hitting the deadbolt strike or door frame.

STEP 5A Install exterior assembly




IMPORTANT: Do not insert the physical key until lock is completely installed.

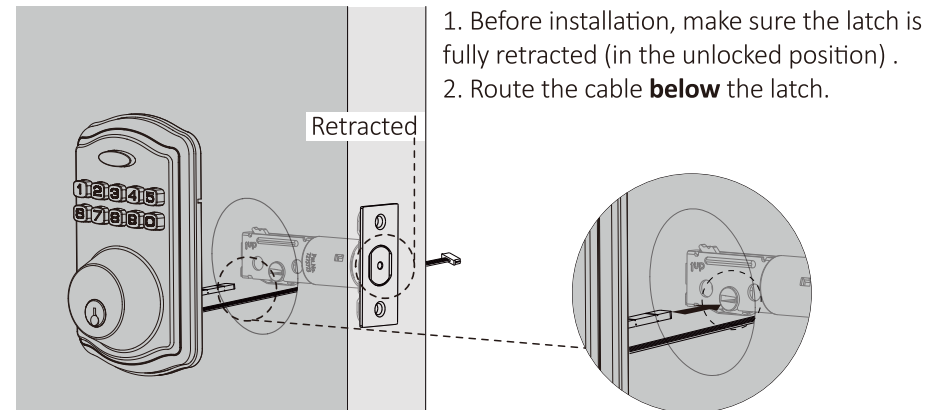


1. Before installation, make sure the latch is fully retracted (in the unlocked position).
2. Route the cable **below** the latch.

STEP 5B

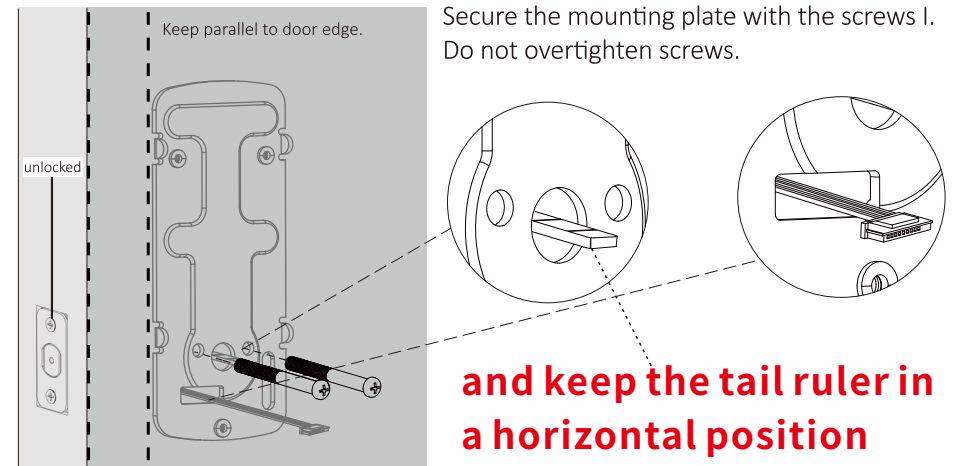


and keep the tail ruler in a horizontal position

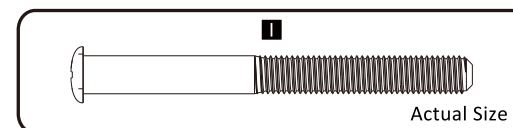


STEP 6 Remove battery cover

! IMPORTANT: Do not load batteries until lock is completely installed.

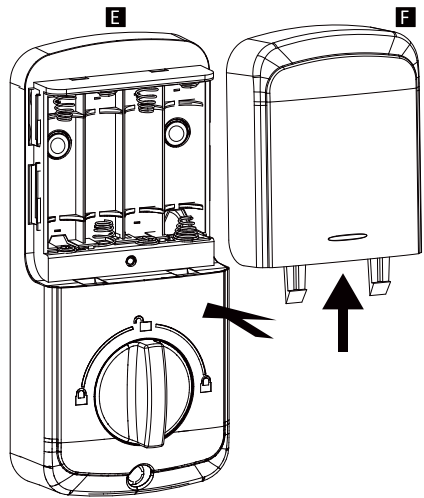


Press the battery cover and pull the cover up.

STEP 7A Install interior assembly



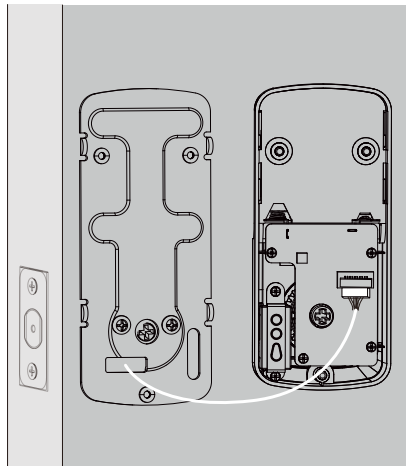


STEP 7B

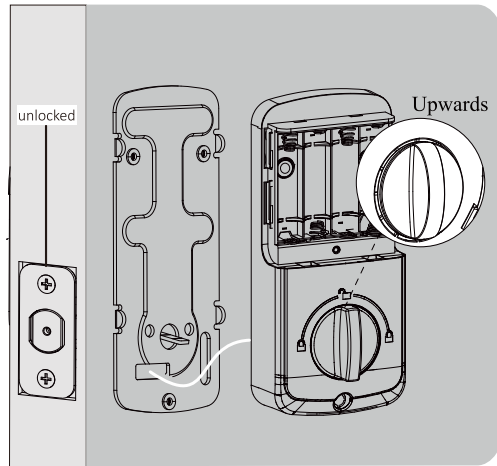

STEP 7C

Attach Interior Assembly to Mounting Plate and tighten 3 screws.

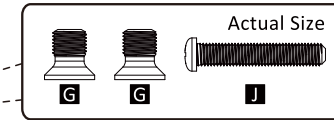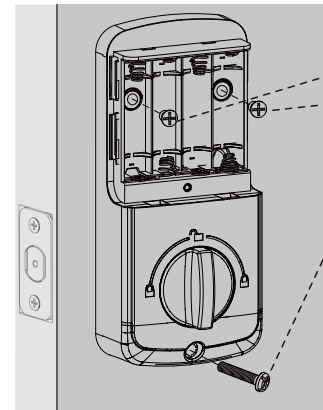


! IMPORTANT: Test the thumbturn for smooth rotation. If thumbturn doesn't rotate, repeat step 7B, making sure the thumbturn is in vertical position.

Please ensure that the knob is in a vertical position

STEP 8A Handing of Door

! IMPORTANT: Always run this step after installation. The motor will not operate before completing the step.

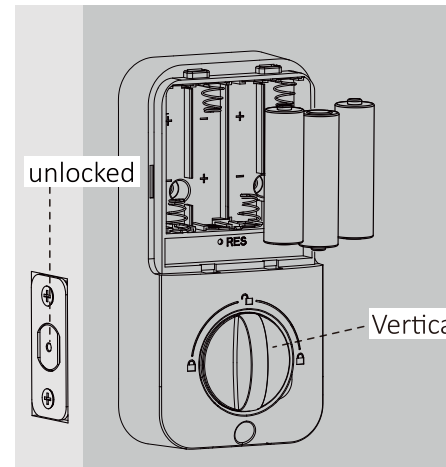

Perform a **factory reset** to detect the door orientation.

While the door is **OPENED** and **UNLOCKED** (latch retracted), load **3 AA** batteries into the battery compartment.

NOTE:

For best results, use new, non-rechargeable Alkaline batteries only. Do not mix old and new batteries.