

TEST REPORT

Application No.: KSCR2511002555AT
FCC ID: 2BRRE-DNVSM1
Applicant: Infitac LLC
Address of Applicant: 190 E Stacy Rd, Ste 306358, Allen, TX 75002
Manufacturer: Infitac LLC
Address of Manufacturer: 190 E Stacy Rd, Ste 306358, Allen, TX 75002
Factory: Infitac LLC
Address of Factory: 190 E Stacy Rd, Ste 306358, Allen, TX 75002
Equipment Under Test (EUT):
EUT Name: Digital Monocular
Model No.: DNVS-14 Pro
Trade Mark: INFITAC
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2025-11-21
Date of Test: 2025-12-20 to 2025-12-30
Date of Issue: 2025-12-30

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2025-12-30	/

Authorized for issue by:			
Tested By			
		Eric Liu /Project Engineer	
Approved By			
		Terry Hou /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	Test Lab
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass	A

Radio Spectrum Matter Part					
Item	Standard	Method	Requirement	Result	Test Lab
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass	B
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Conducted Peak Output Power		ANSI C63.10 (2020) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass	A
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass	A
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass	A
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass	A

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Power level setting using in test.....	5
4.4 Measurement Uncertainty	6
4.5 Test Location	7
4.6 Test Facility	8
4.7 Deviation from Standards.....	8
4.8 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	12
6.1 Antenna Requirement	12
7 Radio Spectrum Matter Test Results	13
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	13
7.2 Radiated Emissions which fall in the restricted bands	17
7.3 Radiated Spurious Emissions Below 1GHz	44
7.4 Radiated Spurious Emissions Above 1GHz.....	48
7.5 Conducted Peak Output Power.....	68
7.6 Minimum 6dB Bandwidth.....	70
7.7 Power Spectrum Density	71
7.8 Conducted Band Edges Measurement	72
7.9 Conducted Spurious Emissions	74
8 Test Setup Photo	76
9 EUT Constructional Details (EUT Photos).....	76
10 Appendix.....	77

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 5V by adapter Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz;802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (DBPSK, DQPSK, CCK); 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Number of Channels:	802.11b/g/n(HT20):11;802.11n(HT40):7
Channel Spacing:	5MHz
Antenna Type:	FPC Antenna
Antenna Gain:	2.9dBi (Provided by the manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

4.3 Power level setting using in test

Channel	802.11b	802.11g	802.11n(HT20)
	Ant 1	Ant 1	Ant 1
1	32	44	44
6	32	43	43
11	32	42	42
Channel	802.11n(HT40)		
	Ant 1		
3	44		
6	43		
9	42		

4.4 Measurement Uncertainty

Test Lab: A

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test Lab: B

No.	Item	Measurement Uncertainty
1	Conduction Emission	$\pm 2.90\text{dB}$ (150kHz to 30MHz)
2	Radiated Emission	$\pm 3.13\text{dB}$ (9k -30MHz) $\pm 4.8\text{dB}$ (30M -1GHz) $\pm 4.8\text{dB}$ (1GHz to 18GHz) $\pm 4.80\text{dB}$ (Above 18GHz)

4.5 Test Location

All tests were performed at:

Test Lab: A

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

Test Lab: B

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

Test Lab: A

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 2541.01.)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

- **VCCI (Member No:1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

Test Lab: B

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Test Lab: A

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	07/09/2025	07/08/2026
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	07/09/2025	07/08/2026
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2025	01/14/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	02/19/2025	02/18/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	07/09/2025	07/08/2026
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	07/08/2025	07/07/2026
7	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	07/09/2025	07/08/2026
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	02/19/2025	02/18/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	07/08/2025	07/07/2026
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2025	01/14/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/14/2025	01/13/2026
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	07/15/2025	07/14/2026
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	02/26/2025	02/25/2026
15	Software	BST	TST-PASS	/	NCR	NCR

Test Lab: B

9*6*6 Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2025	11/20/2026
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	9/10/2025	9/9/2027

Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/15/2025	1/14/2026
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/15/2025	1/14/2026
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	8/25/2025	8/24/2026
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR
		V4.0.0.0			
Measurement Software	Tonscend	JS32-RSE	SUWI-02-09-06	NCR	NCR
		4.0.0.1			
Router	PLANET	FSD-803	SUWI-03-14-01	NCR	NCR
Open Switch and Control Unit	ROHDE&SCHWARZ	OSP220	SUWI-03-15-01	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX60	SUWI-03-16-01	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE60	SUWI-03-16-02	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE90	SUWI-03-16-03	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX90	SUWI-03-17-01	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE140	SUWI-03-19-01	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX140	SUWI-03-19-02	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE220	SUWI-03-19-04	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX220	SUWI-03-17-02	NCR	NCR
Receive Unit	ROHDE&SCHWARZ	TC-RSE325	SUWI-03-16-04	NCR	NCR
Multiplier Unit	ROHDE&SCHWARZ	TC-MX325	SUWI-03-17-03	NCR	NCR
Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	2/1/2025	1/31/2026
Measurement Software	ROHDE&SCHWARZ	ELEKTRA V4.20.1	SUWI-02-09-07	NCR	NCR

Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/19/2025	11/18/2026
------------------------------	-----------	---------	---------------	------------	------------

Conduction Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	8/25/2025	8/24/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2/13/2025	2/12/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	5/8/2025	5/7/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	5/8/2025	5/7/2026
Measurement Software	Tonscend	JS32-CE	SUWI-02-09-05	NCR	NCR
		4.0.0.2			
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/21/2025	11/20/2026

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.9dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

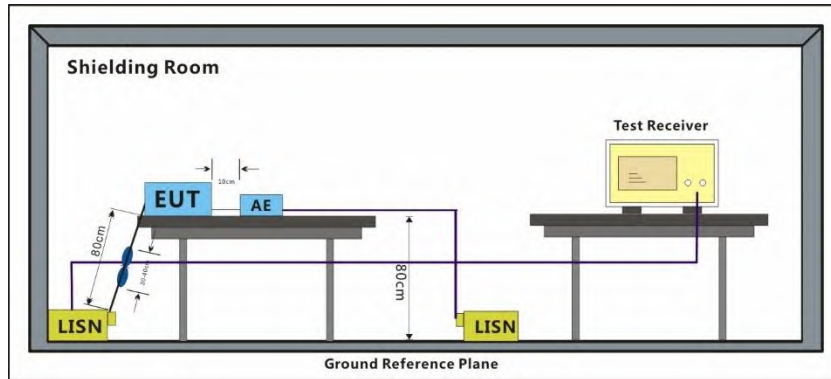

7.1.4 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor



Test Mode: 00

L1

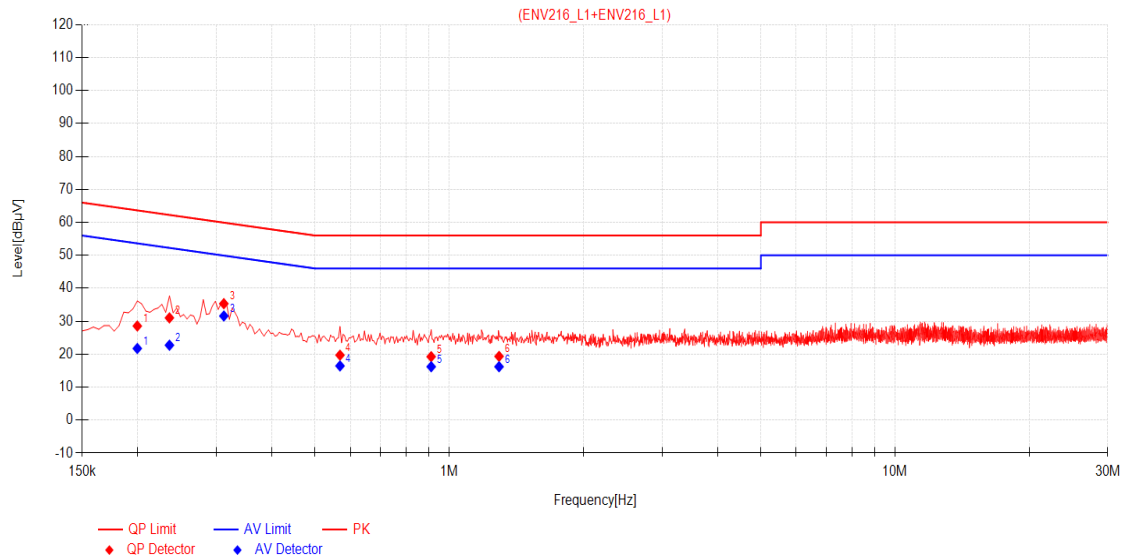


Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1995	9.96	18.60	28.56	63.63	35.07	11.78	21.74	53.63	31.89	PASS
2	0.2355	9.97	21.05	31.02	62.25	31.23	12.76	22.73	52.25	29.52	PASS
3	0.3120	9.97	25.36	35.33	59.92	24.59	21.63	31.60	49.92	18.32	PASS
4	0.5685	9.93	9.79	19.72	56.00	36.28	6.52	16.45	46.00	29.55	PASS
5	0.9105	9.93	9.33	19.26	56.00	36.74	6.28	16.21	46.00	29.79	PASS
6	1.2930	9.93	9.41	19.34	56.00	36.66	6.28	16.21	46.00	29.79	PASS



N

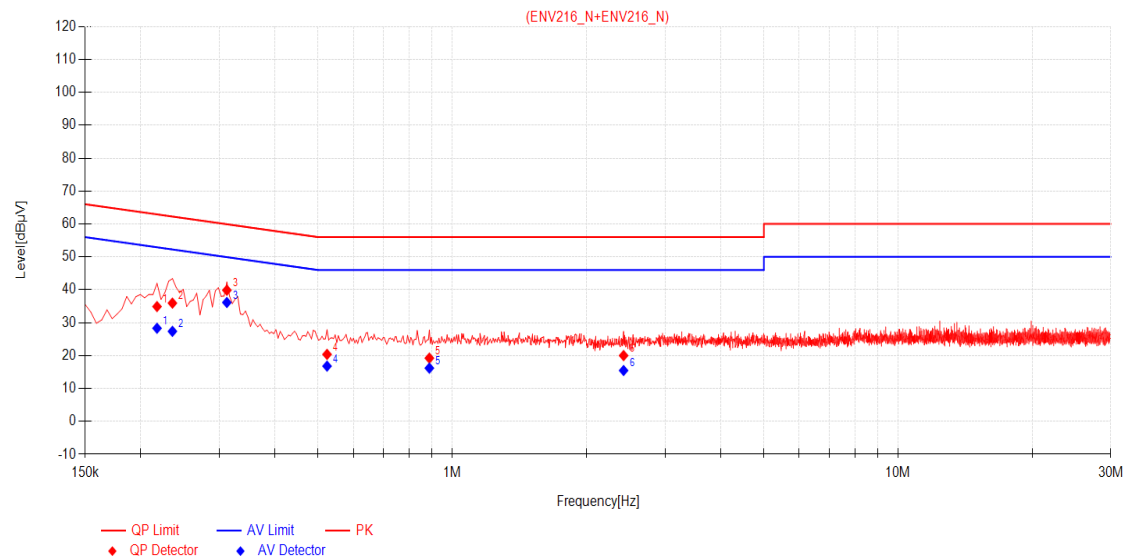

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2175	9.97	24.93	34.90	62.91	28.01	18.34	28.31	52.91	24.60	PASS
2	0.2355	9.98	25.96	35.94	62.25	26.31	17.38	27.36	52.25	24.89	PASS
3	0.3120	9.97	29.89	39.86	59.92	20.06	26.16	36.13	49.92	13.79	PASS
4	0.5235	9.91	10.45	20.36	56.00	35.64	6.88	16.79	46.00	29.21	PASS
5	0.8880	9.90	9.33	19.23	56.00	36.77	6.29	16.19	46.00	29.81	PASS
6	2.4225	10.13	9.87	20.00	56.00	36.00	5.33	15.46	46.00	30.54	PASS

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

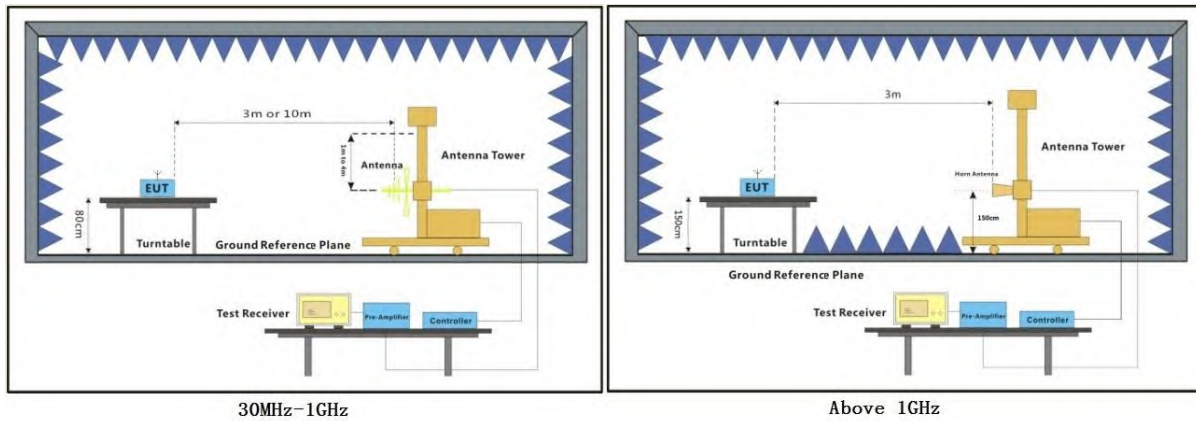

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11b_TX_CH_01_Horizontal_Peak

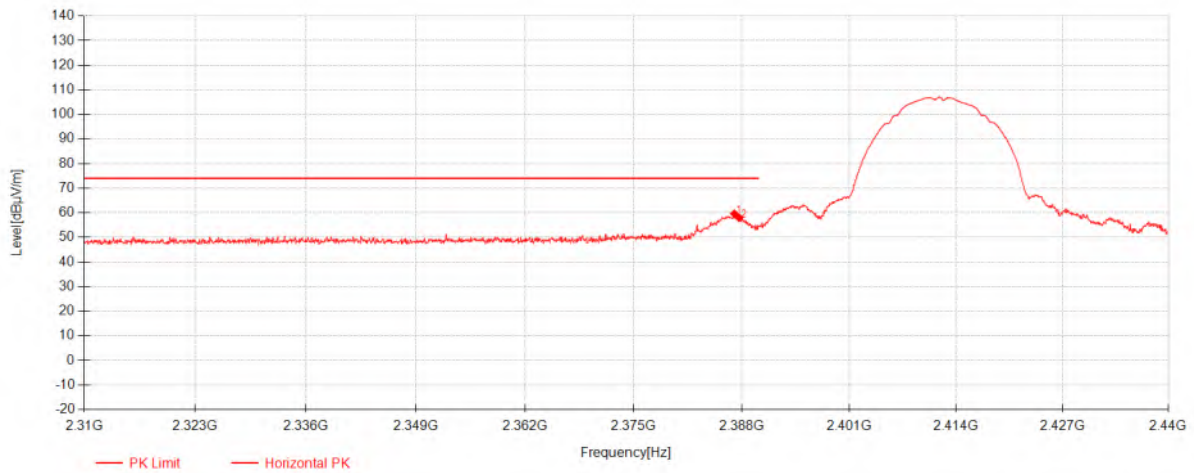


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.1333	56.13	27.00	-23.51	59.61	74.00	14.39	Horizontal
2	2387.6967	54.49	27.00	-23.51	57.97	74.00	16.03	Horizontal

11b_TX_CH_01_Horizontal_Average

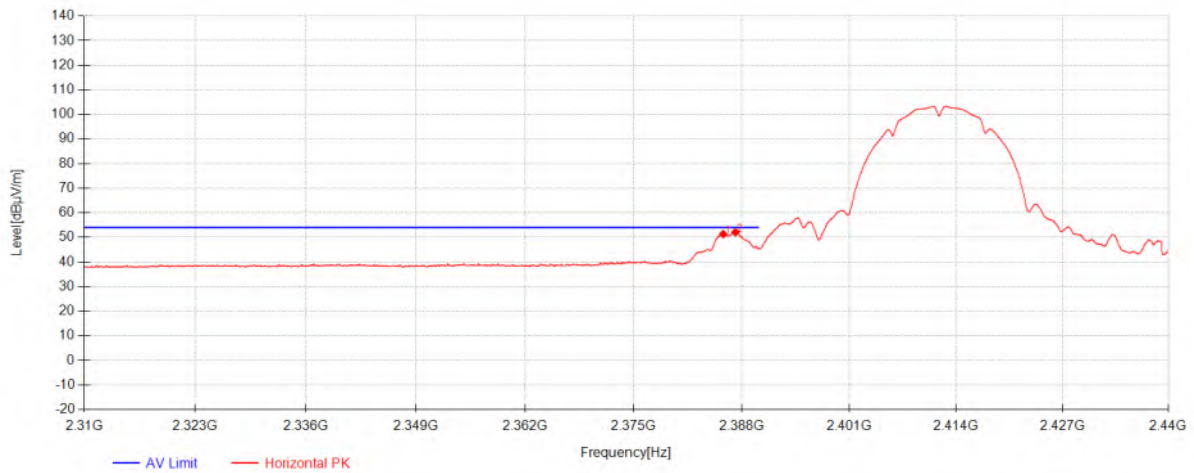


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.79	47.82	26.99	-23.51	51.30	54.00	2.70	Horizontal
2	2387.2525	48.56	27.00	-23.51	52.04	54.00	1.96	Horizontal

11b_TX_CH_01_Vertical_Peak

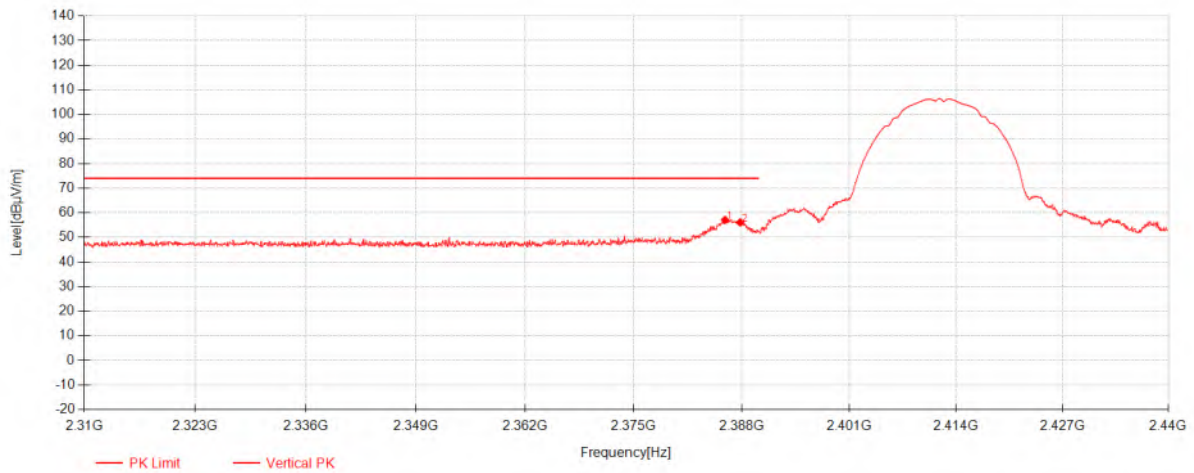


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.0067	53.60	26.99	-23.51	57.08	74.00	16.92	Vertical
2	2387.8267	52.61	27.00	-23.51	56.09	74.00	17.91	Vertical

11b_TX_CH_01_Vertical_Average

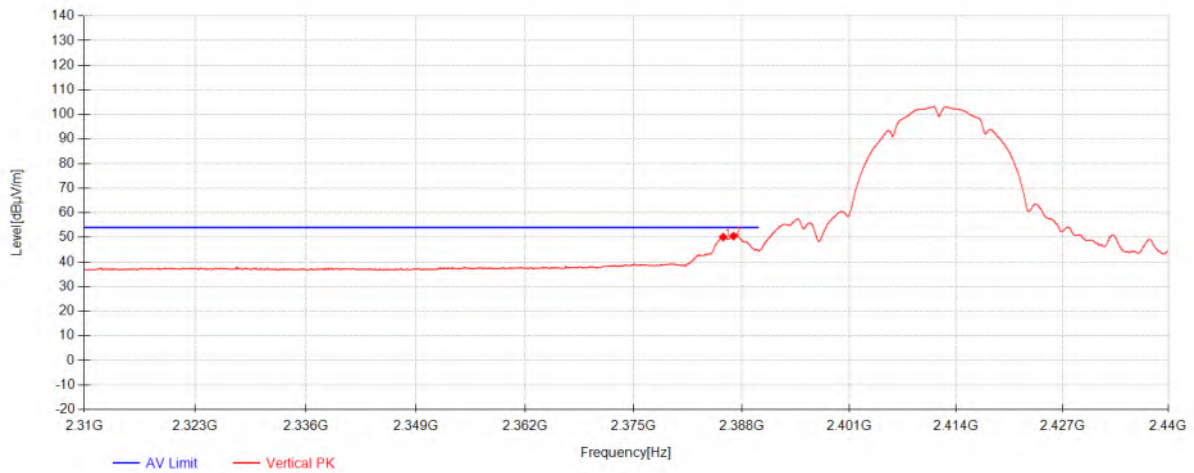


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.79	46.64	26.99	-23.51	50.12	54.00	3.88	Vertical
2	2387.025	47.02	27.00	-23.51	50.50	54.00	3.50	Vertical

11b_TX_CH_11_Horizontal_Peak

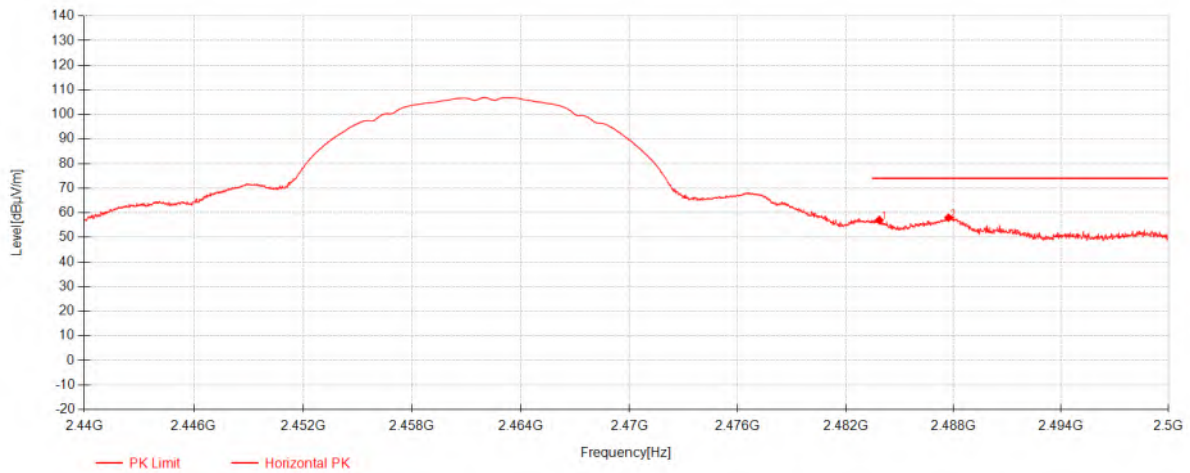


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.875	53.04	27.17	-23.18	57.03	74.00	16.97	Horizontal
2	2487.73	53.97	27.18	-23.16	57.99	74.00	16.01	Horizontal

11b_TX_CH_11_Horizontal_Average

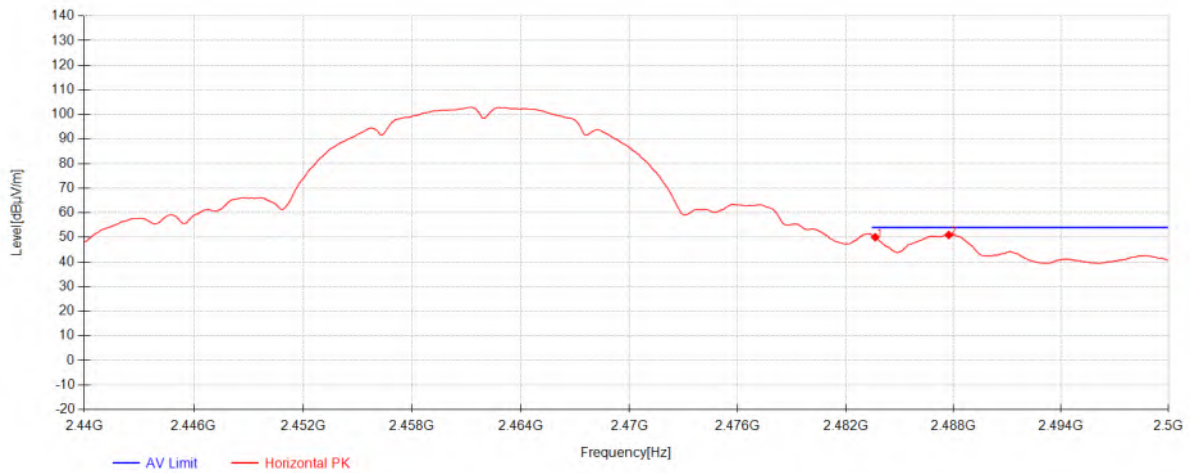


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.65	46.06	27.17	-23.18	50.05	54.00	3.95	Horizontal
2	2487.745	46.94	27.18	-23.16	50.96	54.00	3.04	Horizontal

11b_TX_CH_11_Vertical_Peak

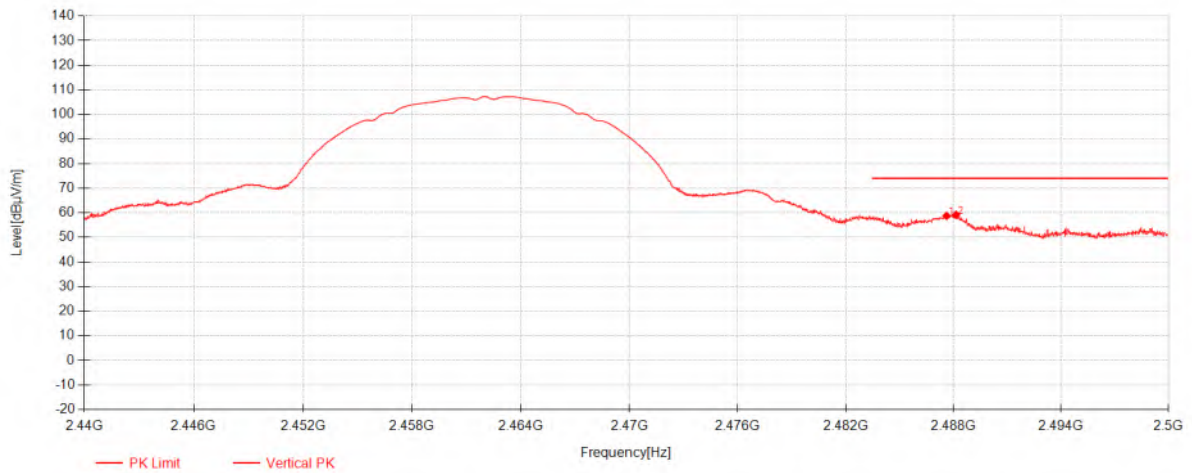


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2487.625	54.72	27.18	-23.16	58.74	74.00	15.26	Vertical
2	2488.15	55.15	27.18	-23.16	59.17	74.00	14.83	Vertical

11b_TX_CH_11_Vertical_Average

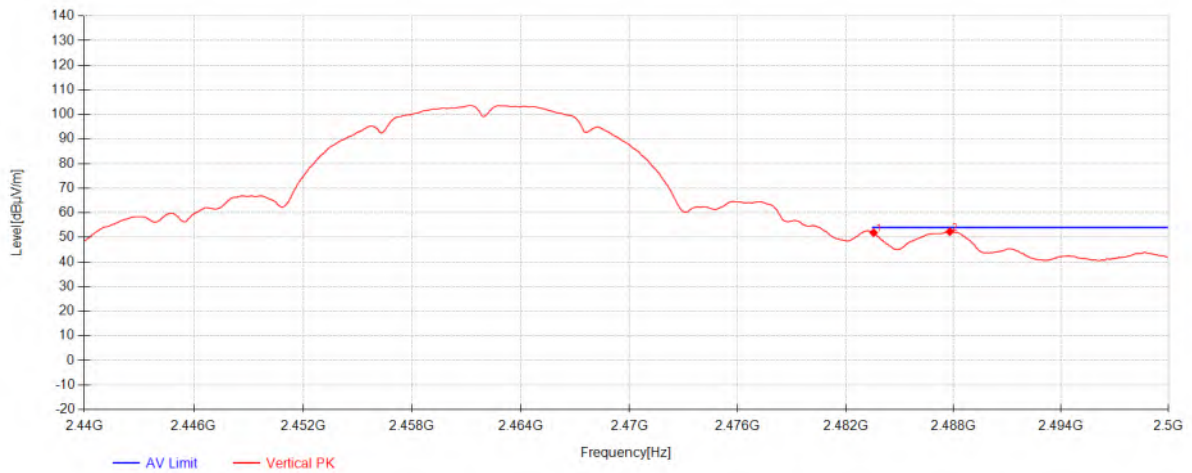


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.56	47.89	27.17	-23.18	51.88	54.00	2.12	Vertical
2	2487.805	48.28	27.18	-23.16	52.30	54.00	1.70	Vertical

11n(HT20)_TX_CH_01_Horizontal_Peak

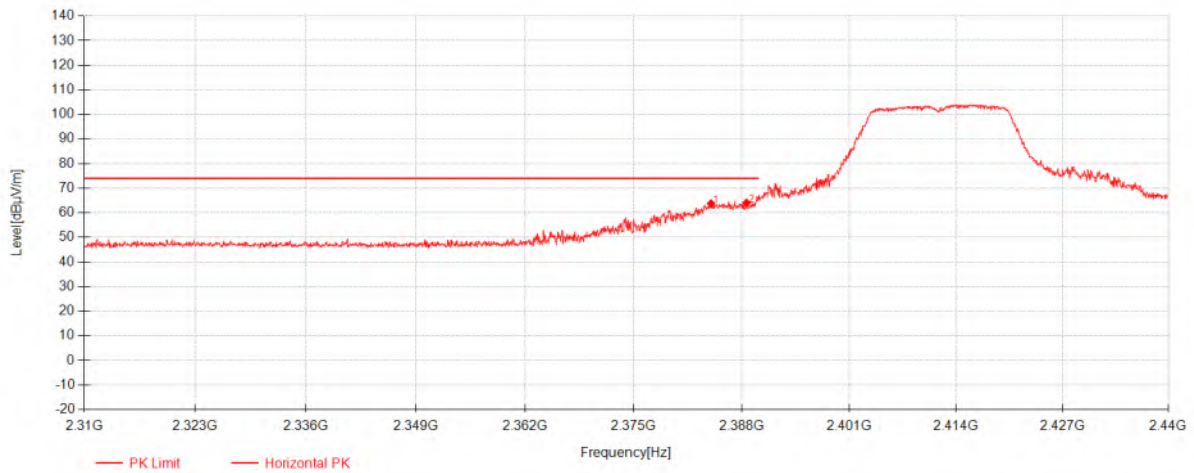


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.3167	60.26	26.99	-23.51	63.74	74.00	10.26	Horizontal
2	2388.6067	60.55	27.00	-23.52	64.03	74.00	9.97	Horizontal

11n(HT20)_TX_CH_01_Horizontal_Average

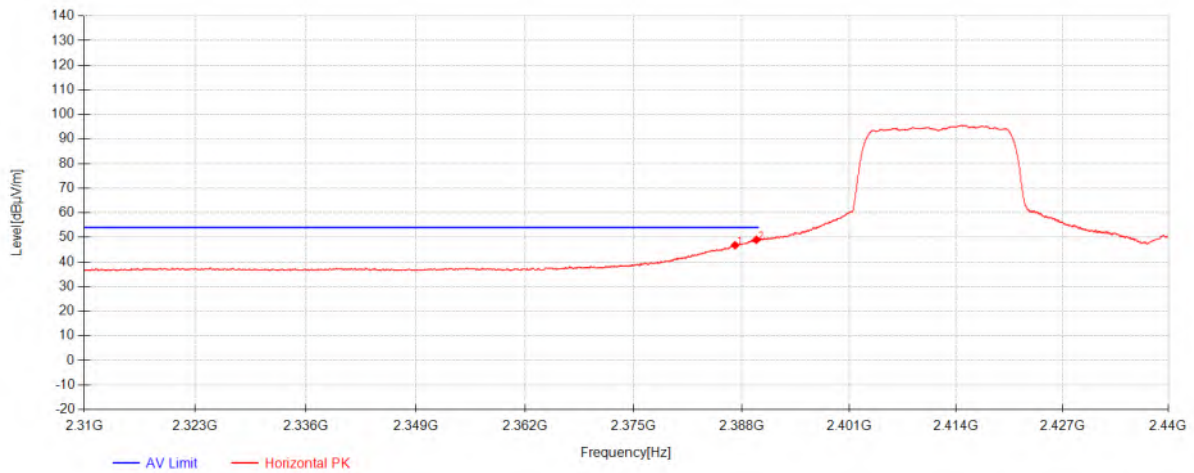


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.22	43.31	27.00	-23.51	46.79	54.00	7.21	Horizontal
2	2389.7875	45.53	27.00	-23.52	49.01	54.00	4.99	Horizontal

11n(HT20)_TX_CH_01_Vertical_Peak

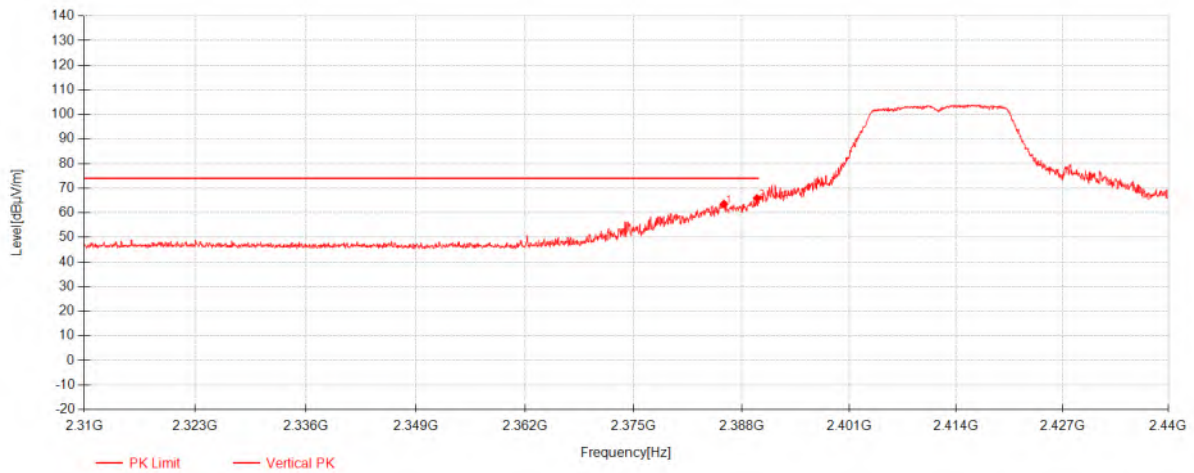


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.8767	60.09	26.99	-23.51	63.57	74.00	10.43	Vertical
2	2389.8633	62.41	27.00	-23.52	65.89	74.00	8.11	Vertical

11n(HT20)_TX_CH_01_Vetical_Average

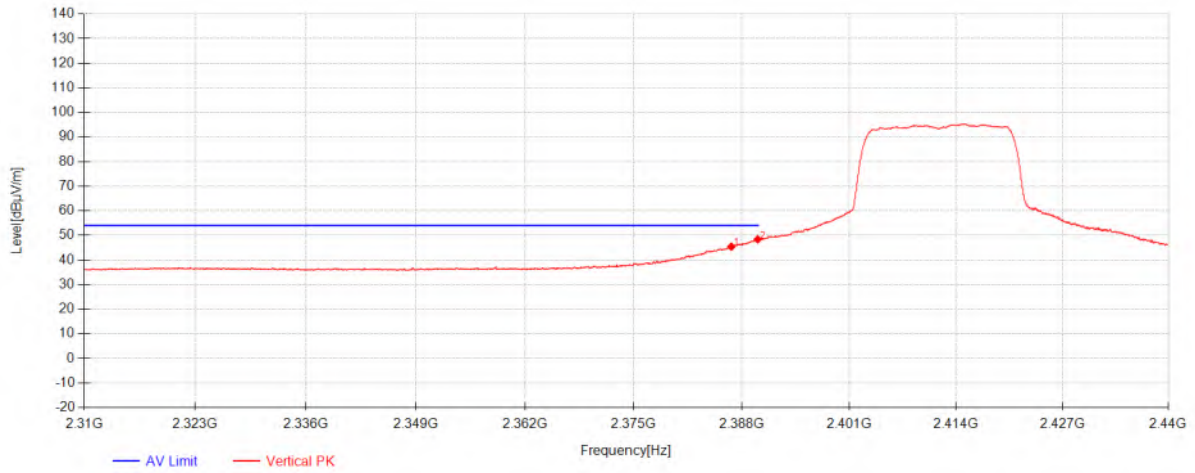


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.765	41.90	27.00	-23.51	45.38	54.00	8.62	Vertical
2	2389.95	44.88	27.00	-23.52	48.36	54.00	5.64	Vertical

11n(HT20)_TX_CH_11_Horizontal_Peak

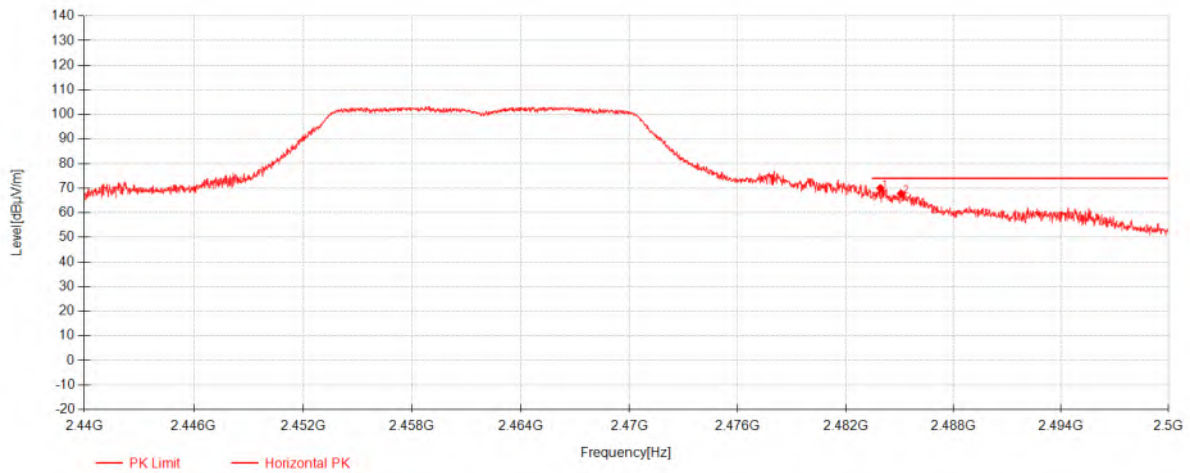


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.935	65.97	27.17	-23.18	69.96	74.00	4.04	Horizontal
2	2485.09	63.77	27.17	-23.17	67.77	74.00	6.23	Horizontal

11n(HT20)_TX_CH_11_Horizontal_Average

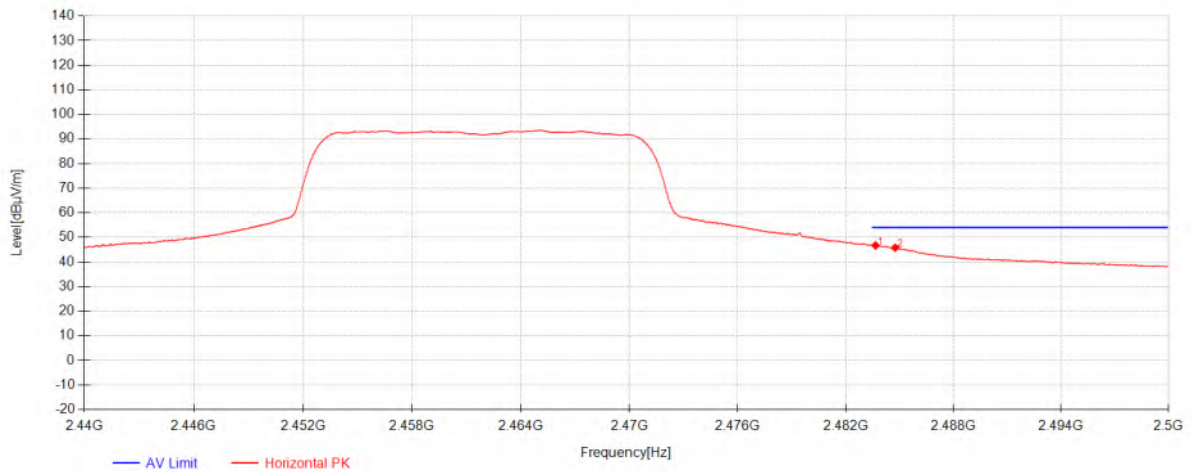


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.665	42.72	27.17	-23.18	46.71	54.00	7.29	Horizontal
2	2484.76	41.80	27.17	-23.17	45.80	54.00	8.20	Horizontal

11n(HT20)_TX_CH_11_Vetical_Peak

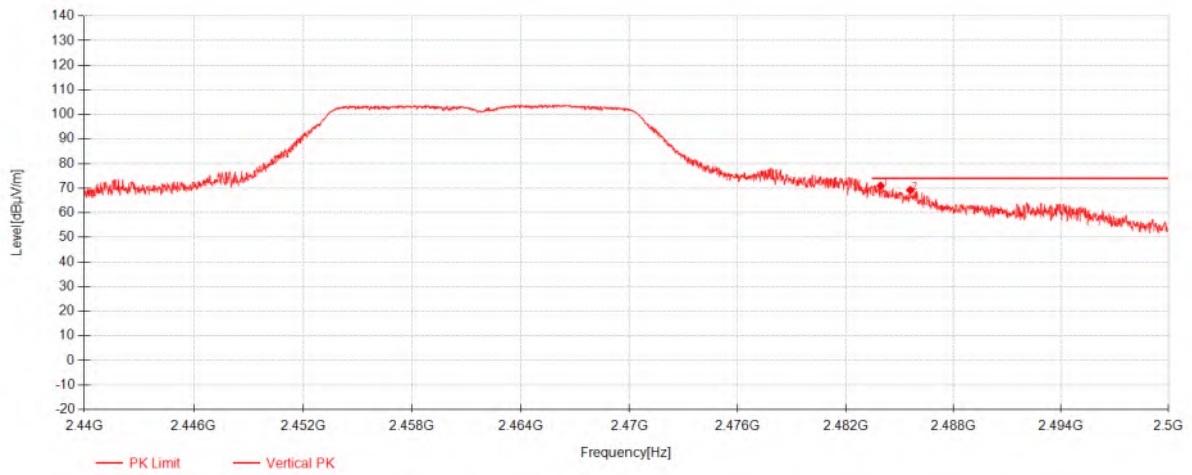


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.95	66.97	27.17	-23.18	70.96	74.00	3.04	Vertical
2	2485.6	65.21	27.17	-23.17	69.21	74.00	4.79	Vertical

11n(HT20)_TX_CH_11_Vetical_Average

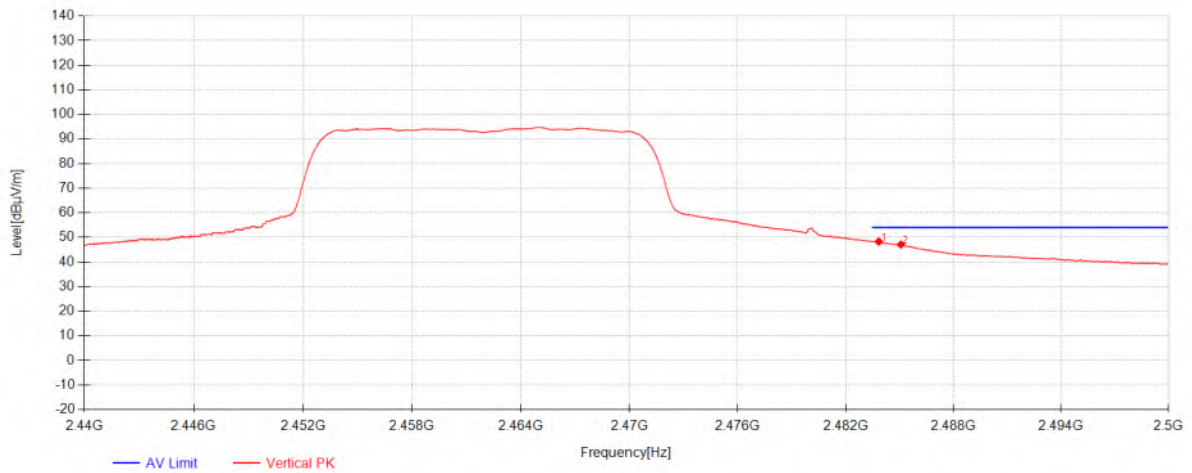


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.845	44.26	27.17	-23.18	48.25	54.00	5.75	Vertical
2	2485.075	43.09	27.17	-23.17	47.09	54.00	6.91	Vertical

11n(HT40)_TX_CH_03_Horizontal_Peak

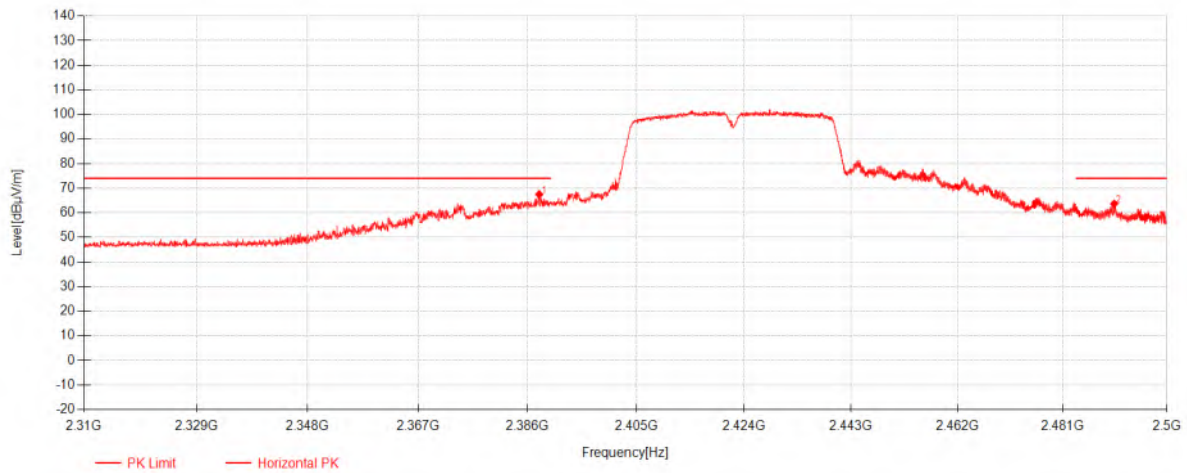


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.0325	64.00	27.00	-23.51	67.48	74.00	6.52	Horizontal
2	2490.355	59.61	27.18	-23.15	63.64	74.00	10.36	Horizontal

11n(HT40)_TX_CH_03_Horizontal_Average

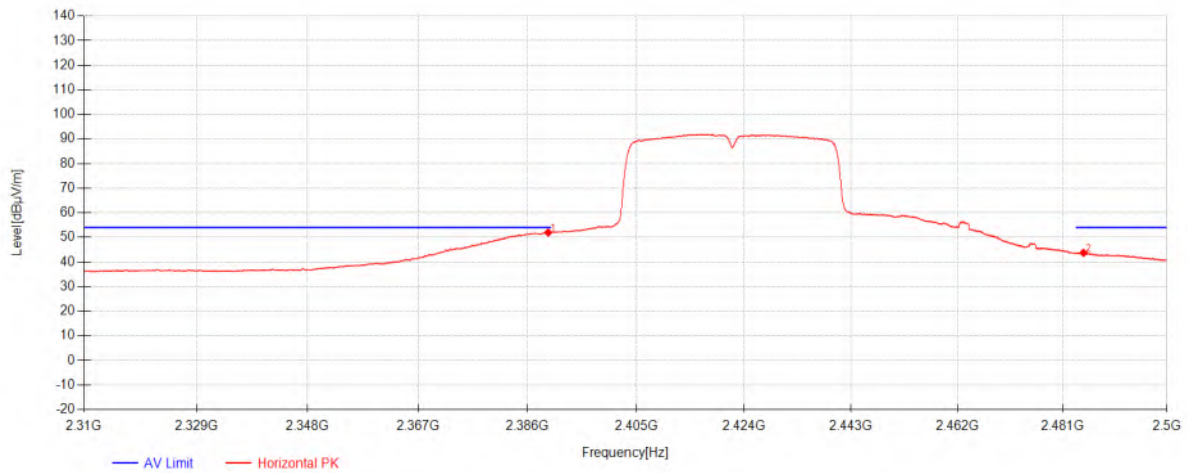


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.5925	48.50	27.00	-23.52	51.98	54.00	2.02	Horizontal
2	2484.79	39.73	27.17	-23.17	43.73	54.00	10.27	Horizontal

11n(HT40)_TX_CH_03_Vetical_Peak

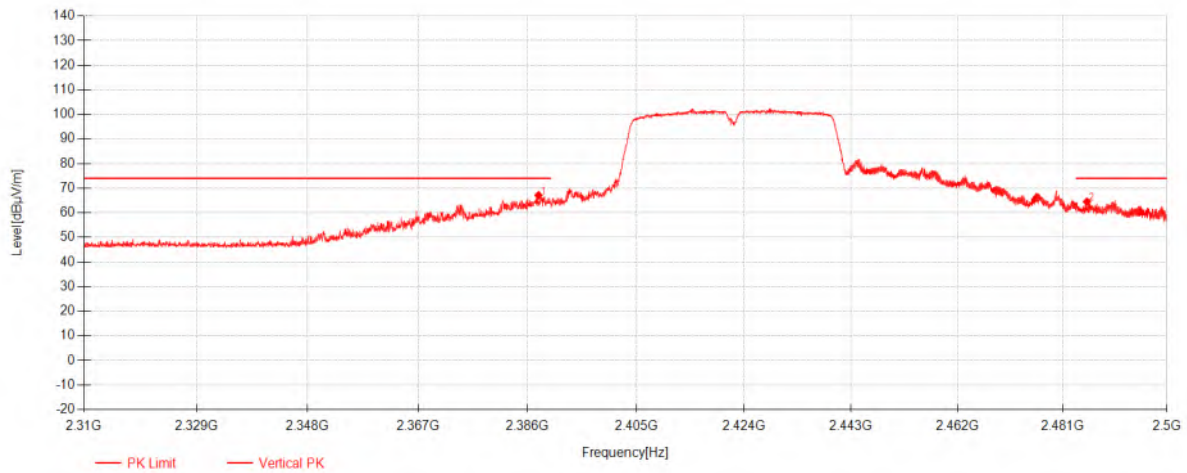


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.9025	63.64	27.00	-23.51	67.12	74.00	6.88	Vertical
2	2485.405	60.53	27.17	-23.17	64.53	74.00	9.47	Vertical

11n(HT40)_TX_CH_03_Vetical_Average

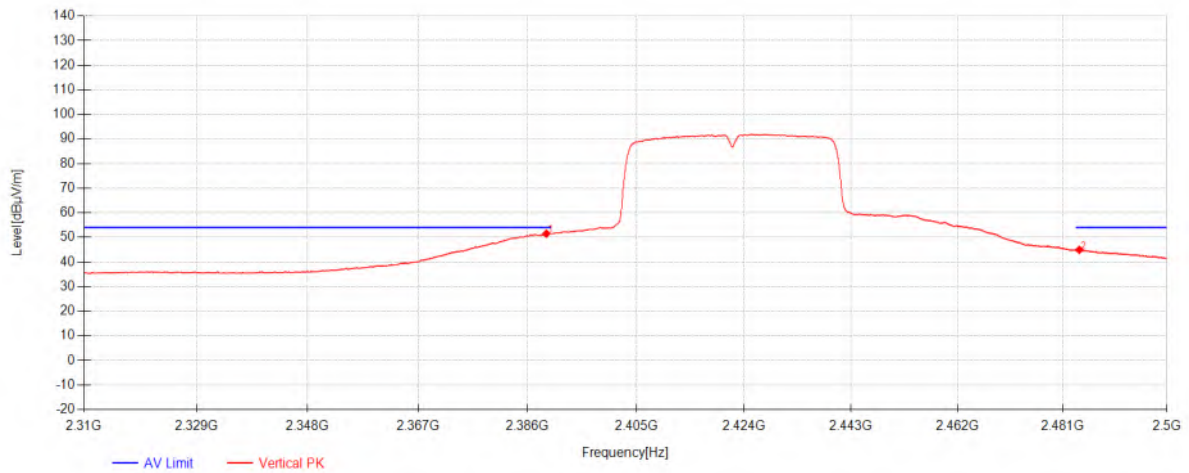


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.2675	48.04	27.00	-23.52	51.52	54.00	2.48	Vertical
2	2484.025	40.94	27.17	-23.18	44.93	54.00	9.07	Vertical

11n(HT40)_TX_CH_09_Horizontal_Peak

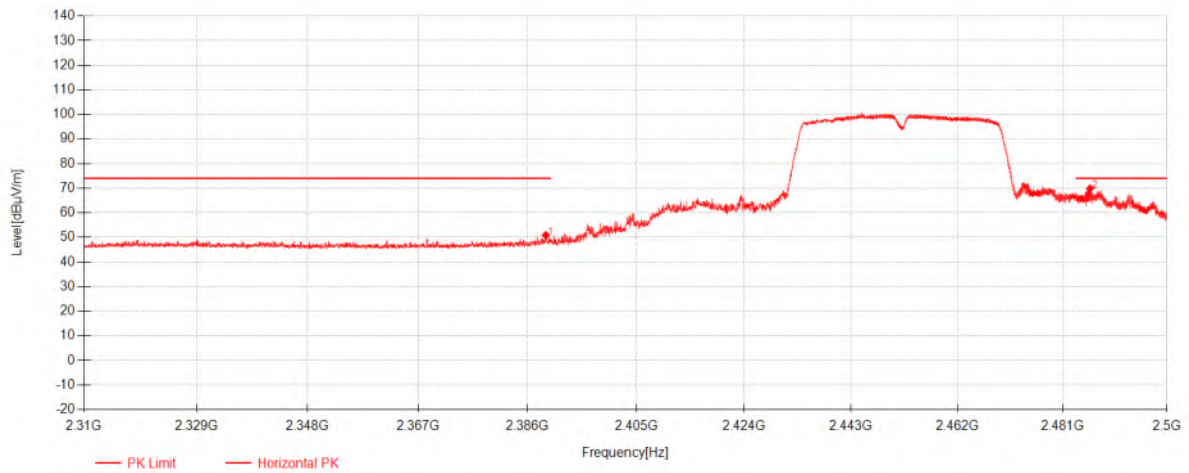


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.17	47.35	27.00	-23.52	50.83	74.00	23.17	Horizontal
2	2485.99	65.83	27.17	-23.17	69.84	74.00	4.16	Horizontal

11n(HT40)_TX_CH_09_Horizontal_Average

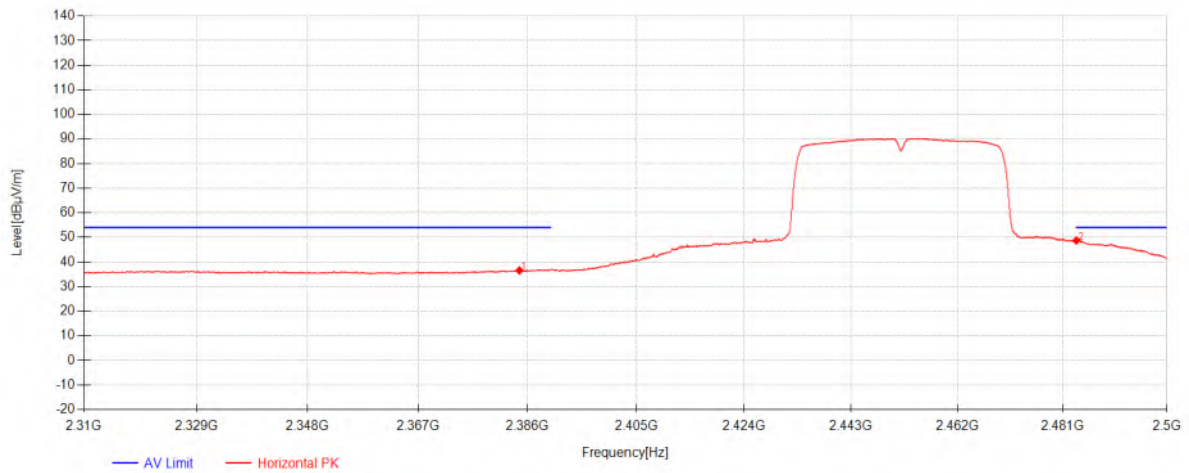


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.5875	33.06	26.99	-23.51	36.54	54.00	17.46	Horizontal
2	2483.5	44.73	27.17	-23.18	48.72	54.00	5.28	Horizontal

11n(HT40)_TX_CH_09_Vertical_Peak

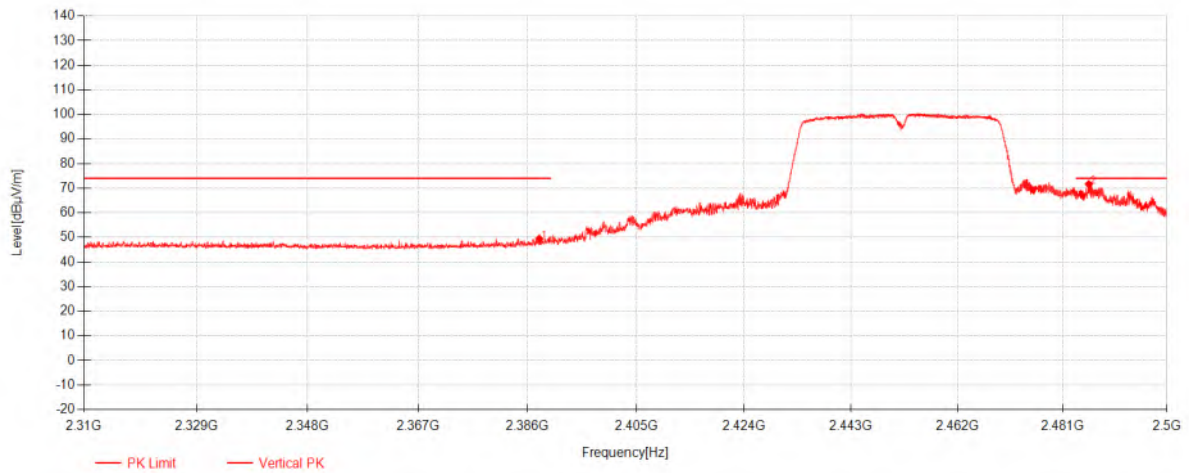

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.0325	45.96	27.00	-23.51	49.44	74.00	24.56	Vertical
2	2485.75	67.62	27.17	-23.17	71.62	74.00	2.38	Vertical

11n(HT40)_TX_CH_09_Vetical_Average

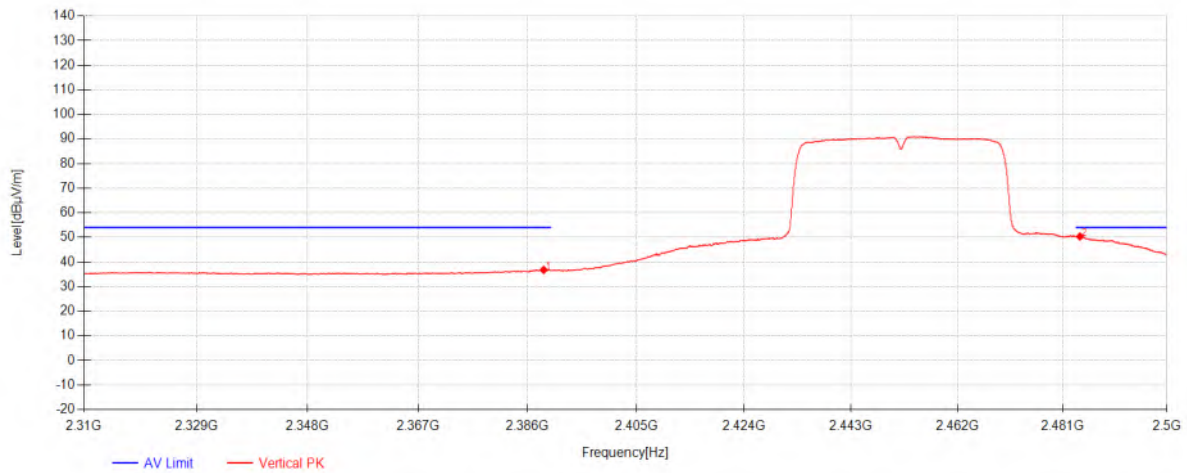

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.8125	33.28	27.00	-23.52	36.76	54.00	17.24	Vertical
2	2484.16	46.36	27.17	-23.18	50.35	54.00	3.65	Vertical

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

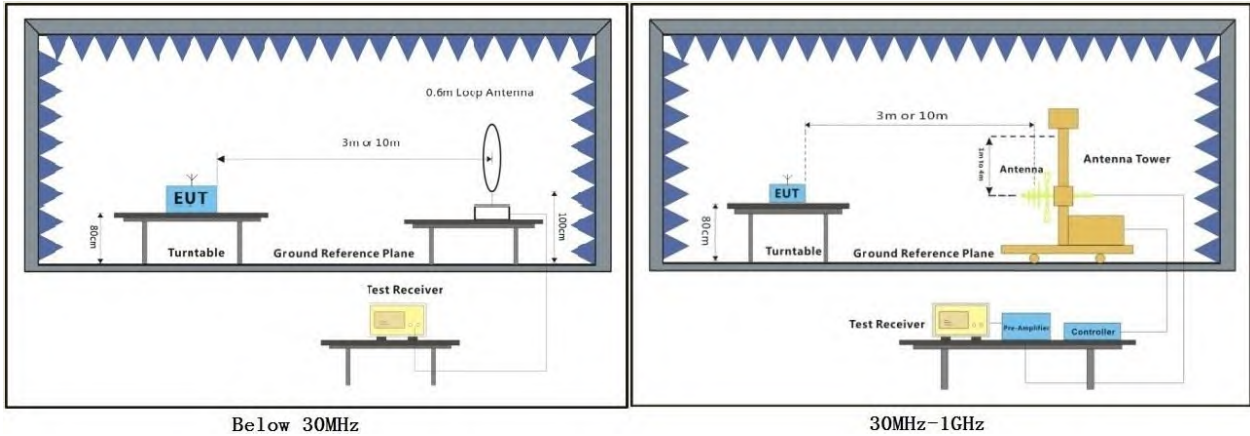


7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


11b_TX_CH_11_Horizontal

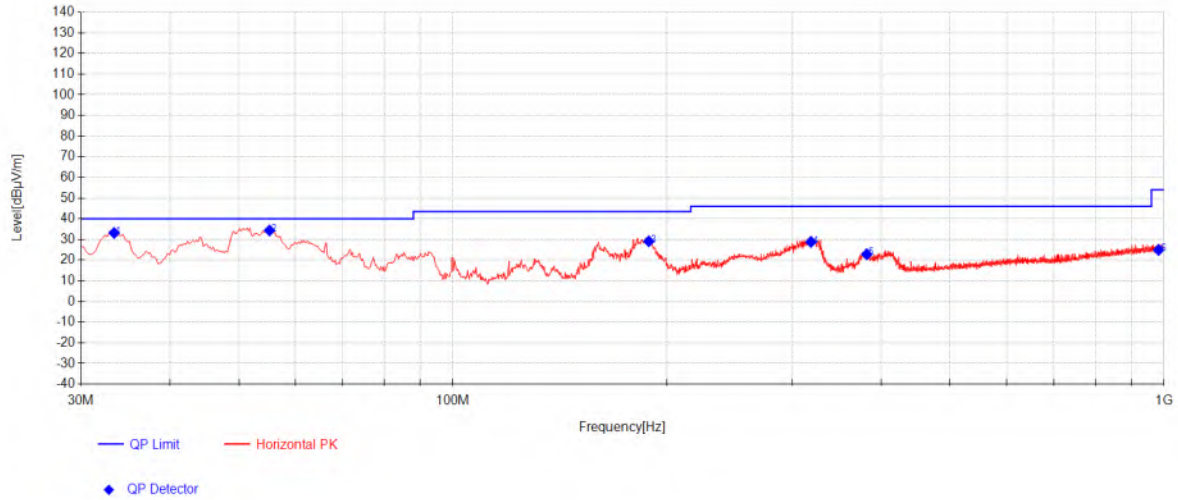

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.395	54.41	12.70	-33.97	33.14	40.00	6.86	158	353	Horizontal
2	55.22	55.12	12.87	-33.62	34.37	40.00	5.63	136	42	Horizontal
3	188.595	51.13	10.31	-32.34	29.11	43.50	14.39	104	218	Horizontal
4	318.8175	46.95	13.36	-31.53	28.78	46.00	17.22	155	207	Horizontal
5	381.8675	38.69	15.26	-31.11	22.84	46.00	23.16	184	156	Horizontal
6	982.54	28.54	24.36	-27.96	24.94	54.00	29.06	162	22	Horizontal

11b_TX_CH_11_Vertical

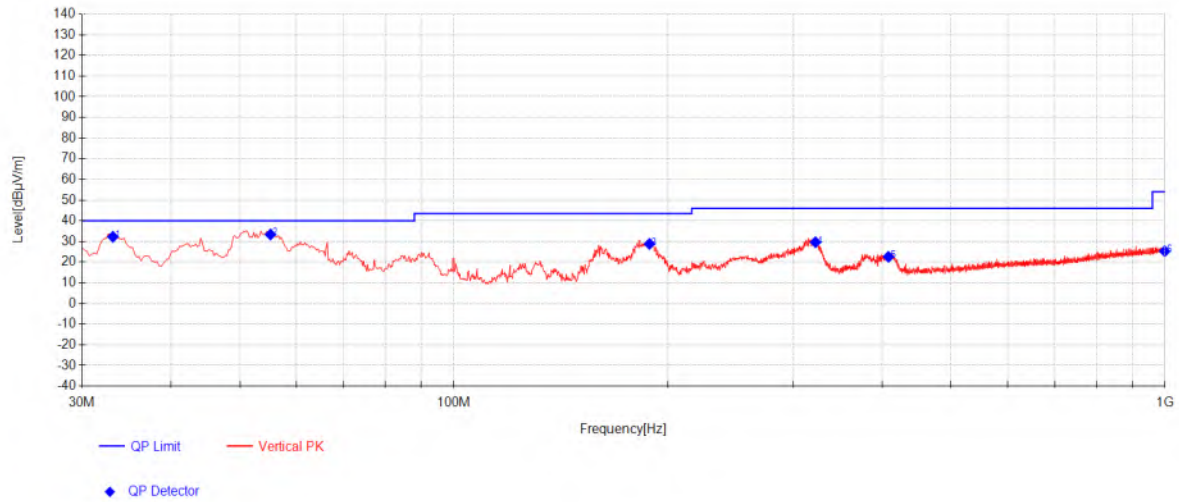

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.1525	53.56	12.69	-33.98	32.27	40.00	7.73	154	63	Vertical
2	55.22	54.12	12.87	-33.62	33.37	40.00	6.63	187	246	Vertical
3	188.3525	50.82	10.32	-32.34	28.81	43.50	14.69	184	205	Vertical
4	322.455	47.68	13.47	-31.52	29.63	46.00	16.37	162	205	Vertical
5	408.3	37.65	15.93	-31.01	22.58	46.00	23.42	174	135	Vertical
6	998.7875	28.58	24.49	-27.81	25.26	54.00	28.74	132	1	Vertical

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

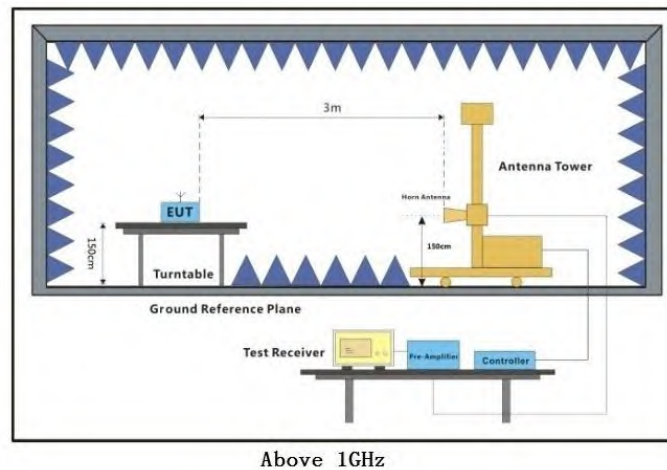


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.

11b_TX_CH_01_Horizontal

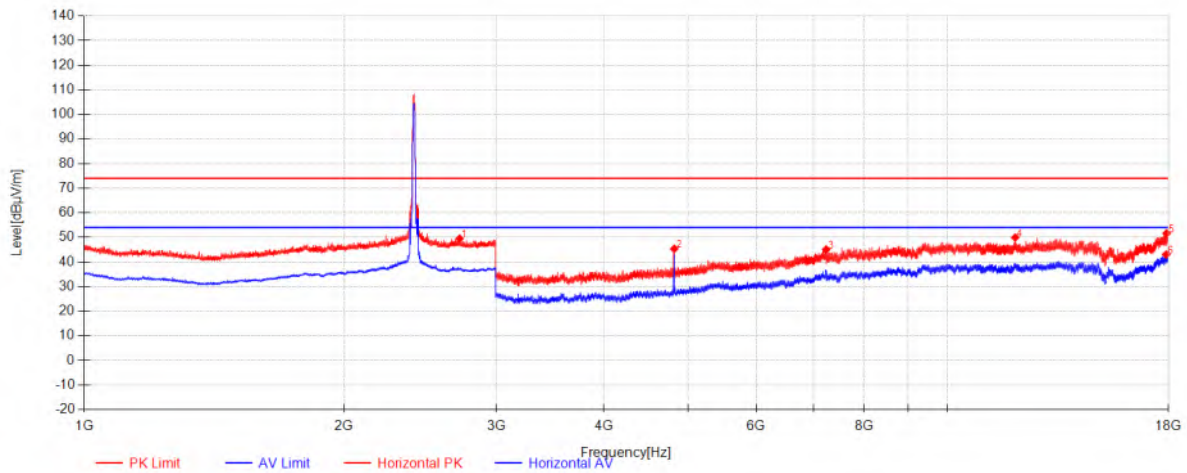


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2722	44.93	27.60	-23.03	49.50	74.00	24.50	Horizontal
2	4824	62.56	30.81	-48.01	45.36	74.00	28.64	Horizontal
3	7234.125	55.32	35.92	-46.19	45.06	74.00	28.94	Horizontal
4	11975.625	50.08	39.40	-39.56	49.92	74.00	24.08	Horizontal
5	17932.875	45.61	44.40	-38.40	51.61	74.00	22.39	Horizontal
6	17911.5	36.98	44.27	-38.24	43.01	54.00	10.99	Horizontal

11b_TX_CH_01_Vertical

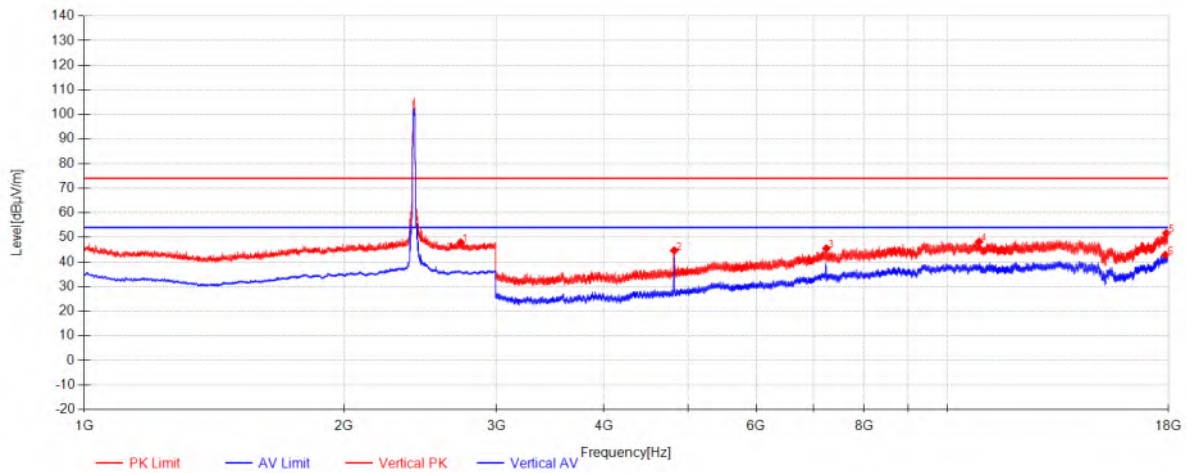


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2729.6667	43.35	27.61	-23.05	47.91	74.00	26.09	Vertical
2	4824	61.84	30.81	-48.01	44.64	74.00	29.36	Vertical
3	7237.5	55.74	35.93	-46.19	45.48	74.00	28.52	Vertical
4	10875.375	48.94	39.41	-40.18	48.17	74.00	25.83	Vertical
5	17914.875	45.63	44.29	-38.26	51.66	74.00	22.34	Vertical
6	17873.625	36.96	44.04	-38.16	42.84	54.00	11.16	Vertical

11b_TX_CH_06_Horizontal

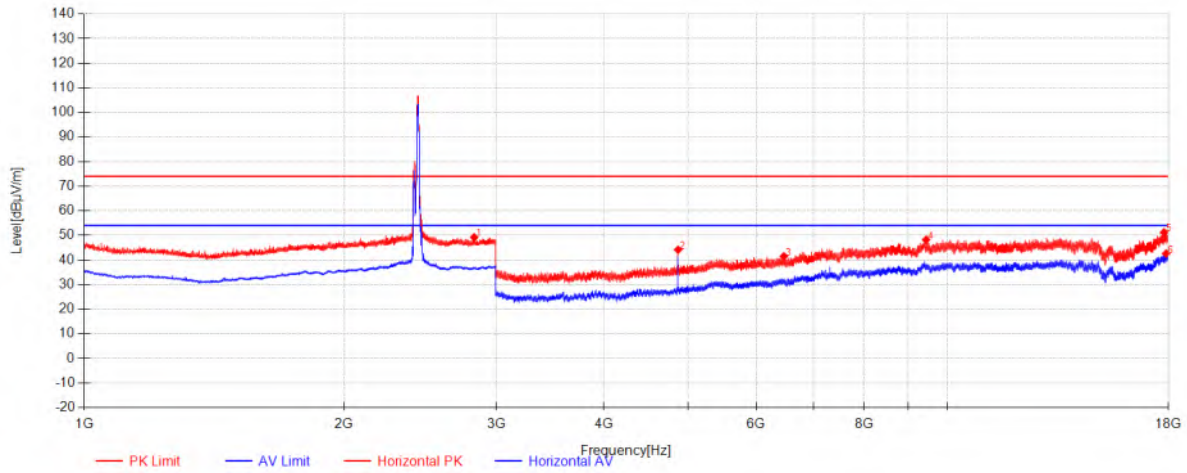


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2829.6667	44.59	27.79	-23.19	49.19	74.00	24.81	Horizontal
2	4873.875	61.23	30.92	-48.02	44.13	74.00	29.87	Horizontal
3	6461.625	53.89	34.55	-46.97	41.48	74.00	32.52	Horizontal
4	9444	52.94	38.02	-42.75	48.21	74.00	25.79	Horizontal
5	17809.875	45.73	43.66	-38.19	51.20	74.00	22.80	Horizontal
6	17909.625	36.56	44.26	-38.22	42.60	54.00	11.40	Horizontal

11b_TX_CH_06_Vertical

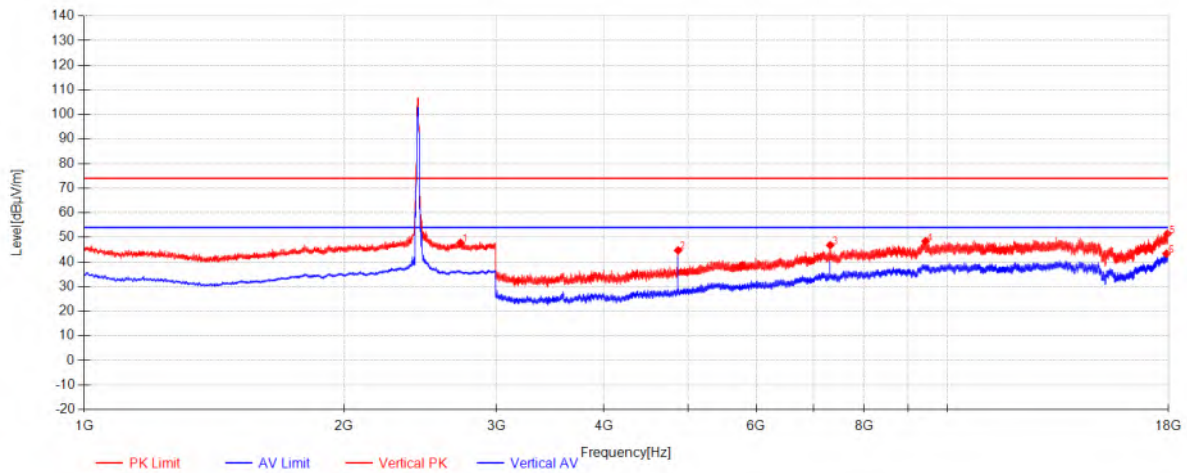


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2728	43.21	27.61	-23.05	47.77	74.00	26.23	Vertical
2	4873.875	61.78	30.92	-48.02	44.68	74.00	29.32	Vertical
3	7312.125	56.91	36.06	-46.16	46.81	74.00	27.19	Vertical
4	9428.625	53.24	38.00	-42.86	48.38	74.00	25.62	Vertical
5	17971.875	45.49	44.63	-38.69	51.43	74.00	22.57	Vertical
6	17925	37.32	44.35	-38.34	43.33	54.00	10.67	Vertical

11b_TX_CH_11_Horizontal

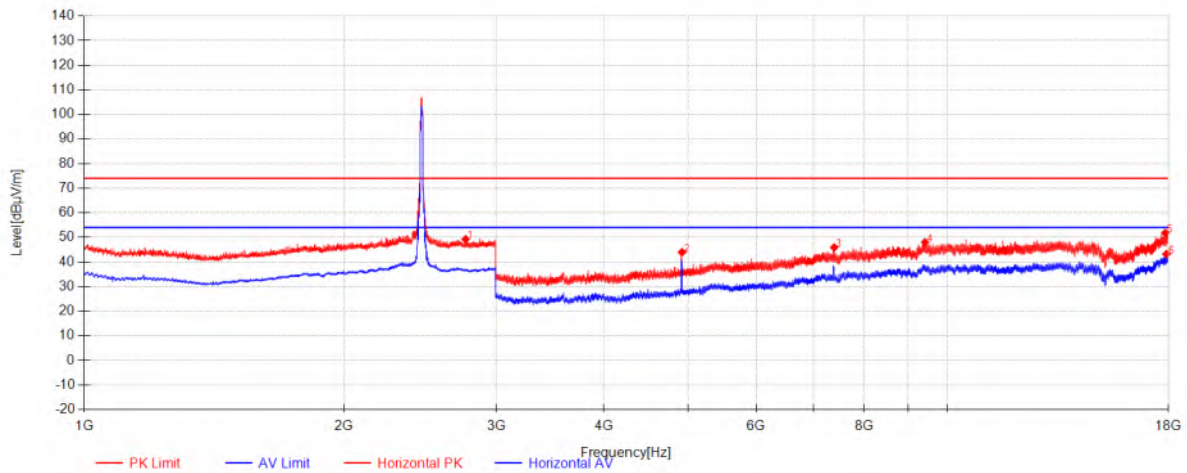


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2765.6667	44.75	27.68	-23.17	49.26	74.00	24.74	Horizontal
2	4924.125	60.95	31.03	-48.03	43.96	74.00	30.04	Horizontal
3	7389.375	55.88	36.20	-46.17	45.91	74.00	28.09	Horizontal
4	9416.625	52.93	37.98	-42.94	47.98	74.00	26.02	Horizontal
5	17872.125	45.88	44.03	-38.16	51.75	74.00	22.25	Horizontal
6	17923.875	37.17	44.34	-38.33	43.18	54.00	10.82	Horizontal

11b_TX_CH_11_Vertical

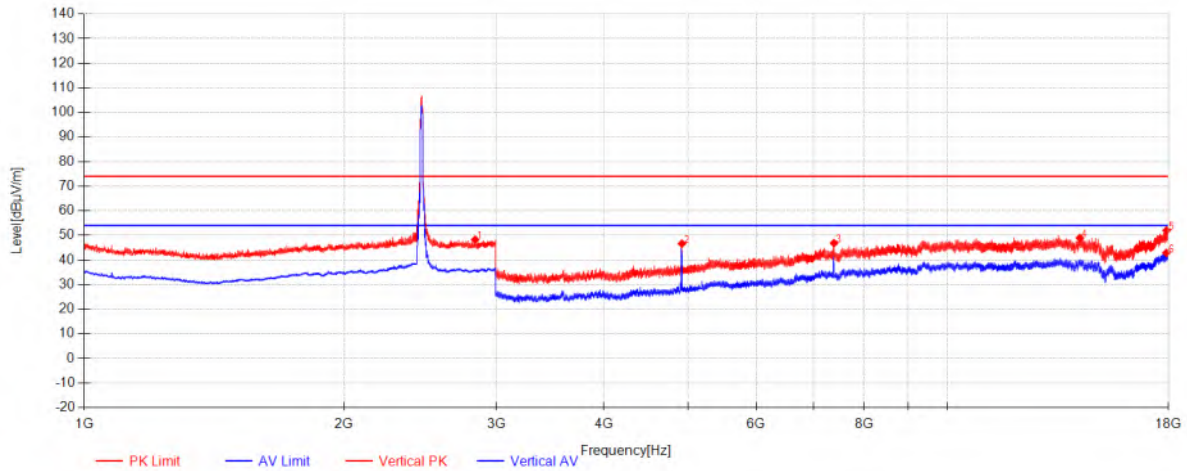


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2836.6667	43.59	27.81	-23.17	48.22	74.00	25.78	Vertical
2	4923.75	63.61	31.03	-48.03	46.62	74.00	27.38	Vertical
3	7386.75	56.83	36.20	-46.17	46.86	74.00	27.14	Vertical
4	14229.375	47.24	40.28	-38.59	48.93	74.00	25.07	Vertical
5	17932.125	46.00	44.39	-38.39	52.00	74.00	22.00	Vertical
6	17922.75	36.83	44.34	-38.32	42.85	54.00	11.15	Vertical

11n(HT20)_TX_CH_01_Horizontal

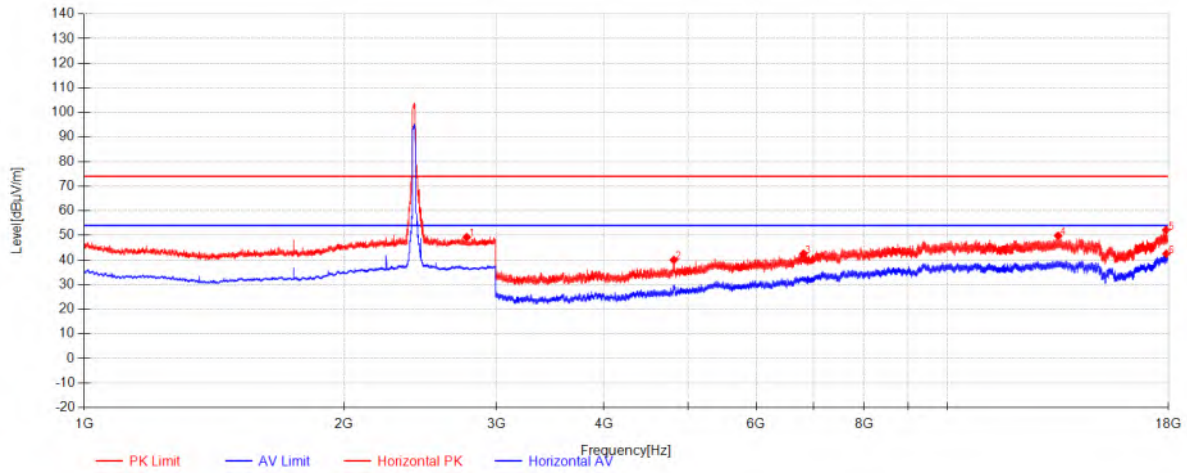


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2774	44.74	27.69	-23.20	49.24	74.00	24.76	Horizontal
2	4817.625	57.21	30.80	-48.01	40.00	74.00	34.00	Horizontal
3	6808.875	54.18	35.19	-46.88	42.50	74.00	31.50	Horizontal
4	13428.75	49.57	39.44	-39.18	49.84	74.00	24.16	Horizontal
5	17914.875	46.14	44.29	-38.26	52.17	74.00	21.83	Horizontal
6	17921.625	36.50	44.33	-38.31	42.52	54.00	11.48	Horizontal

11n(HT20)_TX_CH_01_Vertical

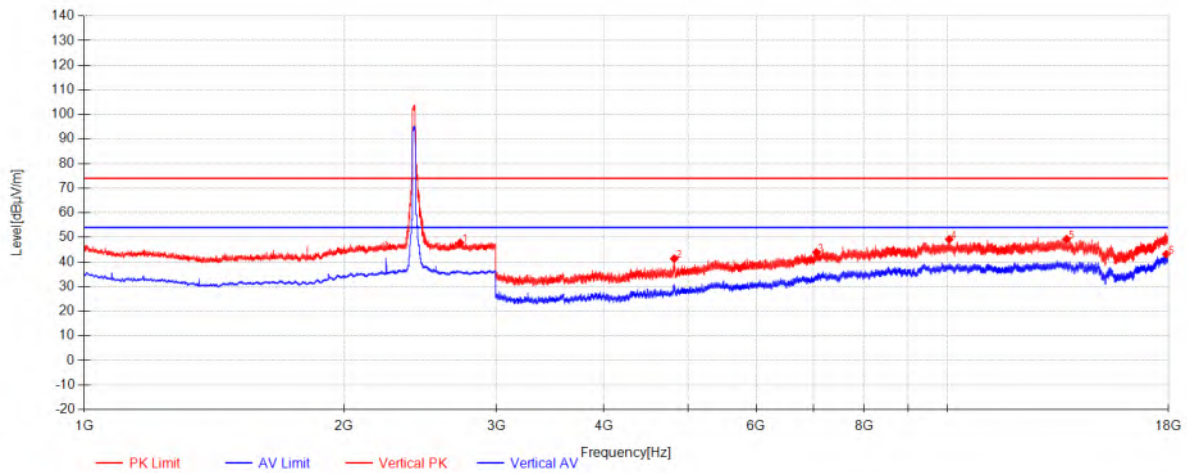


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2725.6667	43.20	27.61	-23.04	47.76	74.00	26.24	Vertical
2	4824	58.52	30.81	-48.01	41.32	74.00	32.68	Vertical
3	7048.5	54.55	35.59	-46.23	43.91	74.00	30.09	Vertical
4	10044.75	52.13	38.83	-41.78	49.19	74.00	24.81	Vertical
5	13733.25	47.68	39.90	-38.32	49.26	74.00	24.74	Vertical
6	17918.625	37.15	44.31	-38.29	43.17	54.00	10.83	Vertical

11n(HT20)_TX_CH_06_Horizontal

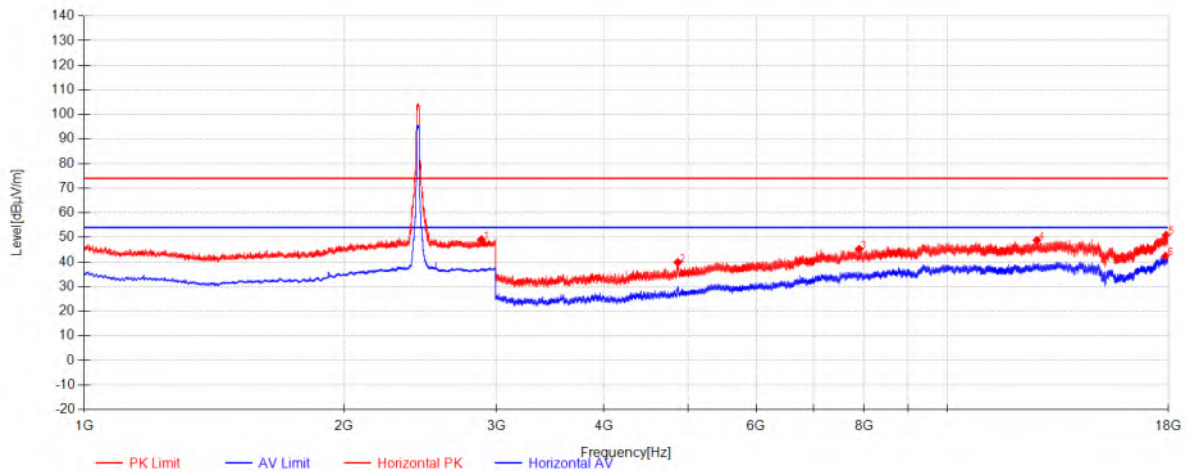


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2885	44.25	27.89	-23.03	49.11	74.00	24.89	Horizontal
2	4870.125	56.96	30.91	-48.02	39.85	74.00	34.15	Horizontal
3	7897.125	54.30	36.32	-45.43	45.19	74.00	28.81	Horizontal
4	12690.375	49.15	38.99	-39.24	48.89	74.00	25.11	Horizontal
5	17913.75	44.86	44.28	-38.25	50.89	74.00	23.11	Horizontal
6	17881.125	36.45	44.09	-38.16	42.38	54.00	11.62	Horizontal

11n(HT20)_TX_CH_06_Verical

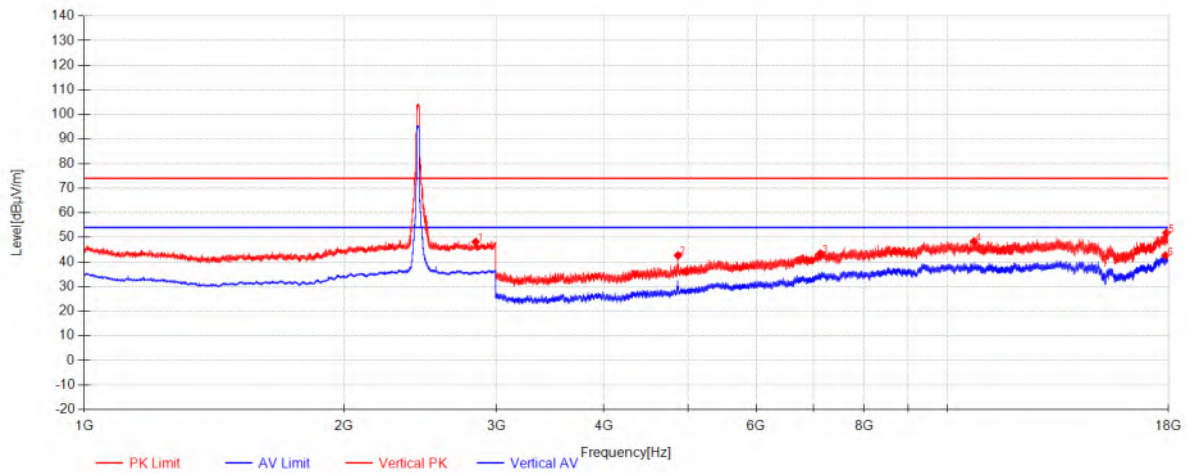


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2840.6667	43.49	27.81	-23.16	48.14	74.00	25.86	Vertical
2	4872.375	59.77	30.92	-48.02	42.66	74.00	31.34	Vertical
3	7120.125	53.59	35.72	-45.90	43.40	74.00	30.60	Vertical
4	10726.5	49.92	39.31	-40.93	48.30	74.00	25.70	Vertical
5	17925.375	45.84	44.35	-38.34	51.85	74.00	22.15	Vertical
6	17878.125	36.67	44.07	-38.16	42.58	54.00	11.42	Vertical

11n(HT20)_TX_CH_11_Horizontal

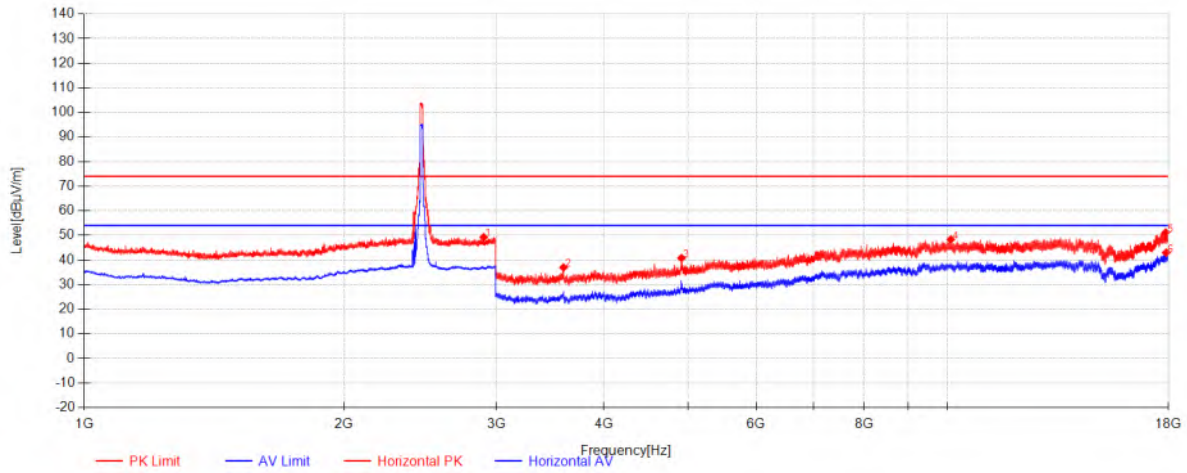


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2901.6667	44.28	27.92	-22.98	49.22	74.00	24.78	Horizontal
2	3590.25	56.58	28.64	-48.28	36.94	74.00	37.06	Horizontal
3	4918.125	57.76	31.02	-48.03	40.75	74.00	33.25	Horizontal
4	10084.5	51.28	38.86	-41.84	48.30	74.00	25.70	Horizontal
5	17886	45.16	44.12	-38.16	51.12	74.00	22.88	Horizontal
6	17910.375	36.93	44.26	-38.23	42.96	54.00	11.04	Horizontal

11n(HT20)_TX_CH_11_Vertical

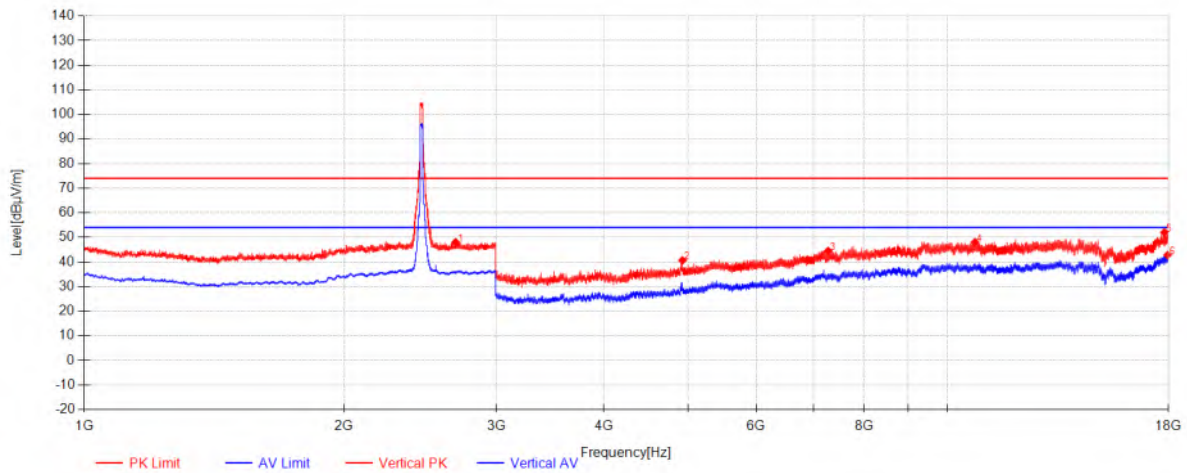


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2693	43.49	27.55	-23.01	48.03	74.00	25.97	Vertical
2	4930.875	57.62	31.05	-48.02	40.64	74.00	33.36	Vertical
3	7271.25	54.64	35.99	-46.17	44.46	74.00	29.54	Vertical
4	10753.125	49.52	39.33	-40.86	47.99	74.00	26.01	Vertical
5	17830.875	46.40	43.79	-38.18	52.01	74.00	21.99	Vertical
6	17974.875	36.84	44.65	-38.71	42.78	54.00	11.22	Vertical

11n(HT40)_TX_CH_03_Horizontal

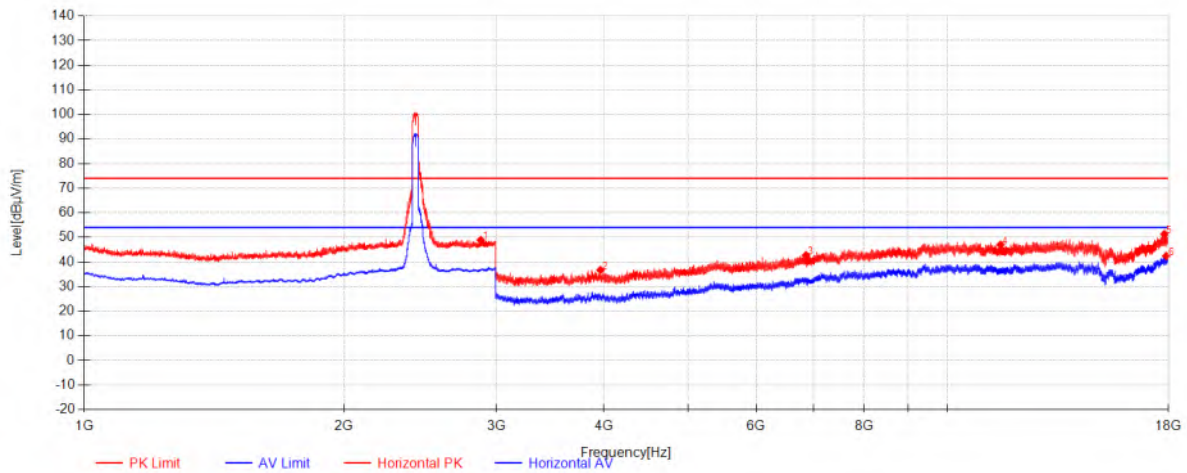


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2879.6667	44.06	27.88	-23.05	48.89	74.00	25.11	Horizontal
2	3962.625	55.68	29.24	-48.22	36.70	74.00	37.30	Horizontal
3	6855	54.22	35.27	-46.80	42.69	74.00	31.31	Horizontal
4	11513.625	47.57	39.45	-40.02	47.00	74.00	27.00	Horizontal
5	17829	45.70	43.77	-38.18	51.30	74.00	22.70	Horizontal
6	17914.5	36.36	44.29	-38.26	42.39	54.00	11.61	Horizontal

11n(HT40)_TX_CH_03_Vertical

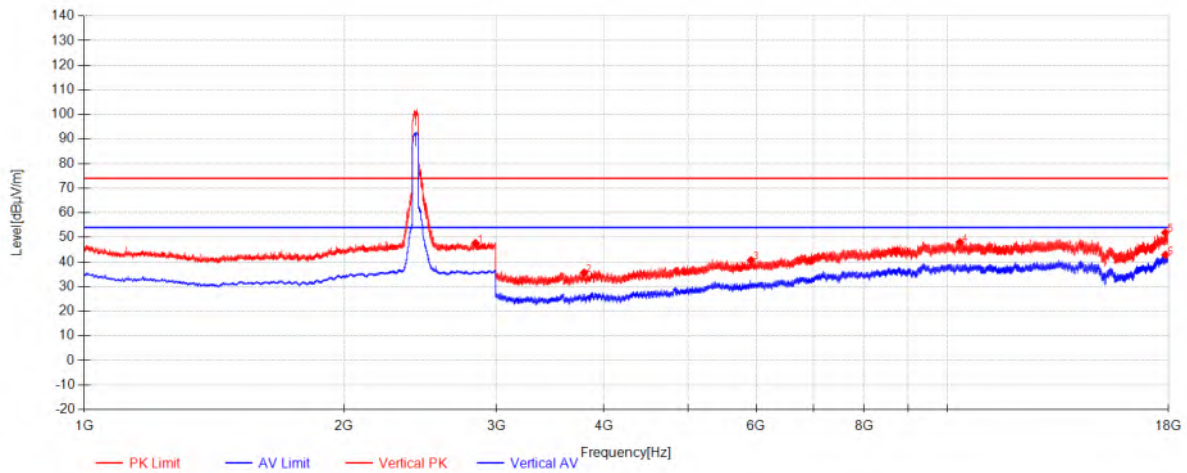


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2839.6667	42.98	27.81	-23.16	47.63	74.00	26.37	Vertical
2	3793.5	54.84	28.97	-48.20	35.61	74.00	38.39	Vertical
3	5919	55.09	32.77	-47.22	40.64	74.00	33.36	Vertical
4	10332.75	50.18	39.03	-41.18	48.03	74.00	25.97	Vertical
5	17874.375	45.99	44.05	-38.16	51.88	74.00	22.12	Vertical
6	17877.75	36.94	44.07	-38.16	42.85	54.00	11.15	Vertical

11n(HT40)_TX_CH_06_Horizontal

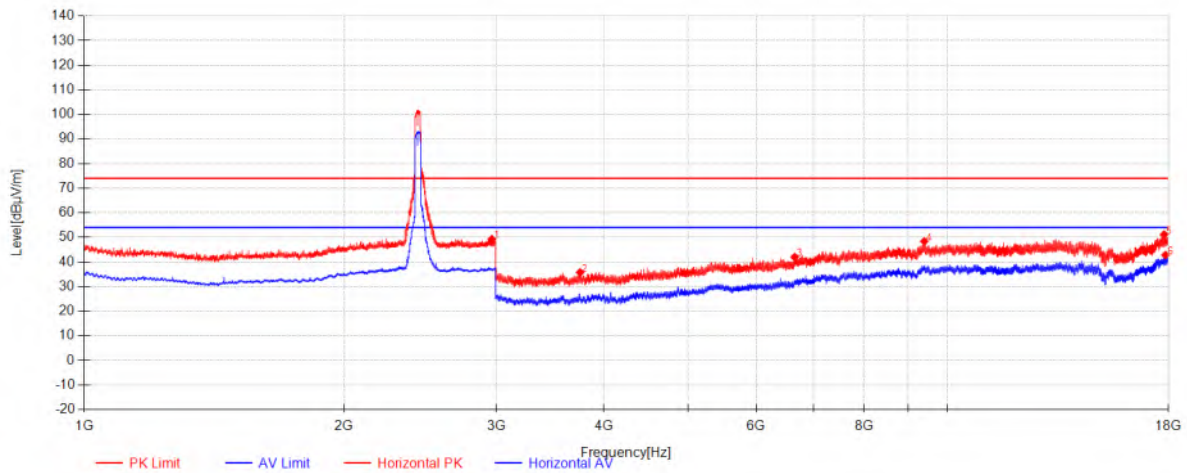


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2965.3333	43.95	28.04	-22.70	49.29	74.00	24.71	Horizontal
2	3753	55.19	28.90	-48.34	35.76	74.00	38.24	Horizontal
3	6649.875	53.85	34.94	-46.80	41.99	74.00	32.01	Horizontal
4	9396	53.45	37.95	-43.04	48.36	74.00	25.64	Horizontal
5	17809.875	45.68	43.66	-38.19	51.15	74.00	22.85	Horizontal
6	17875.875	36.92	44.06	-38.16	42.82	54.00	11.18	Horizontal

11n(HT40)_TX_CH_06_Vertical

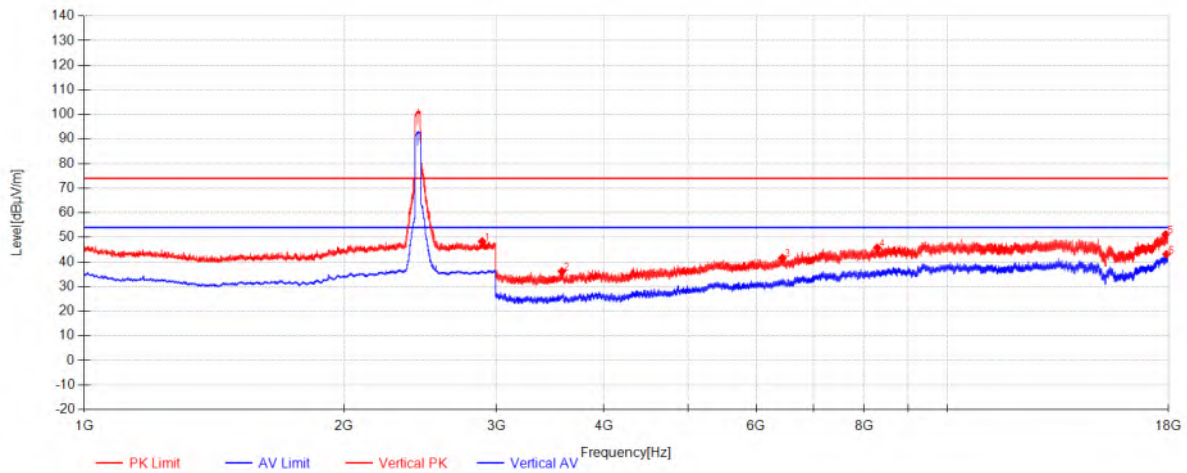


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2889.6667	43.42	27.90	-23.02	48.30	74.00	25.70	Vertical
2	3575.625	55.80	28.62	-48.28	36.14	74.00	37.86	Vertical
3	6436.5	54.11	34.46	-46.95	41.62	74.00	32.38	Vertical
4	8289.75	53.65	36.62	-44.51	45.76	74.00	28.24	Vertical
5	17887.5	45.22	44.13	-38.16	51.19	74.00	22.81	Vertical
6	17926.5	37.09	44.36	-38.35	43.10	54.00	10.90	Vertical

11n(HT40)_TX_CH_09_Horizontal

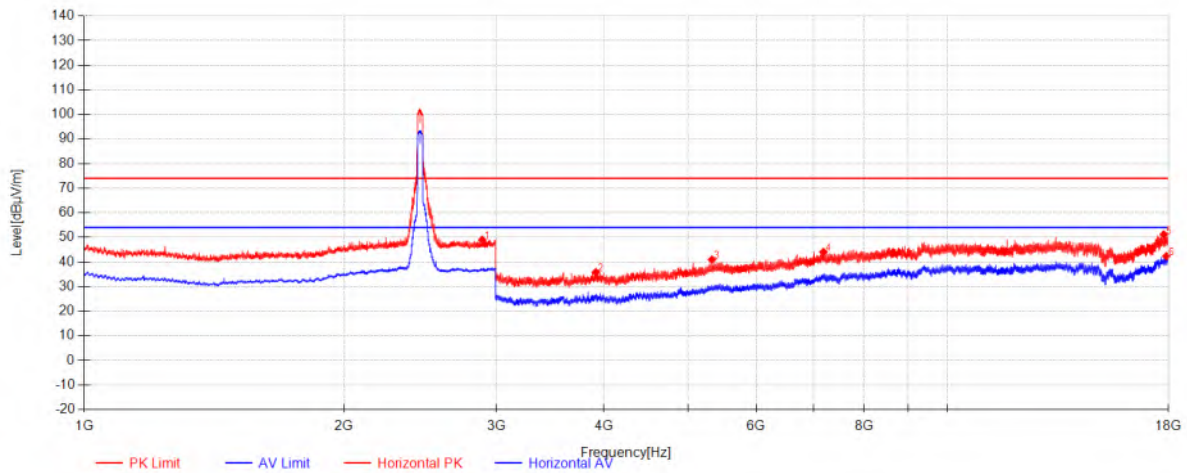

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2891	44.08	27.90	-23.02	48.97	74.00	25.03	Horizontal
2	3913.5	54.91	29.16	-48.28	35.80	74.00	38.20	Horizontal
3	5334	56.55	32.14	-47.76	40.93	74.00	33.07	Horizontal
4	7180.5	54.34	35.82	-46.13	44.04	74.00	29.96	Horizontal
5	17802	45.75	43.61	-38.19	51.17	74.00	22.83	Horizontal
6	17922.375	36.30	44.33	-38.32	42.32	54.00	11.68	Horizontal

11n(HT40)_TX_CH_09_Verical

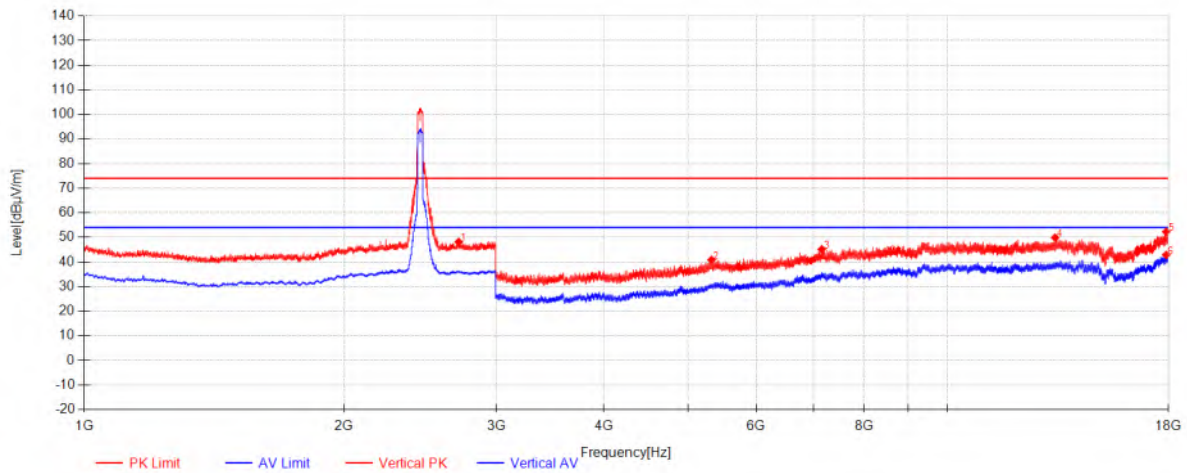

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2715.3333	43.54	27.59	-23.01	48.12	74.00	25.88	Vertical
2	5327.625	56.48	32.12	-47.76	40.83	74.00	33.17	Vertical
3	7149.375	55.37	35.77	-46.01	45.13	74.00	28.87	Vertical
4	13319.625	49.71	39.28	-39.11	49.88	74.00	24.12	Vertical
5	17916.75	46.25	44.30	-38.28	52.27	74.00	21.73	Vertical
6	17912.625	36.80	44.28	-38.24	42.83	54.00	11.17	Vertical

7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

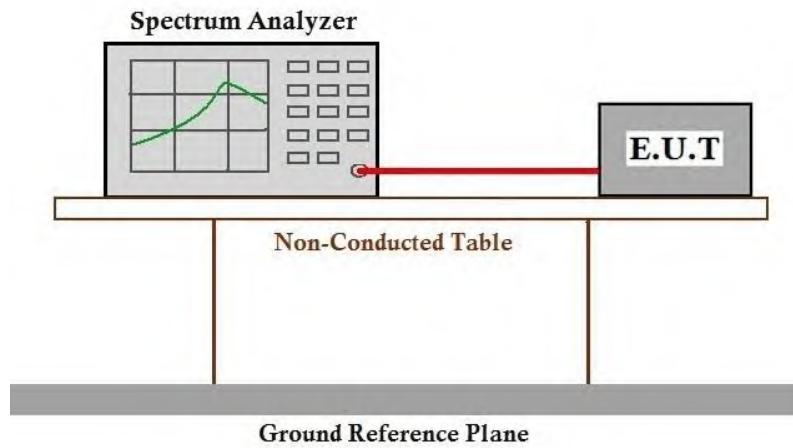

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:

≥500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

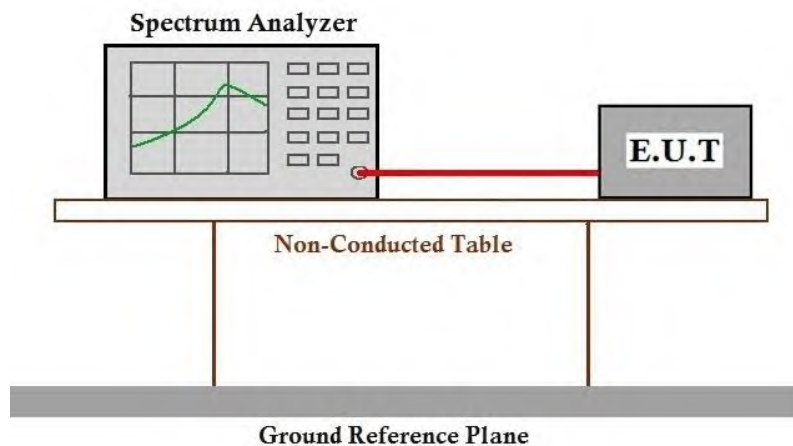

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

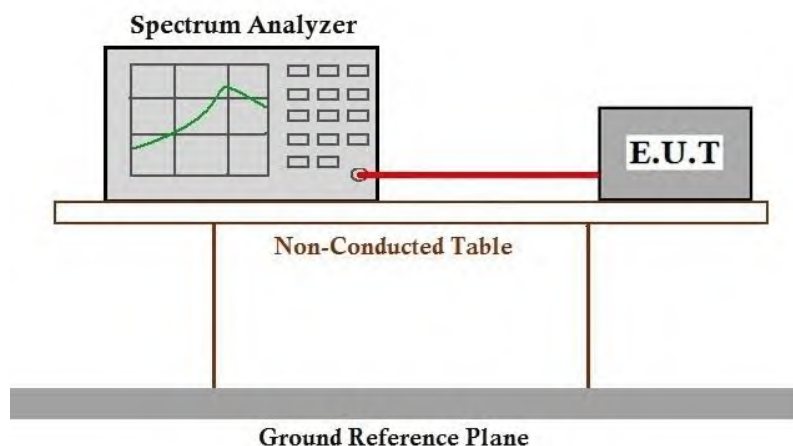

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

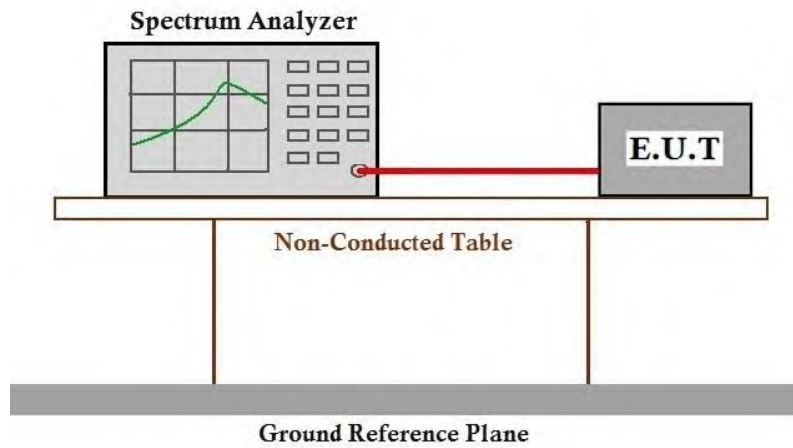

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

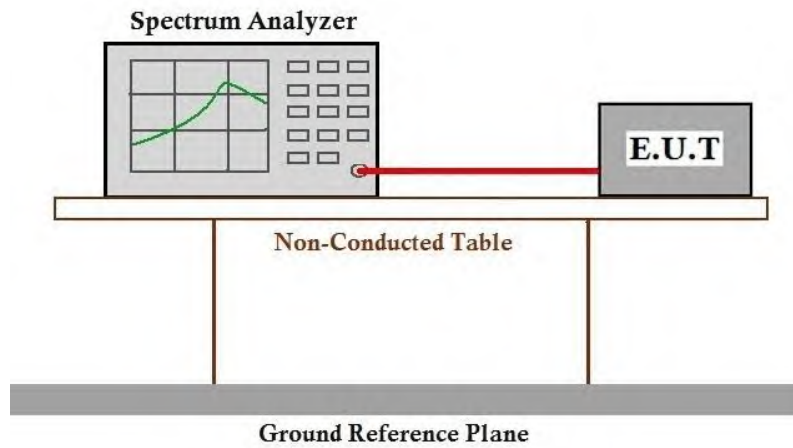

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: KSCR251100255501

Page: 76 of 128

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2511002555AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2511002555AT



10 Appendix

1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	100.000	100.000	100.00	0.00	0.00
		2437	100.000	100.000	100.00	0.00	0.00
		2462	100.000	100.000	100.00	0.00	0.00
802.11g	SISO	2412	100.000	100.000	100.00	0.00	0.00
		2437	100.000	100.000	100.00	0.00	0.00
		2462	100.000	100.000	100.00	0.00	0.00
802.11n (HT20)	SISO	2412	100.000	100.000	100.00	0.00	0.00
		2437	100.000	100.000	100.00	0.00	0.00
		2462	100.000	100.000	100.00	0.00	0.00
802.11n (HT40)	SISO	2422	100.000	100.000	100.00	0.00	0.00
		2437	100.000	100.000	100.00	0.00	0.00
		2452	100.000	100.000	100.00	0.00	0.00


1.2 Test Graph

1.2.1 Ant1


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

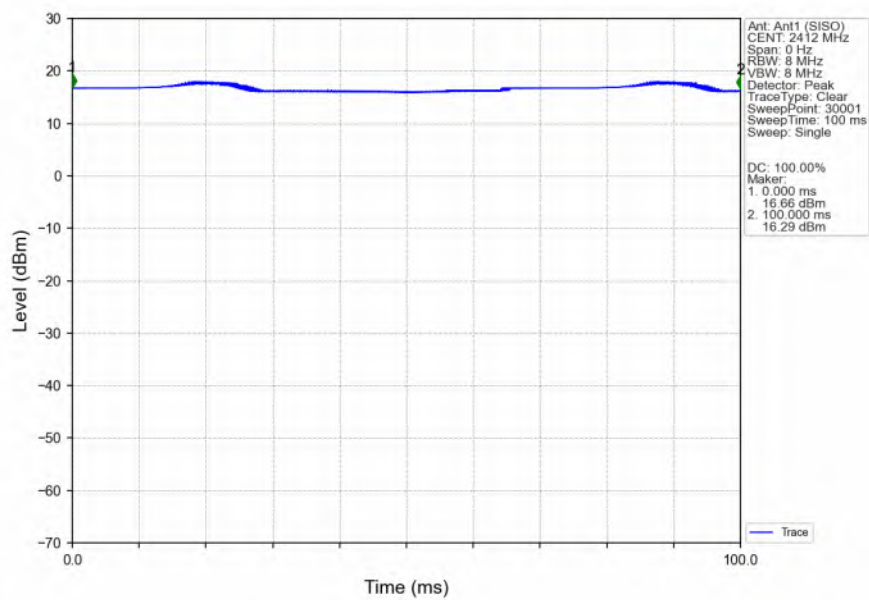


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

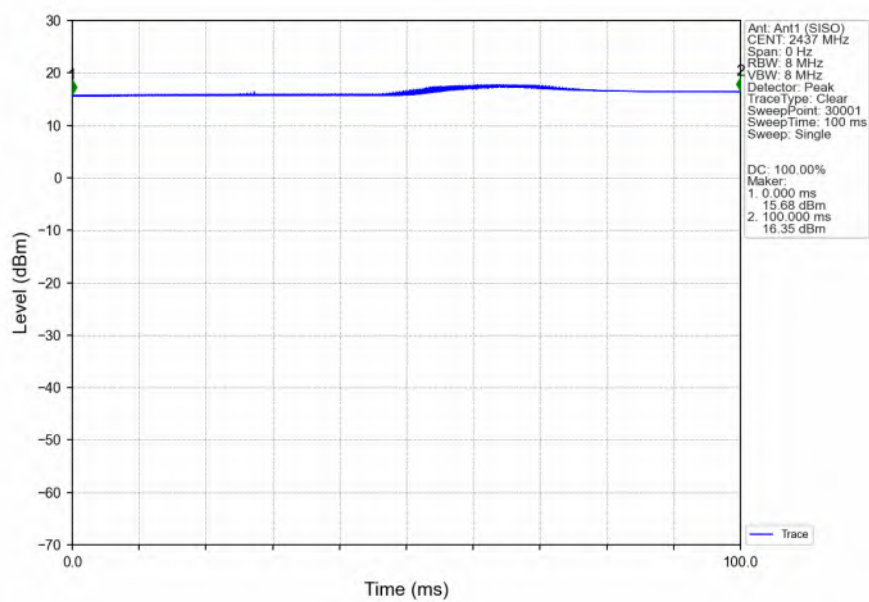


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

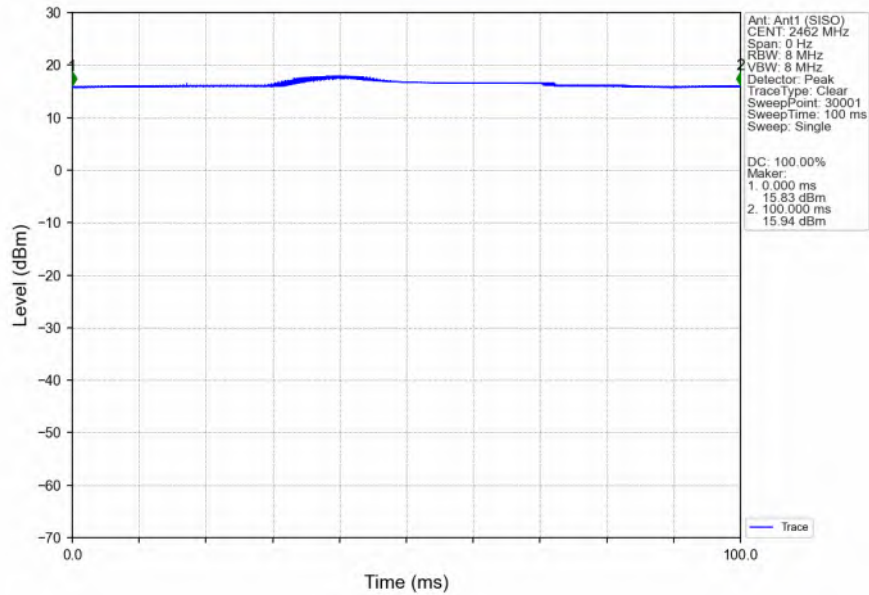


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

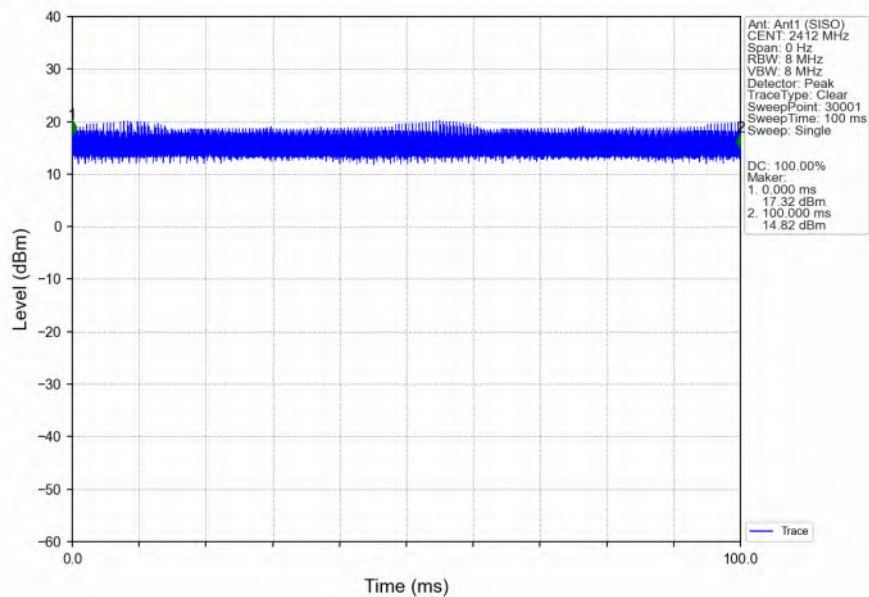


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

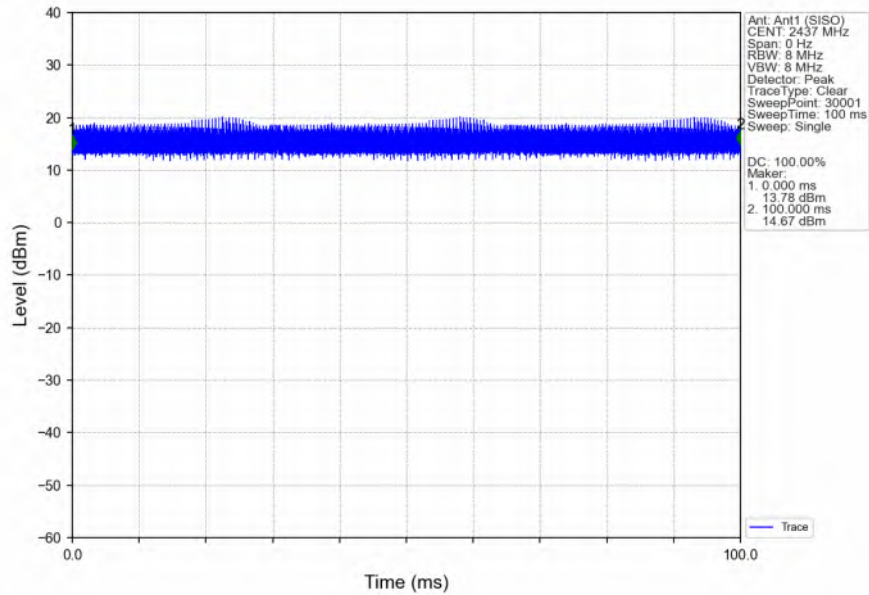


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

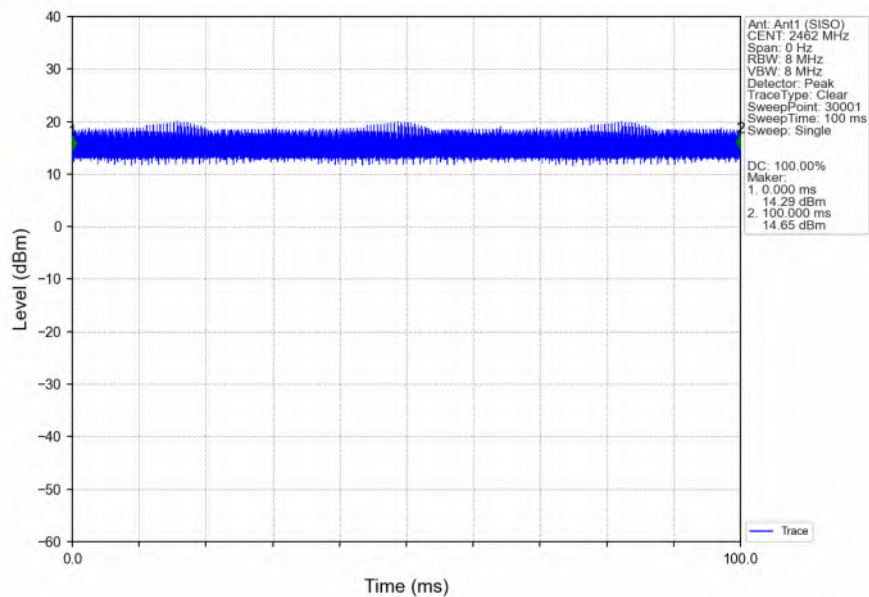


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

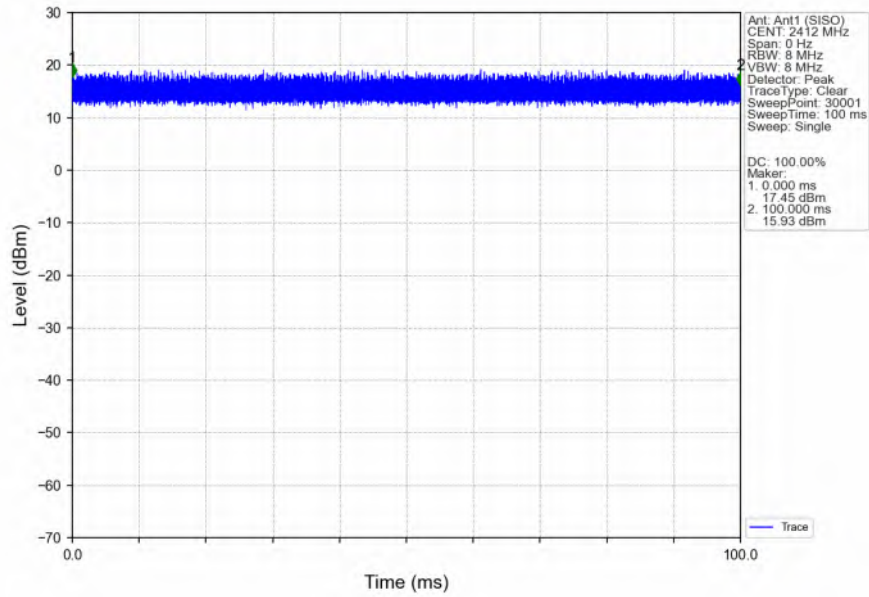


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

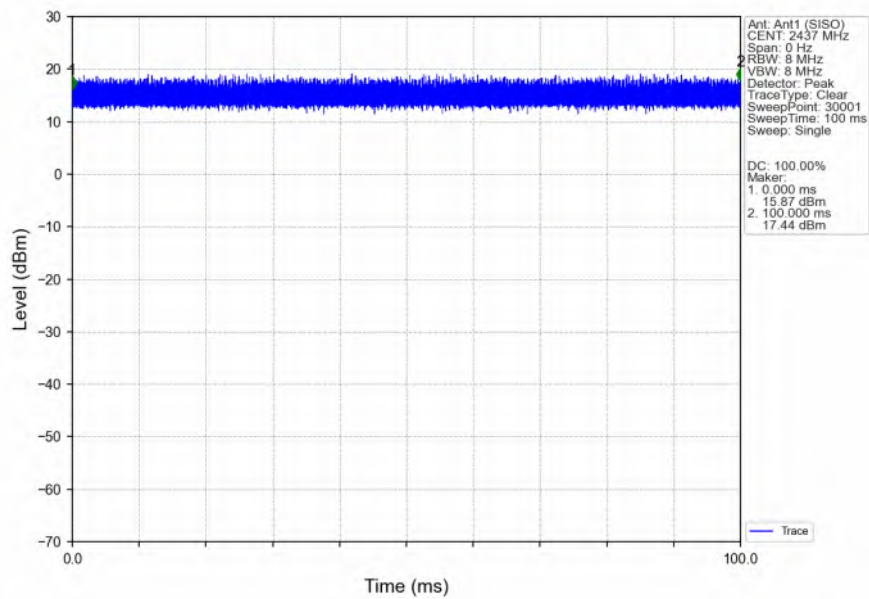


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

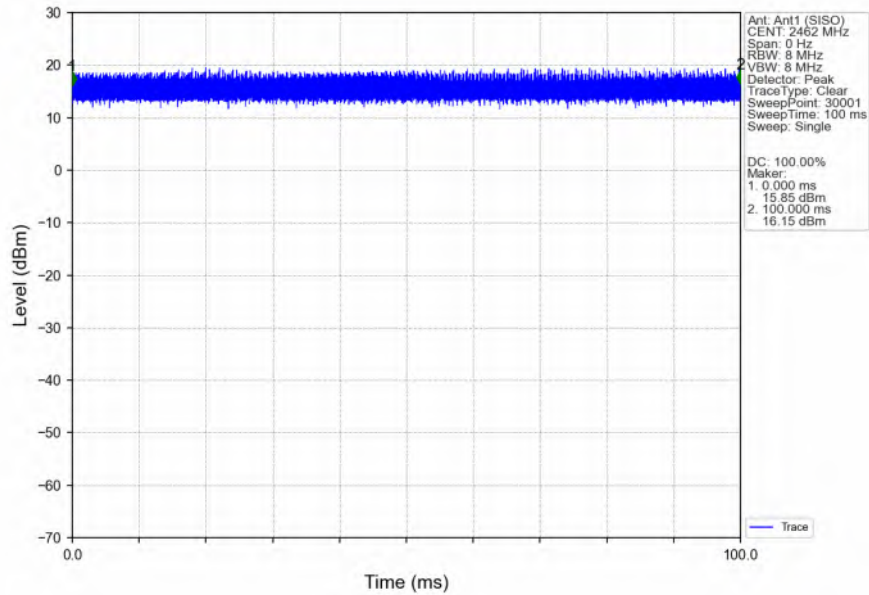


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

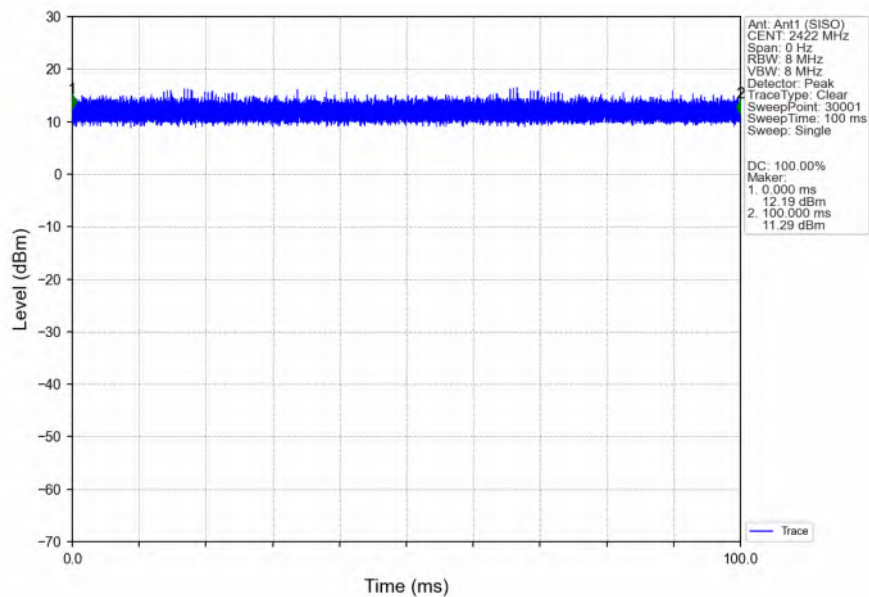

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

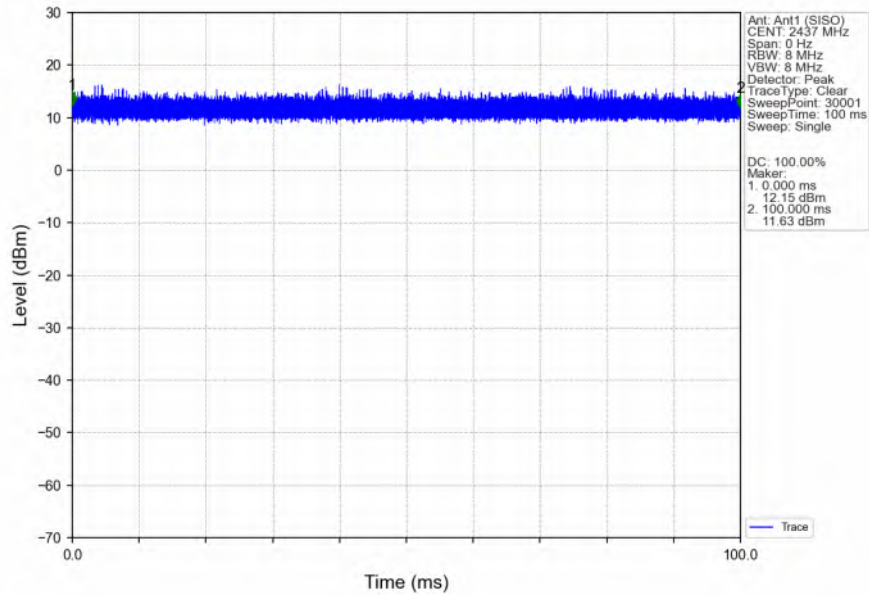

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

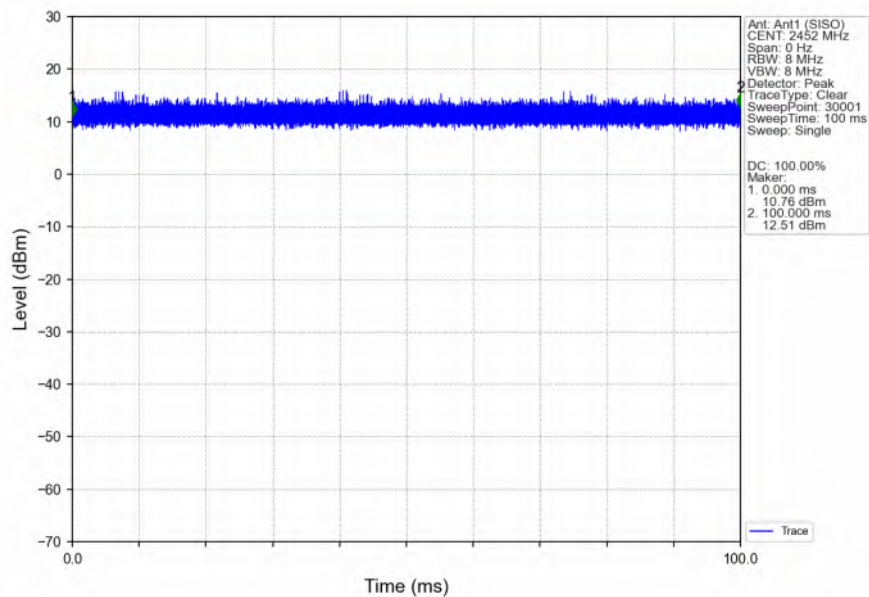

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	14.849	/	Pass
		2437	1	14.837	/	Pass
		2462	1	14.831	/	Pass
802.11g	SISO	2412	1	17.708	/	Pass
		2437	1	17.704	/	Pass
		2462	1	17.669	/	Pass
802.11n (HT20)	SISO	2412	1	18.596	/	Pass
		2437	1	18.576	/	Pass
		2462	1	18.593	/	Pass
802.11n (HT40)	SISO	2422	1	36.049	/	Pass
		2437	1	36.017	/	Pass
		2452	1	36.029	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	10.176	≥ 0.5	Pass
		2437	1	10.173	≥ 0.5	Pass
		2462	1	10.175	≥ 0.5	Pass
802.11g	SISO	2412	1	16.686	≥ 0.5	Pass
		2437	1	16.676	≥ 0.5	Pass
		2462	1	16.674	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	1	17.717	≥ 0.5	Pass
		2437	1	17.715	≥ 0.5	Pass
		2462	1	17.695	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	1	36.115	≥ 0.5	Pass
		2437	1	36.080	≥ 0.5	Pass
		2452	1	36.078	≥ 0.5	Pass


2.2 Test Graph

2.2.1 OBW


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

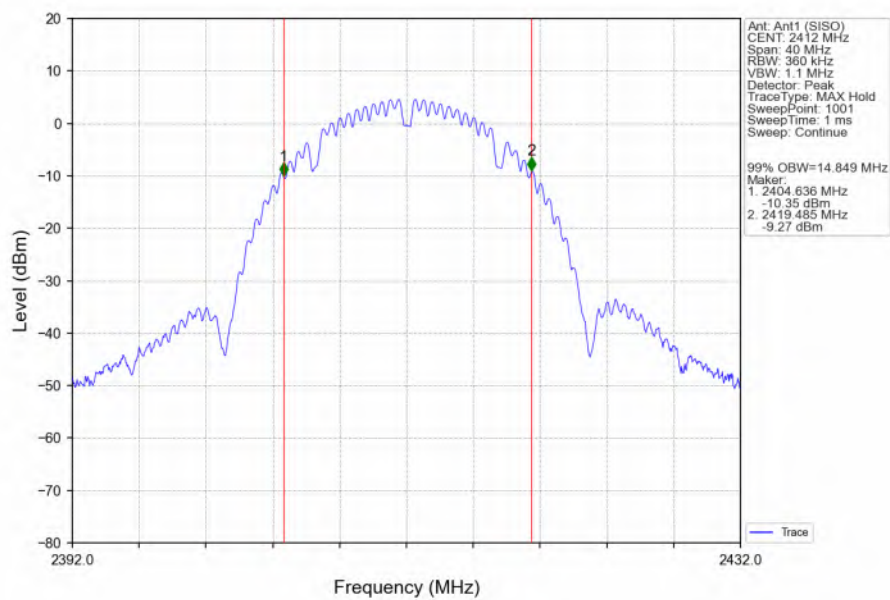


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

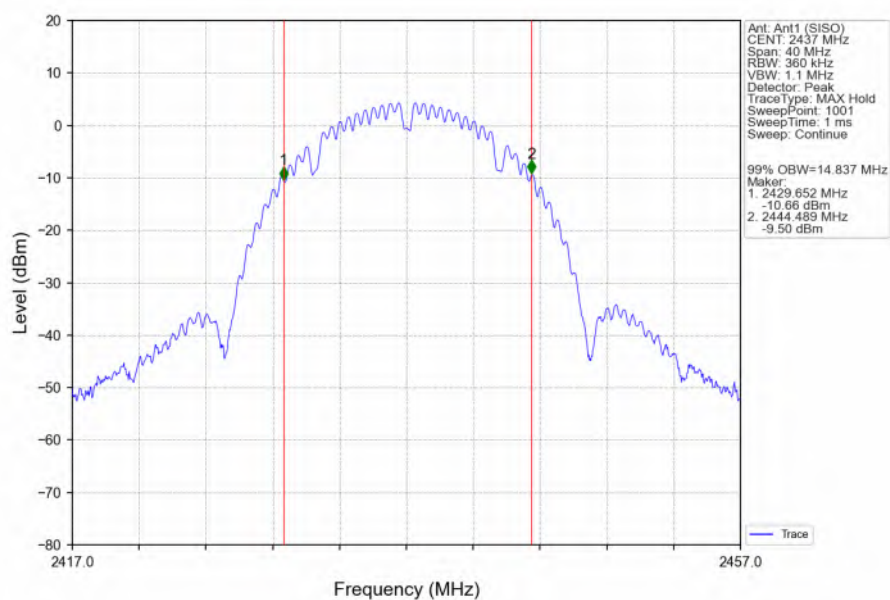


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

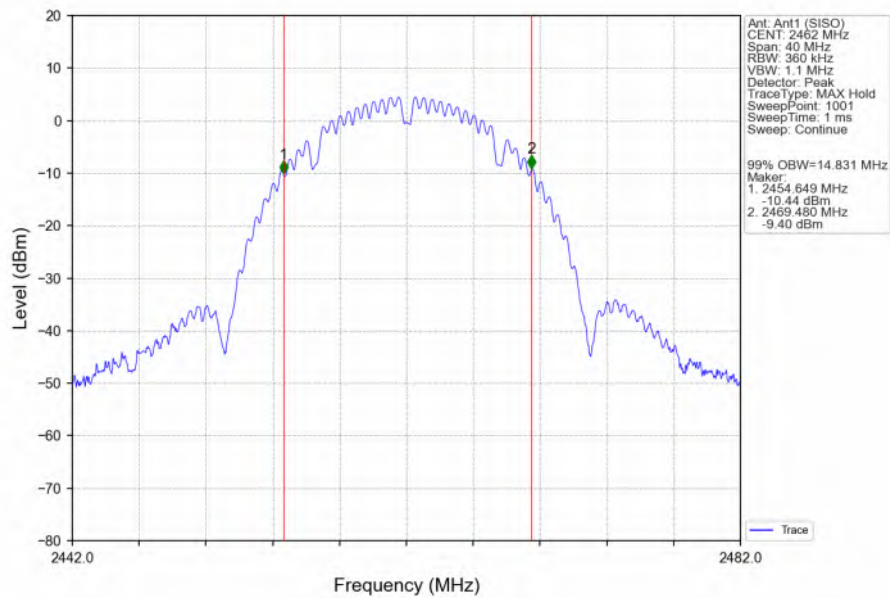


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

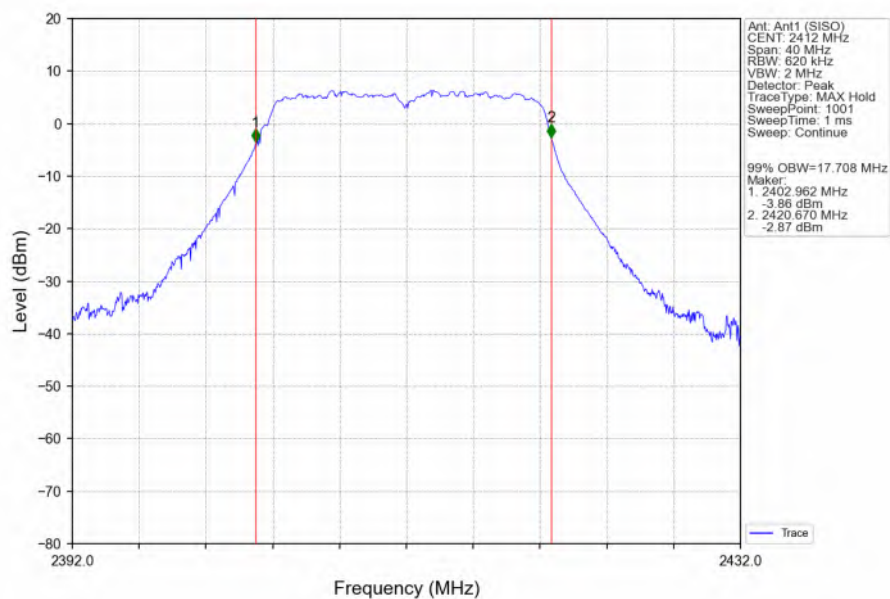


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

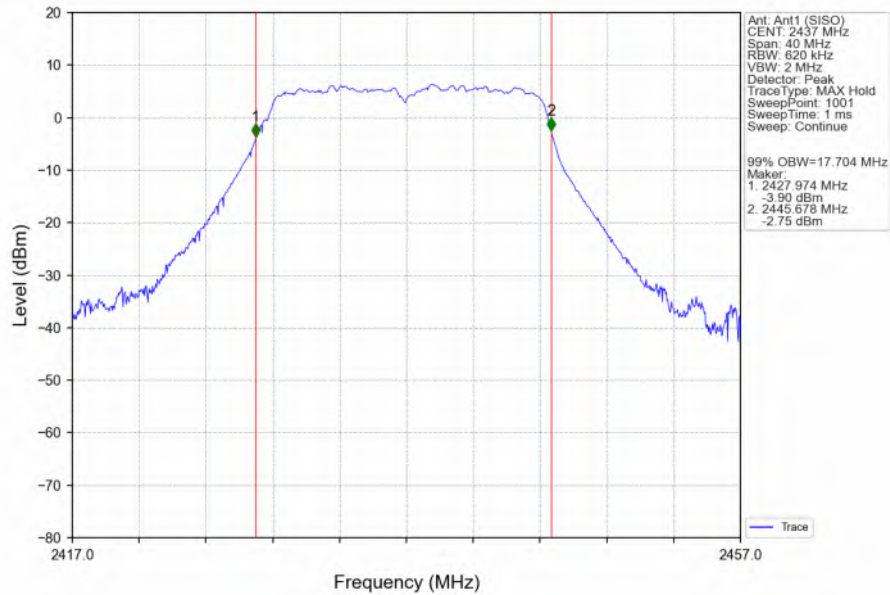


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

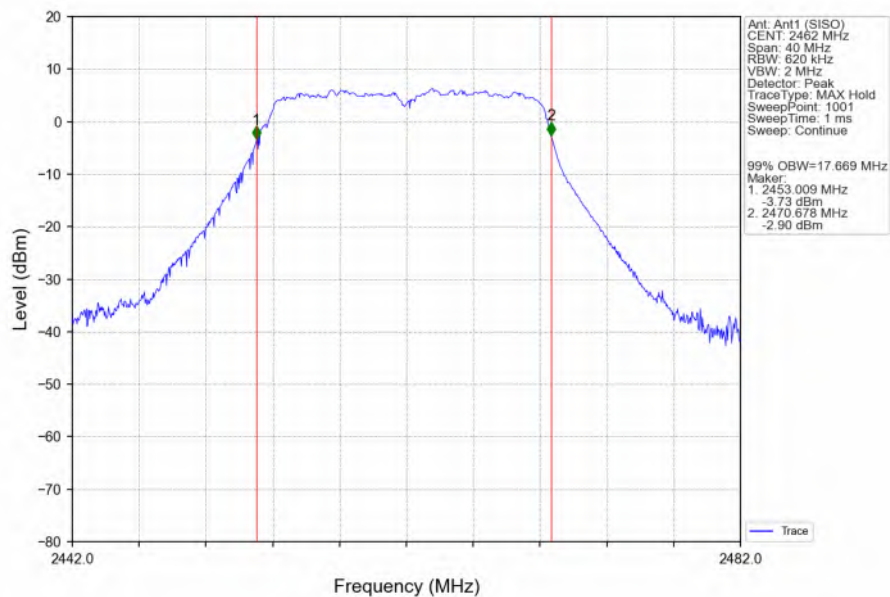


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

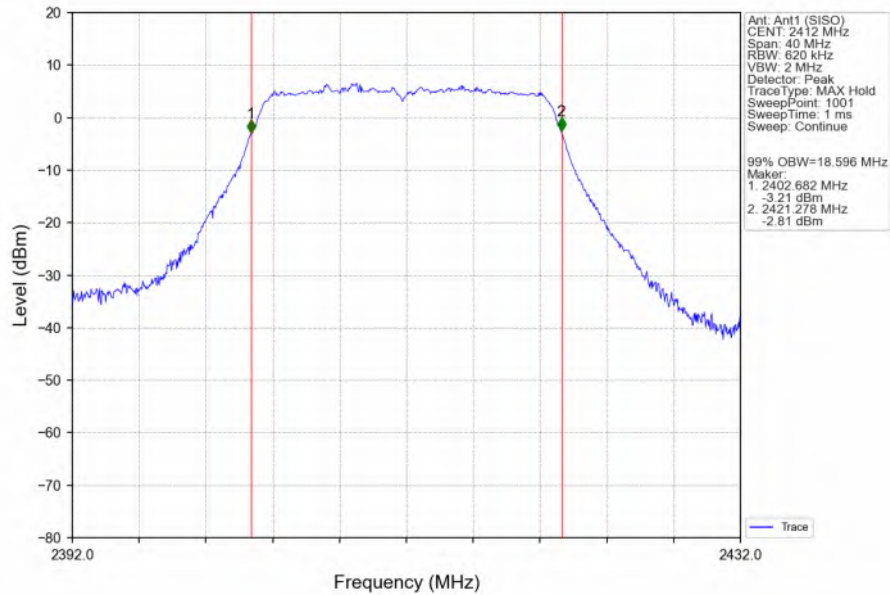


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

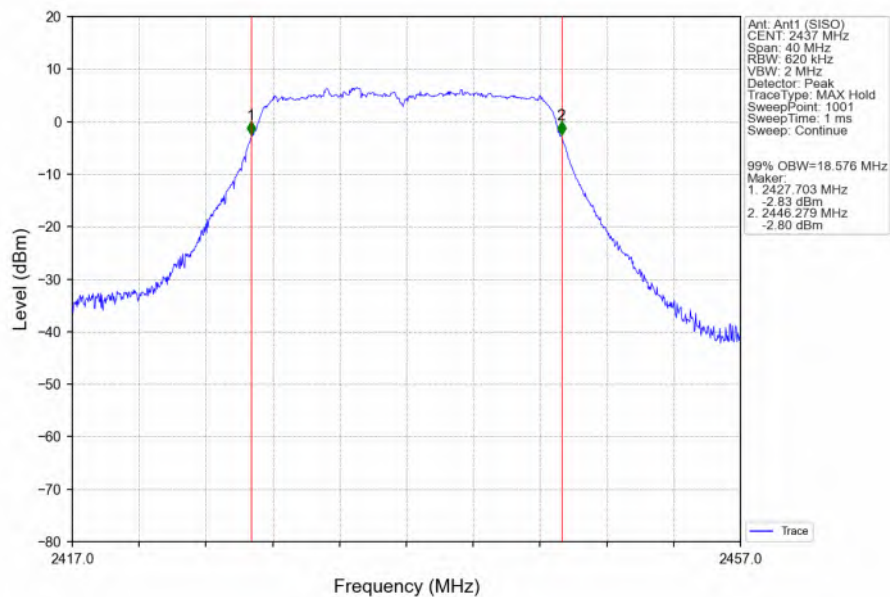


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

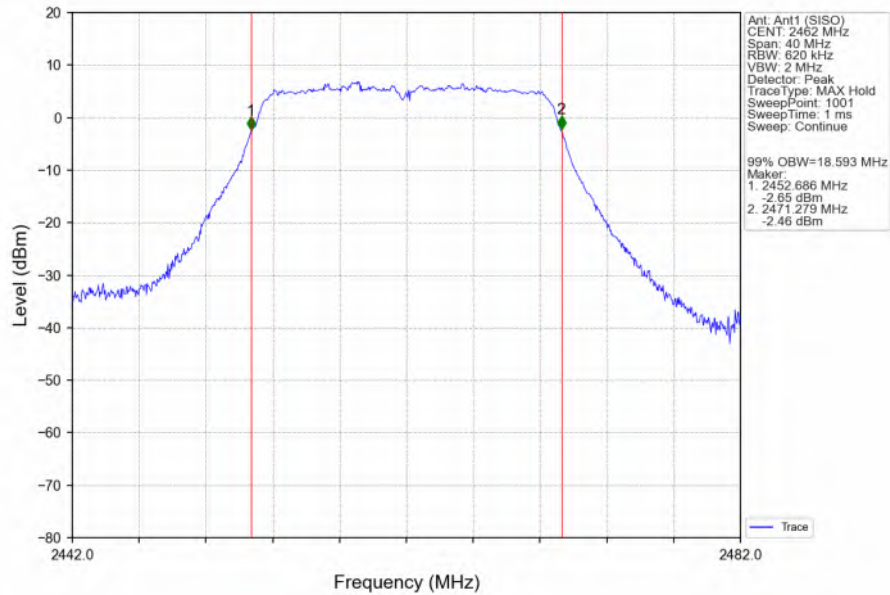


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

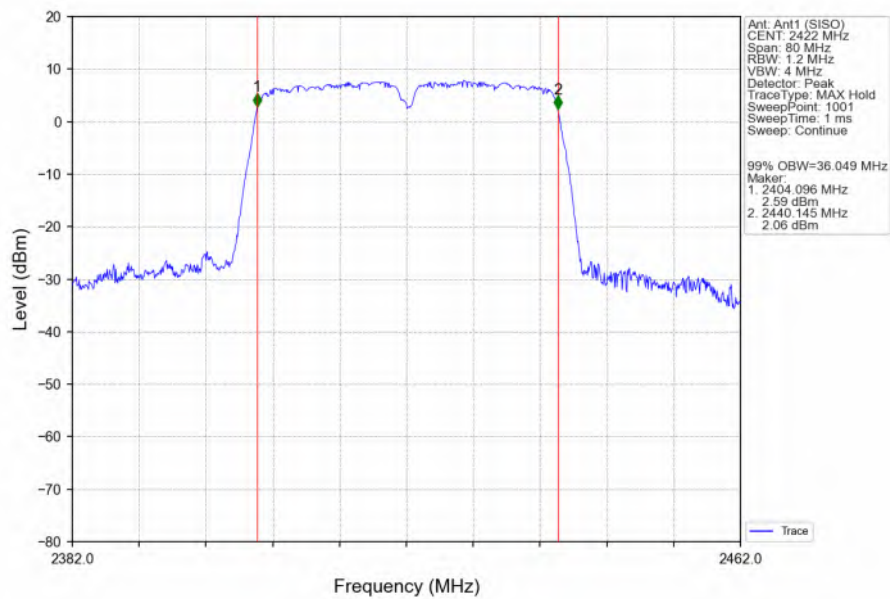

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

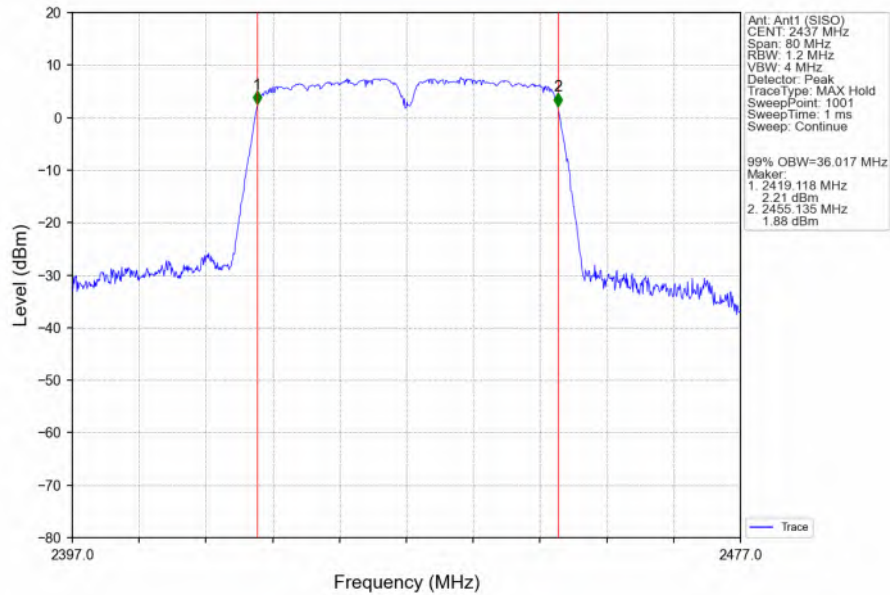


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

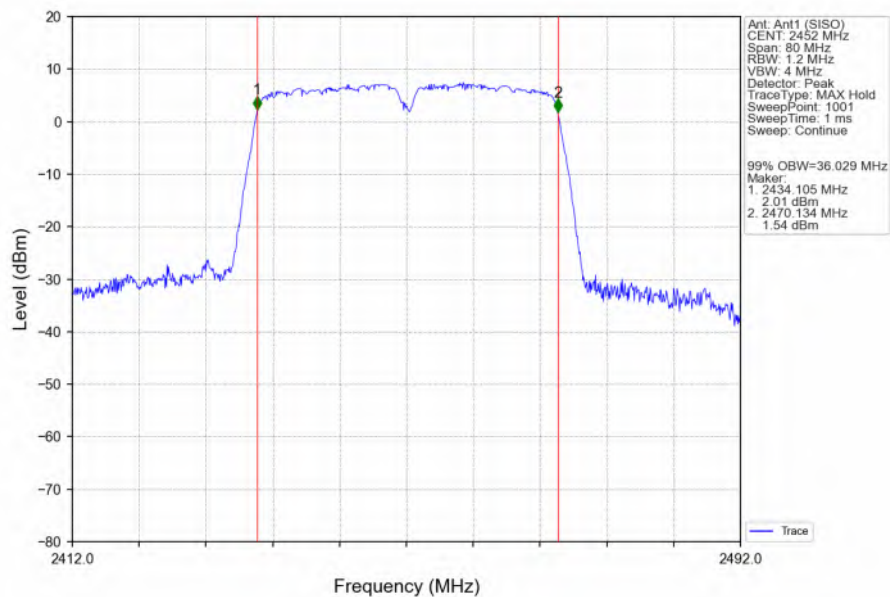


2.2.2 6dB BW


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

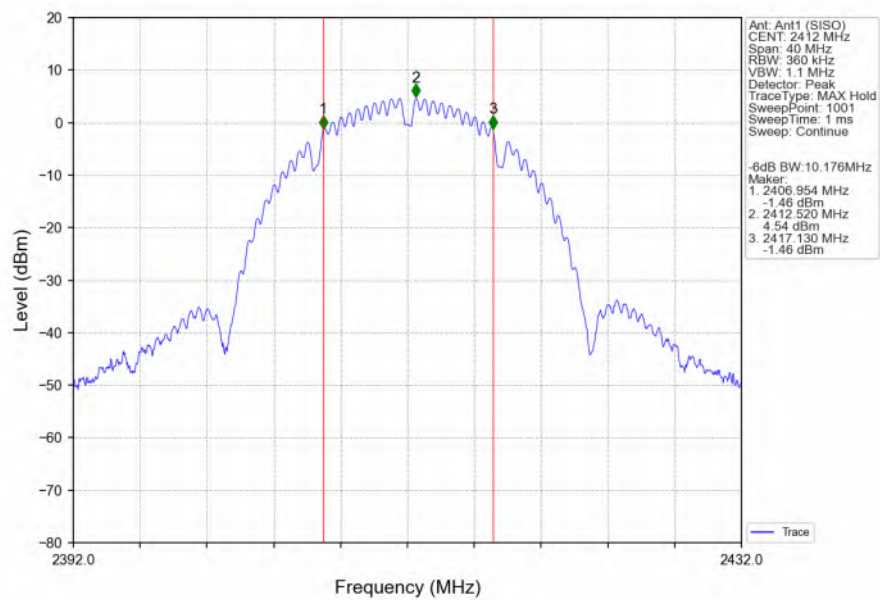


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

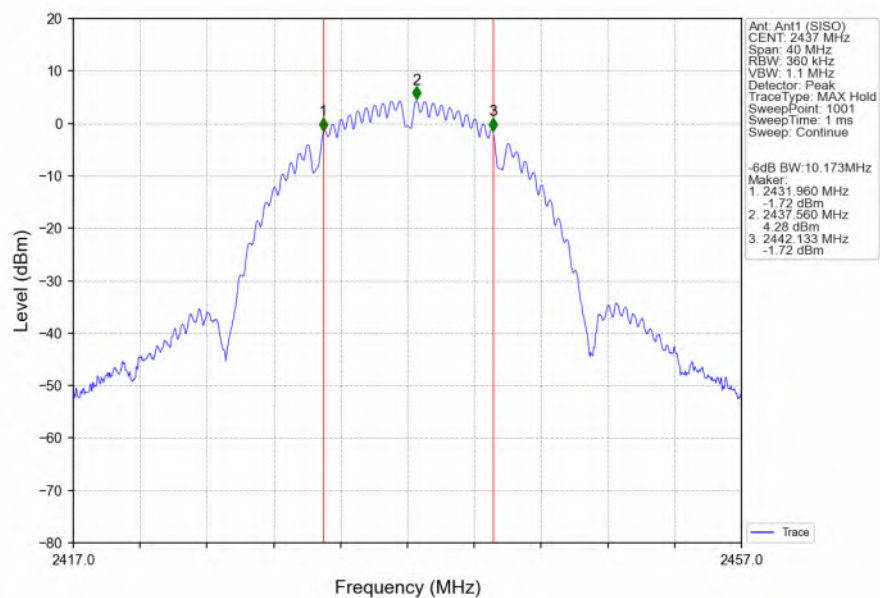


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

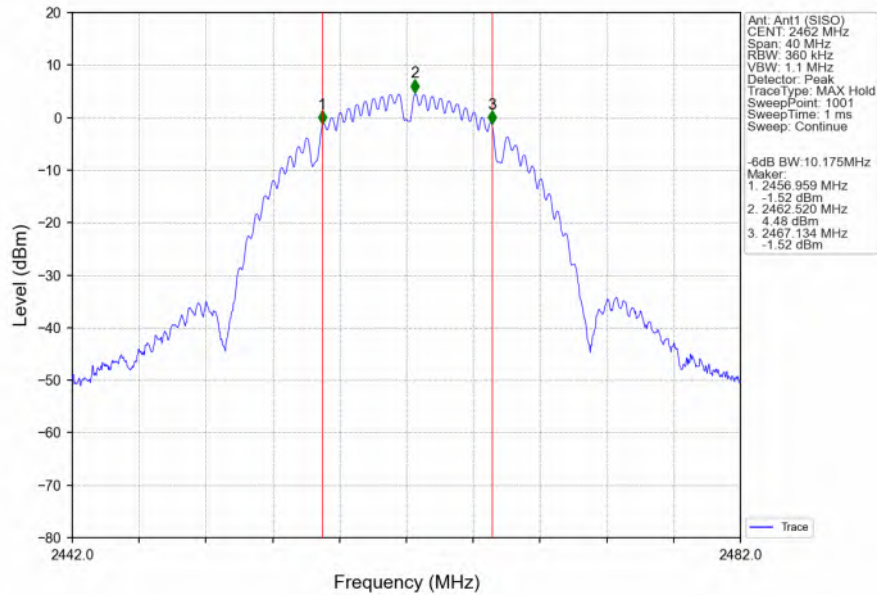


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

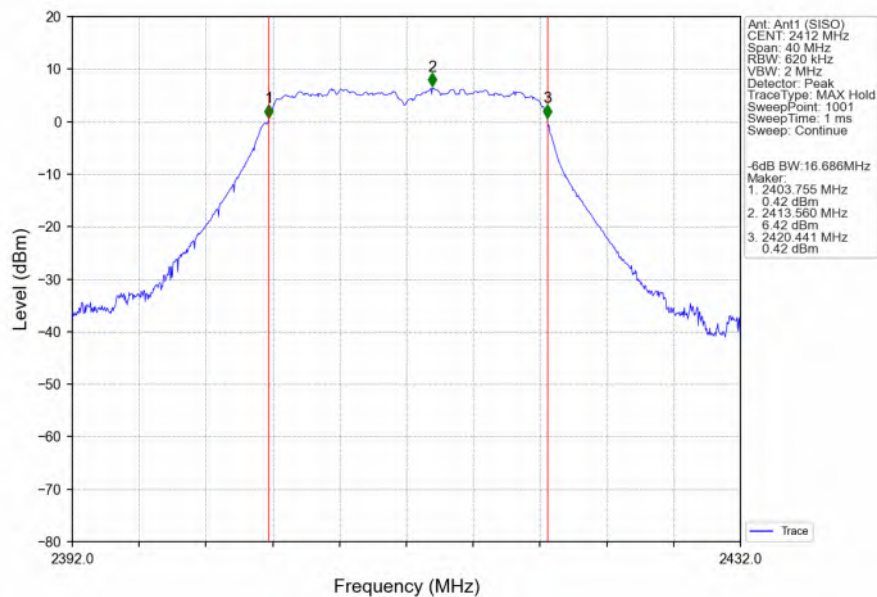


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

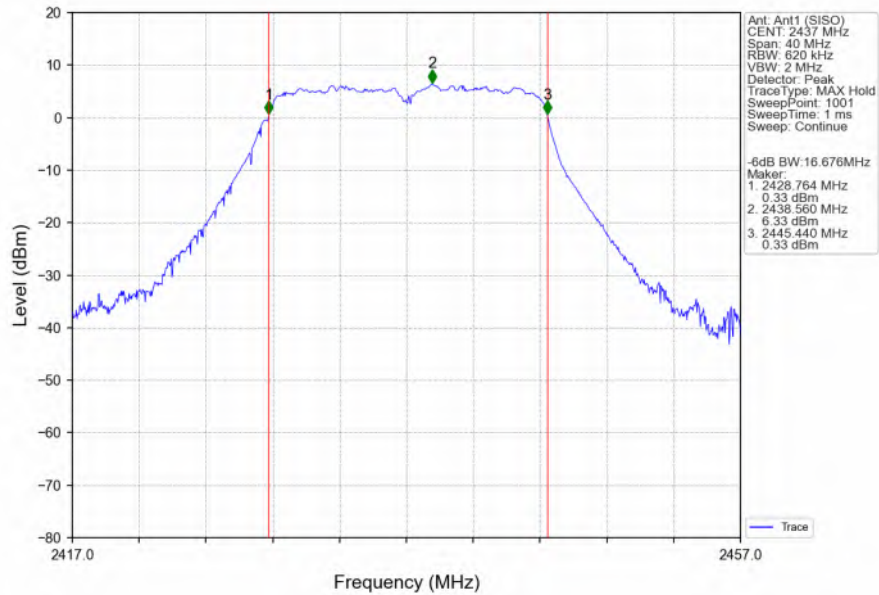


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

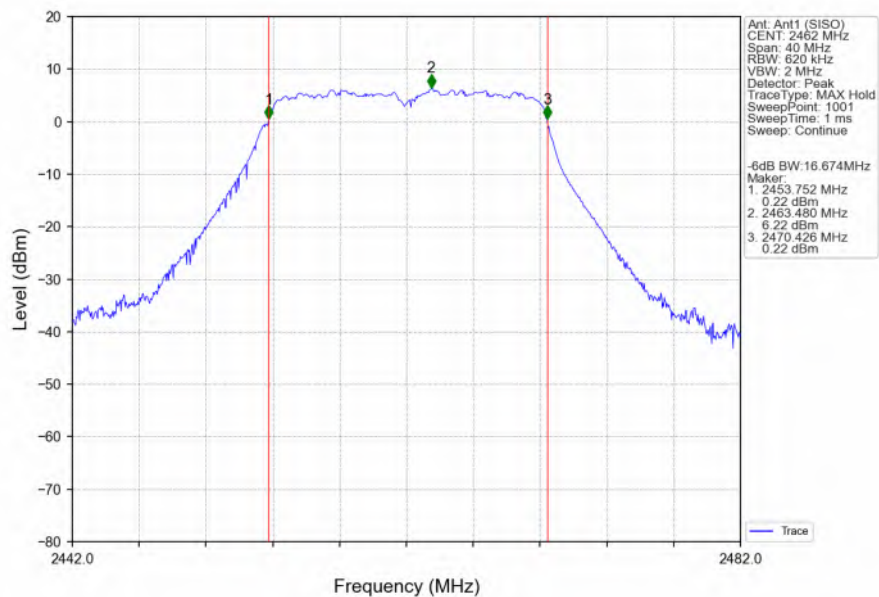


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

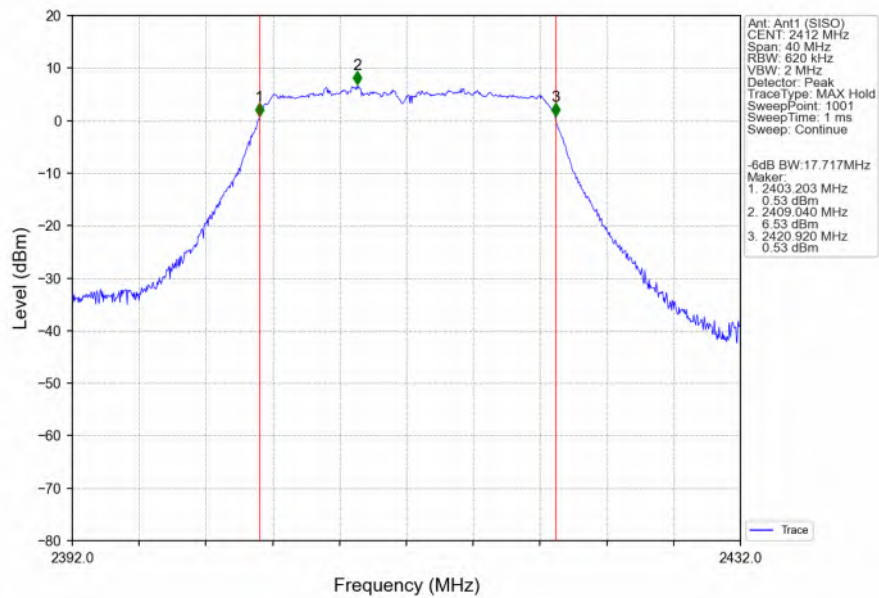


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

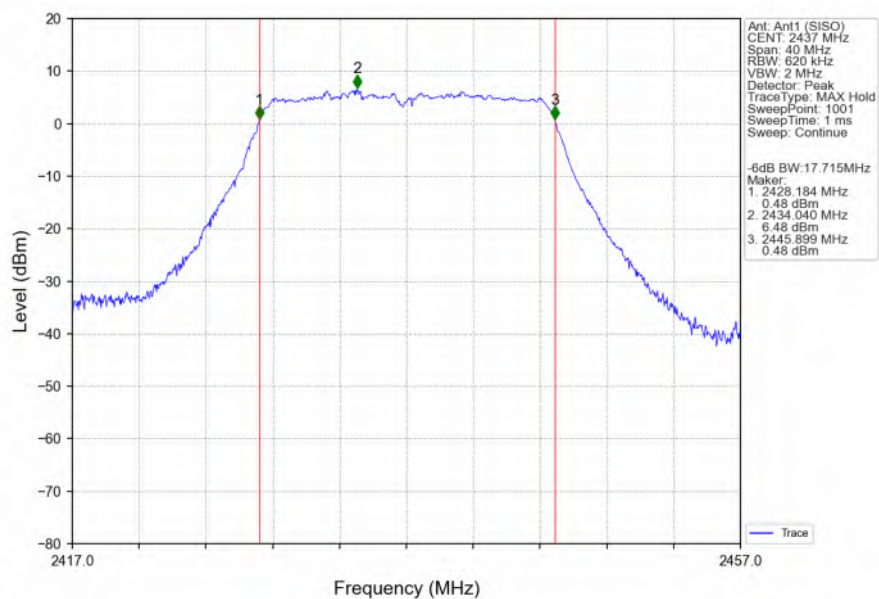


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

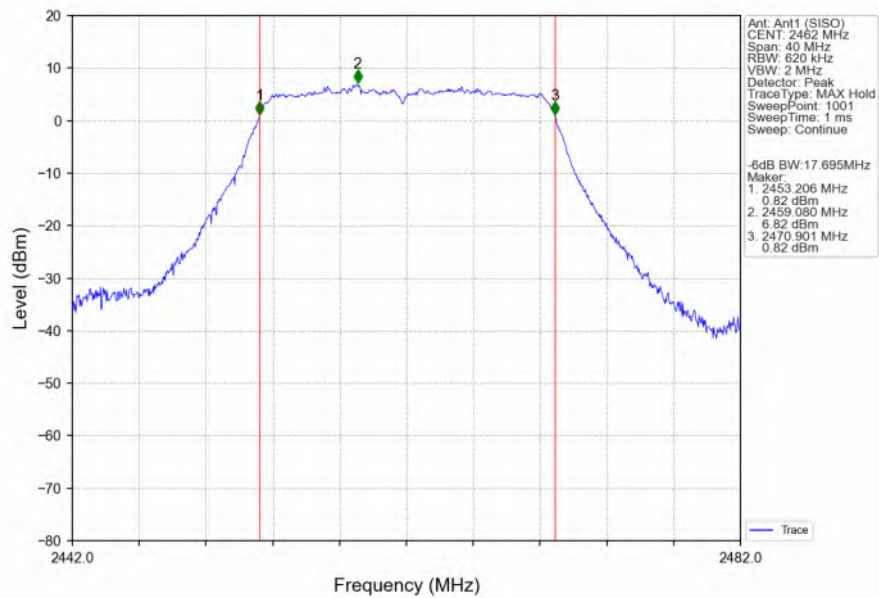


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

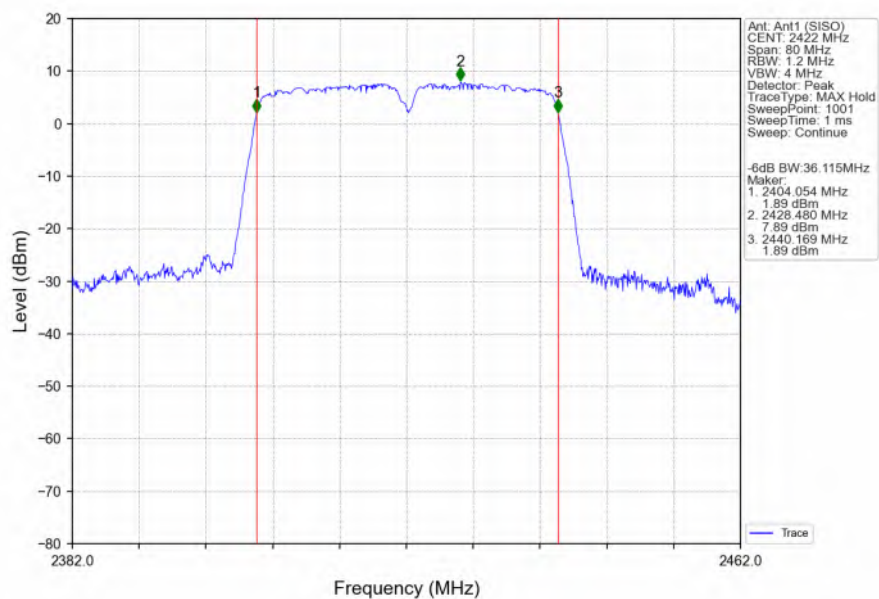

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

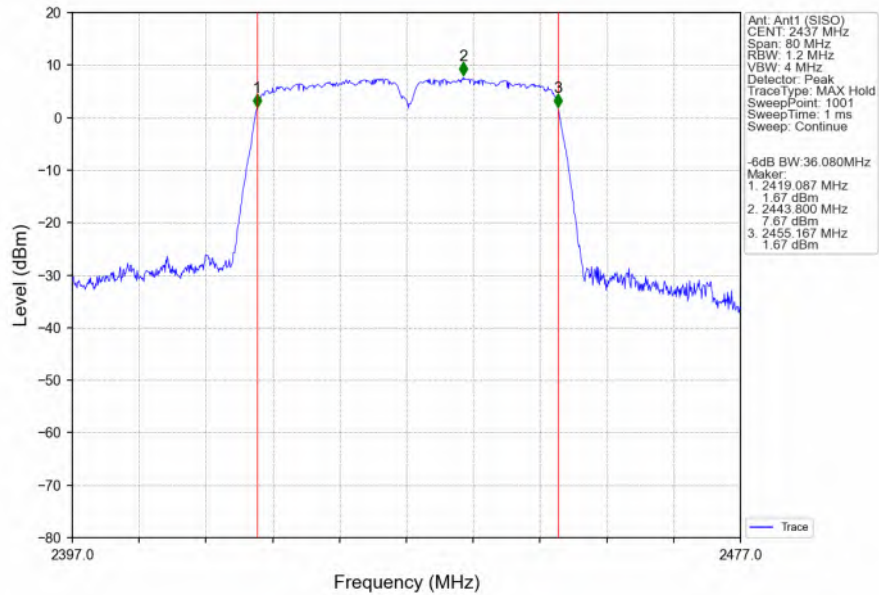

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

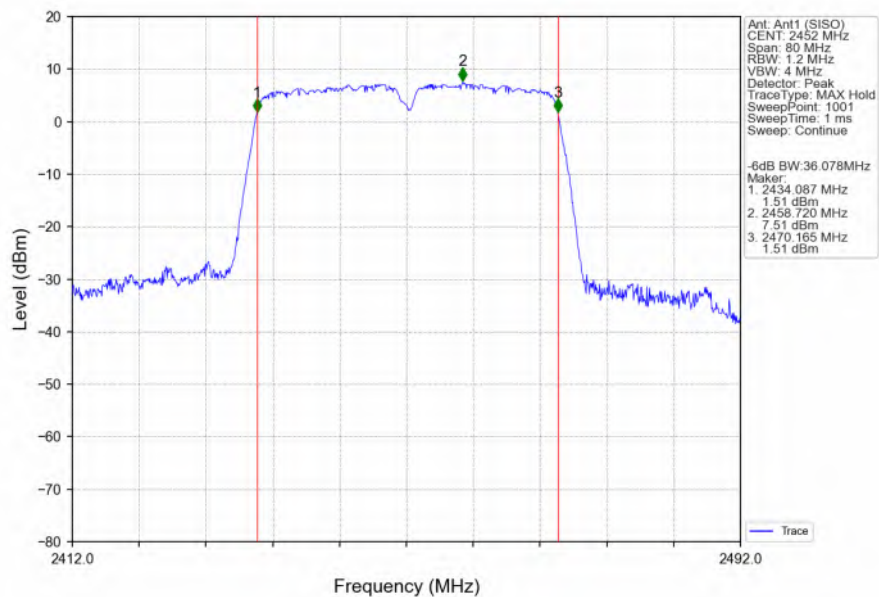



3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11b	SISO	2412	12.86	<=30	Pass
		2437	12.60	<=30	Pass
		2462	12.81	<=30	Pass
802.11g	SISO	2412	12.66	<=30	Pass
		2437	12.56	<=30	Pass
		2462	12.46	<=30	Pass
802.11n (HT20)	SISO	2412	12.41	<=30	Pass
		2437	12.39	<=30	Pass
		2462	12.70	<=30	Pass
802.11n (HT40)	SISO	2422	12.70	<=30	Pass
		2437	12.41	<=30	Pass
		2452	12.18	<=30	Pass


Note1: Antenna Gain: Ant1: 2.90dBi;

3.2 Test Graph


3.2.1 Power

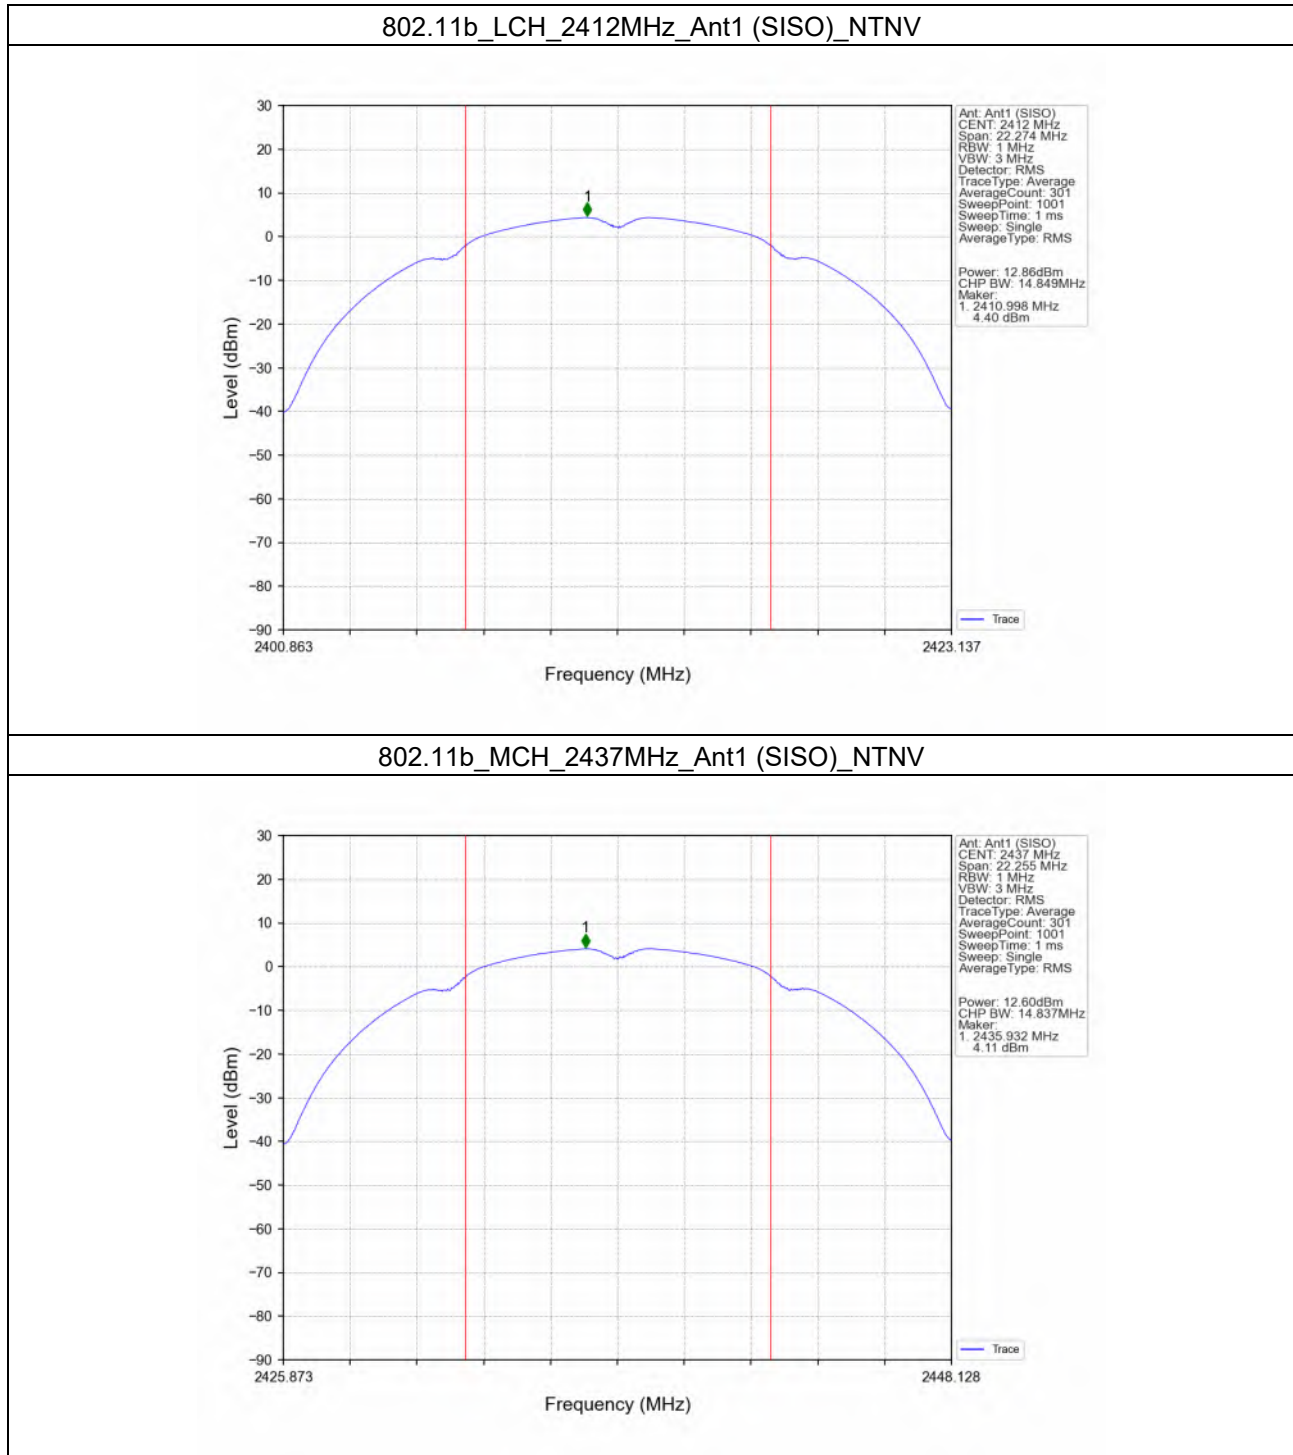


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

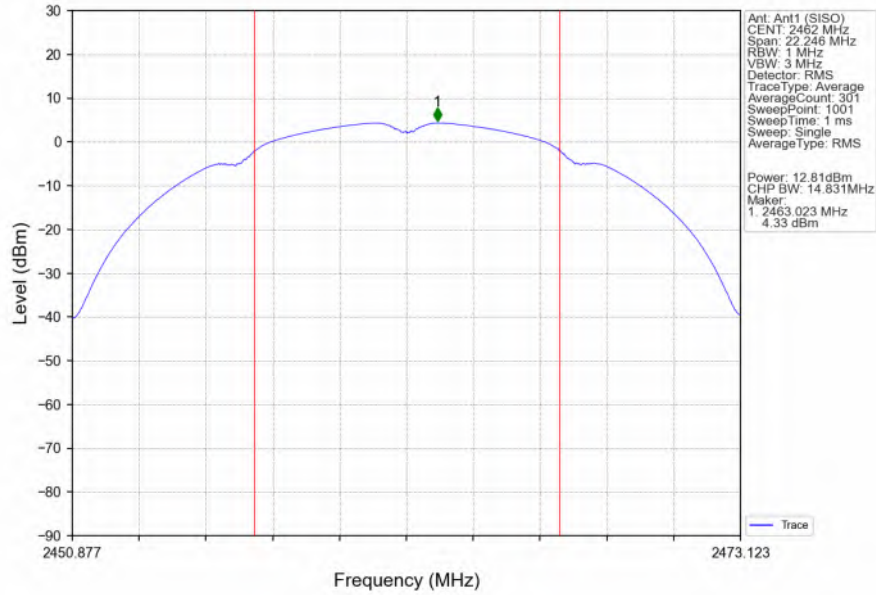


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

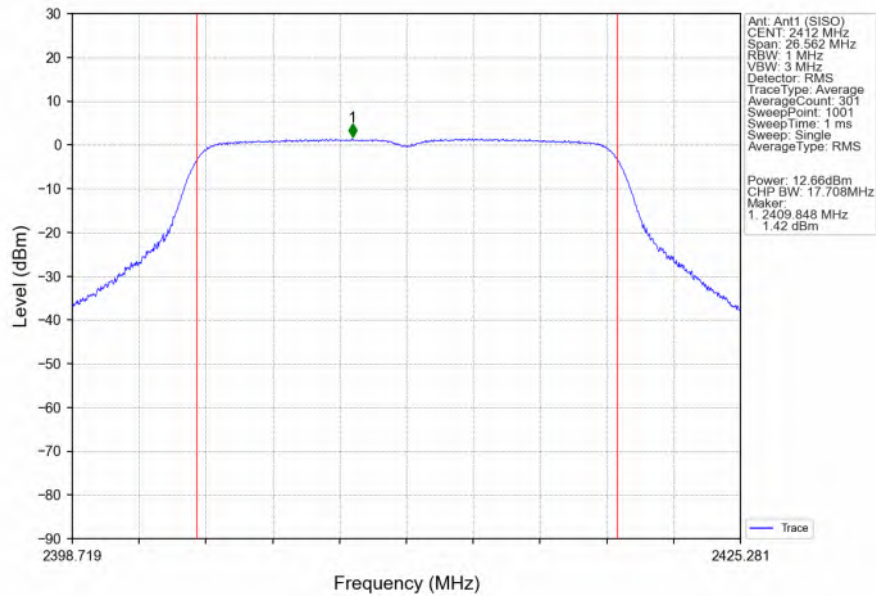


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

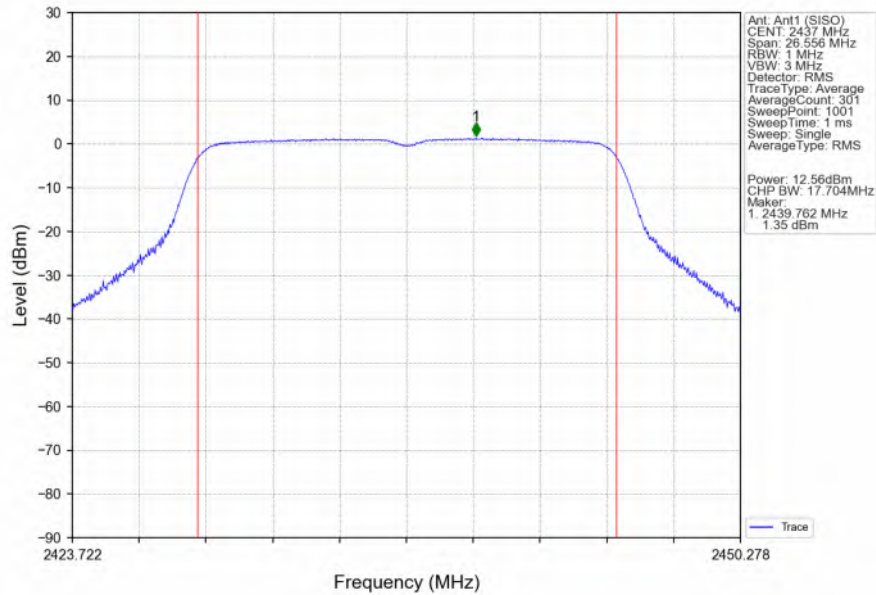


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

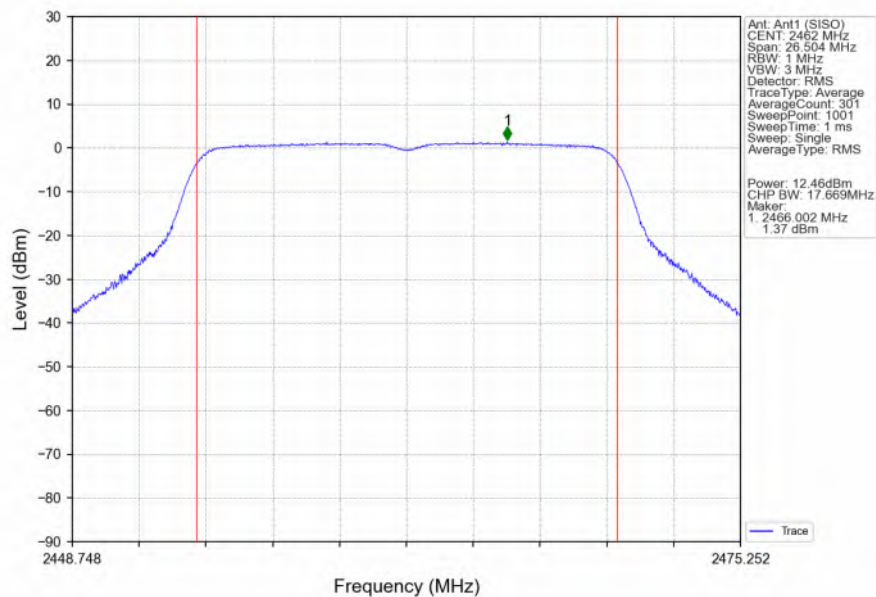


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

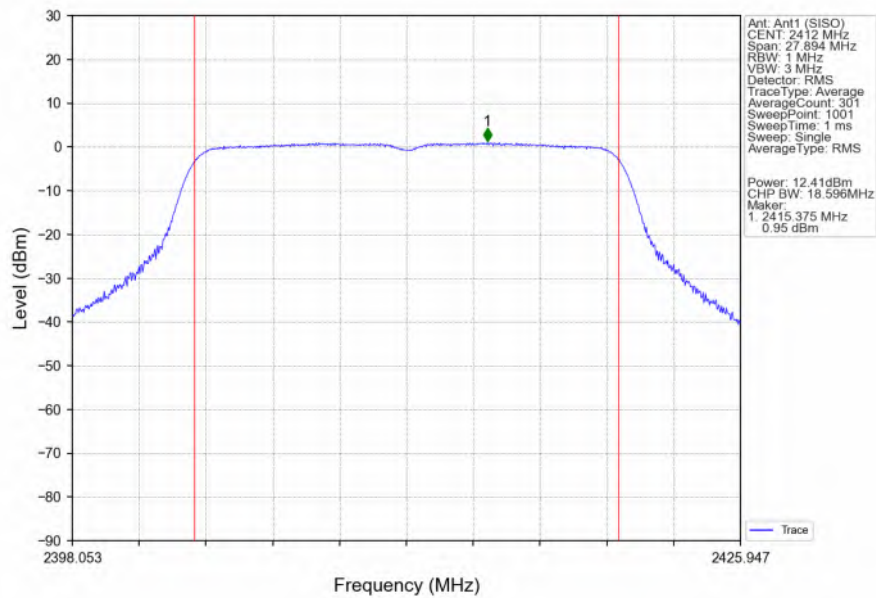


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

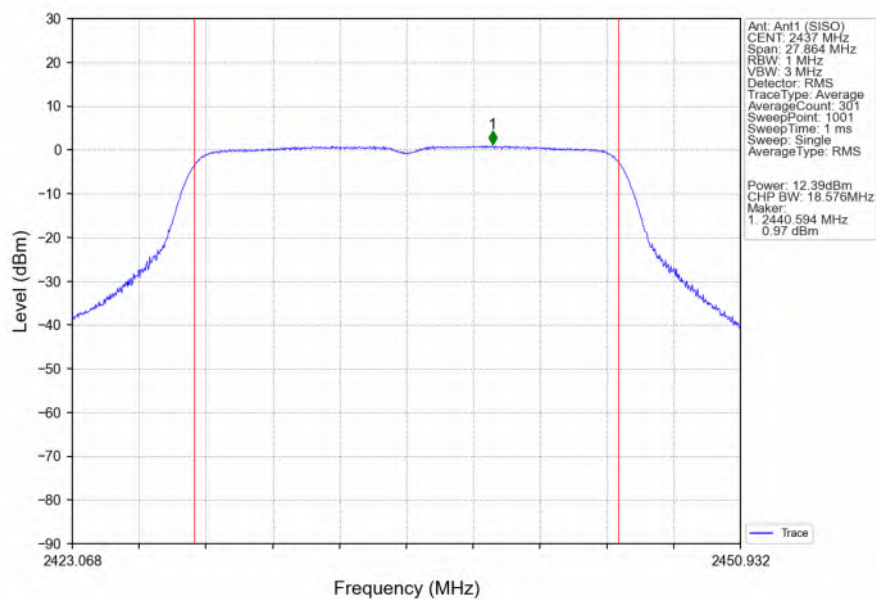


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

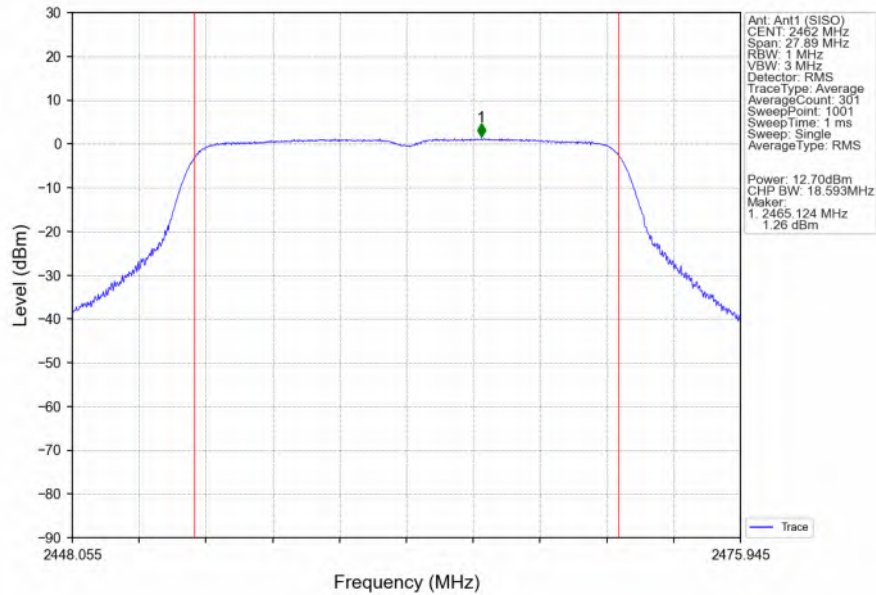


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

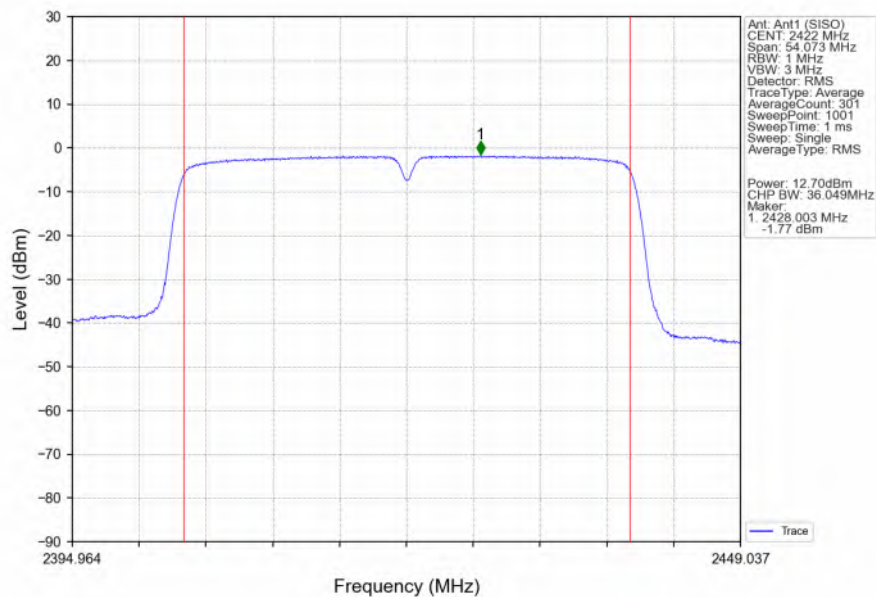

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

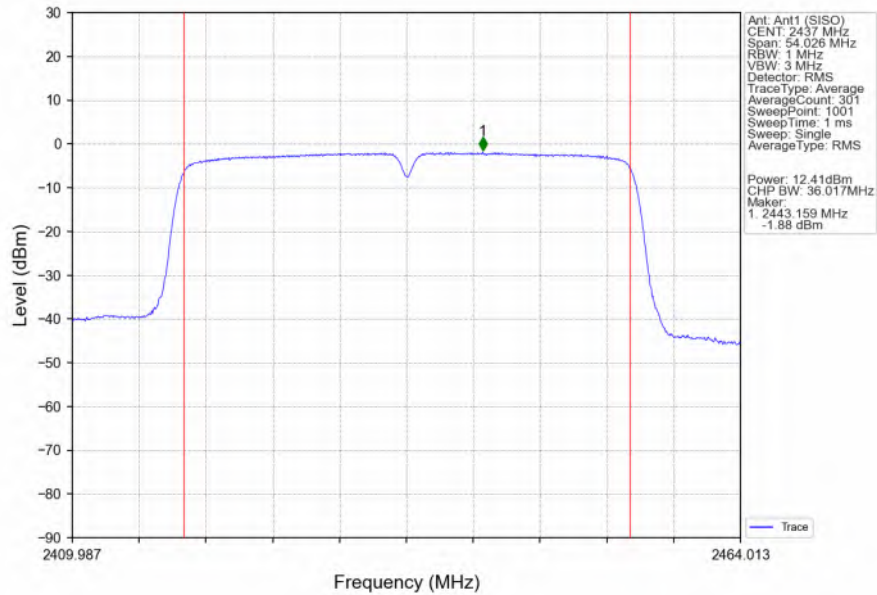

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

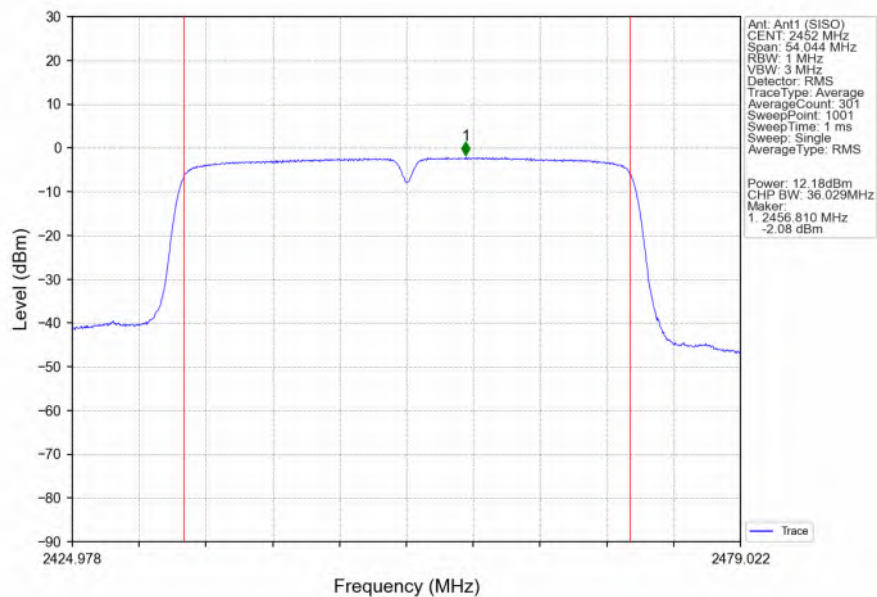



4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
802.11b	SISO	2412	-4.56	<=8	Pass
		2437	-4.70	<=8	Pass
		2462	-4.52	<=8	Pass
802.11g	SISO	2412	-7.59	<=8	Pass
		2437	-7.71	<=8	Pass
		2462	-7.89	<=8	Pass
802.11n (HT20)	SISO	2412	-8.18	<=8	Pass
		2437	-7.84	<=8	Pass
		2462	-7.72	<=8	Pass
802.11n (HT40)	SISO	2422	-10.63	<=8	Pass
		2437	-10.65	<=8	Pass
		2452	-11.16	<=8	Pass
Note1: Antenna Gain: Ant1: 2.90dBi;					


4.2 Test Graph

4.2.1 PSD


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

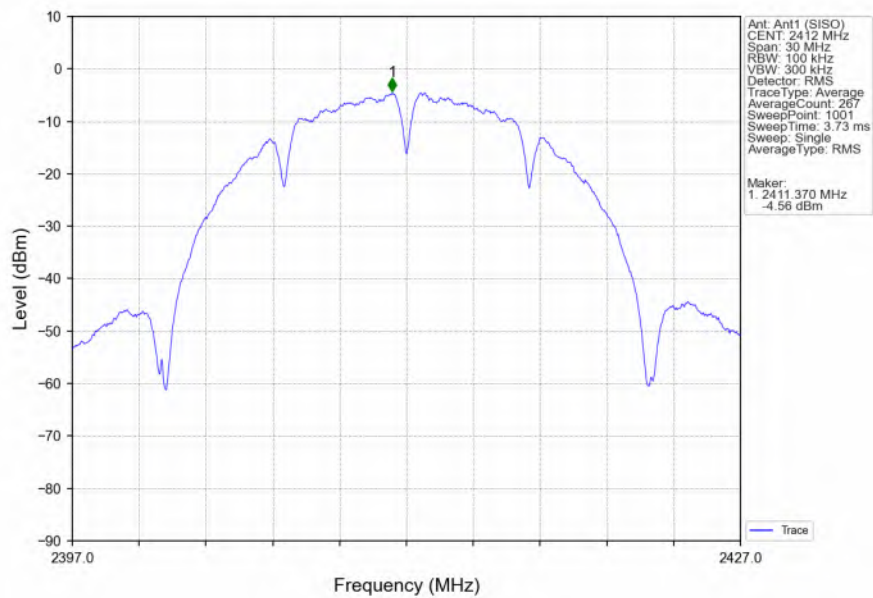


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

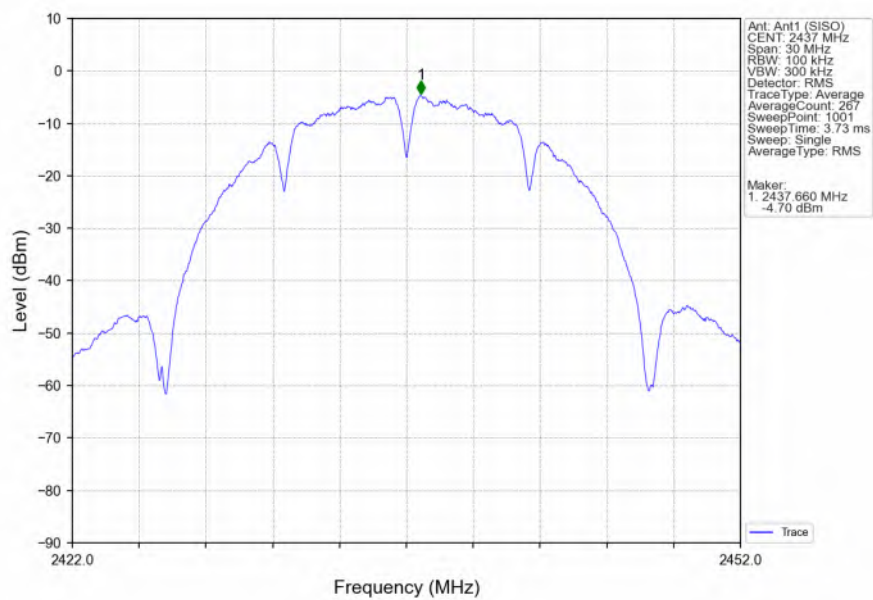


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

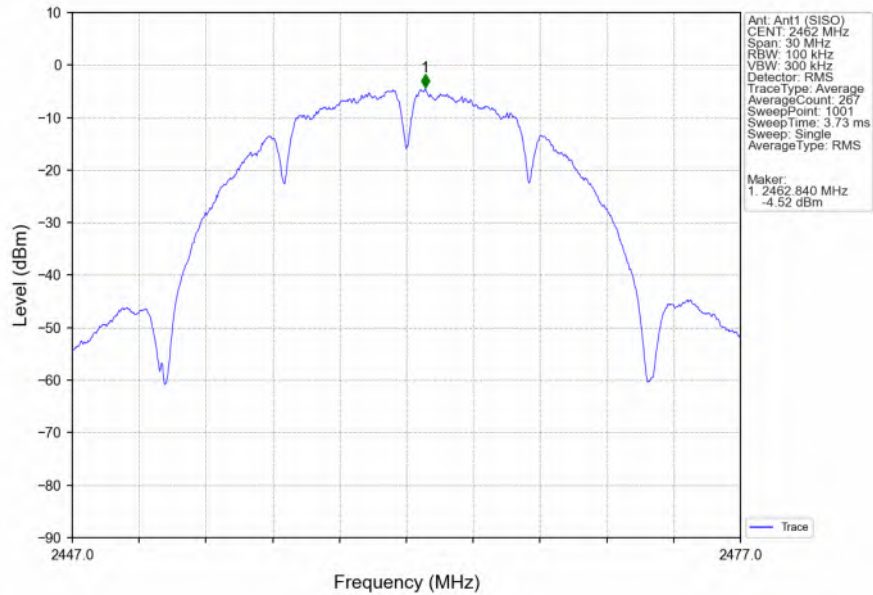


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

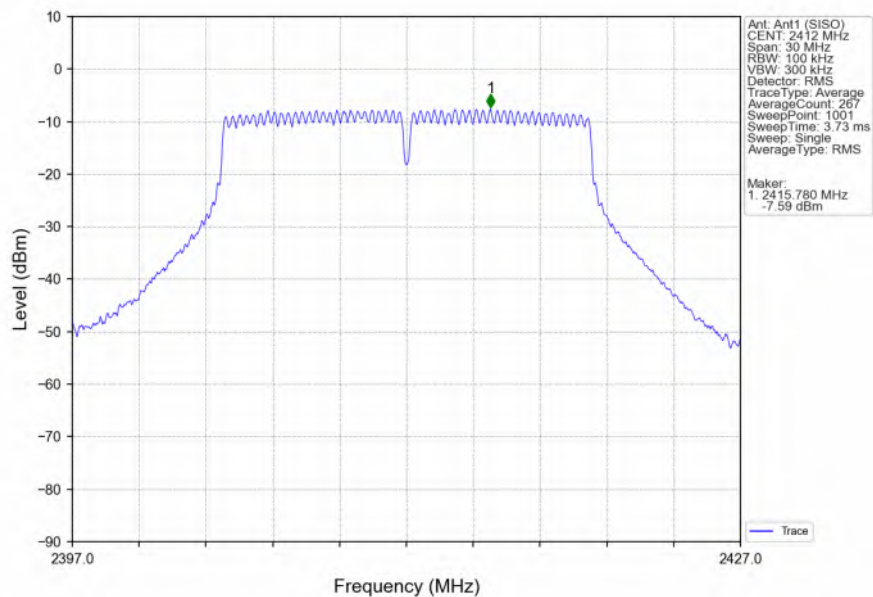


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

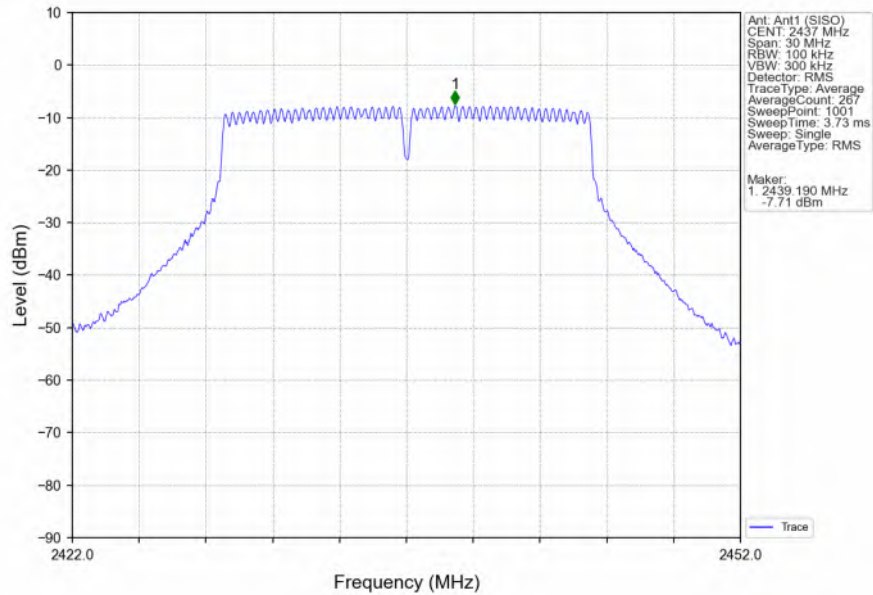


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

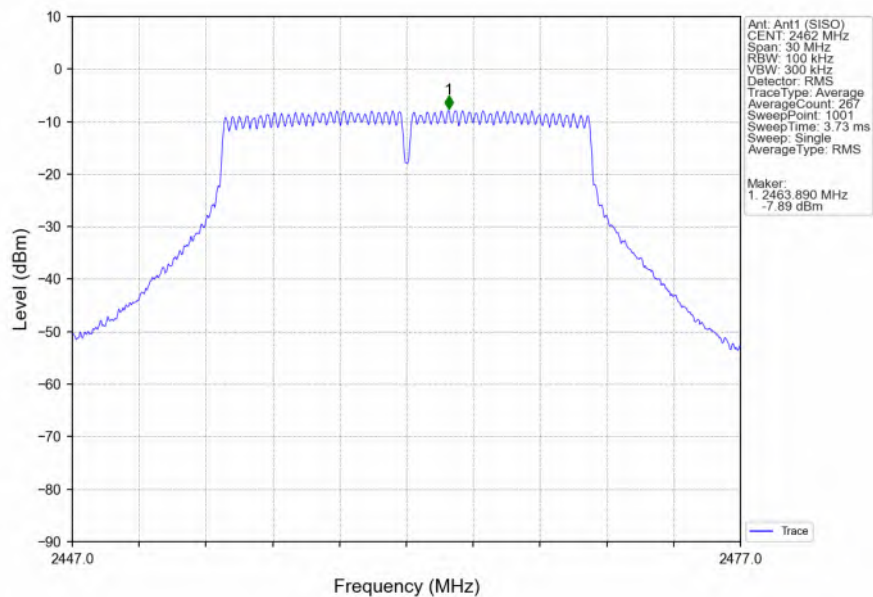


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

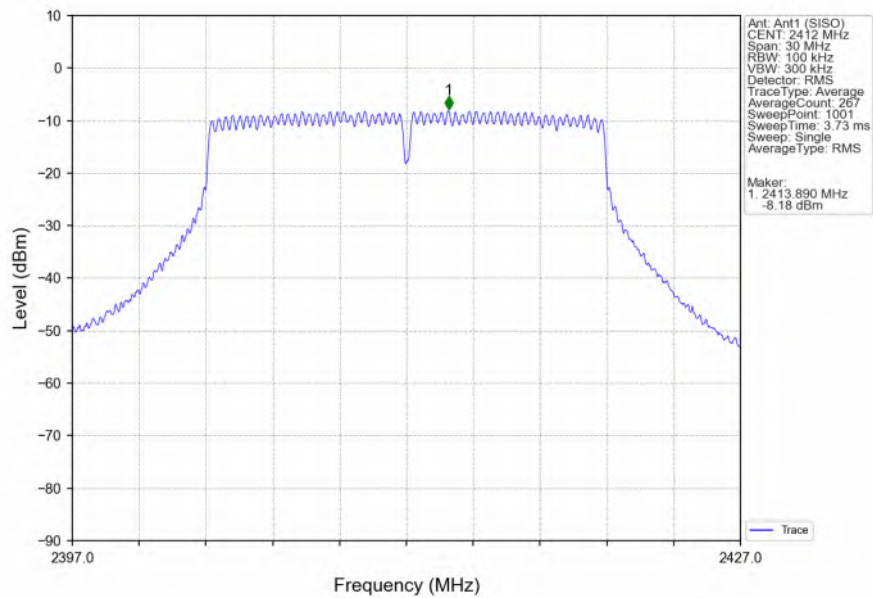


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

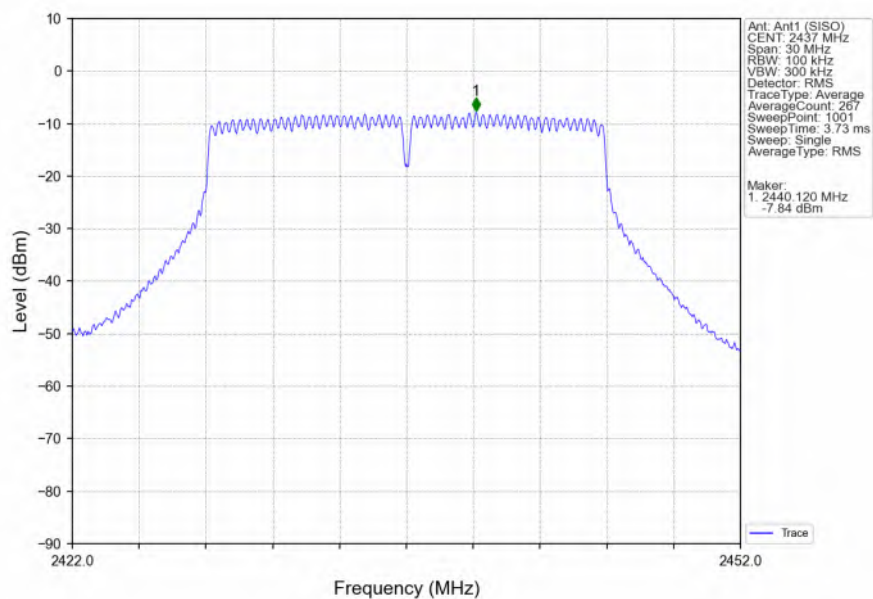


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

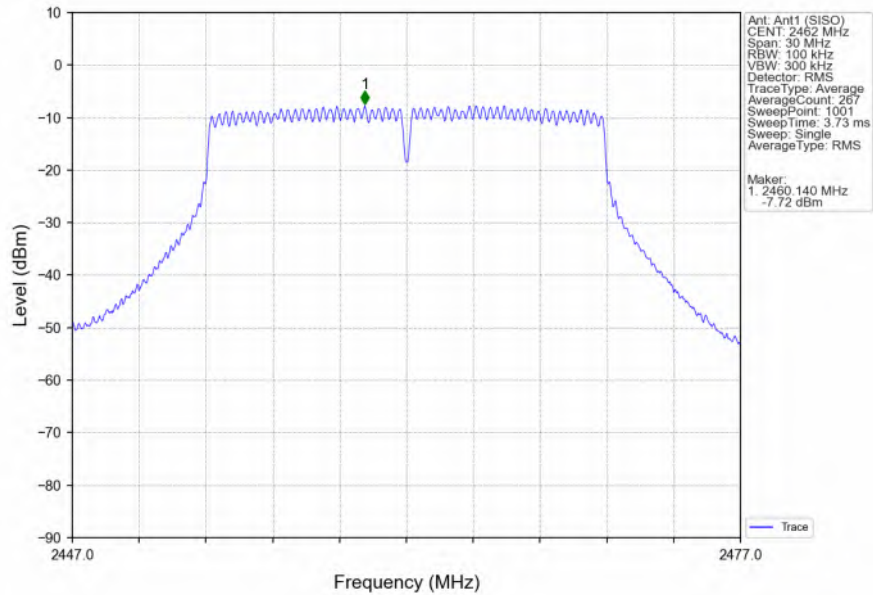


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

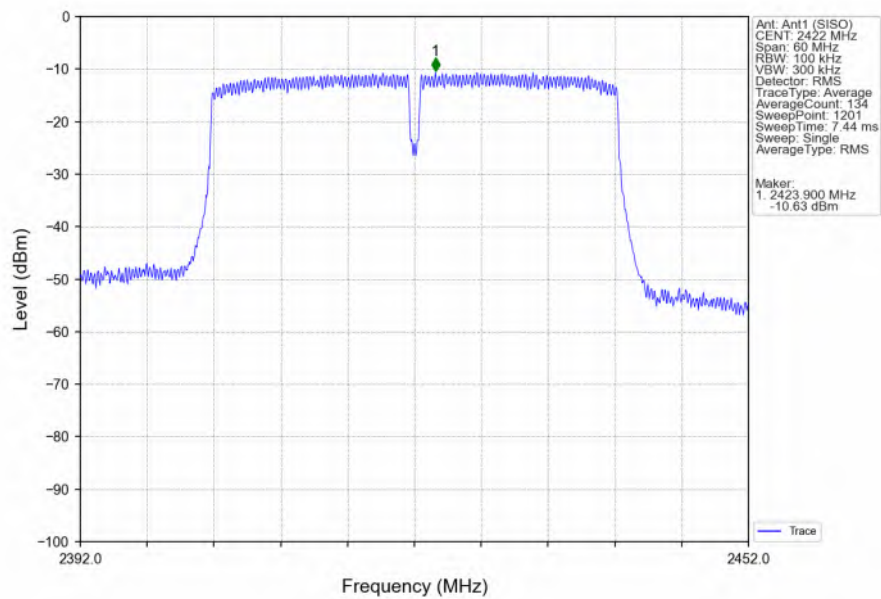

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

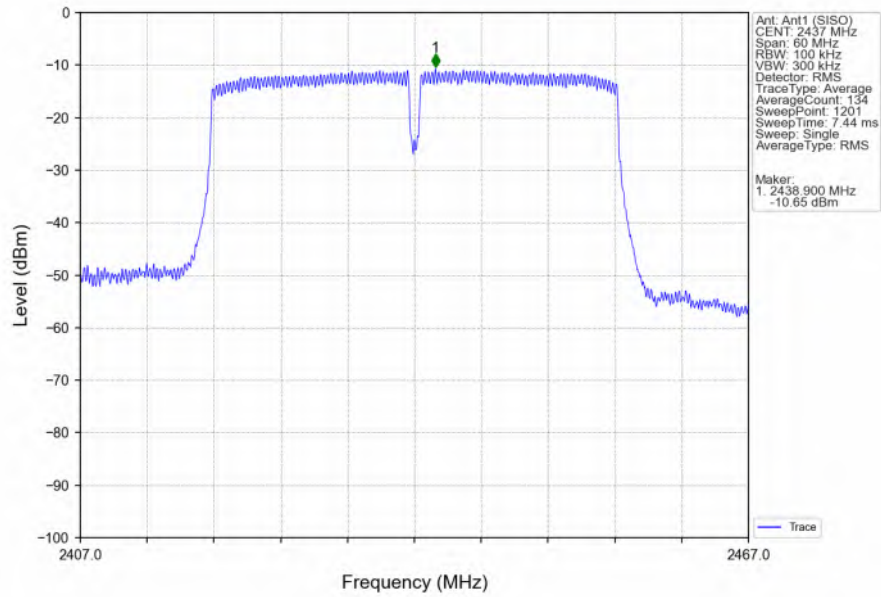

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

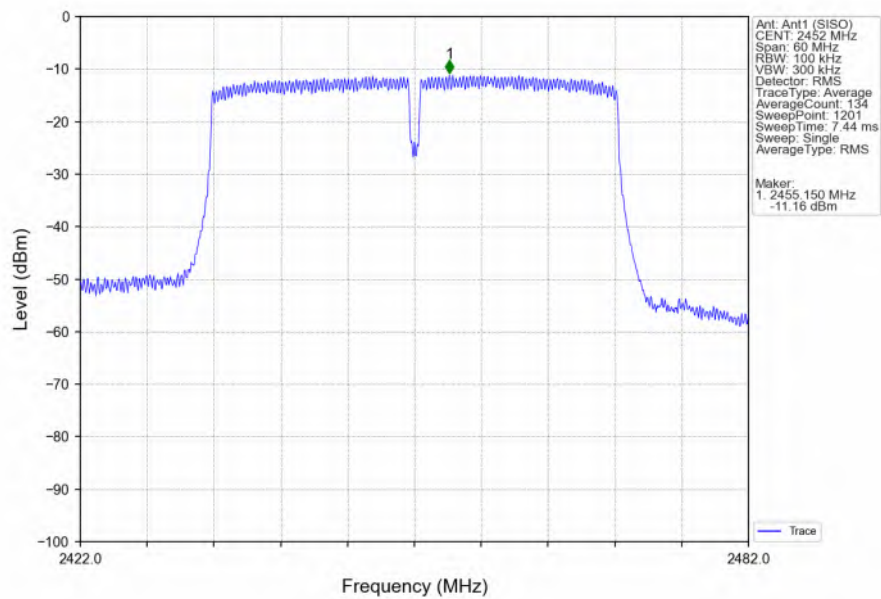

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
802.11b	SISO	2412	1	3.23
		2437	1	2.98
		2462	1	3.18
802.11g	SISO	2412	1	-1.43
		2437	1	-1.56
		2462	1	-1.60
802.11n (HT20)	SISO	2412	1	-1.19
		2437	1	-1.33
		2462	1	-1.02
802.11n (HT40)	SISO	2422	1	-4.43
		2437	1	-4.51
		2452	1	-4.87

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	1	3.23	-26.77	Pass
		2437	1	3.23	-26.77	Pass
		2462	1	3.23	-26.77	Pass
802.11g	SISO	2412	1	-1.43	-31.43	Pass
		2437	1	-1.43	-31.43	Pass
		2462	1	-1.43	-31.43	Pass
802.11n (HT20)	SISO	2412	1	-1.02	-31.02	Pass
		2437	1	-1.02	-31.02	Pass
		2462	1	-1.02	-31.02	Pass
802.11n (HT40)	SISO	2422	1	-4.43	-34.43	Pass
		2437	1	-4.43	-34.43	Pass
		2452	1	-4.43	-34.43	Pass



Report No.: KSCR251100255501


Page: 112 of 128

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


5.2 Test Graph

5.2.1 Ref


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

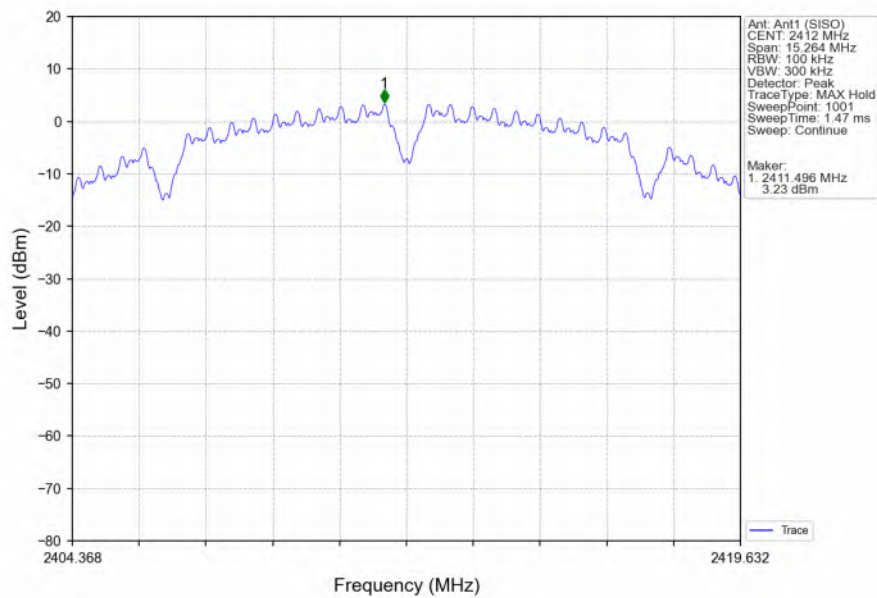


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

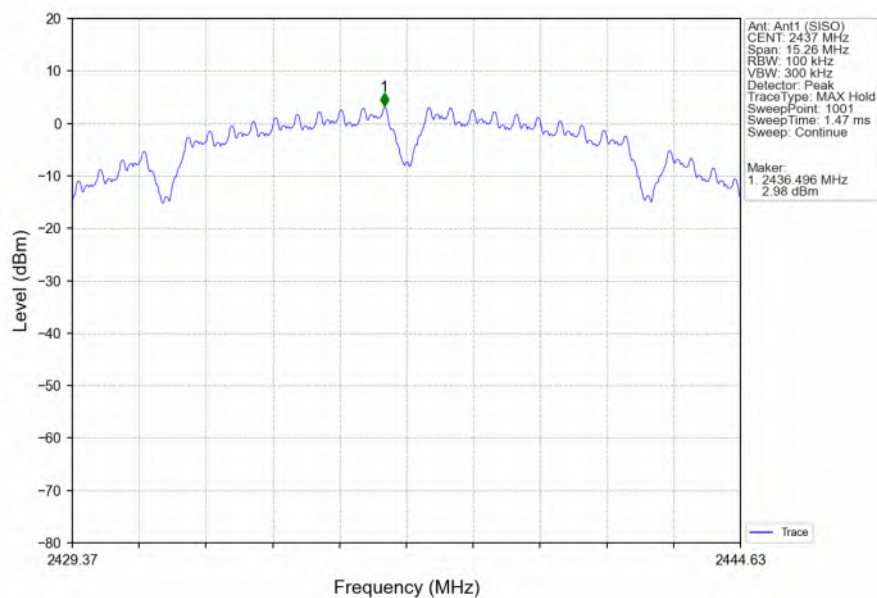


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

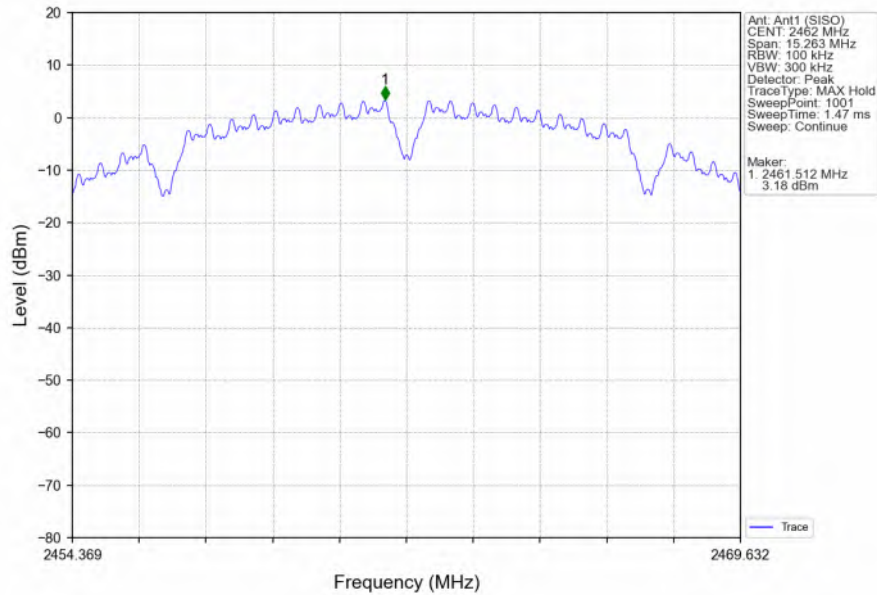


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

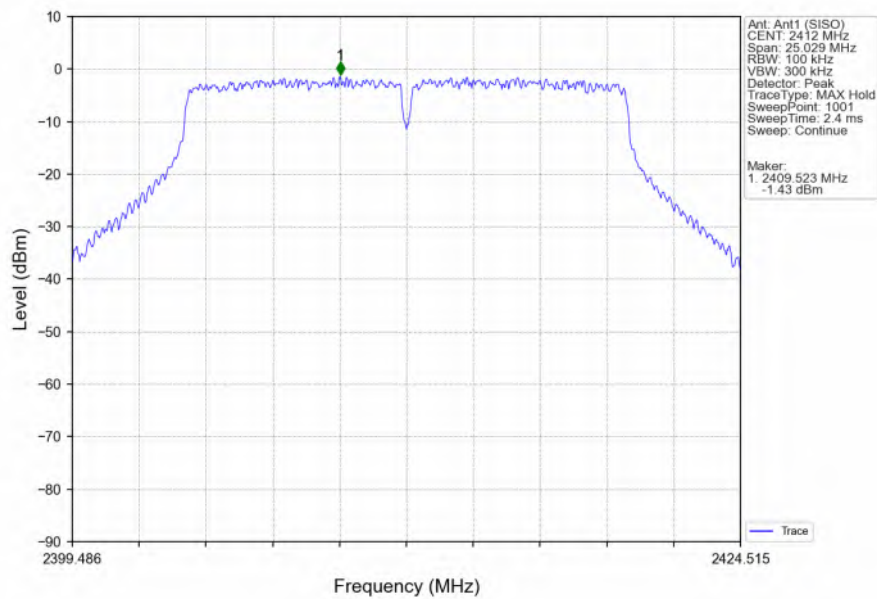


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

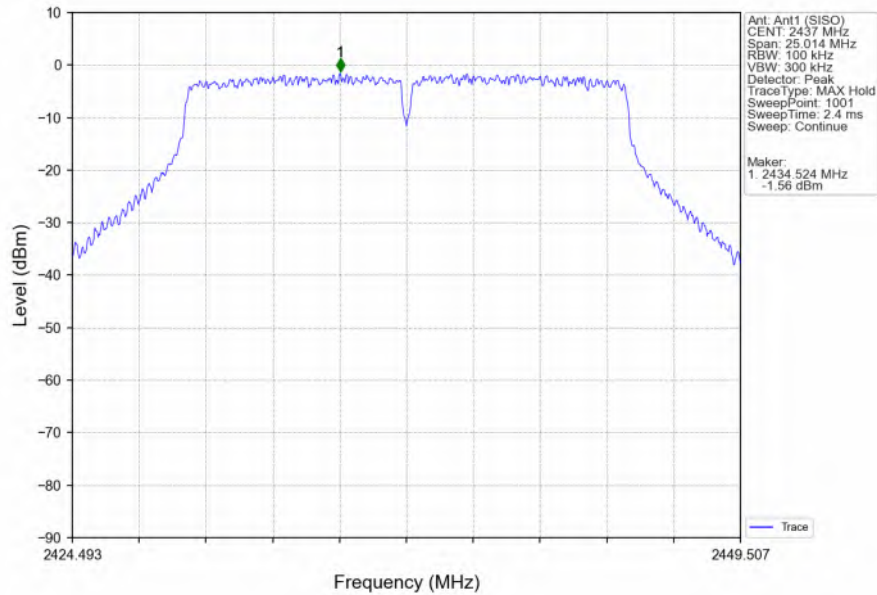


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

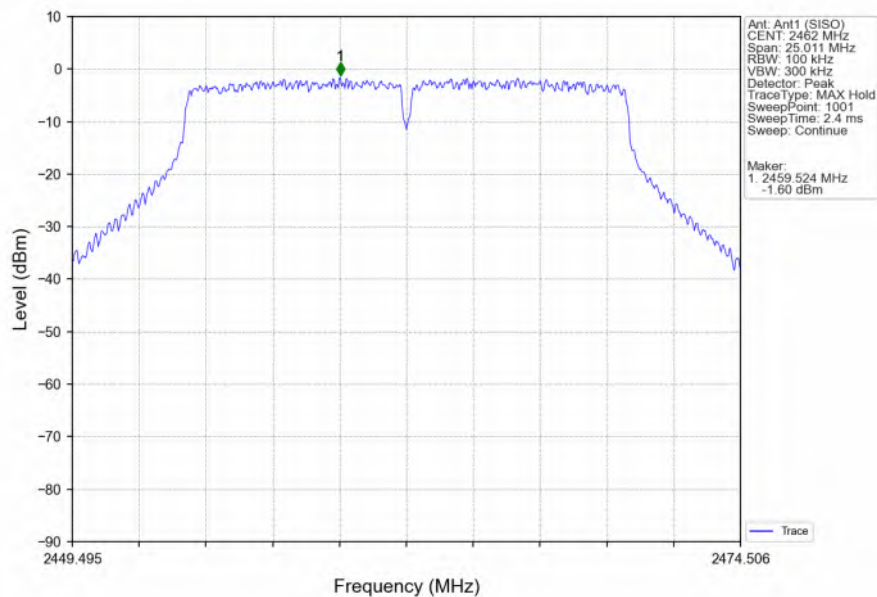


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

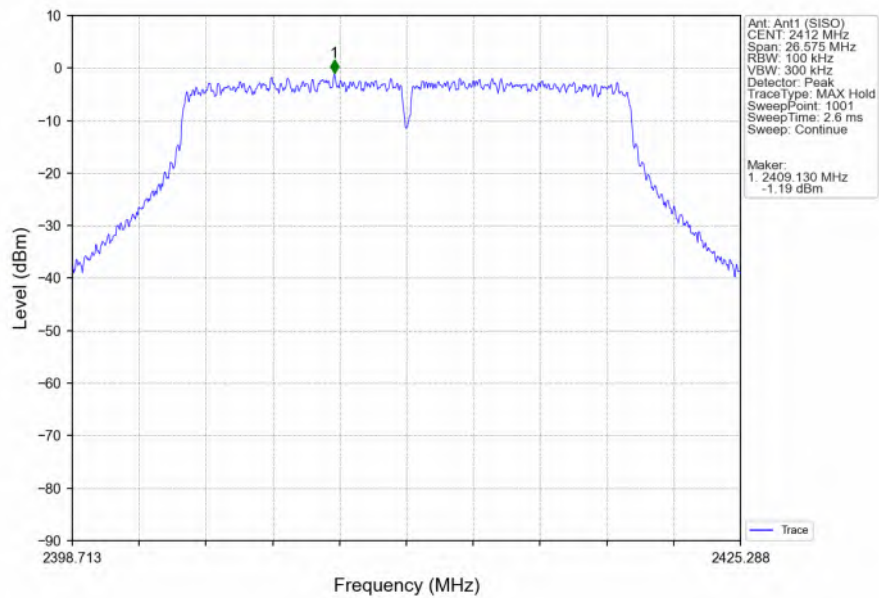


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

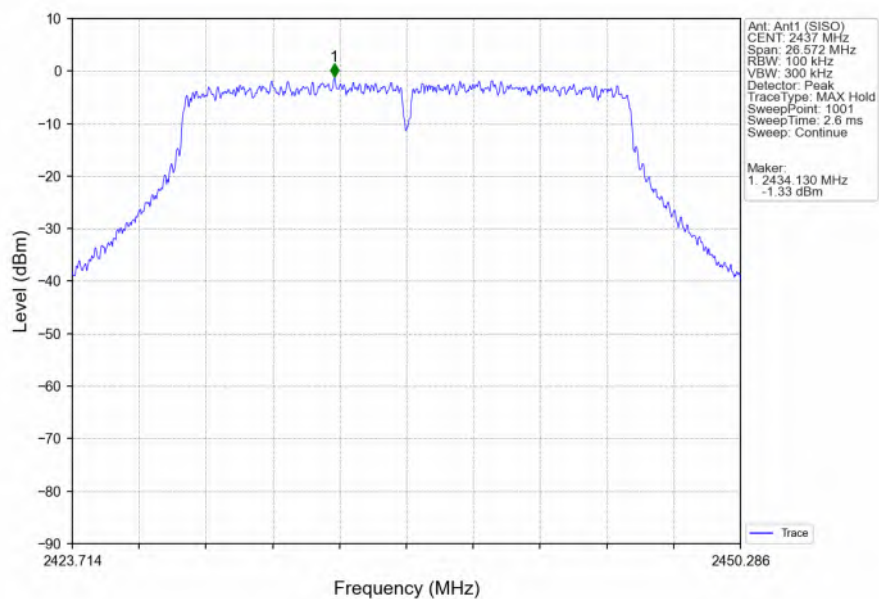


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

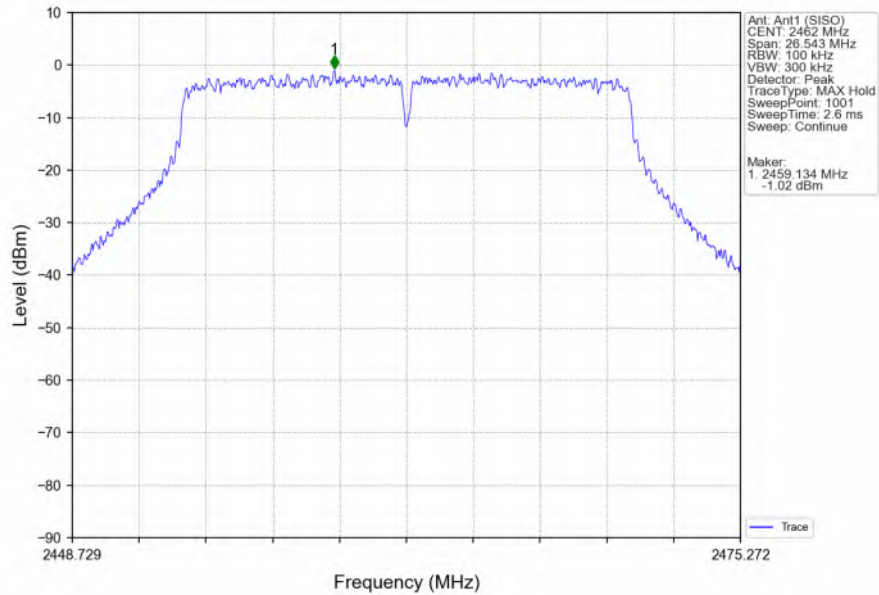


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

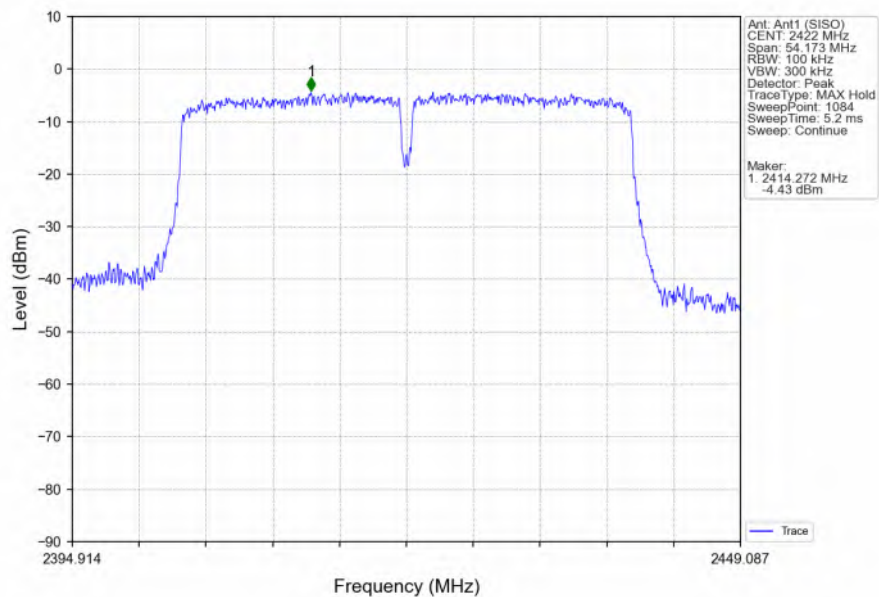

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

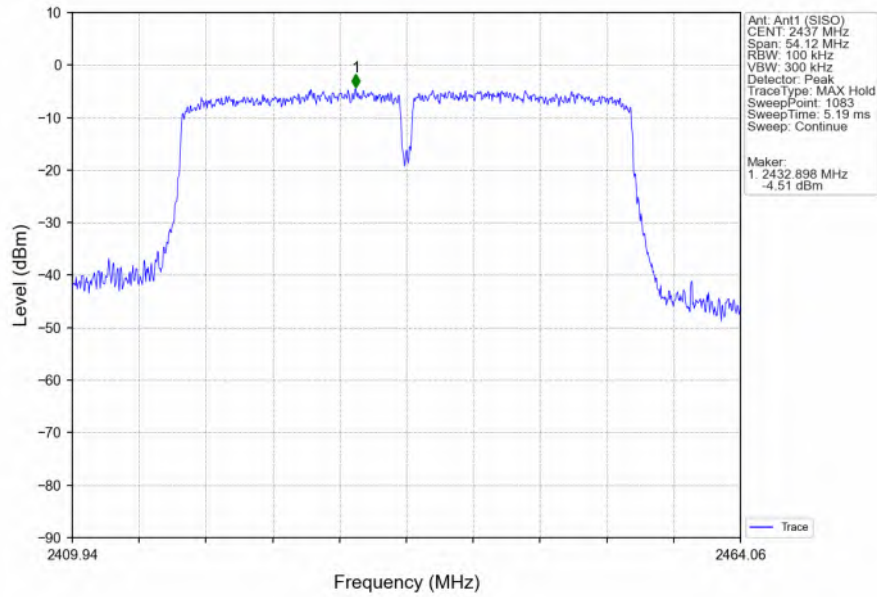


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

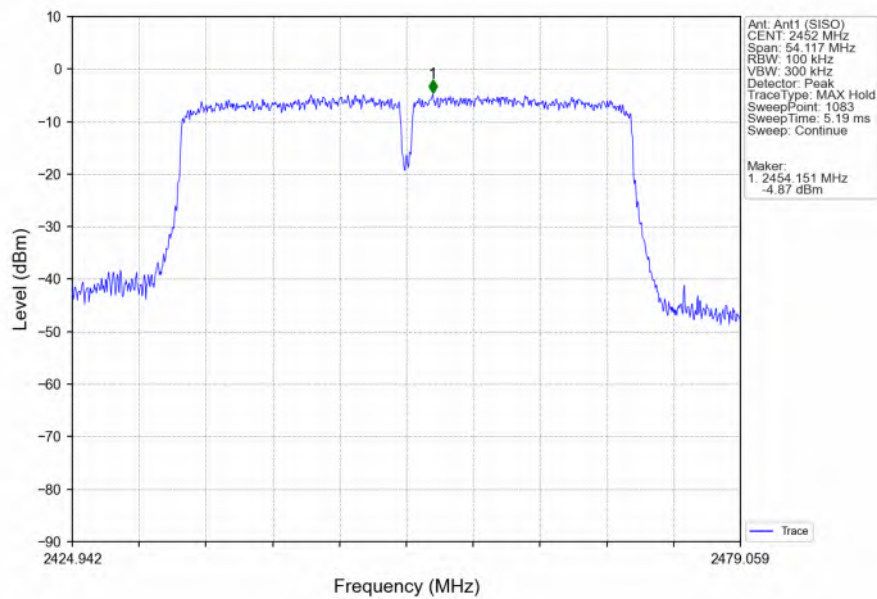


5.2.2 CSE


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

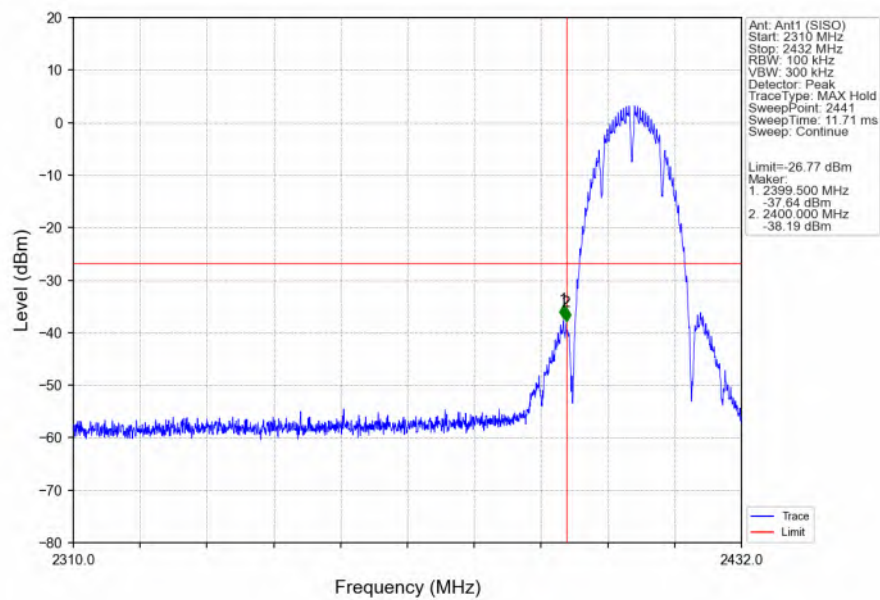


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

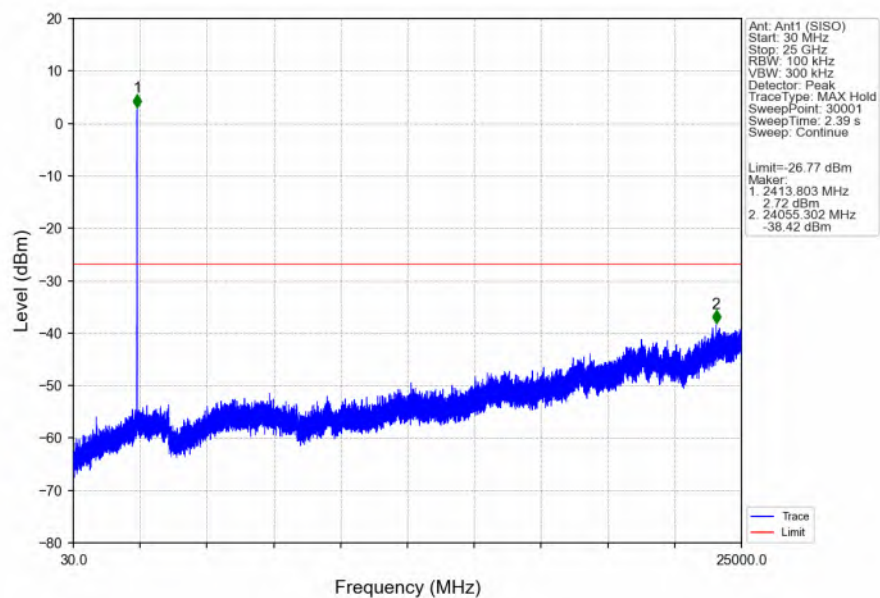


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

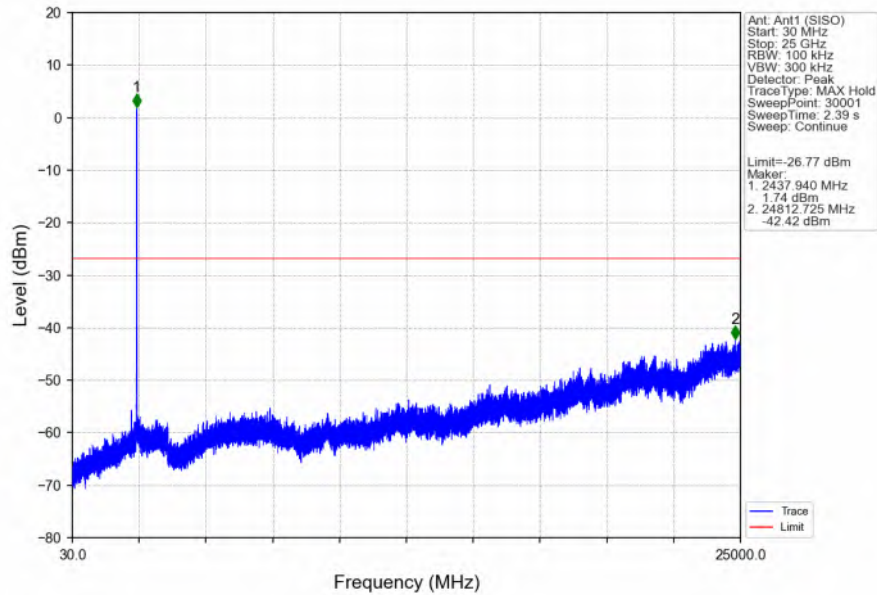


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

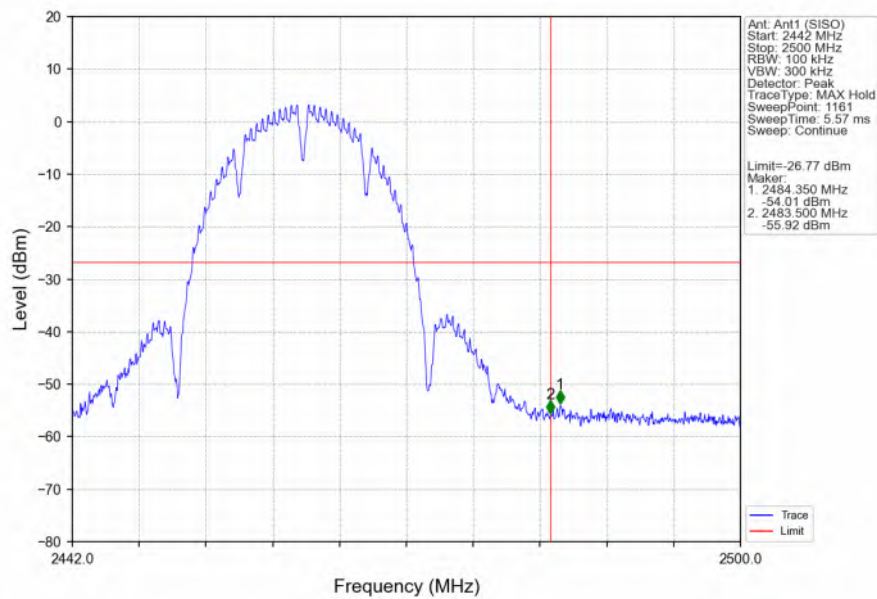


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

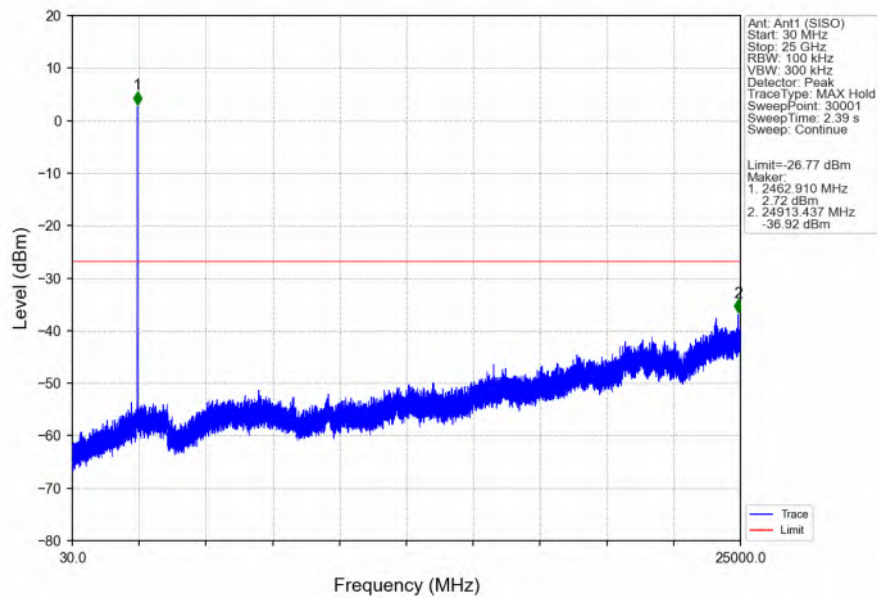


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

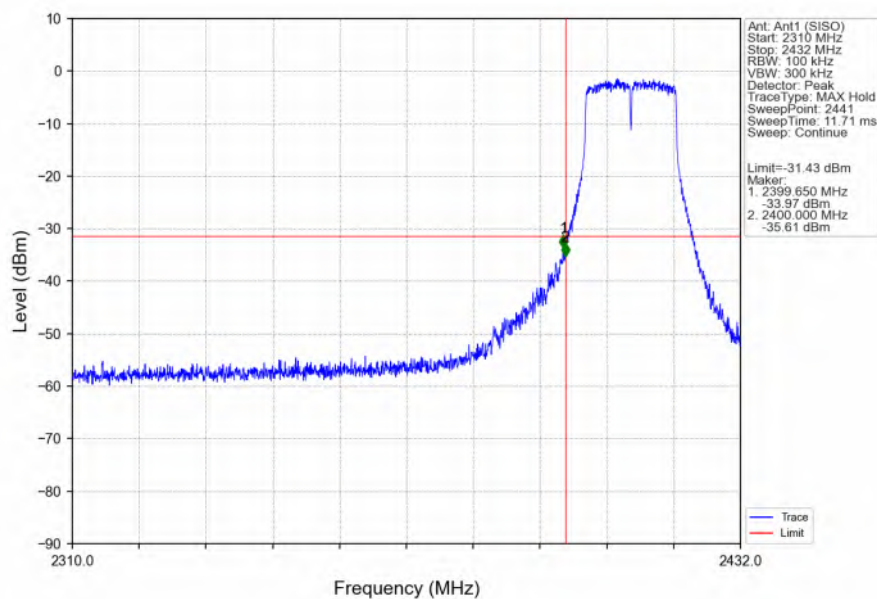


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

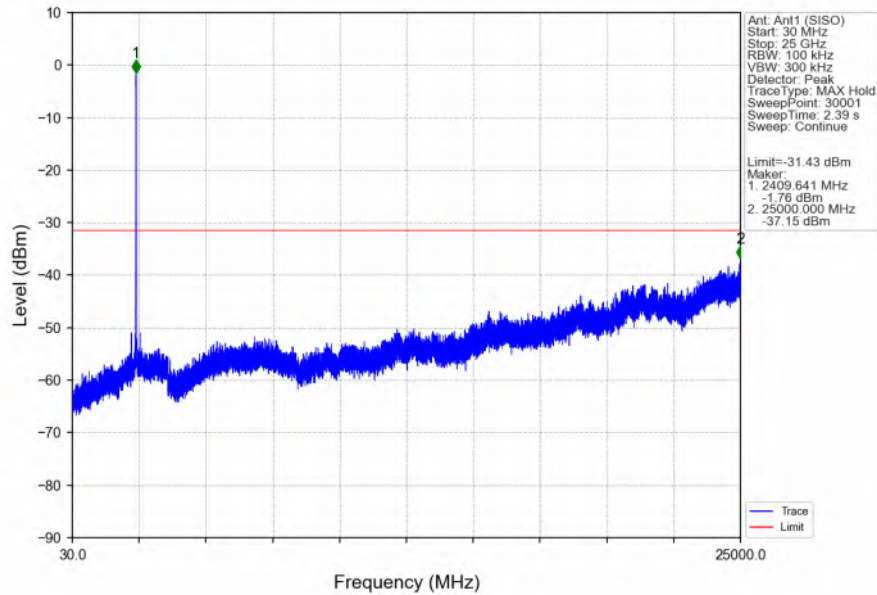


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

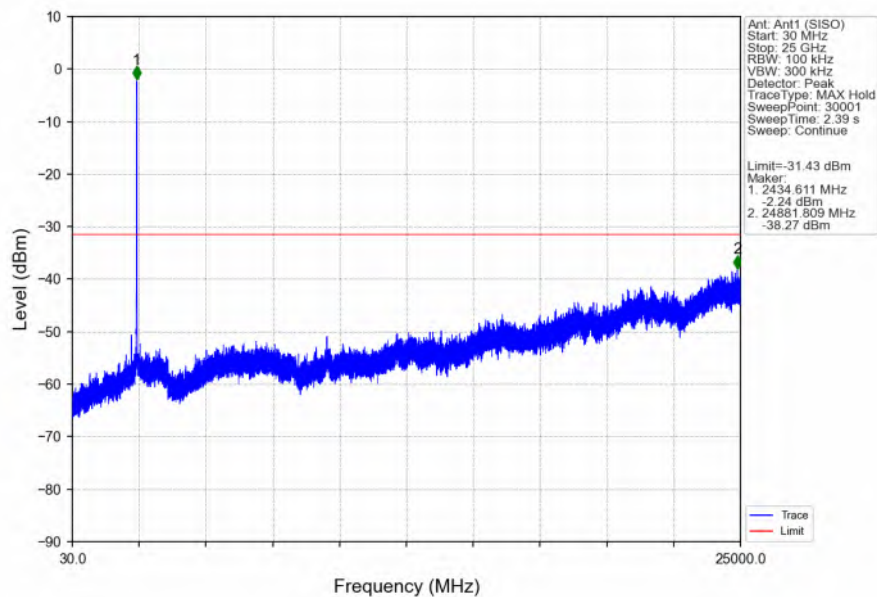


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

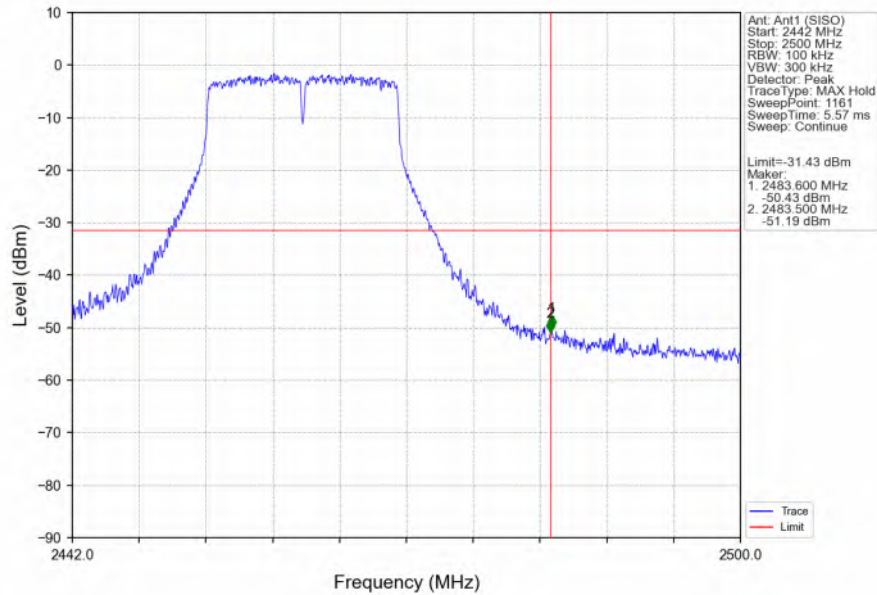


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

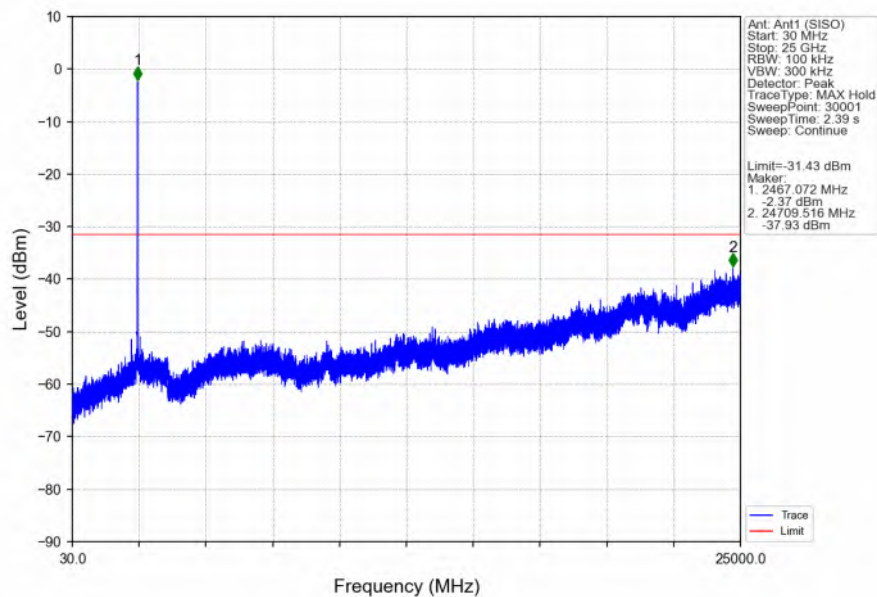


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

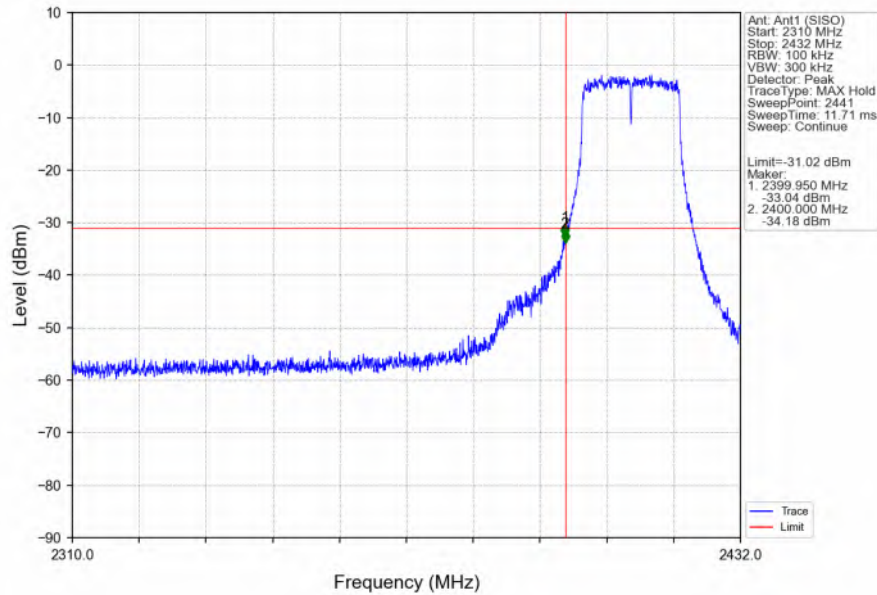


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

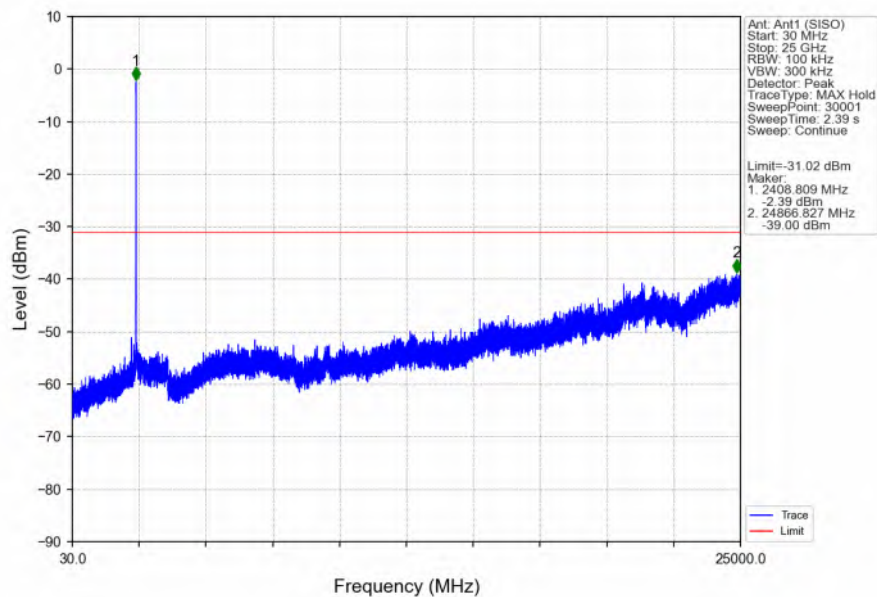


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

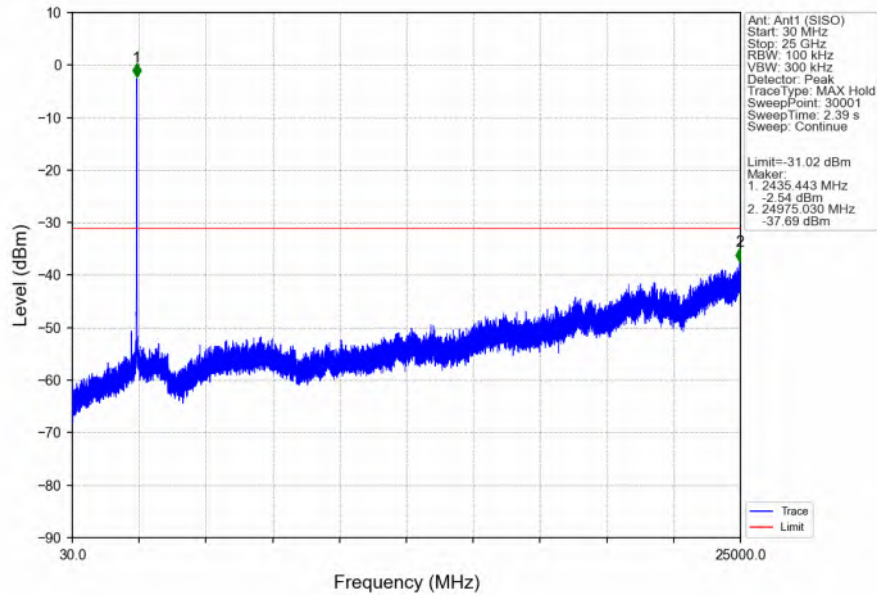


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

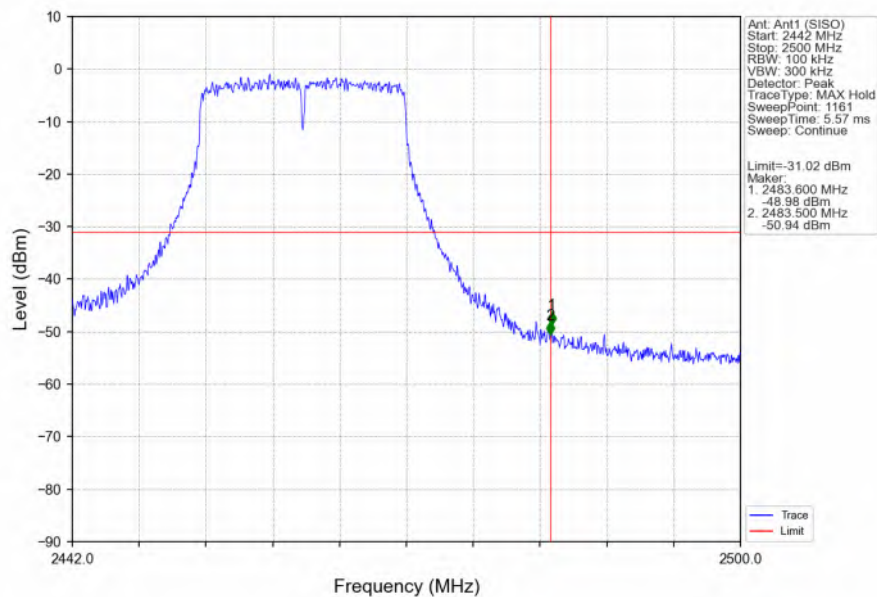


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

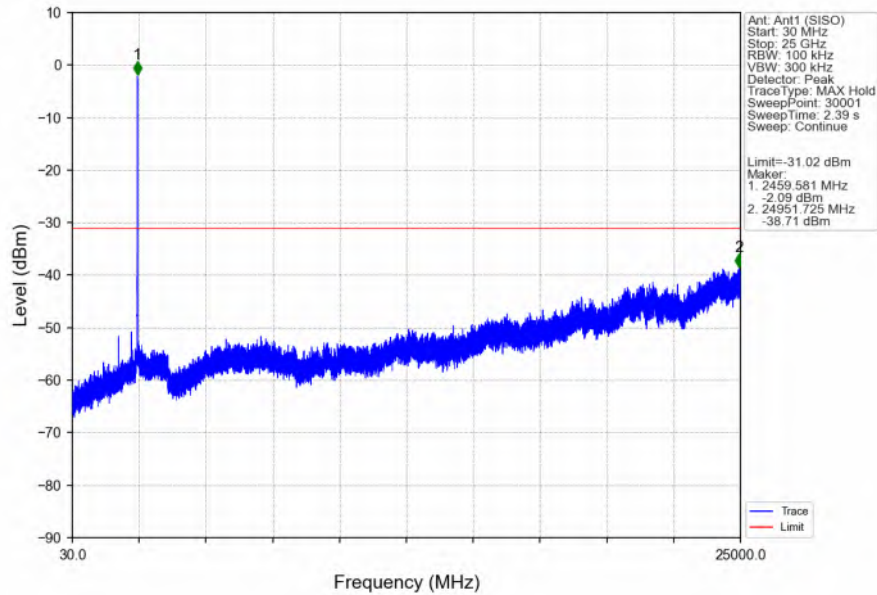


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

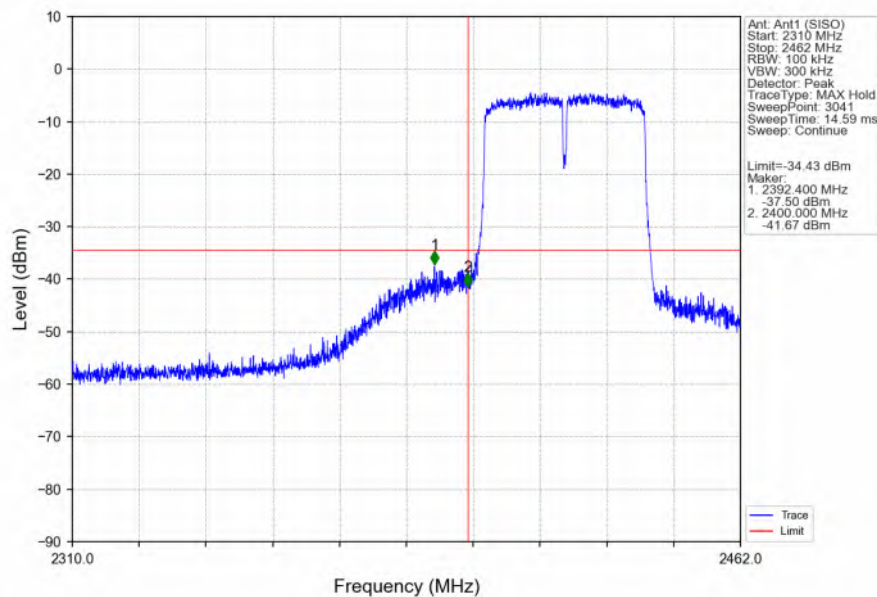


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

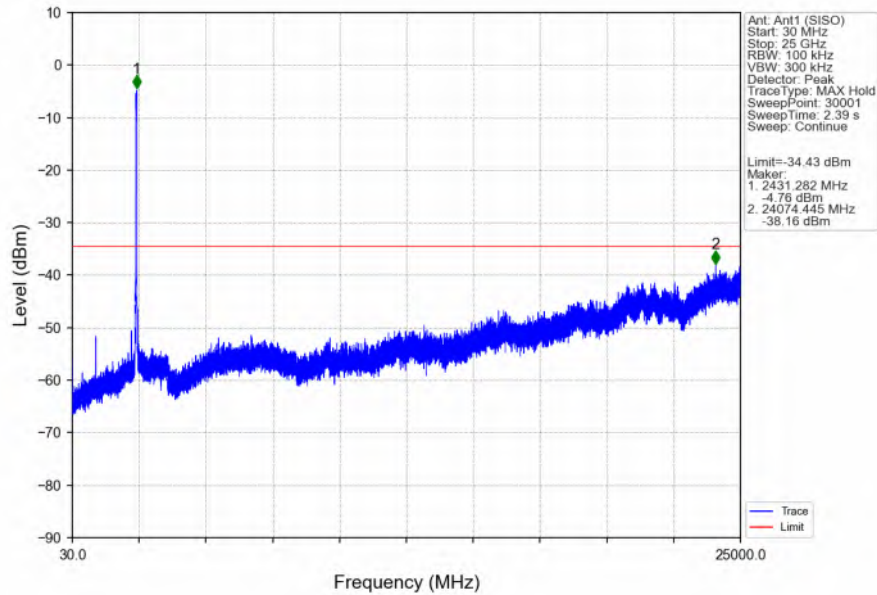


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

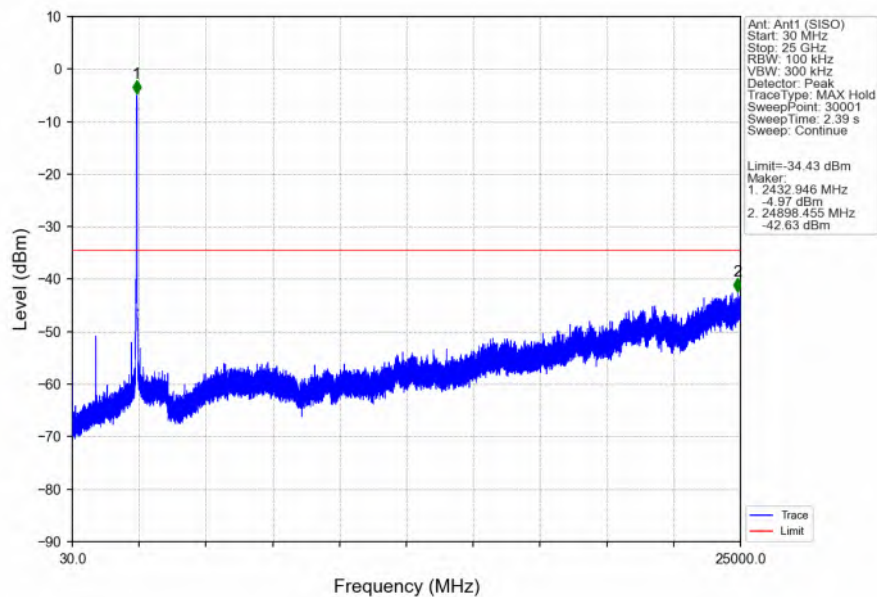

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

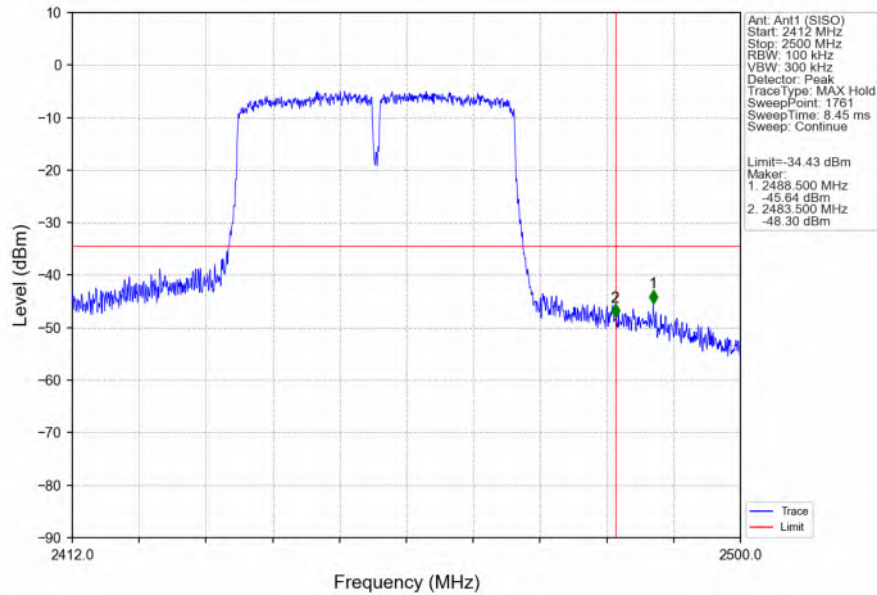

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

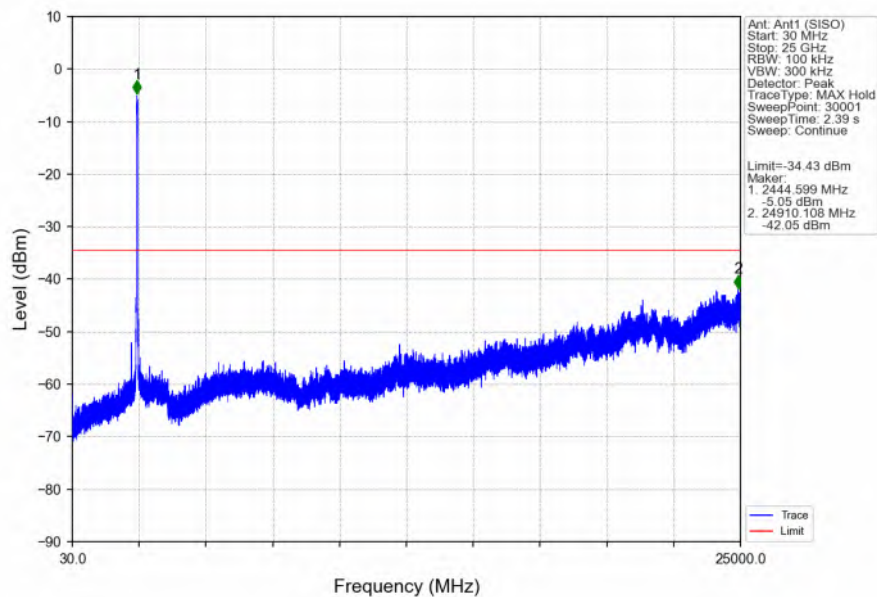

- End of the Report -