

Smart Handle Lock instructions

Please read this manual carefully before use and keep it properly

Dear user
Thank you for purchasing the smart door lock
To improve the quality survivalwith innovative technology, to create the world's most outstanding, mosti'nnovative products so that enterprises become the industrv benchmark , We always adhere to thequality survival, service and development" business philosophy. In the intelligent lock industry, alconstantly improve the product quality system. our company keep up with the pace of the times.We always walk in the forefront of the industry, and always steadfastly protects the people'sproperty safety! From products to service ,we always pursue to provide you with a full range of intimateand comfortable service!Thank you for vour support for smart door lock!!


Disclaimer:

We have done our best to ensure that the information provided in this manual is correct and reliable, butwe cannot fully guarantee errors before and during printing. Sometimes we in order to improve theperformance, reliability and safety of components and systems, may upgrade the product, which may besomewhat inconsistent with the contents of the manual, but does not affect the actual operation, if there isa change is not known, please understand! Our company wil update the content regularly. If you have anyquestions, please call our company to answer ,The final interpretation of the entire contents of this manuais the right of the Company. The functions described in this statement are not used as a reason for the useof this product for special purposes and the Company shall not be liable for accidents and hazards causedby the customer'simproper operation.


Install diagram

Warmly tips


Home, Office lock, fit indoor door
Fit 35*50mm door.

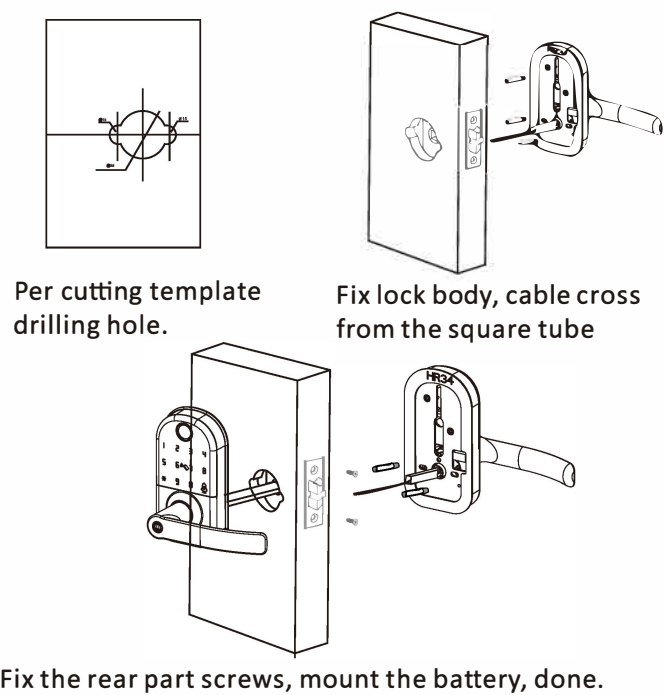

Outer dimensions

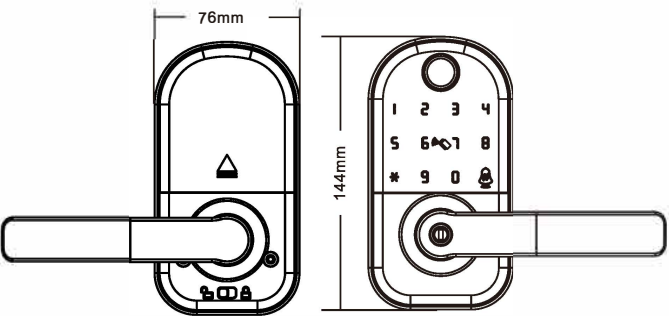


Physical press button operate:




Physical key operate

1. Long press the Setting key (s1) around 3 seconds: to force the system to enter the initialization mode and initialize the system without verifying the administrator
2. Anti-lock key s2: push the s2 push button to S1 direction to open the anti-lock mode; The reverse direction is to turn off the anti-lock mode; Note: Anti-lock key turn on that only the first3 admin can access.
- 3.In the standby state, long press or touch "0" # "to wake up the keypad

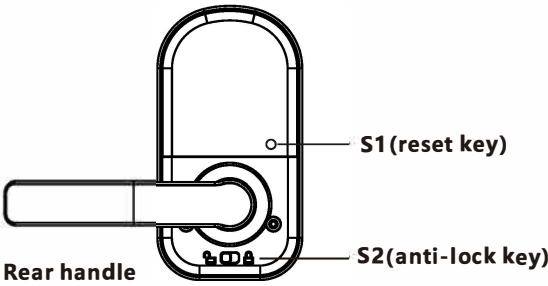


Enter into Lock function management

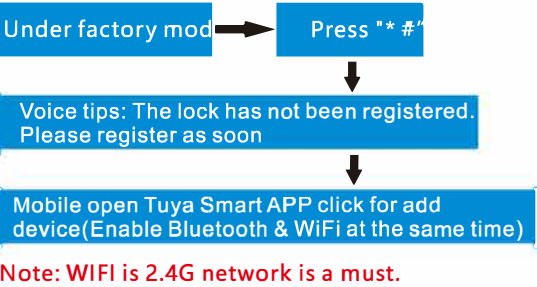


Tuya smart connection guide




1. Please download the "Tuya smart" APP in the app store, or scan the QR code for software download;
2. Ensure that the device is powered on properly and perform operations without an administrator registered.
3. Open the software, the phone will automatically connect the lock body Bluetooth, select the connection can be passed Mobile phone operation. As shown below

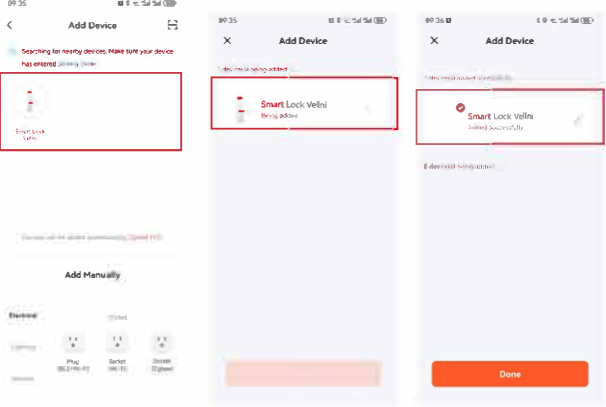


Soft functions



1. In the main interface, slide the unlock box to unlock
2. You can query operation records of the device in device logs, including alarm records and operation logs.
3. On the home screen, you can set a temporary password and manage members



- 4.. Temporary password function: You can set a temporary password for a limited time, a single time, or a custom one as required

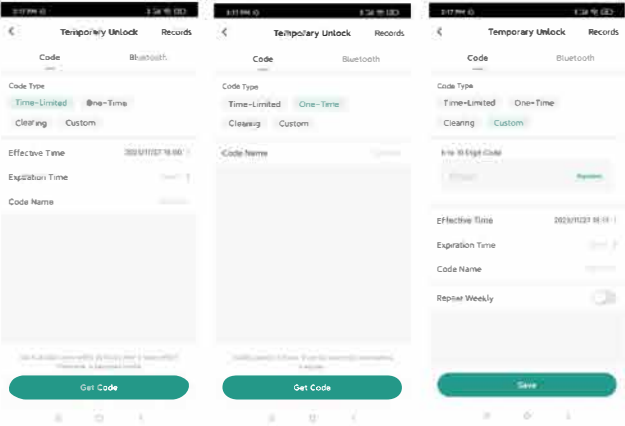


Note: Limited time password: can set the effective time and expiration time, the validity period is not limited to open the lock, automatically generate the password;

Single password: Valid for 6 hours and can be used only once.


Auto generate a password;
Custom password: You can customize the password, validity period, and repetition times

5. Anti-lock function

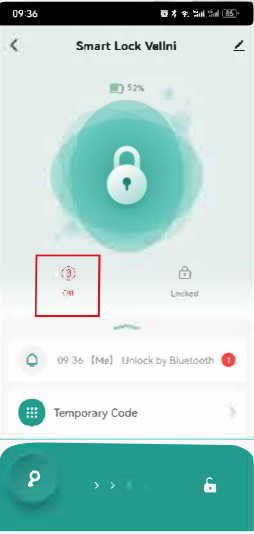

Note: There is a corresponding display on the APP interface after unlocking, as shown in the figure above, only the first three administrators can unlock after unlocking.

6. Member manage function



Note: Click the member page, you can activate the lock body through the software for finger print, password and card input

- 7.System setting function



Note: This page can set the automatic locking time of the lock body, indoor anti lock, verification mode and other functions;
Automatic locked: By setting the time parameter, determine the number of seconds after unlocking the automatic lock;
Indoor anti-lock: After opening the indoor anti-lock, only the administrator can open the lock;

Product parameters

Number	Function	Contents	Details
1	Unlock ways	Fingerprint password card key	
2	Admin 3	3	01-03
3	User	200	01-200(Fingerprint& password& card in total)
4	Fingerprint	100	Fingerprint Input 5 times(please Input from different views)
5	Card	100	Card Input 1 time
6	Password	100	Password input twice, # confirm, (6 digit password number input keep same exactly)
7	Lower power alarm	4.7V÷0.2V	When the voltage is lower than 4.3V, the red indicator will continue to flash 5 times, and the lock can continue to be opened
8	Power Voltage	6V	New battery full power voltage
9	Emergency power	5V DC	USB

Tips: Please store your mechanical keys outside for backup!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.