

TEST REPORT

Applicant: BASICS CO.,LTD

Address: 17, Tongil-ro 214beon-gil, Deogyang-gu, Goyang-si, Gyeonggi-do,
South Korea

Product Name: Laptop computer

FCC ID: 2BRTE-BB1422SS-N

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2020
KDB 789033 D02 General U-NII Test Procedures New Rules
v02r01

Report Number: 2502V37588E-RF-00D

Report Date: 2025/9/22

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Pedro Yun

Reviewed By: Alice Tan
Title: RF Engineer

Approved By: Pedro Yun
Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL ▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 OPERATION FREQUENCY DETAIL	7
3.2 EUT OPERATION CONDITION	8
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	9
3.4 SUPPORT CABLE LIST AND DETAILS	9
3.5 BLOCK DIAGRAM OF TEST SETUP	10
3.6 TEST FACILITY	12
3.7 MEASUREMENT UNCERTAINTY	12
4. REQUIREMENTS AND TEST PROCEDURES	13
4.1 AC LINE CONDUCTED EMISSIONS	13
4.1.1 Applicable Standard	13
4.1.2 EUT Setup	14
4.1.3 EMI Test Receiver Setup	14
4.1.4 Test Procedure	15
4.1.5 Corrected Amplitude & Margin Calculation	15
4.1.6 Test Result	15
4.2 RADIATION SPURIOUS EMISSIONS	16
4.2.1 Applicable Standard	16
4.2.2 EUT Setup	17
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	19
4.2.4 Test Procedure	19
4.2.5 Corrected Result & Margin Calculation	20
4.2.6 Test Result	20
4.3 EMISSION BANDWIDTH	21
4.3.1 Applicable Standard	21
4.3.2 EUT Setup	21
4.3.3 Test Procedure	21
4.3.4 Test Result	22
4.4 MAXIMUM CONDUCTED OUTPUT POWER	23
4.4.1 Applicable Standard	23
4.4.2 EUT Setup	23
4.4.3 Test Procedure	23
4.4.4 Test Result	23
4.5 MAXIMUM POWER SPECTRAL DENSITY	24
4.5.1 Applicable Standard	24
4.5.2 EUT Setup	24

4.5.3 Test Procedure.....	25
4.5.4 Test Result.....	25
4.6 DUTY CYCLE.....	26
4.6.1 EUT Setup.....	26
4.6.2 Test Procedure.....	26
4.6.3 Judgment	26
4.7 ANTENNA REQUIREMENT	27
4.7.1 Applicable Standard	27
4.7.2 Judgment	27
5. TEST DATA AND RESULTS	28
5.1 AC LINE CONDUCTED EMISSIONS	28
5.2 RADIATION SPURIOUS EMISSIONS.....	31
5.3 EMISSION BANDWIDTH	64
5.4 99% OCCUPIED BANDWIDTH	69
5.5 MAXIMUM CONDUCTED OUTPUT POWER	74
5.6 POWER SPECTRAL DENSITY	76
5.7 DUTY CYCLE.....	81
EXHIBIT A - EUT PHOTOGRAPHS.....	83
EXHIBIT B - TEST SETUP PHOTOGRAPHS	84

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502V37588E-RF-00D	Original Report	2025/9/22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Laptop computer	
EUT Model:	BB1422SS-N	
Operation Frequency:	5150-5250MHz: 5180-5240 MHz(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5725-5850MHz: 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)	
Maximum Average Conducted Output Power:	12.44	dBm in 5150-5250 MHz Band
	12.79	dBm in 5725-5850 MHz Band
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM	
Rated Input Voltage:	DC 7.6V from Battery or DC 12V from Adapter	
Serial Number:	For RF Conducted test: 37QT-2 For Radiated Spurious Emission and AC Line Conducted Emissions test: 37QT-1	
EUT Received Date:	2025/7/30	
EUT Received Status:	Good	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Jiuzhou Power Technology Co.,Ltd	J302-1203000UX	Input:100-240Vac~50/60Hz 1.5A Output:12.0Vdc 3.0A 36.0W

1.3 Antenna Information Detail ▲

Antenna Type	Input impedance (Ohm)	Frequency Range (MHz)	Antenna Gain (dBi)
FPC	50	5150-5250	1.69
		5725-5850	1.74
The design of compliance with §15.203: ☒ Unit uses a permanently attached antenna. ☐ Unit uses a unique coupling to the intentional radiator. ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
Note 1: For AC line conducted emissions, the maximum output power channel was tested. Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~40GHz, the maximum output power channel was tested.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
For 802.11a/n ht20/ac vht20:			
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
For 802.11n ht40/ac vht40:			
38	5190	151	5755
46	5230	159	5795
For 802.11ac vht80:			
42	5210	155	5775

Note: The above frequencies in bold were performed the test.

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The EUT configuration is below:

EUT Exercise Software:		MT7922 QA.exe		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	47
	Middle	5200	6Mbps	46
	Highest	5240	6Mbps	45
802.11n ht20	Lowest	5180	MCS0	47
	Middle	5200	MCS0	46
	Highest	5240	MCS0	45
802.11n ht40	Lowest	5190	MCS0	47
	Highest	5230	MCS0	45
802.11ac vht80	Middle	5210	MCS0	46
5725-5850 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	43
	Middle	5785	6Mbps	42
	Highest	5825	6Mbps	41
802.11n ht20	Lowest	5745	MCS0	43
	Middle	5785	MCS0	42
	Highest	5825	MCS0	41
802.11n ht40	Lowest	5755	MCS0	43
	Highest	5795	MCS0	41
802.11ac vht80	Middle	5775	MCS0	42
Note: 1.The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the ac vht20/ac vht40 were reduced since the identical parameters with 802.11n ht20 and 802.11n ht40. 2.The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.				

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
PHILIPS	Keyboard	SPK6234	K234210510744
PHILIPS	Mouse	SPK7214	M214BQ210411115
DELL	Monitor	P2721Q	CN-0XJ46C-FCC00-135-AA8L-A03
SANDisk	USB Flash Disk	16G	BL201026115 B
IPRO	Earphone	Phonenix 5.0s	EMZBEP21103002B
SanDisk	TF Card	32 GB	Unknown
Epik	Phone	K500	SZ180322001SA

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Keyboard Cable	No	No	1.5	EUT	Keyboard
Mouse Cable	No	No	1.5	EUT	Mouse
DC Cable	No	No	2	Adapter	EUT
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	No	No	1	EUT	Phone
HDMI Cable	No	No	1.2	EUT	Monitor

3.5 Block Diagram of Test Setup

AC line conducted emissions:

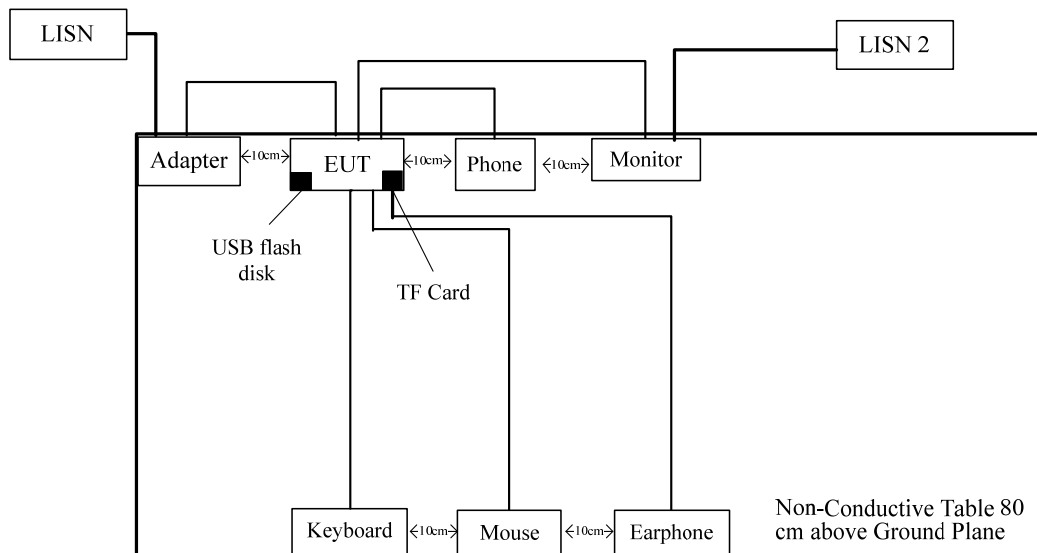

Spurious Emissions:

Below 1G:

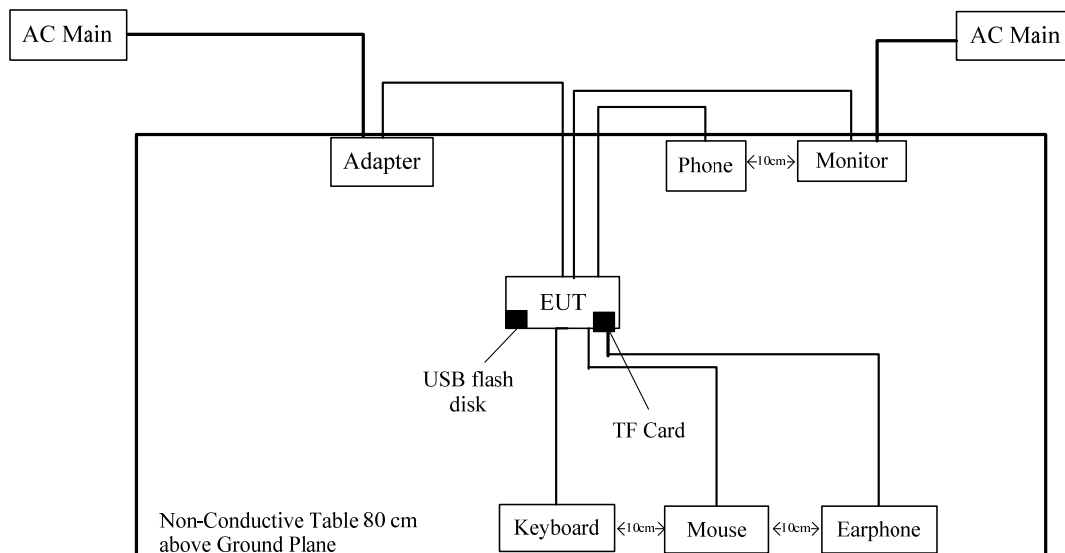


Diagram illustrating the experimental setup for EUT (Equipment Under Test) testing. The setup includes the following components and connections:

- AC Main** (Power Source) connected to the **Adapter** and the **Monitor**.
- Adapter** connected to the **Keyboard** and the **Mouse**.
- Monitor** connected to the **Phone**.
- Keyboard**, **Mouse**, **Earphone**, and **Phone** are all connected to the **EUT**.
- The **EUT** is placed on a **Non-Conductive Table 150 cm above Ground Plane**.
- Distances between components are indicated: $<10\text{cm}>$ between Keyboard and Mouse, and $<10\text{cm}>$ between Mouse and Earphone.

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

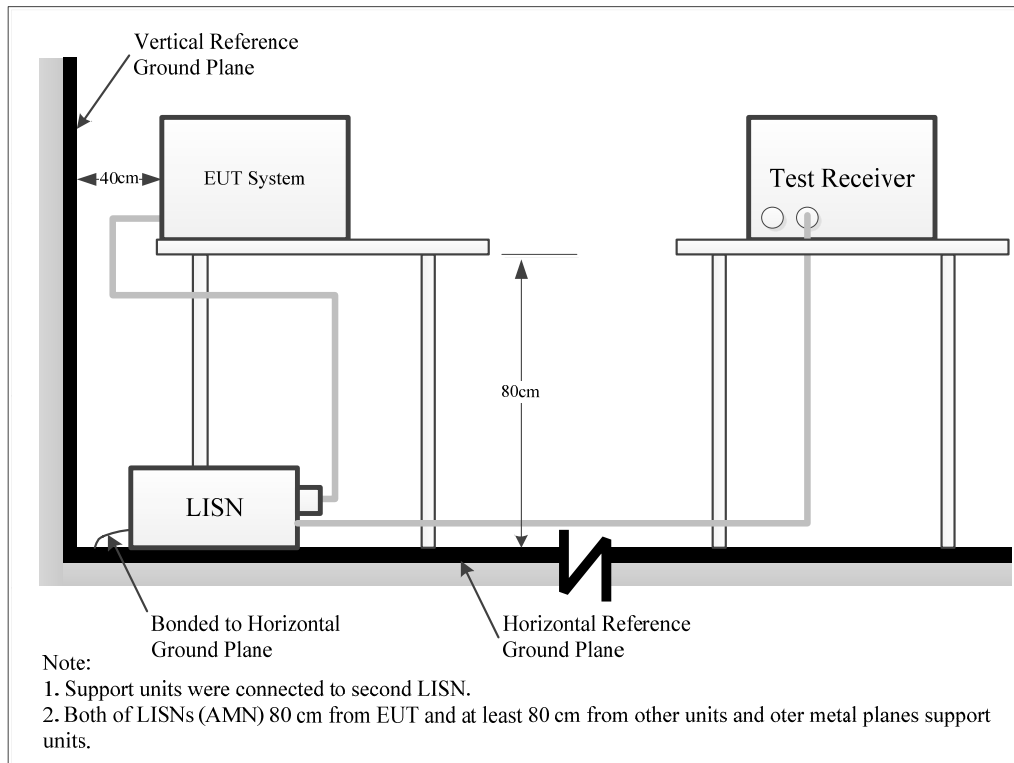

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

4.2.2 EUT Setup


9kHz~30MHz:

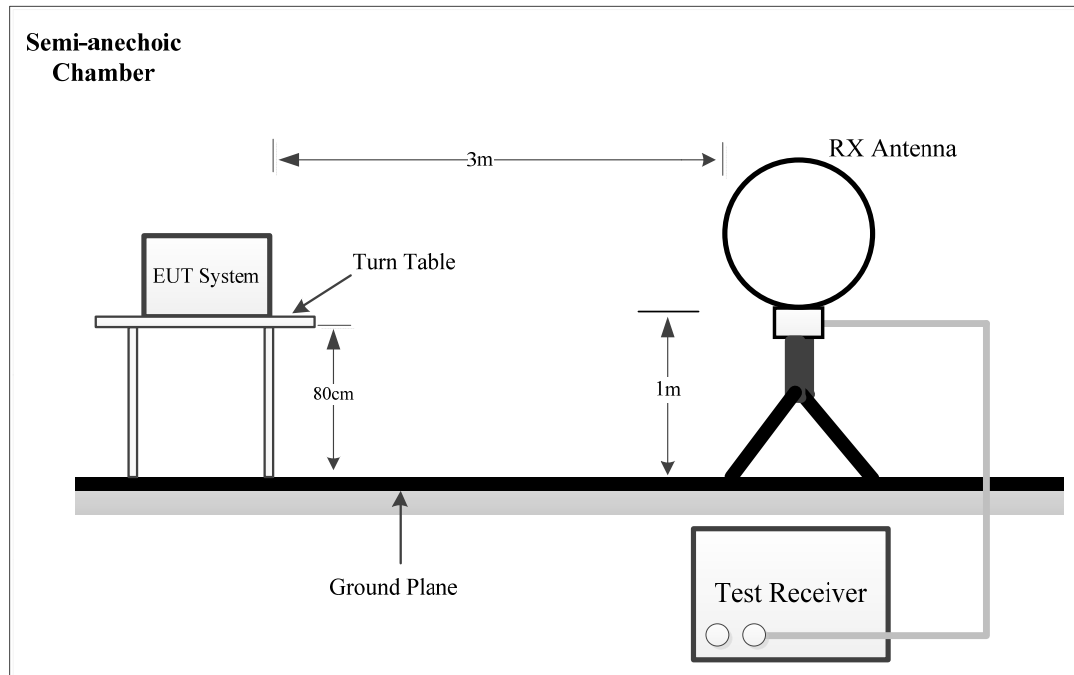


30MHz~1GHz:

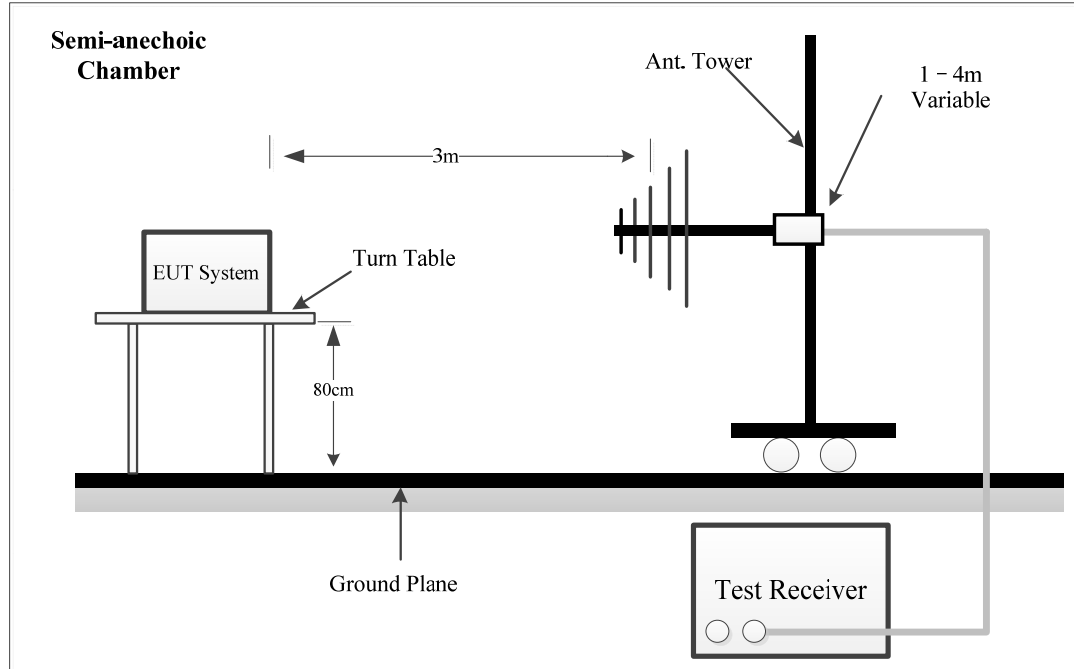

1-18GHz:

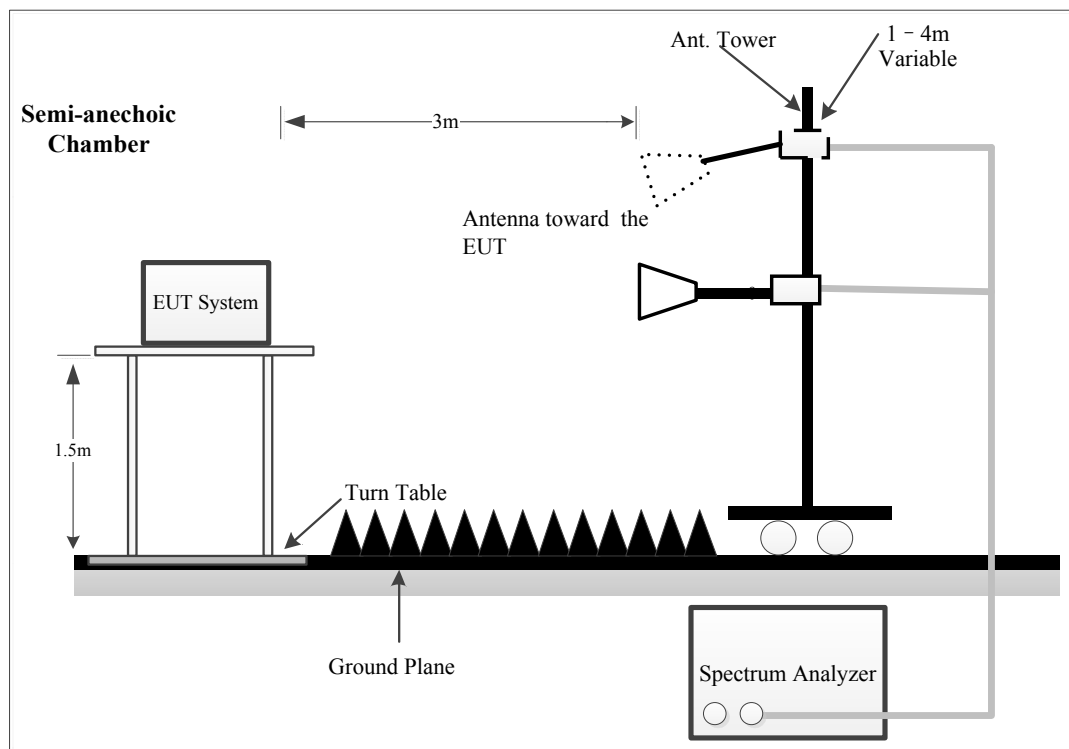

18-40GHz:

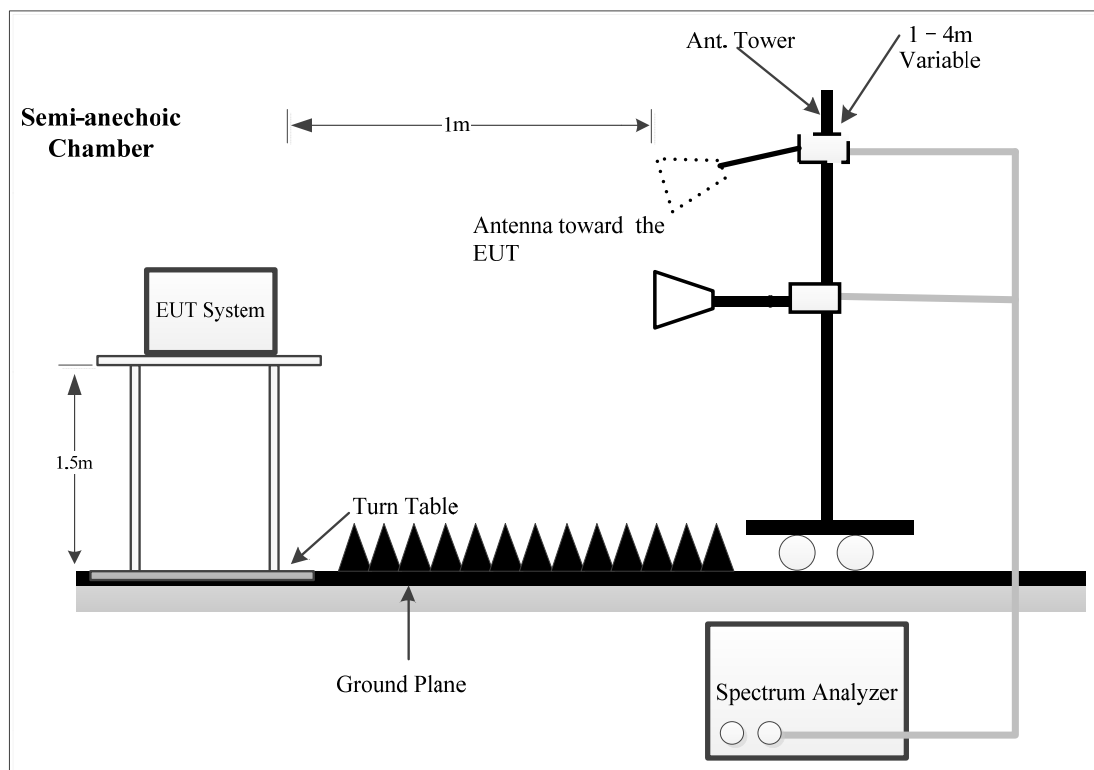

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2020. The specification used was FCC 15.209, FCC 15.407 limits.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	120 kHz	500 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	10 Hz
		<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

4.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

All emissions under the average limit and under the noise floor have not recorded in the report.

For Radiated 18-40GHz test, which was performed at 1.0 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m
Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.0m])$ dB= 9.54 dB

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in $\mu\text{ V/m}$

E_{Log} is the field strength of the emission, in $\text{dB } \mu\text{ V/m}$

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10} (d_{\text{standard}}/d_{\text{measure}})$$

The basic equation except 18-40GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 18-40GHz test:

Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Emission Bandwidth

4.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.3.2 EUT Setup

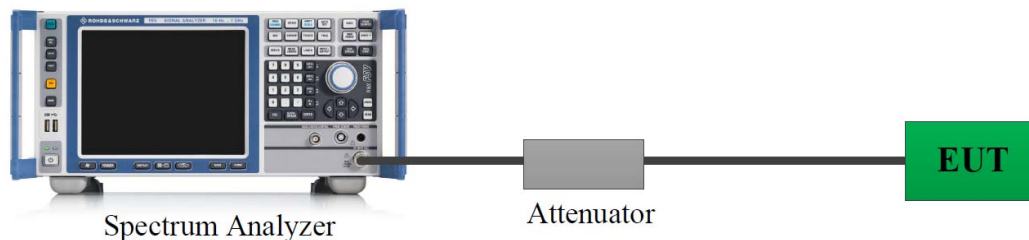

4.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2020 Section 12.5.2

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) ≥ 3 RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2020 Section 12.5.3&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Result

Please refer to section 5.3 and section 5.4.

4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard


FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.4.3 Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.4.4 Test Result

Please refer to section 5.5.

4.5 Maximum Power Spectral Density

4.5.1 Applicable Standard


FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.5.2 EUT Setup

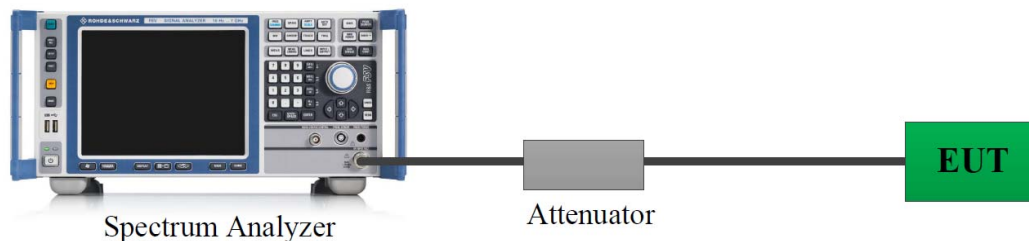

A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

4.5.4 Test Result

Please refer to section 5.6.

4.6 Duty Cycle

4.6.1 EUT Setup

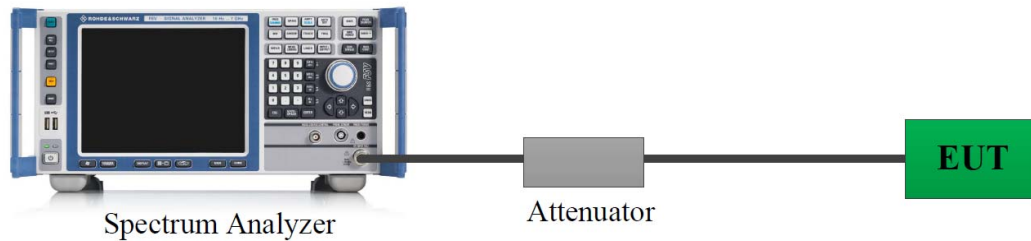

4.6.2 Test Procedure

According to ANSI C63.10-2020 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.6.3 Judgment

Report Only. Please refer to section 5.7.

4.7 Antenna Requirement

4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.7.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. TEST DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	37QT-1	Test Date:	2025/8/14
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yukin Qiu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.6	Relative Humidity: (%)	63	ATM Pressure: (kPa)	100.2
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
Unknown	Coaxial Cable	RG 142	C-0200-05	2025/5/6	2026/5/5
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below plots.

Note: 802.11n40 5755MHz was tested.

Project No.: 2502V37588E-RF
Port: Line
Test Mode: Transmitting
IF B/W 9kHz PK/AV


Serial No.: 37QT-1
Tester: Yukin Qiu
Note: 5G

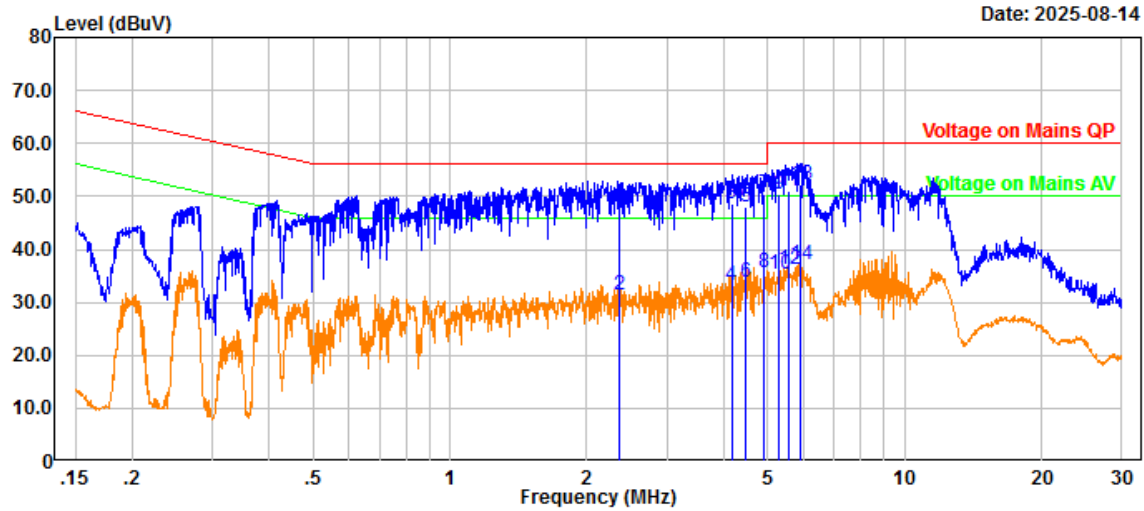

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	2.358	36.81	11.20	48.01	56.00	7.99	QP
2	2.358	20.32	11.20	31.52	46.00	14.48	Average
3	4.158	37.92	10.73	48.65	56.00	7.35	QP
4	4.158	22.62	10.73	33.35	46.00	12.65	Average
5	4.473	37.29	10.80	48.09	56.00	7.91	QP
6	4.473	23.03	10.80	33.83	46.00	12.17	Average
7	4.896	39.47	10.90	50.37	56.00	5.63	QP
8	4.896	24.78	10.90	35.68	46.00	10.32	Average
9	5.282	39.50	10.98	50.48	60.00	9.52	QP
10	5.282	24.32	10.98	35.30	50.00	14.70	Average
11	5.554	40.02	11.04	51.06	60.00	8.94	QP
12	5.554	25.14	11.04	36.18	50.00	13.82	Average
13	5.877	40.98	11.11	52.09	60.00	7.91	QP
14	5.877	25.95	11.11	37.06	50.00	12.94	Average

Project No.: 2502V37588E-RF
Port: neutral
Test Mode: Transmitting
IF B/W 9kHz PK/AV

Serial No.: 37QT-1
Tester: Yukin Qiu
Note: 5G

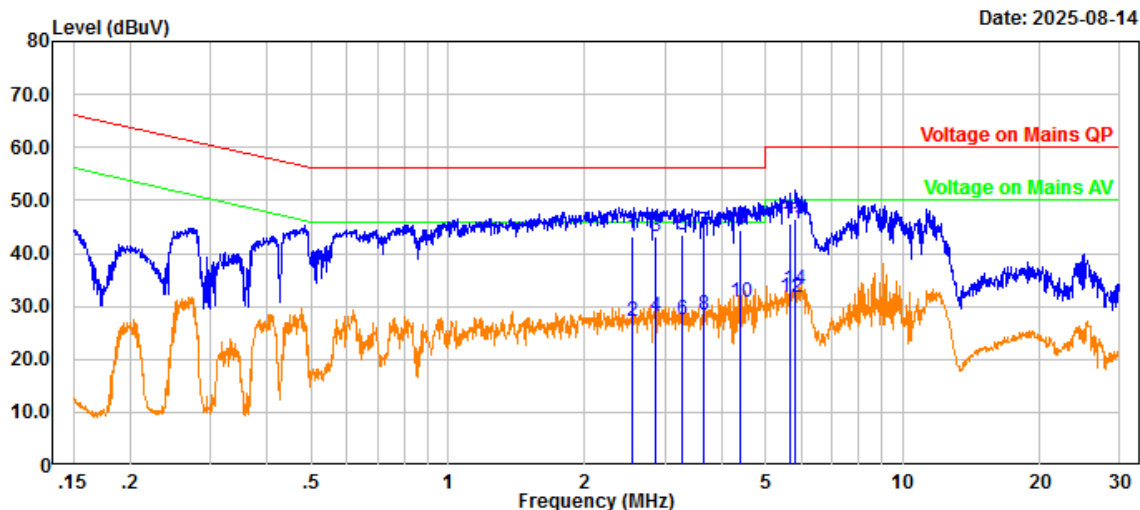

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	2.538	32.11	11.10	43.21	56.00	12.79	QP
2	2.538	15.95	11.10	27.05	46.00	18.95	Average
3	2.867	32.28	11.04	43.32	56.00	12.68	QP
4	2.867	16.94	11.04	27.98	46.00	18.02	Average
5	3.281	32.45	10.95	43.40	56.00	12.60	QP
6	3.281	16.63	10.95	27.58	46.00	18.42	Average
7	3.637	33.22	10.87	44.09	56.00	11.91	QP
8	3.637	17.63	10.87	28.50	46.00	17.50	Average
9	4.396	33.66	10.82	44.48	56.00	11.52	QP
10	4.396	19.90	10.82	30.72	46.00	15.28	Average
11	5.675	34.72	10.89	45.61	60.00	14.39	QP
12	5.675	20.81	10.89	31.70	50.00	18.30	Average
13	5.776	35.70	10.89	46.59	60.00	13.41	QP
14	5.776	22.23	10.89	33.12	50.00	16.88	Average

5.2 Radiation Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	37QT-1	Test Date:	2025/8/23
Test Site:	Chamber A	Test Mode:	Transmitting
Tester:	Ethan Wu	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26.1	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2025/7/1	2026/6/30
Sonoma	Amplifier	310N	372193	2025/7/30	2026/7/29
R&S	EMI Test Receiver	ESCI	100035	2025/6/25	2026/6/24
Audix	Test Software	E3	191218 V9	N/A	N/A
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.

Note: 802.11n40 5755MHz was tested.


9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

Project No.: 2502V37588E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI
RBW:200Hz,VBW:1kHz

Serial No.: 37QT-1
Tester: Ethan Wu


Date: 2025-08-23

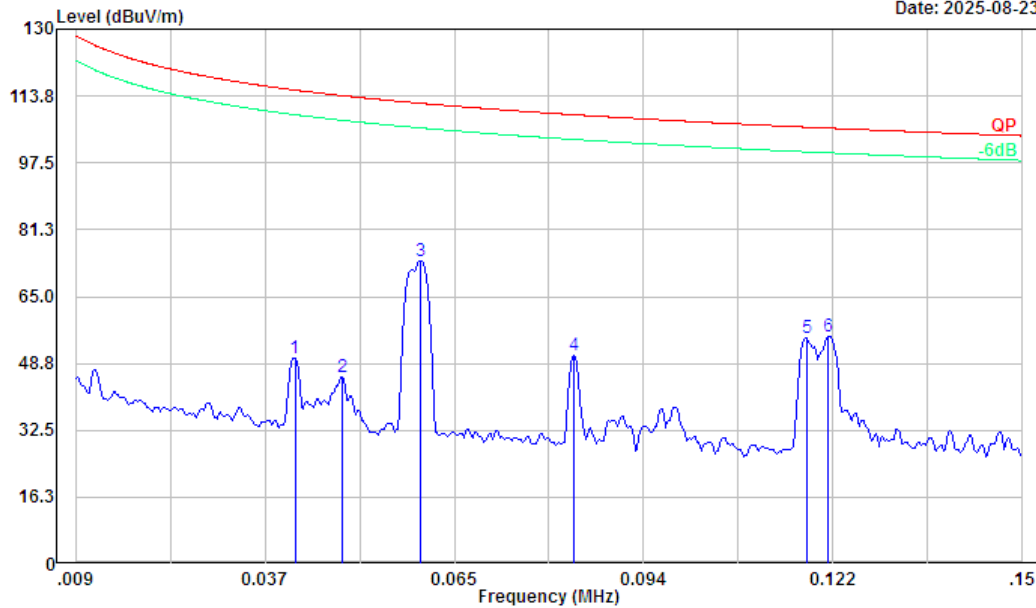

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.042	54.37	-4.30	50.07	115.21	65.14	Peak
2	0.049	50.32	-4.82	45.50	113.85	68.35	Peak
3	0.060	79.52	-6.04	73.48	111.97	38.49	Peak
4	0.083	59.27	-8.59	50.68	109.20	58.52	Peak
5	0.118	65.16	-10.26	54.90	106.18	51.28	Peak
6	0.121	65.78	-10.45	55.33	105.94	50.61	Peak

Project No.: 2502V37588E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI
RBW: 9kHz, VBW: 30kHz

Serial No.: 37QT-1
Tester: Ethan Wu

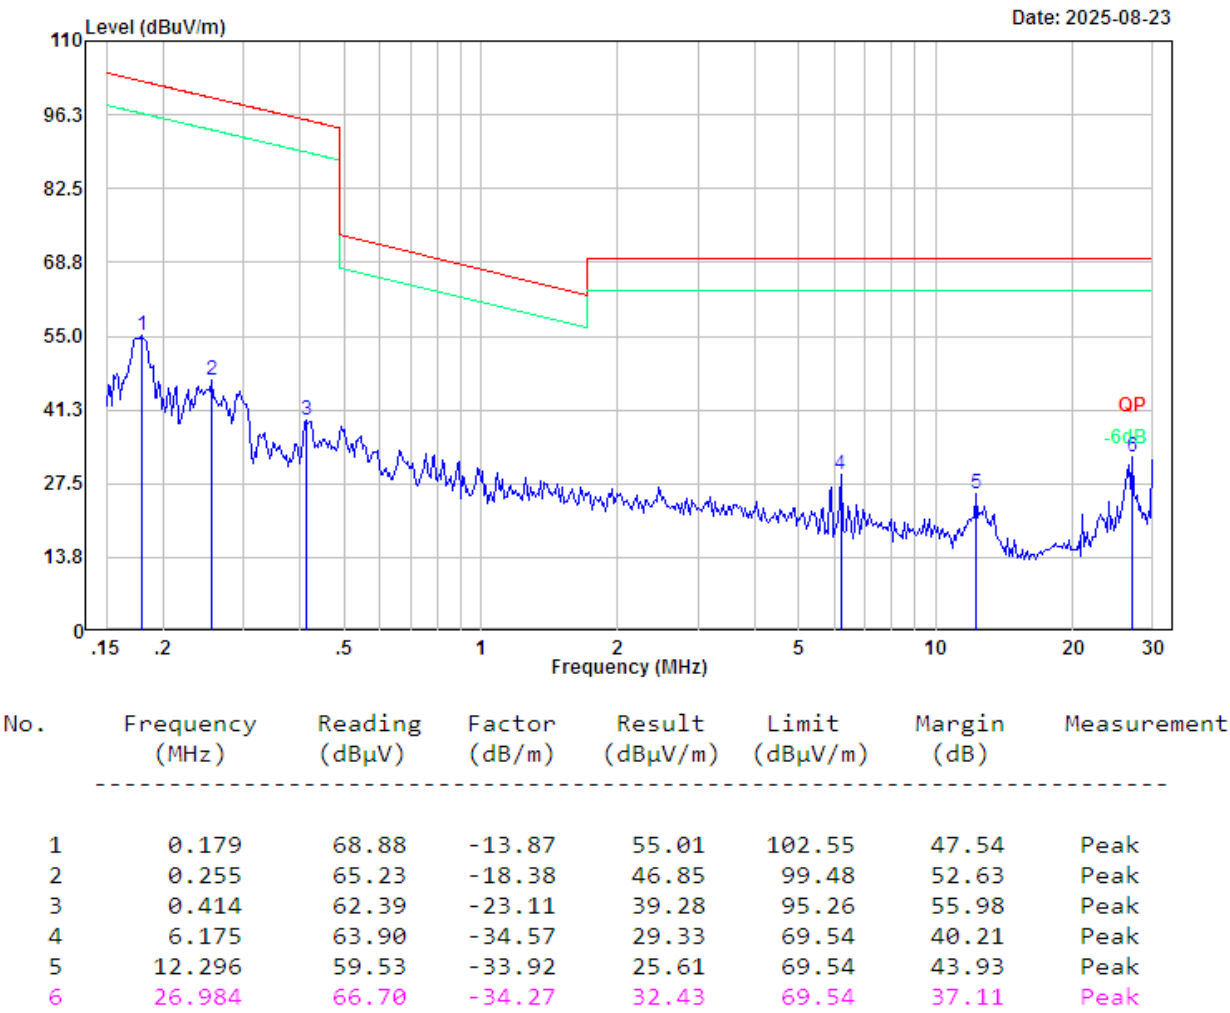

30MHz-1GHz

Project No.: 2502V37588E-RF

Serial No.: 37QT-1


Polarization: Horizontal

Tester: Ethan Wu

Test Mode: Transmitting


Note: 5G WIFI

RBW:120kHz,VBW:500kHz

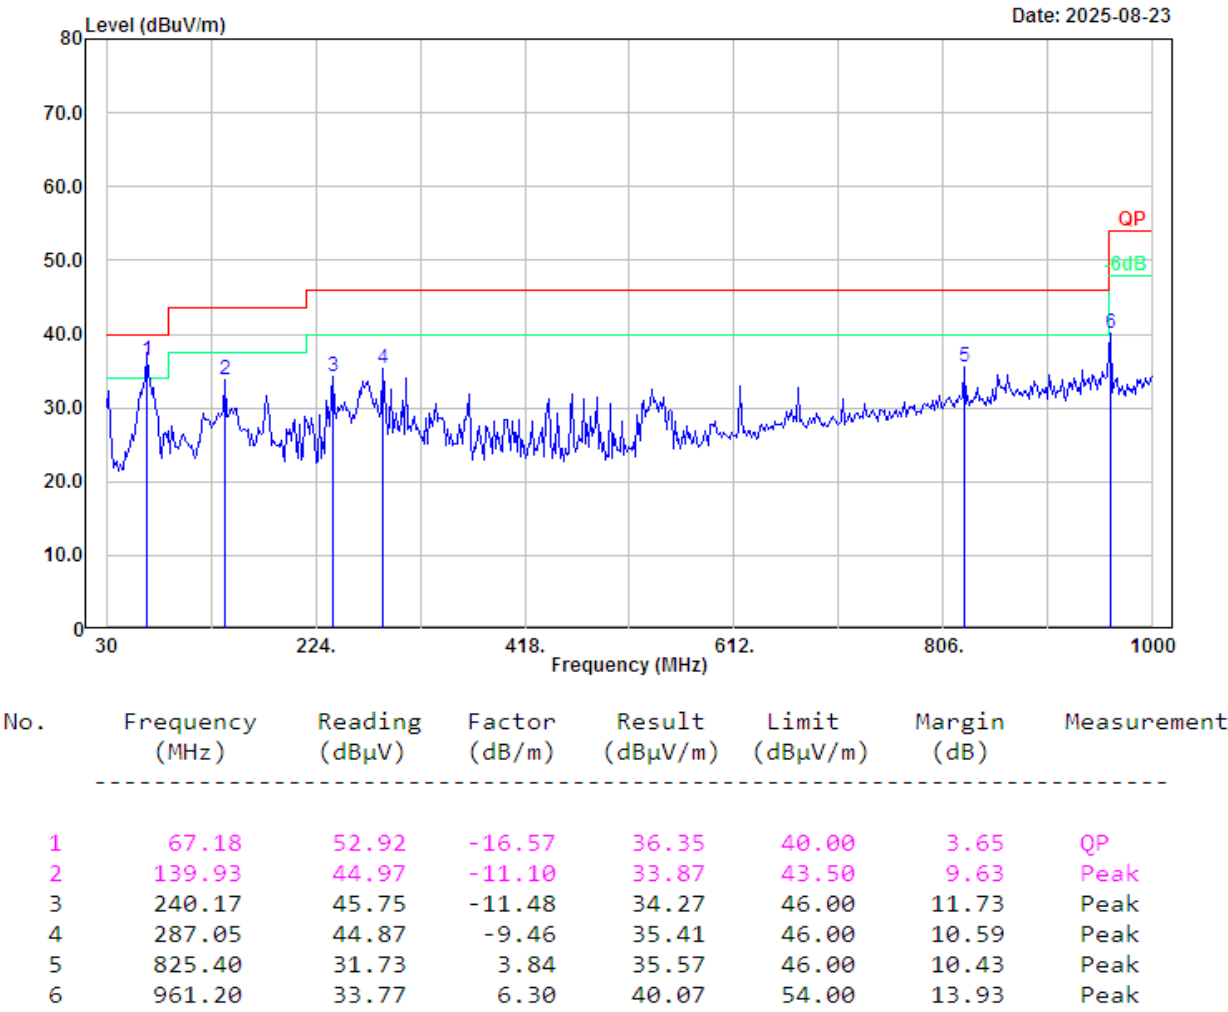

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI
RBW:120kHz,VBW:500kHz

Serial No.: 37QT-1
Tester: Ethan Wu

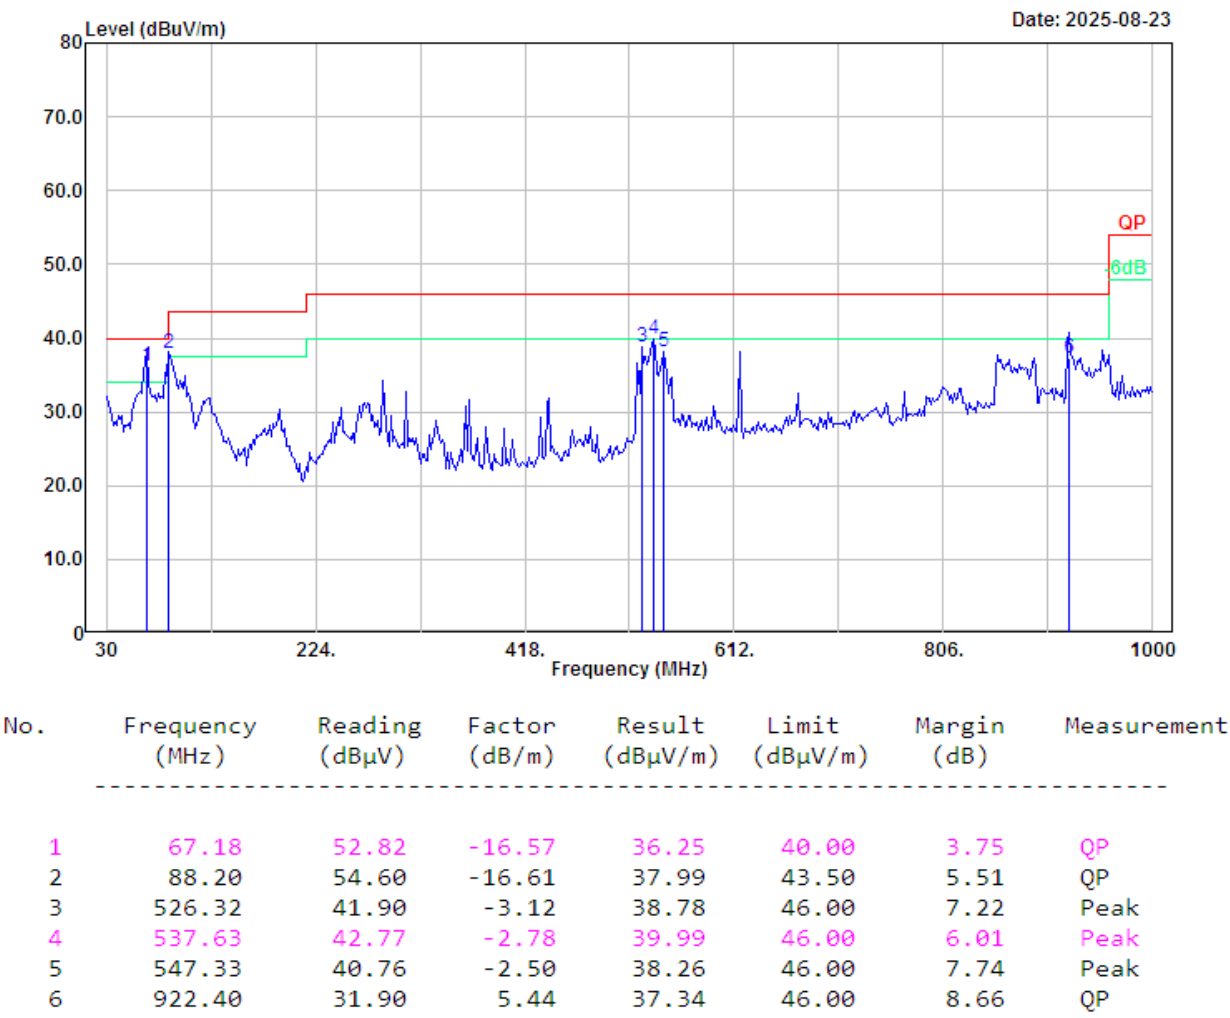

2) 1-40GHz:

Serial Number:	37QT-1	Test Date:	2025/8/22
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Leo Xiao	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.1	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2025/4/11	2026/4/10
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.

1-18GHz:
5150-5250MHz:

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1_low channel 5180MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 37QT-1
Tester: Leo Xiao

Date: 2025-08-22

Level (dBuV/m)

Fundamental test with Filter Switch Unit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6383.40	49.72	0.19	49.91	68.20	18.29	Peak

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1_low channel 5180MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 37QT-1
Tester: Leo Xiao

Date: 2025-08-22

Level (dBuV/m)

Fundamental test with Filter Switch Unit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6329.50	49.69	0.22	49.91	68.20	18.29	Peak

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1_low channel 5180MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 37QT-1
Tester: Leo Xiao

Date: 2025-08-22

Level (dBuV/m)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10360.00	46.11	2.29	48.40	68.20	19.80	Peak
2	15540.00	46.39	3.87	50.26	74.00	23.74	Peak
3	17993.10	47.95	11.25	59.20	74.00	14.80	Peak
4	17993.10	36.41	11.25	47.66	54.00	6.34	Average

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1_low channel 5180MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 37QT-1
Tester: Leo Xiao

Date: 2025-08-22




Level (dBuV/m)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10360.00	45.95	2.29	48.24	68.20	19.96	Peak
2	15540.00	47.17	3.87	51.04	74.00	22.96	Peak
3	17983.90	47.42	11.18	58.60	74.00	15.40	Peak
4	17983.90	36.35	11.18	47.53	54.00	6.47	Average

802.11a middle channel Horizontal

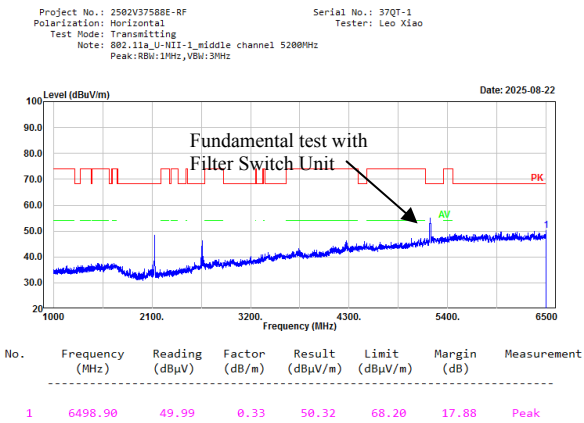


802.11a middle channel Vertical

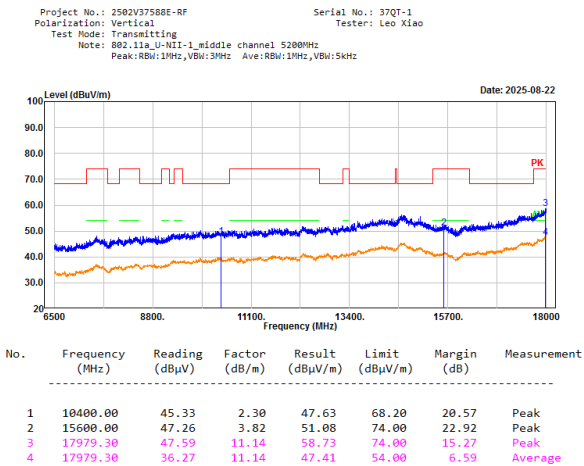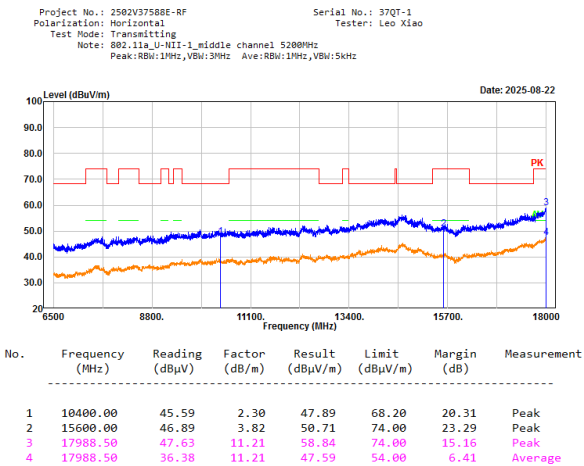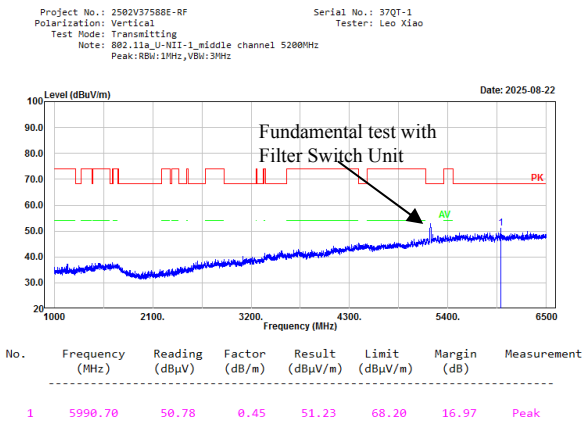

802.11a high channel Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

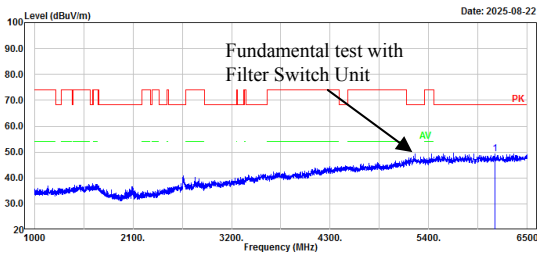


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6138.10	49.31	0.08	49.39	68.20	18.81	Peak

802.11a high channel Vertical

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 370T-1
Tester: Leo Xiao

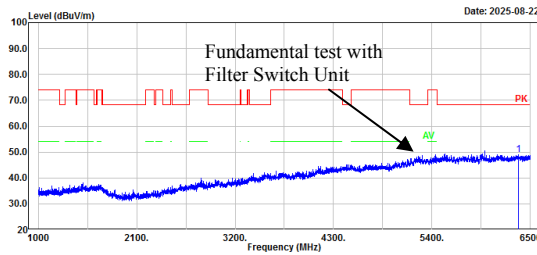

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6368.00	48.75	0.26	49.01	68.20	19.19	Peak

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 370T-1
Tester: Leo Xiao

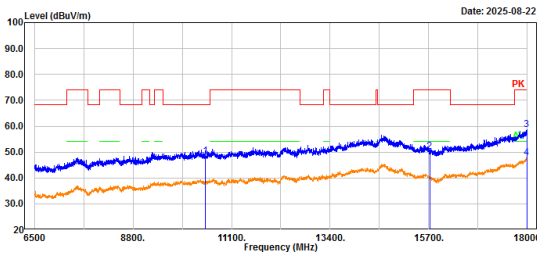

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	46.07	2.33	48.40	68.20	19.80	Peak
2	15720.00	46.75	3.59	50.34	74.00	23.66	Peak
3	17983.90	47.56	11.18	58.74	74.00	15.26	Peak
4	17983.90	36.45	11.18	47.63	54.00	6.37	Average


Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 370T-1
Tester: Leo Xiao



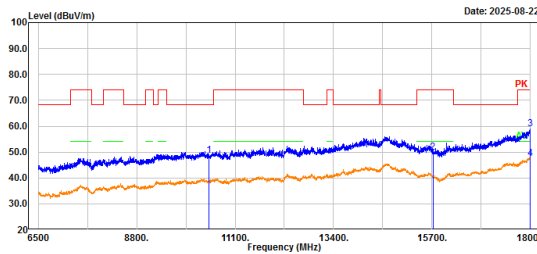


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	46.33	2.33	48.66	68.20	19.54	Peak
2	15720.00	46.34	3.59	49.93	74.00	24.07	Peak
3	17986.20	47.66	11.19	58.85	74.00	15.15	Peak
4	17986.20	36.40	11.19	47.59	54.00	6.41	Average

802.11n20 low channel Horizontal

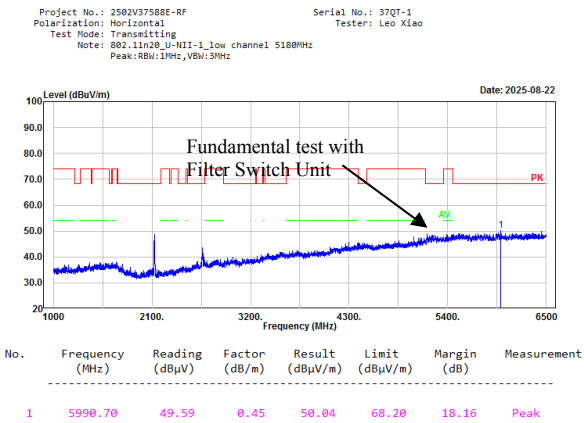


802.11n20 low channel Vertical

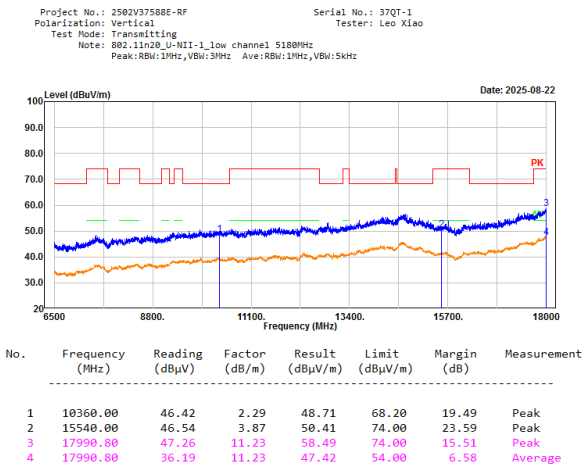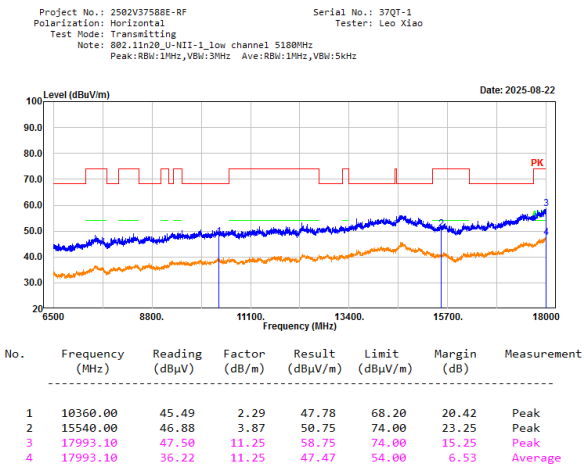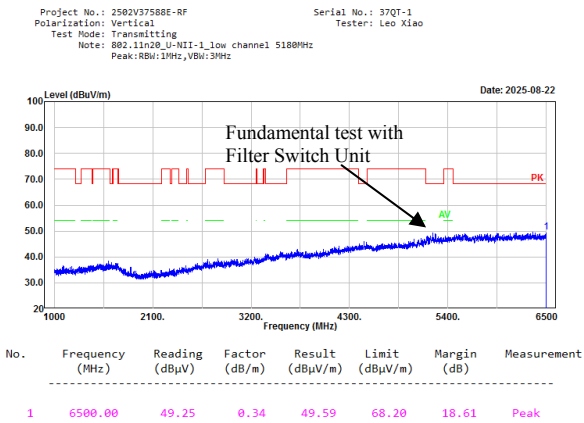

802.11n20 middle channel Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-1_middle channel 5200MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 37QT-1
Tester: Leo Xiao

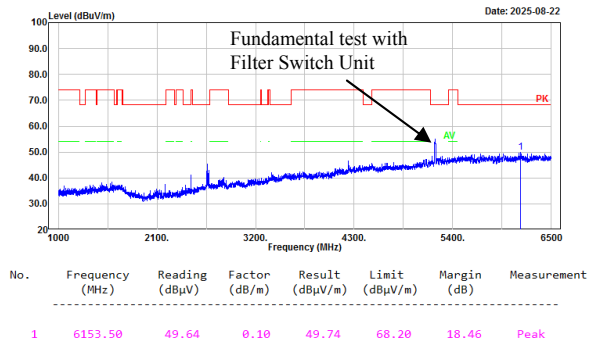

802.11n20 middle channel Vertical


Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-1_middle channel 5200MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 37QT-1
Tester: Leo Xiao

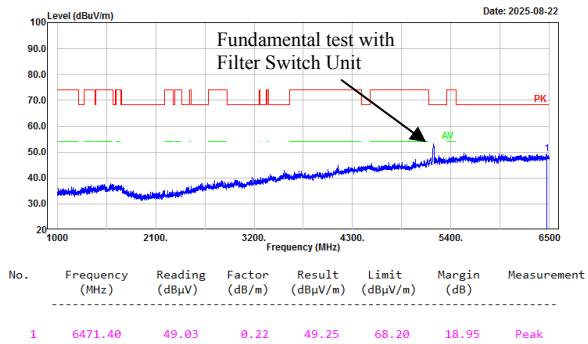


Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-1_middle channel 5200MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 37QT-1
Tester: Leo Xiao

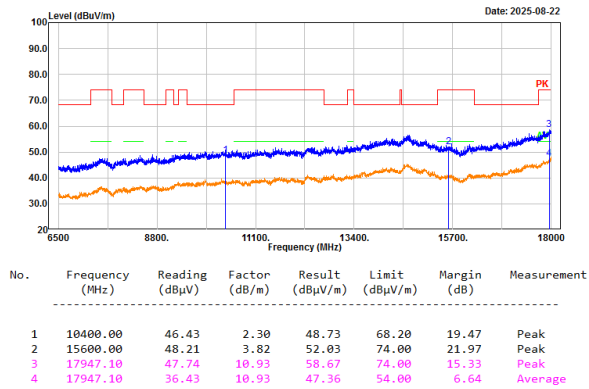


Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-1_middle channel 5200MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz




Serial No.: 37QT-1
Tester: Leo Xiao

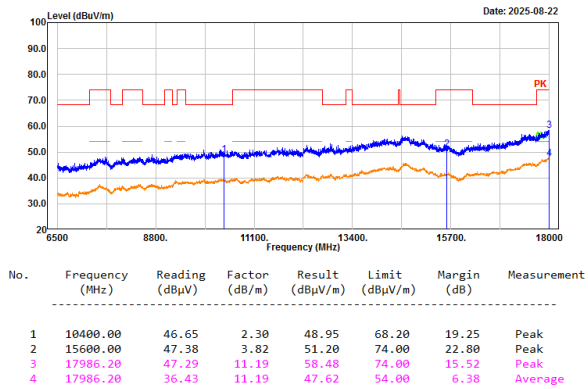


802.11n20 high channel Horizontal

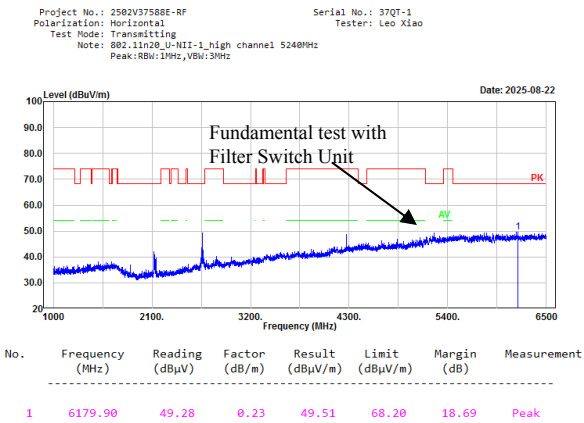




802.11n20 high channel Vertical

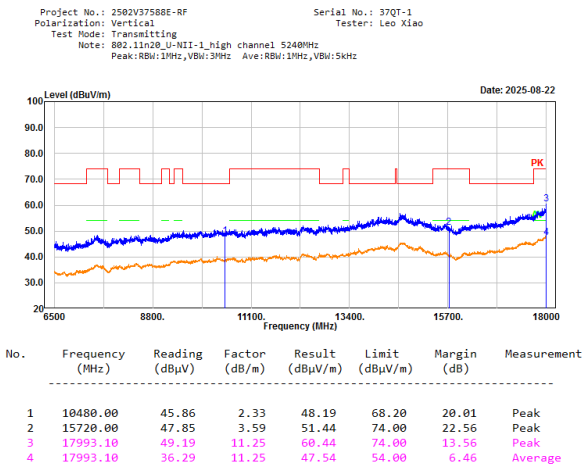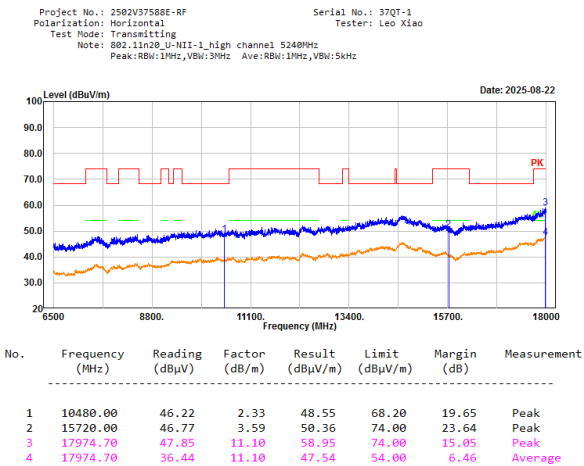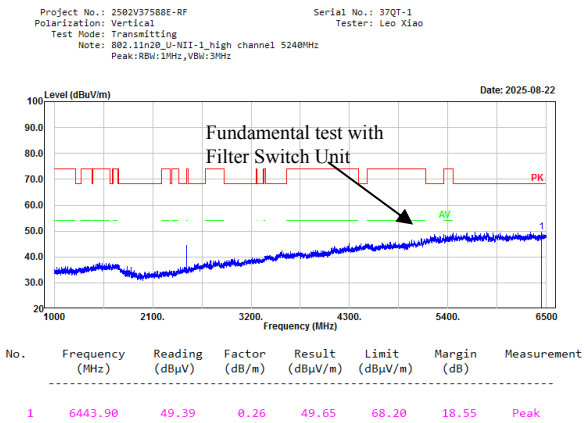


802.11n40 low channel Horizontal

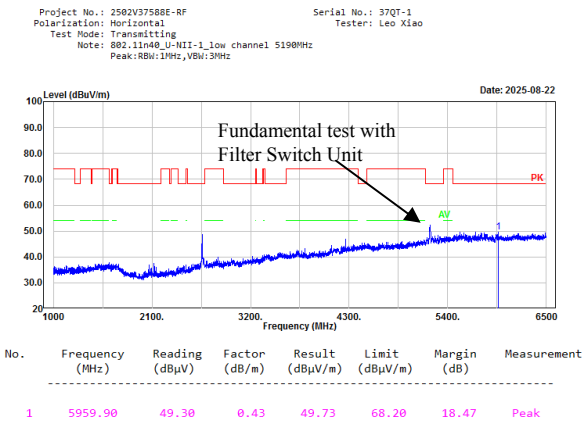




802.11n40 low channel Vertical

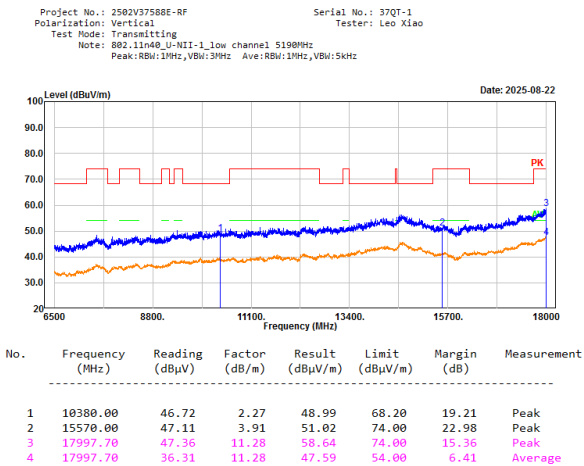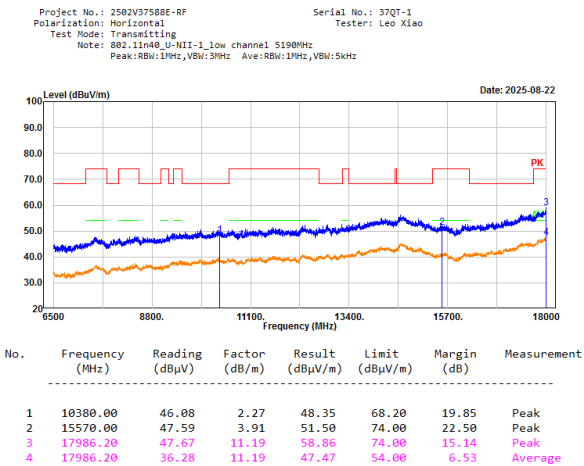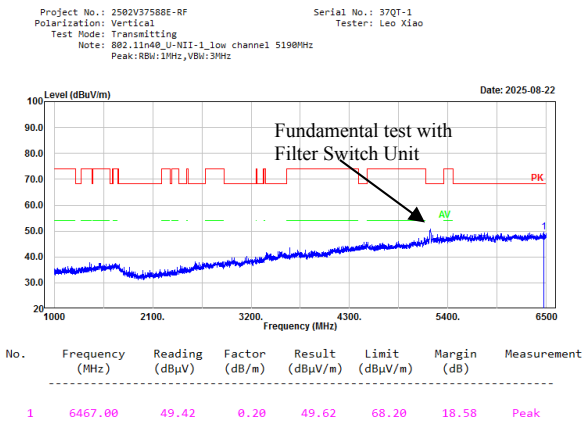


802.11n40 high channel Horizontal

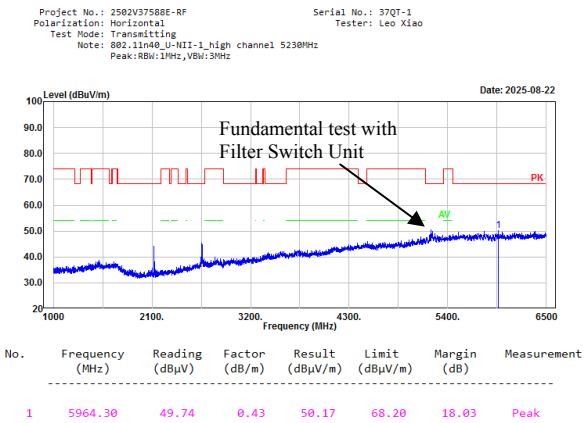




802.11n40 high channel Vertical

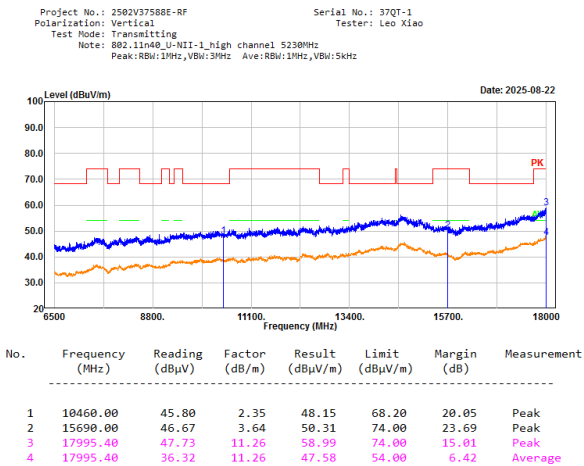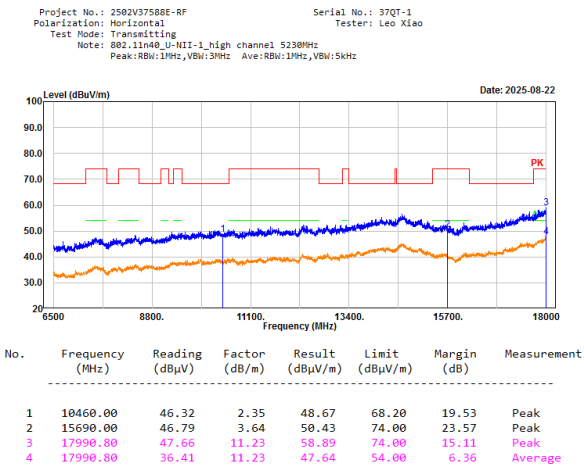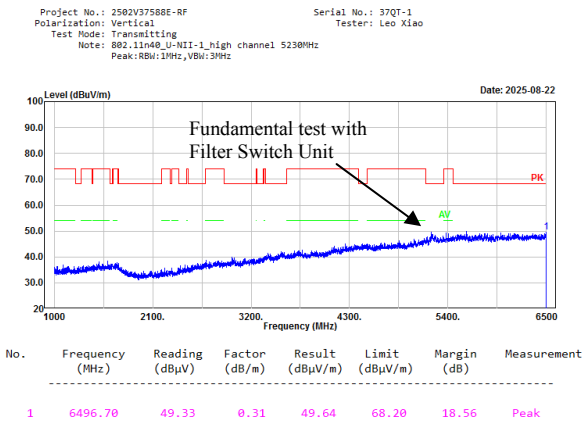

802.11ac80 middle channel Horizontal

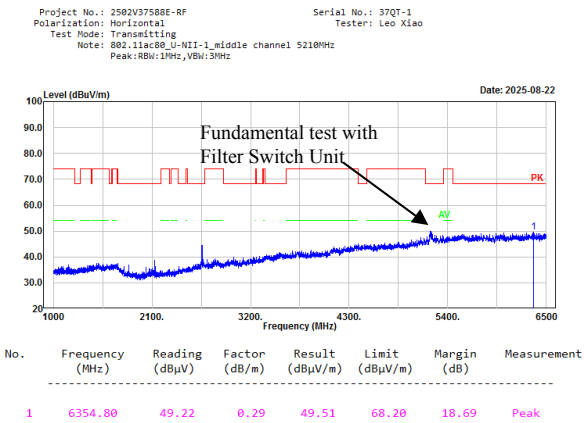

802.11ac80 middle channel Vertical

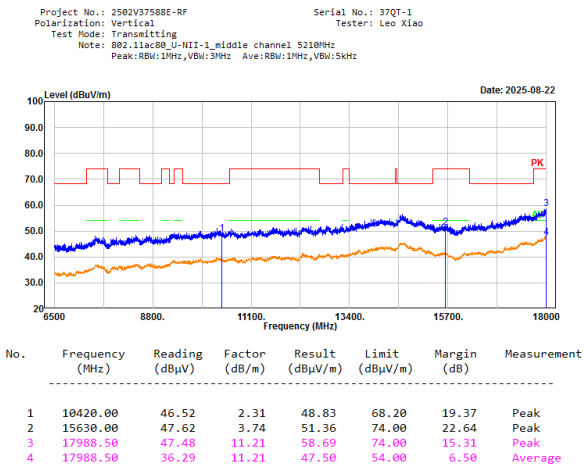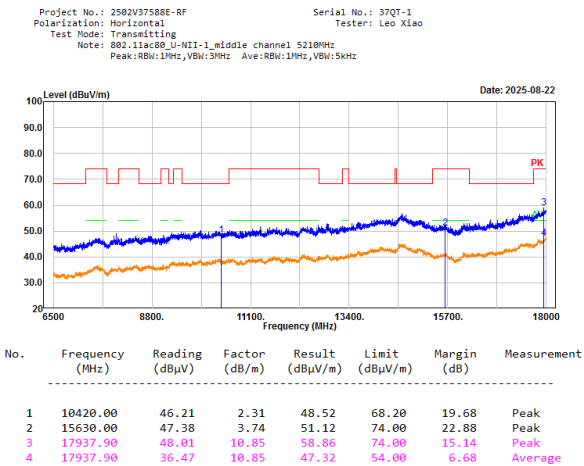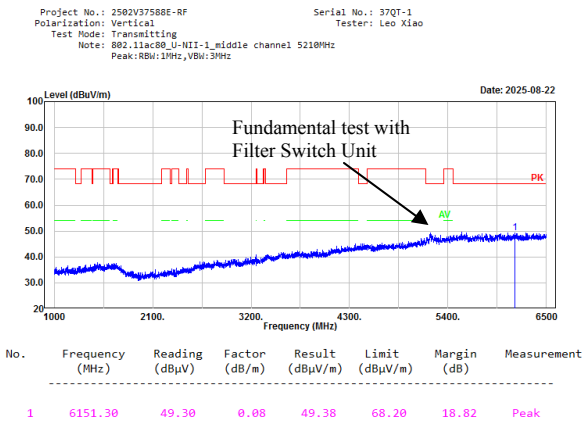


5725-5850MHz:




802.11a low channel Horizontal							802.11a low channel Vertical																																						
Project No.: 2502V37588E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 37QT-1 Tester: Leo Xiao			Project No.: 2502V37588E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 37QT-1 Tester: Leo Xiao																																		
Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 1000 2100 3200 4300 5400 6500 Frequency (MHz) Fundamental test with Filter Switch Unit PK AV Date: 2025-08-22							Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 1000 2100 3200 4300 5400 6500 Frequency (MHz) Fundamental test with Filter Switch Unit PK AV Date: 2025-08-22																																						
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5990.70</td><td>50.82</td><td>0.45</td><td>51.27</td><td>68.20</td><td>16.93</td><td>Peak</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5990.70	50.82	0.45	51.27	68.20	16.93	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>6429.60</td><td>49.45</td><td>0.25</td><td>49.70</td><td>68.20</td><td>18.50</td><td>Peak</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	6429.60	49.45	0.25	49.70	68.20	18.50	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																						
1	5990.70	50.82	0.45	51.27	68.20	16.93	Peak																																						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																						
1	6429.60	49.45	0.25	49.70	68.20	18.50	Peak																																						

Project No.: 2502V37588E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz							Serial No.: 37QT-1 Tester: Leo Xiao			Project No.: 2502V37588E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz							Serial No.: 37QT-1 Tester: Leo Xiao																																																																												
Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 6500 8800 11100 13400 15700 18000 Frequency (MHz) PK 3 2 1 Date: 2025-08-22							Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 6500 8800 11100 13400 15700 18000 Frequency (MHz) PK 3 2 1 Date: 2025-08-22																																																																																						
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>11490.00</td><td>45.63</td><td>3.33</td><td>48.96</td><td>74.00</td><td>25.04</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>45.88</td><td>6.93</td><td>52.81</td><td>68.20</td><td>15.39</td><td>Peak</td></tr><tr><td>3</td><td>17995.40</td><td>47.66</td><td>11.26</td><td>58.92</td><td>74.00</td><td>15.08</td><td>Peak</td></tr><tr><td>4</td><td>17995.40</td><td>36.31</td><td>11.26</td><td>47.57</td><td>54.00</td><td>6.43</td><td>Average</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	11490.00	45.63	3.33	48.96	74.00	25.04	Peak	2	17235.00	45.88	6.93	52.81	68.20	15.39	Peak	3	17995.40	47.66	11.26	58.92	74.00	15.08	Peak	4	17995.40	36.31	11.26	47.57	54.00	6.43	Average	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>11490.00</td><td>47.14</td><td>3.33</td><td>50.47</td><td>74.00</td><td>23.53</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>46.62</td><td>6.93</td><td>53.55</td><td>68.20</td><td>14.65</td><td>Peak</td></tr><tr><td>3</td><td>17995.40</td><td>47.83</td><td>11.26</td><td>59.09</td><td>74.00</td><td>14.91</td><td>Peak</td></tr><tr><td>4</td><td>17995.40</td><td>36.46</td><td>11.26</td><td>47.72</td><td>54.00</td><td>6.28</td><td>Average</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	11490.00	47.14	3.33	50.47	74.00	23.53	Peak	2	17235.00	46.62	6.93	53.55	68.20	14.65	Peak	3	17995.40	47.83	11.26	59.09	74.00	14.91	Peak	4	17995.40	36.46	11.26	47.72	54.00	6.28	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	11490.00	45.63	3.33	48.96	74.00	25.04	Peak																																																																																						
2	17235.00	45.88	6.93	52.81	68.20	15.39	Peak																																																																																						
3	17995.40	47.66	11.26	58.92	74.00	15.08	Peak																																																																																						
4	17995.40	36.31	11.26	47.57	54.00	6.43	Average																																																																																						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	11490.00	47.14	3.33	50.47	74.00	23.53	Peak																																																																																						
2	17235.00	46.62	6.93	53.55	68.20	14.65	Peak																																																																																						
3	17995.40	47.83	11.26	59.09	74.00	14.91	Peak																																																																																						
4	17995.40	36.46	11.26	47.72	54.00	6.28	Average																																																																																						


802.11a middle channel Horizontal

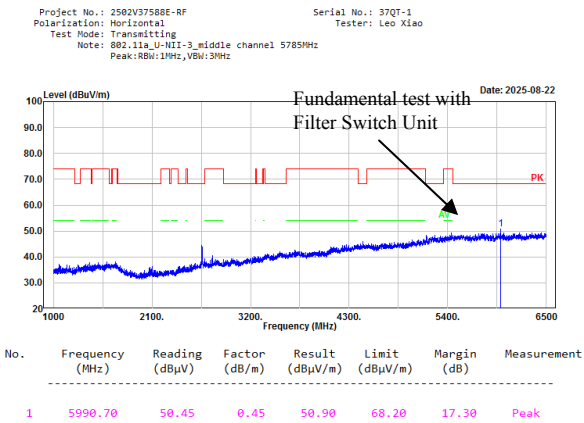




802.11a middle channel Vertical

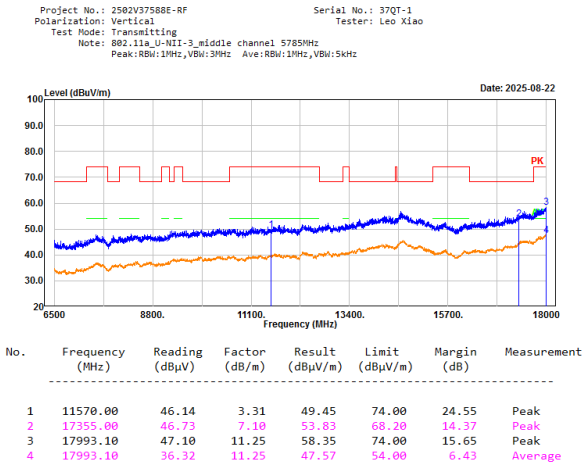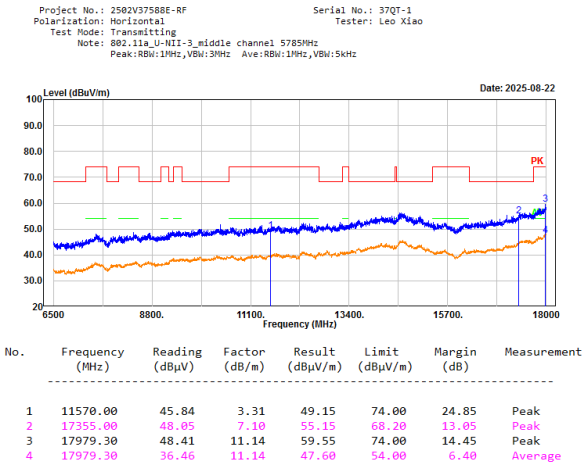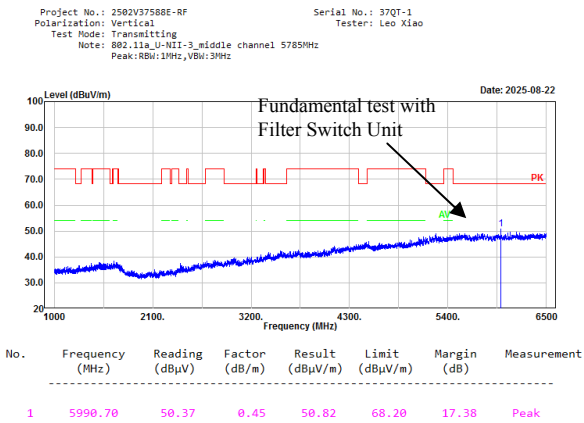


802.11a high channel Horizontal

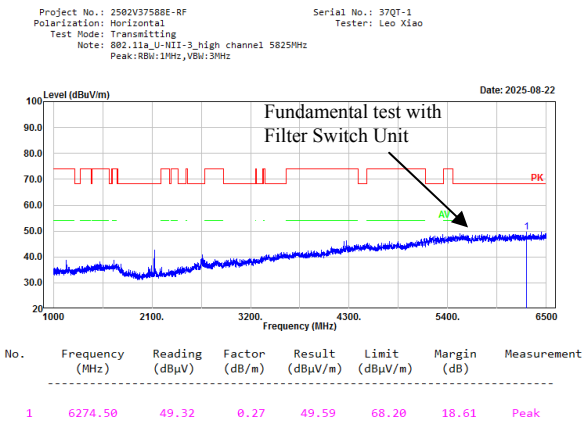




802.11a high channel Vertical

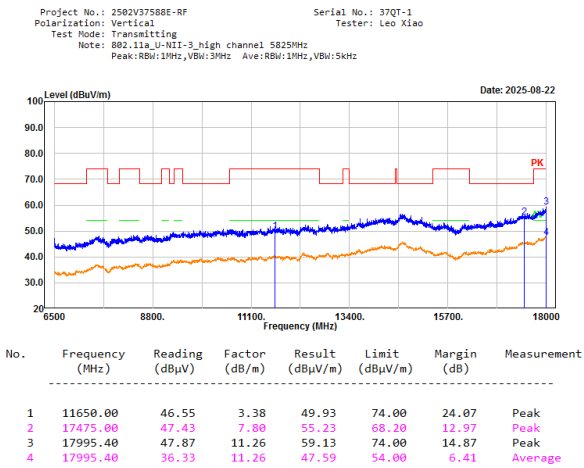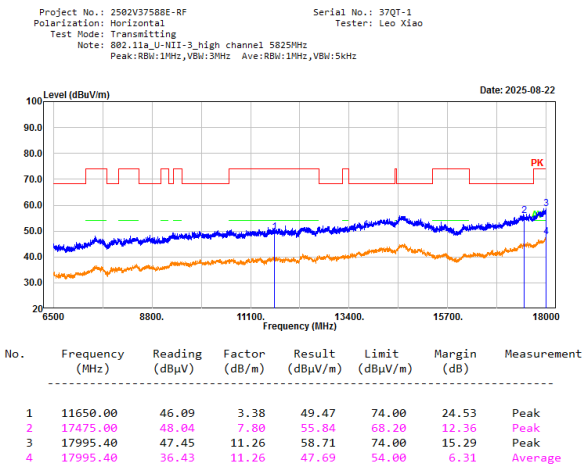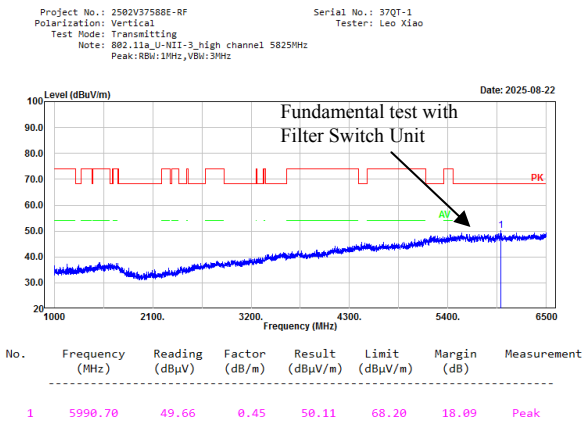

802.11n20 low channel Horizontal

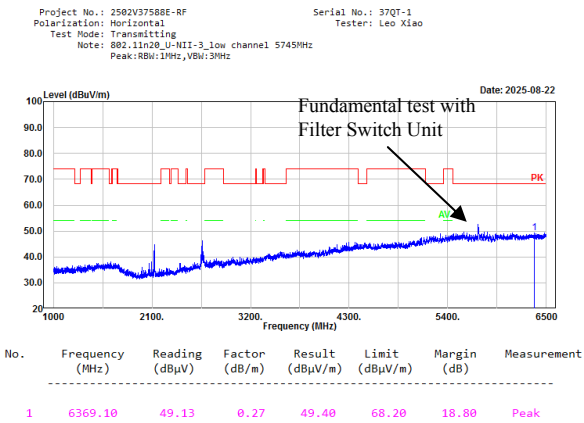


802.11n20 low channel Vertical

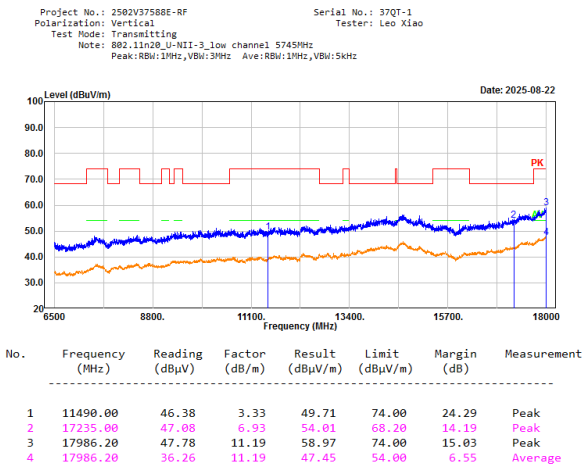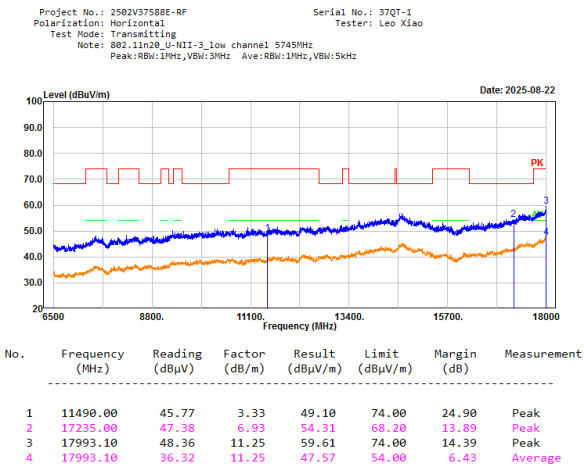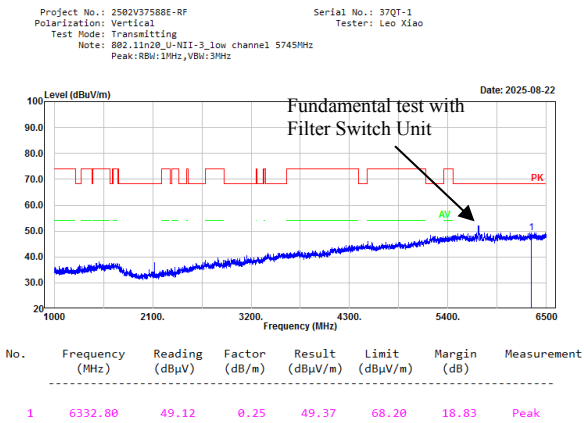

802.11n20 middle channel Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

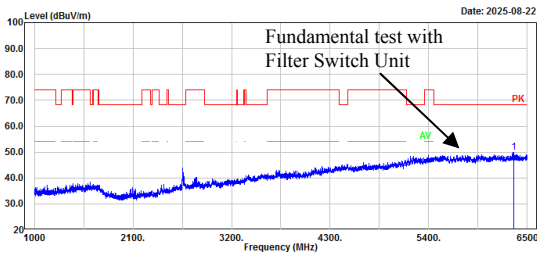


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6348.20	49.55	0.27	49.82	68.20	18.38	Peak

802.11n20 middle channel Vertical

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 370T-1
Tester: Leo Xiao

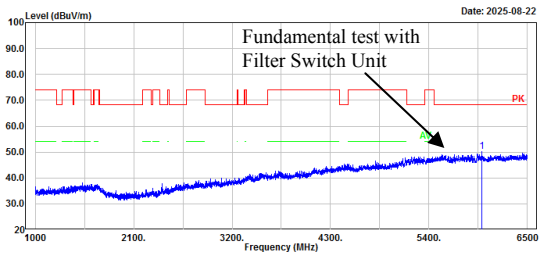

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5988.50	49.65	0.44	50.09	68.20	18.11	Peak

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 370T-1
Tester: Leo Xiao

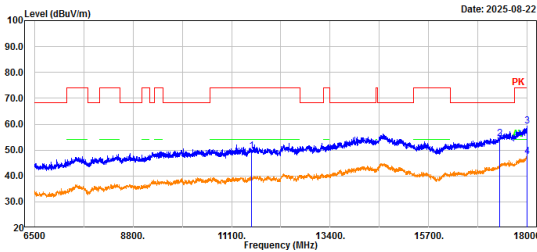

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11570.00	46.13	3.31	49.44	74.00	24.56	Peak
2	17355.00	47.19	7.10	54.29	68.20	13.91	Peak
3	17990.80	48.06	11.23	59.29	74.00	14.71	Peak
4	17990.80	36.23	11.23	47.46	54.00	6.54	Average


Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 370T-1
Tester: Leo Xiao



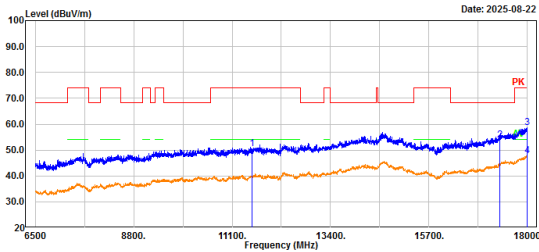


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11570.00	47.22	3.31	50.53	74.00	23.47	Peak
2	17355.00	46.62	7.10	53.72	68.20	14.48	Peak
3	17997.70	47.32	11.28	58.60	74.00	15.40	Peak
4	17997.70	36.38	11.28	47.66	54.00	6.34	Average


802.11n20 high channel Horizontal

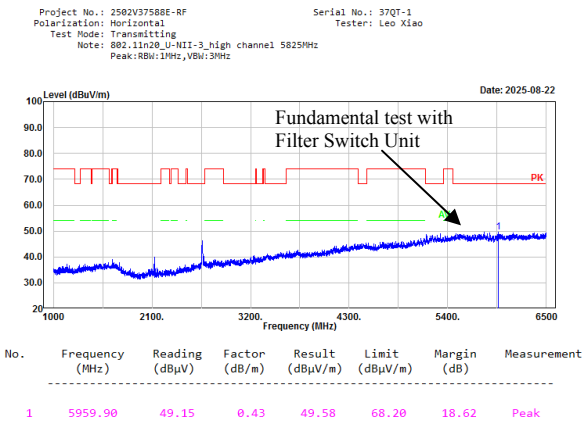




802.11n20 high channel Vertical

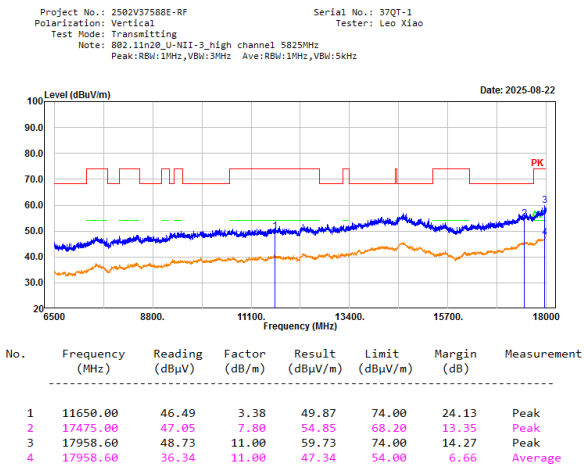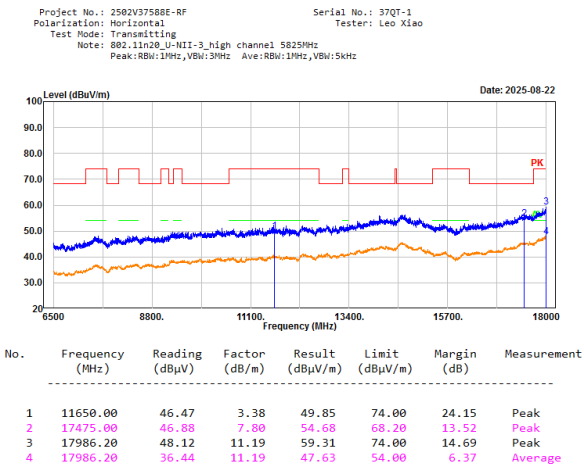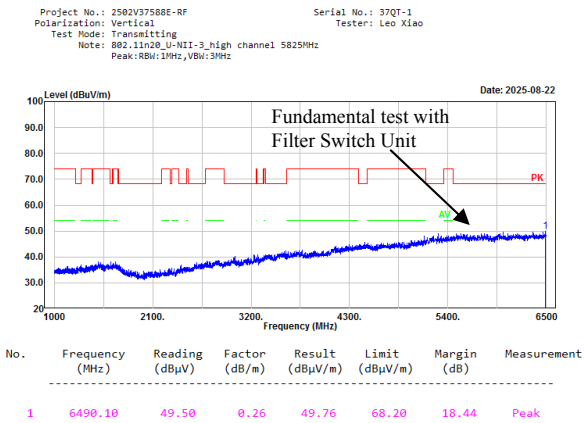


802.11n40 low channel Horizontal

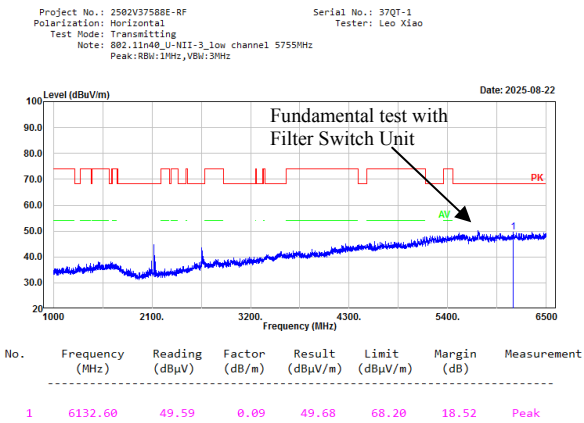




802.11n40 low channel Vertical

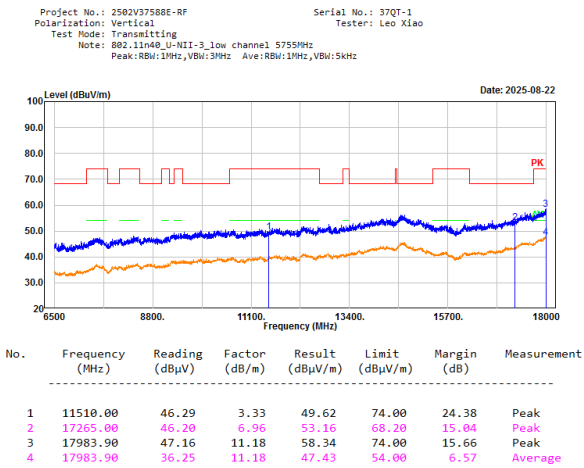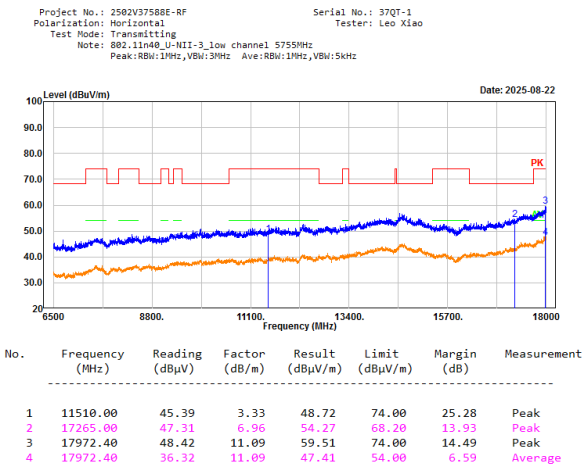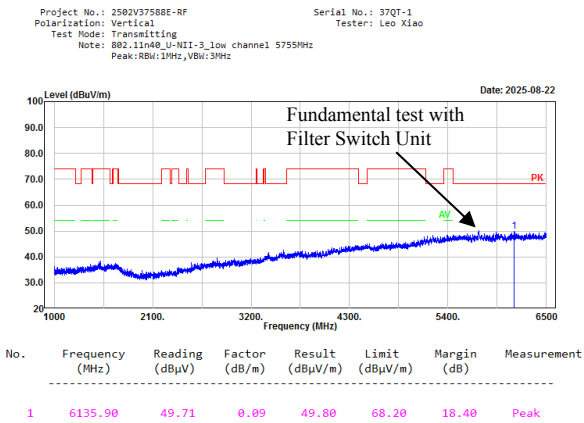

802.11n40 high channel Horizontal

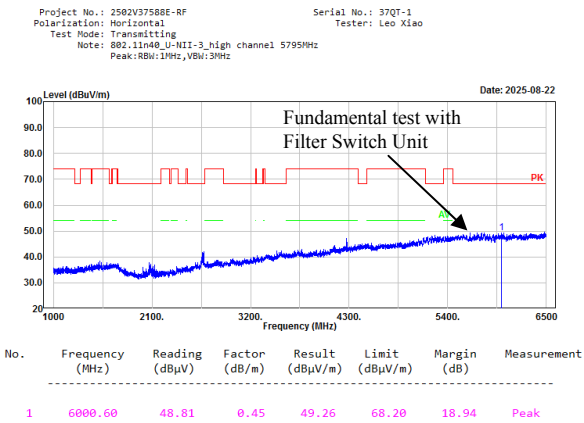


802.11n40 high channel Vertical

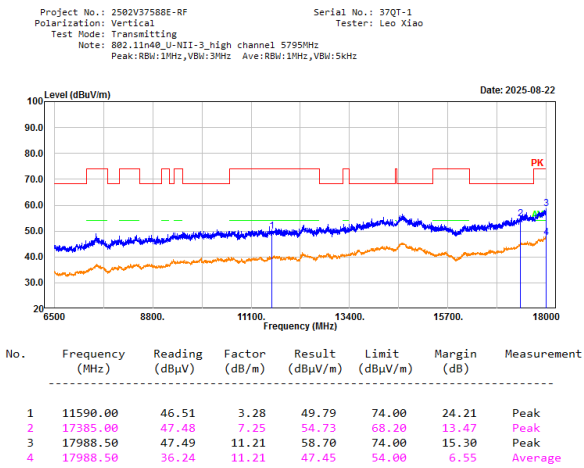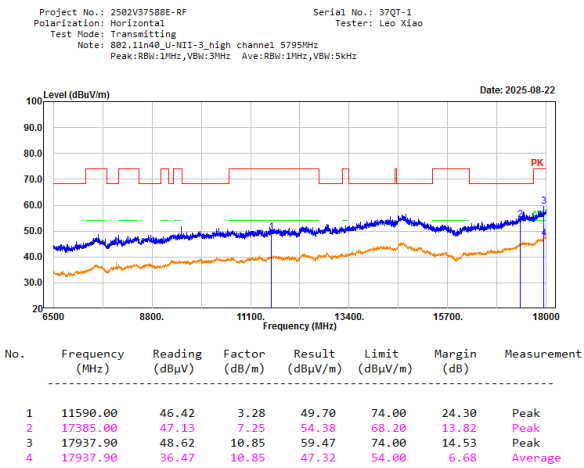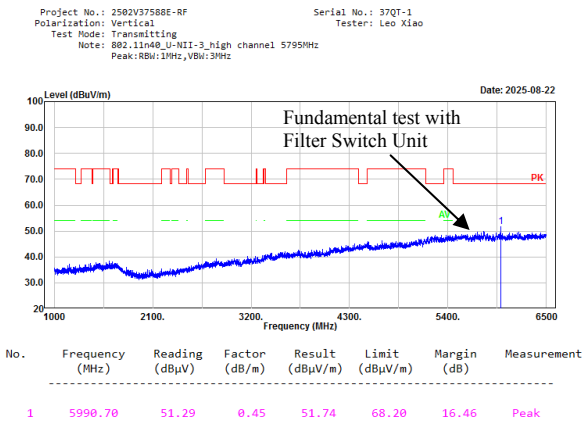

802.11ac80 middle channel Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80 U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 37QT-1
Tester: Leo Xiao

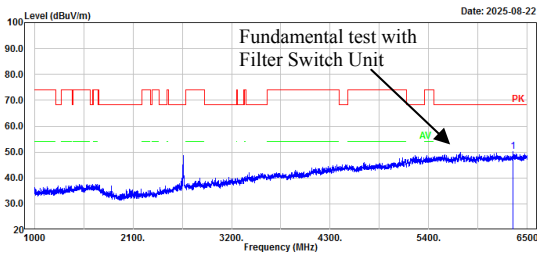


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6342.70	49.88	0.26	50.14	68.20	18.06	Peak

802.11ac80 middle channel Vertical

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80 U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 37QT-1
Tester: Leo Xiao

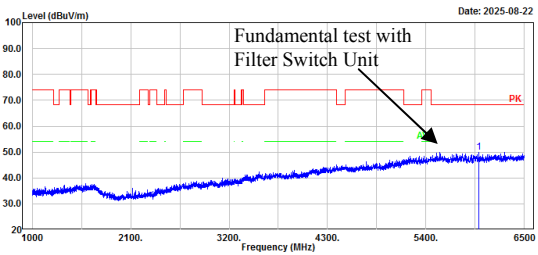

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5990.70	49.39	0.45	49.84	68.20	18.36	Peak

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80 U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 37QT-1
Tester: Leo Xiao

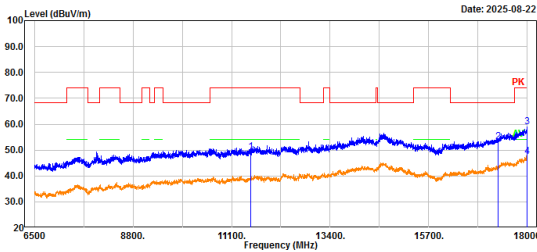

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11550.00	45.96	3.32	49.28	74.00	24.72	Peak
2	17325.00	46.40	6.94	53.34	68.20	14.86	Peak
3	17993.10	47.61	11.25	58.86	74.00	15.14	Peak
4	17993.10	36.22	11.25	47.47	54.00	6.53	Average



Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80 U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz



Serial No.: 37QT-1
Tester: Leo Xiao

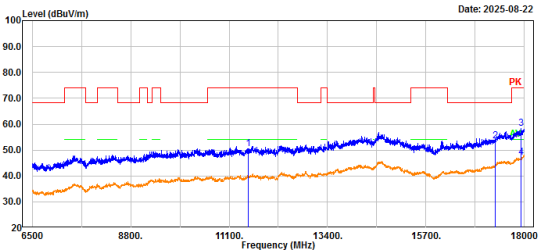

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11550.00	47.20	3.32	50.52	74.00	23.48	Peak
2	17325.00	46.58	6.94	53.52	68.20	14.68	Peak
3	17924.10	47.53	10.76	58.29	74.00	15.71	Peak
4	17924.10	36.39	10.76	47.15	54.00	6.85	Average

18-40GHz:
No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

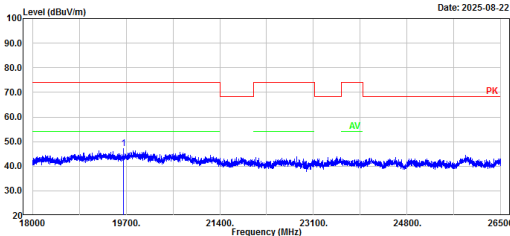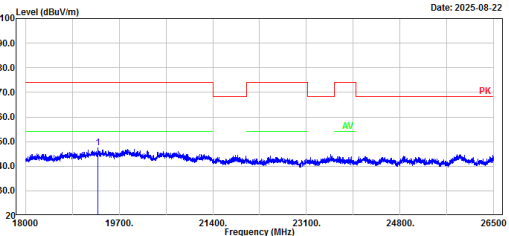
802.11n40 5755MHz Horizontal				802.11n40 5755MHz Vertical											
Project No.: 2502V37588E-RF Polarization: Horizontal Test Mode: Transmitting Note: 5G WiFi Peak: RBW: 1MHz, VBW: 3MHz		Serial No.: 37QT-1 Tester: Leo Xiao		Project No.: 2502V37588E-RF Polarization: Vertical Test Mode: Transmitting Note: 5G WiFi Peak: RBW: 1MHz, VBW: 3MHz		Serial No.: 37QT-1 Tester: Leo Xiao									
															
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	19652.40	46.87	0.28	47.15	74.00	26.85	Peak	1	19319.20	47.39	0.16	47.55	74.00	26.45	Peak

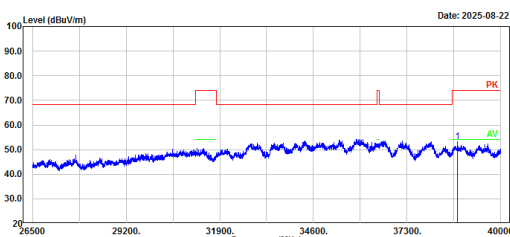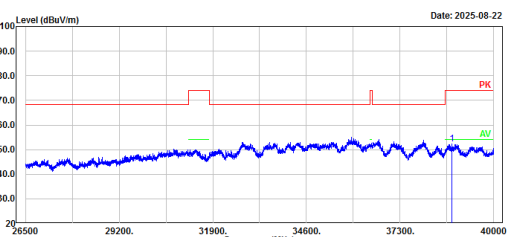Project No.: 2502V37588E-RF Polarization: Horizontal Test Mode: Transmitting Note: 5G WiFi Peak: RBW: 1MHz, VBW: 3MHz		Serial No.: 37QT-1 Tester: Leo Xiao		Project No.: 2502V37588E-RF Polarization: Vertical Test Mode: Transmitting Note: 5G WiFi Peak: RBW: 1MHz, VBW: 3MHz		Serial No.: 37QT-1 Tester: Leo Xiao									
															
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	38758.00	44.79	8.40	53.19	74.00	20.81	Peak	1	38795.80	43.83	8.46	52.29	74.00	21.71	Peak


Bandedge:
5150-5250MHz:

Project No.: 2502V37588E-RF Serial No.: 37QT-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-1_low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 110 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30 5100 5120 5140 5160 5180 5200 Frequency (MHz) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5150.00</td><td>48.06</td><td>7.47</td><td>55.53</td><td>74.00</td><td>18.47</td><td>Peak</td></tr><tr><td>2</td><td>5150.00</td><td>36.14</td><td>7.47</td><td>43.61</td><td>54.00</td><td>10.39</td><td>Average</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5150.00	48.06	7.47	55.53	74.00	18.47	Peak	2	5150.00	36.14	7.47	43.61	54.00	10.39	Average	Project No.: 2502V37588E-RF Serial No.: 37QT-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-1_low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 110 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30 5100 5120 5140 5160 5180 5200 Frequency (MHz) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5150.00</td><td>47.81</td><td>7.47</td><td>55.28</td><td>74.00</td><td>18.72</td><td>Peak</td></tr><tr><td>2</td><td>5150.00</td><td>35.76</td><td>7.47</td><td>43.23</td><td>54.00</td><td>10.77</td><td>Average</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5150.00	47.81	7.47	55.28	74.00	18.72	Peak	2	5150.00	35.76	7.47	43.23	54.00	10.77	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																										
1	5150.00	48.06	7.47	55.53	74.00	18.47	Peak																																										
2	5150.00	36.14	7.47	43.61	54.00	10.39	Average																																										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																										
1	5150.00	47.81	7.47	55.28	74.00	18.72	Peak																																										
2	5150.00	35.76	7.47	43.23	54.00	10.77	Average																																										
Project No.: 2502V37588E-RF Serial No.: 37QT-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-1_high channel 5240MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 110 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30 5220 5256 5292 5328 5364 5400 Frequency (MHz) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5350.00</td><td>48.80</td><td>8.01</td><td>56.81</td><td>74.00</td><td>17.19</td><td>Peak</td></tr><tr><td>2</td><td>5350.00</td><td>36.17</td><td>8.01</td><td>44.18</td><td>54.00</td><td>9.82</td><td>Average</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5350.00	48.80	8.01	56.81	74.00	17.19	Peak	2	5350.00	36.17	8.01	44.18	54.00	9.82	Average	Project No.: 2502V37588E-RF Serial No.: 37QT-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-1_high channel 5240MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 110 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30 5220 5256 5292 5328 5364 5400 Frequency (MHz) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5350.00</td><td>49.02</td><td>8.01</td><td>57.03</td><td>74.00</td><td>16.97</td><td>Peak</td></tr><tr><td>2</td><td>5350.00</td><td>35.68</td><td>8.01</td><td>43.69</td><td>54.00</td><td>10.31</td><td>Average</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5350.00	49.02	8.01	57.03	74.00	16.97	Peak	2	5350.00	35.68	8.01	43.69	54.00	10.31	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																										
1	5350.00	48.80	8.01	56.81	74.00	17.19	Peak																																										
2	5350.00	36.17	8.01	44.18	54.00	9.82	Average																																										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																										
1	5350.00	49.02	8.01	57.03	74.00	16.97	Peak																																										
2	5350.00	35.68	8.01	43.69	54.00	10.31	Average																																										


802.11n20 low channel Bandedge Horizontal

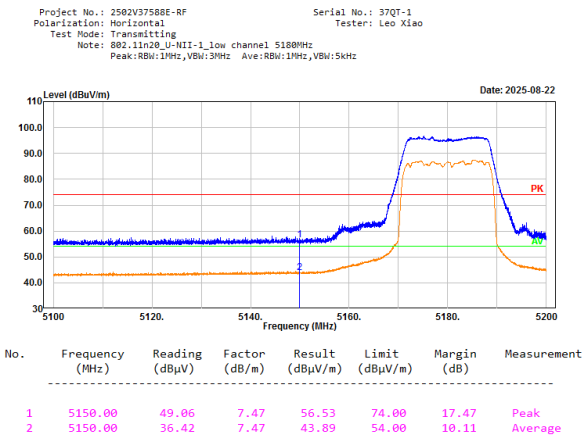


802.11n20 low channel Bandedge Vertical

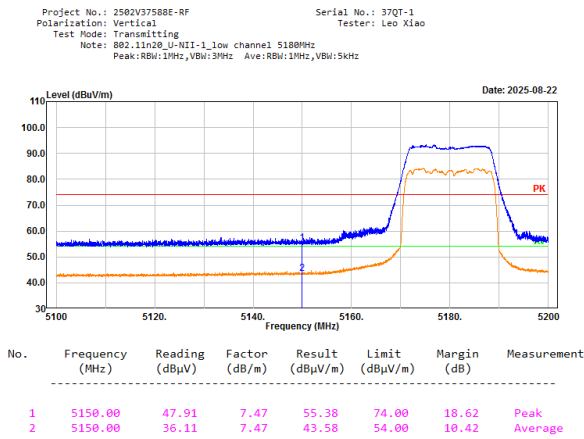


802.11n20 high channel Bandedge Horizontal

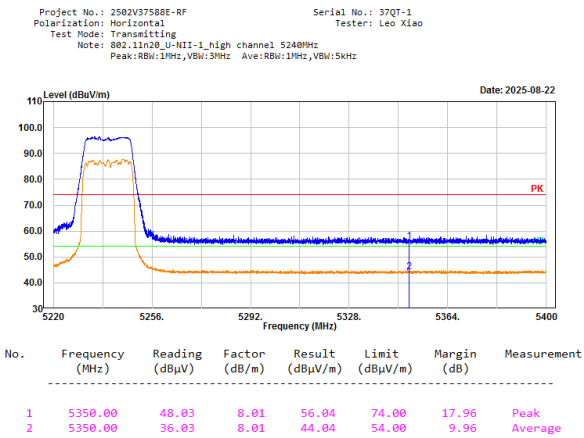


802.11n20 high channel Bandedge Vertical

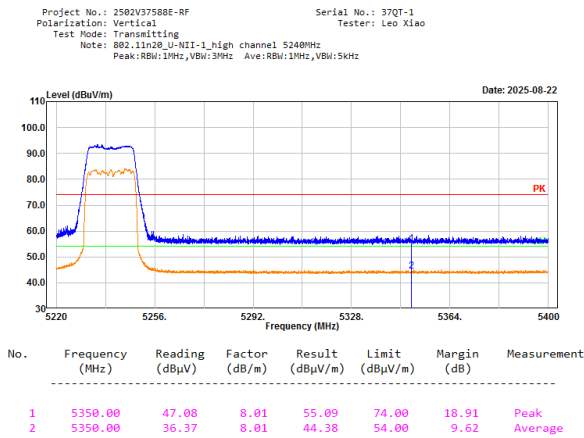


802.11n40 low channel Bandedge Horizontal

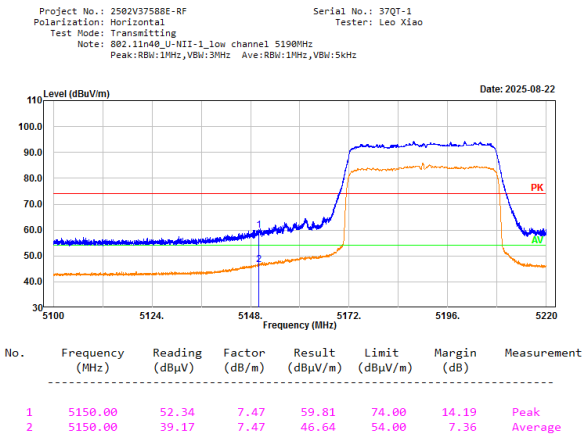


802.11n40 low channel Bandedge Vertical

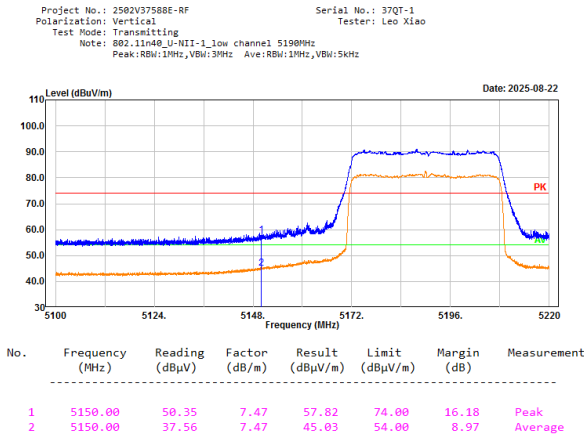

802.11n40 high channel Bandedge Horizontal

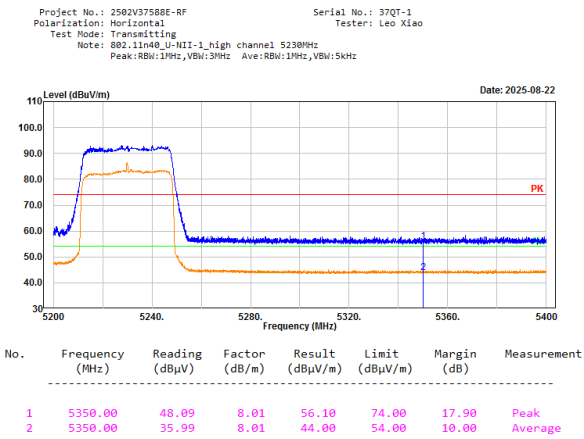


802.11n40 high channel Bandedge Vertical

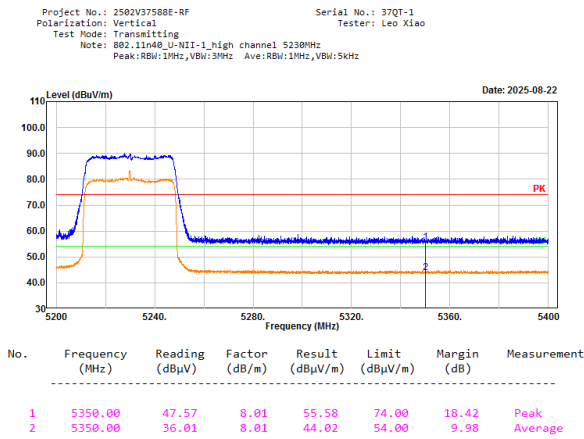

802.11ac80 middle channel Bandedge Horizontal


Project No.: 2502V37588E-RF Serial No.: 370T-1
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: 802.11ac80_U-NII-1_middle channel 5210MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

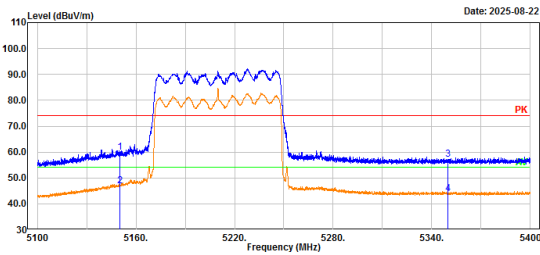

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	52.33	7.47	59.80	74.00	14.20	Peak
2	5150.00	39.51	7.47	46.98	54.00	7.02	Average
3	5350.00	49.01	8.01	57.02	74.00	16.98	Peak
4	5350.00	35.95	8.01	43.96	54.00	10.04	Average

802.11ac80 middle channel Bandedge Vertical

Project No.: 2502V37588E-RF Serial No.: 370T-1
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: 802.11ac80_U-NII-1_middle channel 5210MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

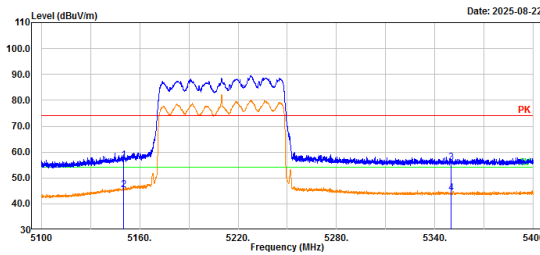

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	49.30	7.47	56.77	74.00	17.23	Peak
2	5150.00	38.06	7.47	45.53	54.00	8.47	Average
3	5350.00	48.06	8.01	56.07	74.00	17.93	Peak
4	5350.00	36.08	8.01	44.09	54.00	9.91	Average


5725-5850MHz:

802.11a low channel Bandedge Horizontal				802.11a low channel Bandedge Vertical																																																																																			
Project No.: 2502V37588E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Peak:RBW:1MHz,VBW:3MHz Serial No.: 37QT-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5650.00</td><td>49.27</td><td>8.82</td><td>58.09</td><td>68.20</td><td>10.11</td><td>Peak</td></tr><tr><td>2</td><td>5700.00</td><td>48.41</td><td>8.85</td><td>57.26</td><td>105.20</td><td>47.94</td><td>Peak</td></tr><tr><td>3</td><td>5720.00</td><td>50.24</td><td>8.91</td><td>59.15</td><td>110.80</td><td>51.65</td><td>Peak</td></tr><tr><td>4</td><td>5725.00</td><td>47.67</td><td>8.93</td><td>56.60</td><td>122.20</td><td>65.60</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5650.00	49.27	8.82	58.09	68.20	10.11	Peak	2	5700.00	48.41	8.85	57.26	105.20	47.94	Peak	3	5720.00	50.24	8.91	59.15	110.80	51.65	Peak	4	5725.00	47.67	8.93	56.60	122.20	65.60	Peak	Project No.: 2502V37588E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Peak:RBW:1MHz,VBW:3MHz Serial No.: 37QT-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5650.00</td><td>48.39</td><td>8.82</td><td>57.21</td><td>68.20</td><td>10.99</td><td>Peak</td></tr><tr><td>2</td><td>5700.00</td><td>48.62</td><td>8.85</td><td>57.47</td><td>105.20</td><td>47.73</td><td>Peak</td></tr><tr><td>3</td><td>5720.00</td><td>48.46</td><td>8.91</td><td>57.37</td><td>110.80</td><td>53.43</td><td>Peak</td></tr><tr><td>4</td><td>5725.00</td><td>48.28</td><td>8.93</td><td>57.21</td><td>122.20</td><td>64.99</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5650.00	48.39	8.82	57.21	68.20	10.99	Peak	2	5700.00	48.62	8.85	57.47	105.20	47.73	Peak	3	5720.00	48.46	8.91	57.37	110.80	53.43	Peak	4	5725.00	48.28	8.93	57.21	122.20	64.99	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	5650.00	49.27	8.82	58.09	68.20	10.11	Peak																																																																																
2	5700.00	48.41	8.85	57.26	105.20	47.94	Peak																																																																																
3	5720.00	50.24	8.91	59.15	110.80	51.65	Peak																																																																																
4	5725.00	47.67	8.93	56.60	122.20	65.60	Peak																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	5650.00	48.39	8.82	57.21	68.20	10.99	Peak																																																																																
2	5700.00	48.62	8.85	57.47	105.20	47.73	Peak																																																																																
3	5720.00	48.46	8.91	57.37	110.80	53.43	Peak																																																																																
4	5725.00	48.28	8.93	57.21	122.20	64.99	Peak																																																																																
802.11a high channel Bandedge Horizontal				802.11a high channel Bandedge Vertical																																																																																			
Project No.: 2502V37588E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3_high channel 5825MHz Peak:RBW:1MHz,VBW:3MHz Serial No.: 37QT-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5850.00</td><td>47.69</td><td>9.10</td><td>56.79</td><td>122.20</td><td>65.41</td><td>Peak</td></tr><tr><td>2</td><td>5855.00</td><td>48.24</td><td>9.12</td><td>57.36</td><td>110.80</td><td>53.44</td><td>Peak</td></tr><tr><td>3</td><td>5875.00</td><td>47.45</td><td>9.16</td><td>56.61</td><td>105.20</td><td>48.59</td><td>Peak</td></tr><tr><td>4</td><td>5925.00</td><td>47.67</td><td>9.24</td><td>56.91</td><td>68.20</td><td>11.29</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5850.00	47.69	9.10	56.79	122.20	65.41	Peak	2	5855.00	48.24	9.12	57.36	110.80	53.44	Peak	3	5875.00	47.45	9.16	56.61	105.20	48.59	Peak	4	5925.00	47.67	9.24	56.91	68.20	11.29	Peak	Project No.: 2502V37588E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3_high channel 5825MHz Peak:RBW:1MHz,VBW:3MHz Serial No.: 37QT-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-08-22 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5850.00</td><td>47.77</td><td>9.10</td><td>56.87</td><td>122.20</td><td>65.33</td><td>Peak</td></tr><tr><td>2</td><td>5855.00</td><td>48.14</td><td>9.12</td><td>57.26</td><td>110.80</td><td>53.54</td><td>Peak</td></tr><tr><td>3</td><td>5875.00</td><td>49.89</td><td>9.16</td><td>59.05</td><td>105.20</td><td>46.15</td><td>Peak</td></tr><tr><td>4</td><td>5925.00</td><td>47.79</td><td>9.24</td><td>57.03</td><td>68.20</td><td>11.17</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5850.00	47.77	9.10	56.87	122.20	65.33	Peak	2	5855.00	48.14	9.12	57.26	110.80	53.54	Peak	3	5875.00	49.89	9.16	59.05	105.20	46.15	Peak	4	5925.00	47.79	9.24	57.03	68.20	11.17	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	5850.00	47.69	9.10	56.79	122.20	65.41	Peak																																																																																
2	5855.00	48.24	9.12	57.36	110.80	53.44	Peak																																																																																
3	5875.00	47.45	9.16	56.61	105.20	48.59	Peak																																																																																
4	5925.00	47.67	9.24	56.91	68.20	11.29	Peak																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	5850.00	47.77	9.10	56.87	122.20	65.33	Peak																																																																																
2	5855.00	48.14	9.12	57.26	110.80	53.54	Peak																																																																																
3	5875.00	49.89	9.16	59.05	105.20	46.15	Peak																																																																																
4	5925.00	47.79	9.24	57.03	68.20	11.17	Peak																																																																																

802.11n20 low channel Bandedge Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

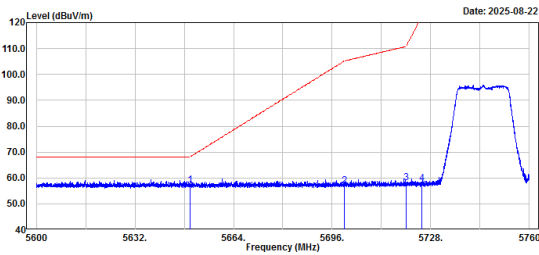


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	48.33	8.82	57.15	68.20	11.05	Peak
2	5700.00	48.19	8.85	57.04	105.20	48.16	Peak
3	5720.00	49.17	8.91	58.08	110.80	52.72	Peak
4	5725.00	49.00	8.93	57.93	122.20	64.27	Peak

802.11n20 low channel Bandedge Vertical

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

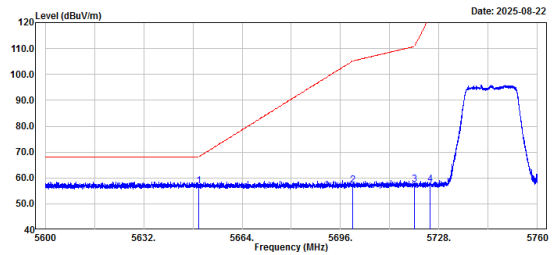


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	47.94	8.82	56.76	68.20	11.44	Peak
2	5700.00	48.46	8.85	57.31	105.20	47.89	Peak
3	5720.00	48.49	8.91	57.40	110.80	53.40	Peak
4	5725.00	48.63	8.93	57.56	122.20	64.64	Peak

802.11n20 high channel Bandedge Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

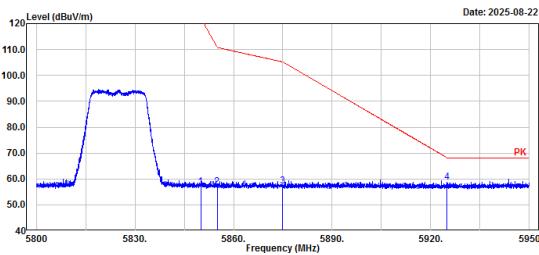


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	47.67	9.10	56.77	122.20	65.43	Peak
2	5855.00	47.87	9.12	56.99	110.80	53.81	Peak
3	5875.00	47.97	9.16	57.13	105.20	48.07	Peak
4	5925.00	49.34	9.24	58.58	68.20	9.62	Peak

802.11n20 high channel Bandedge Vertical


Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11n20_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

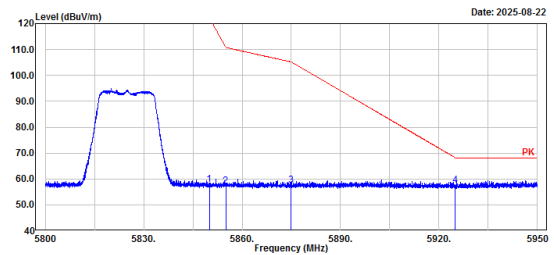


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	48.63	9.10	57.73	122.20	64.47	Peak
2	5855.00	48.19	9.12	57.31	110.80	53.49	Peak
3	5875.00	48.49	9.16	57.65	105.20	47.55	Peak
4	5925.00	48.40	9.24	57.64	68.20	10.56	Peak


802.11n40 low channel Bandedge Horizontal

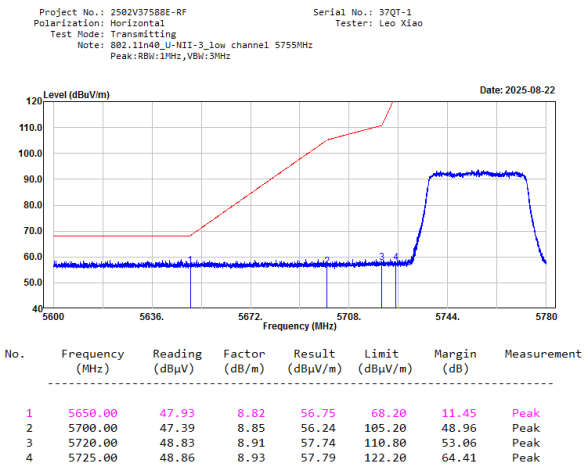


802.11n40 low channel Bandedge Vertical

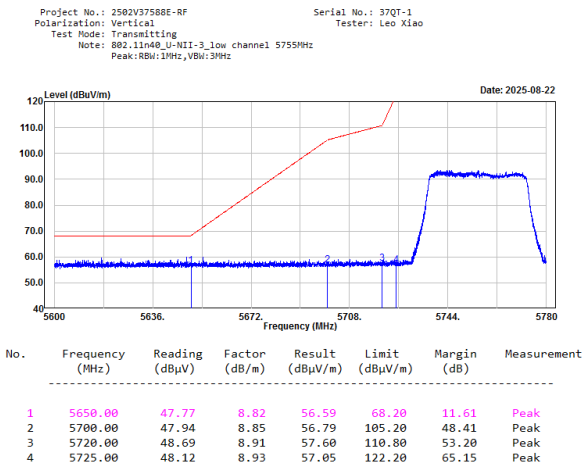

802.11n40 high channel Bandedge Horizontal

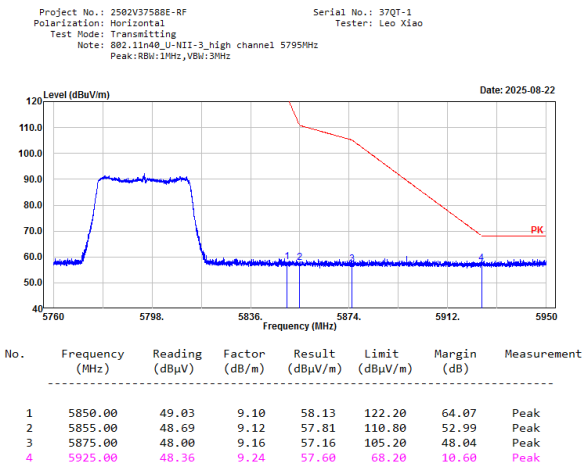


802.11n40 high channel Bandedge Vertical

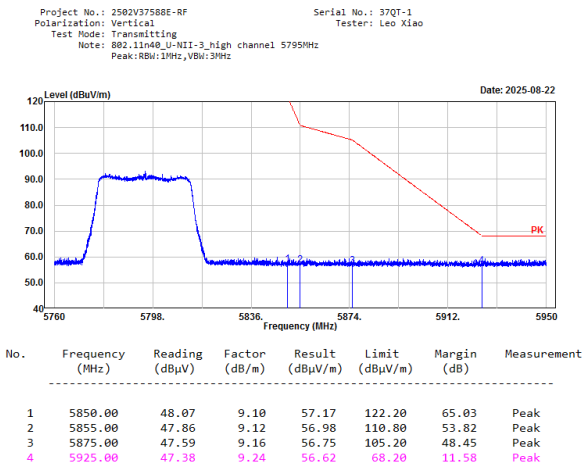

802.11ac80 middle channel Bandedge Horizontal

Project No.: 2502V37588E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80 U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

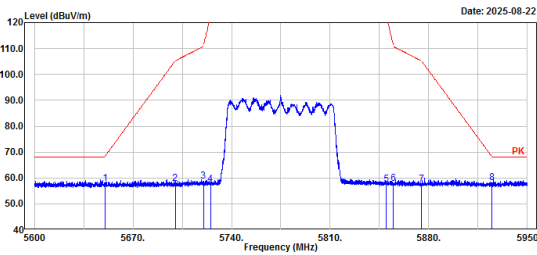


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	48.88	8.82	57.70	68.20	10.50	Peak
2	5700.00	48.92	8.85	57.77	105.20	47.43	Peak
3	5720.00	49.70	8.91	58.61	110.80	52.19	Peak
4	5725.00	48.69	8.93	57.62	122.20	64.58	Peak
5	5850.00	48.39	9.10	57.49	122.20	64.71	Peak
6	5855.00	48.62	9.12	57.74	110.80	53.06	Peak
7	5875.00	48.23	9.16	57.39	105.20	47.81	Peak
8	5925.00	48.74	9.24	57.98	68.20	10.22	Peak

802.11ac80 middle channel Bandedge Vertical

Project No.: 2502V37588E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80 U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 370T-1
Tester: Leo Xiao

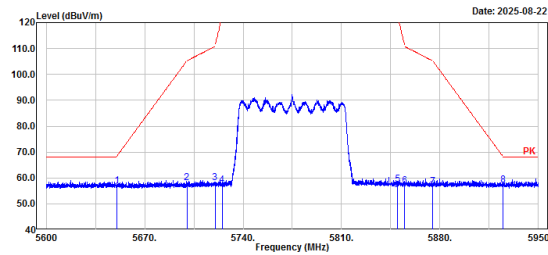

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	48.21	8.82	57.03	68.20	11.17	Peak
2	5700.00	49.16	8.85	58.01	105.20	47.19	Peak
3	5720.00	49.29	8.91	58.20	110.80	52.60	Peak
4	5725.00	48.15	8.93	57.08	122.20	65.12	Peak
5	5850.00	48.28	9.10	57.38	122.20	64.82	Peak
6	5855.00	47.74	9.12	56.86	110.80	53.94	Peak
7	5875.00	47.31	9.16	56.47	105.20	48.73	Peak
8	5925.00	48.01	9.24	57.25	68.20	10.95	Peak

5.3 Emission Bandwidth

Test Information:

Serial No.:	37QT-2	Test Date:	2025/08/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	73	ATM Pressure: (kPa)	100.4
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/09/05	2025/09/04
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/13	2026/06/12

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**26dB Emission Bandwidth
5150-5250MHz**


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	21.321
	5200	21.121
	5240	20.921
802.11n20	5180	22.122
	5200	22.022
	5240	21.972
802.11n40	5190	42.843
	5230	42.843
802.11ac80	5210	83.483

**6dB Emission Bandwidth
5725-5850MHz**

Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11a	5745	16.617	0.5	Pass
	5785	16.617	0.5	Pass
	5825	16.667	0.5	Pass
802.11n20	5745	17.718	0.5	Pass
	5785	17.718	0.5	Pass
	5825	17.868	0.5	Pass
802.11n40	5755	36.737	0.5	Pass
	5795	36.737	0.5	Pass
802.11ac80	5775	76.677	0.5	Pass


5150-5250MHz

802.11a_5180MHz

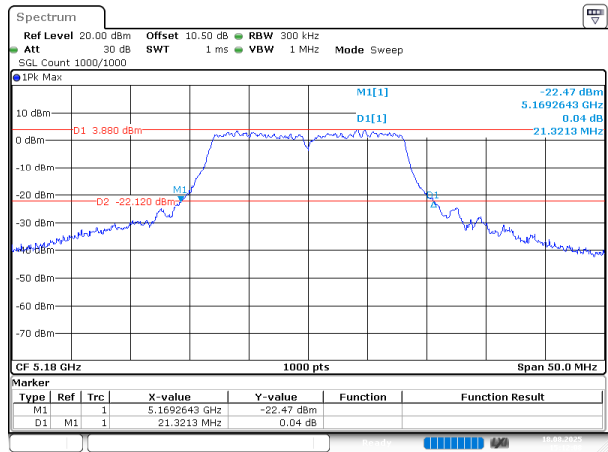


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:12:09

802.11a_5200MHz

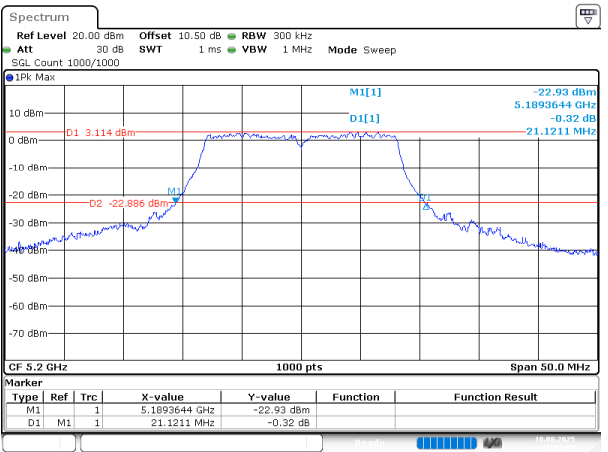


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:13:35

802.11a_5240MHz

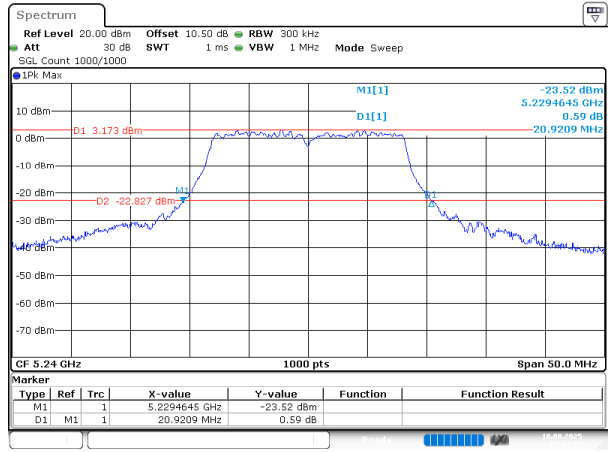


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:14:53

802.11n20_5180MHz

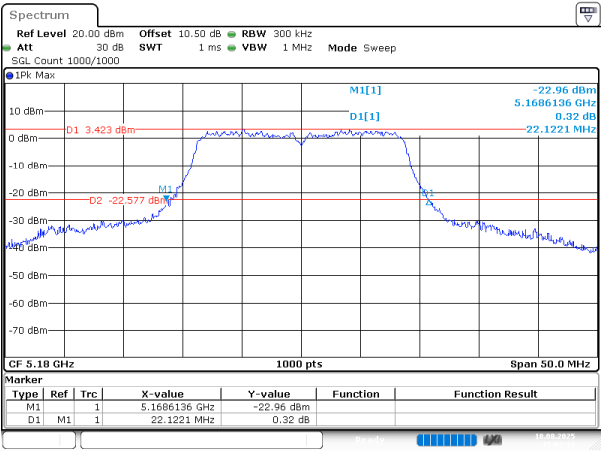


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:02:32

802.11n20_5200MHz

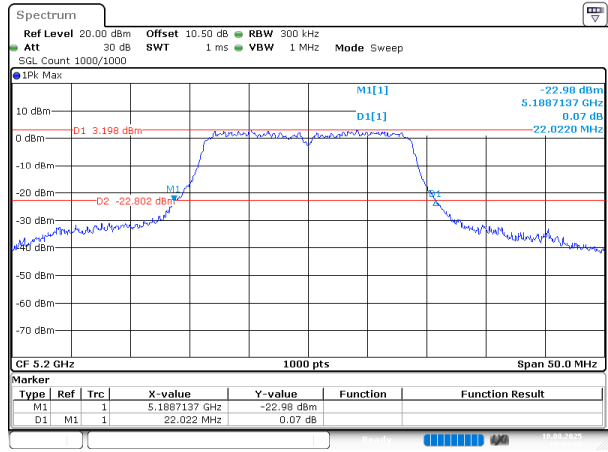


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:04:37

802.11n20_5240MHz

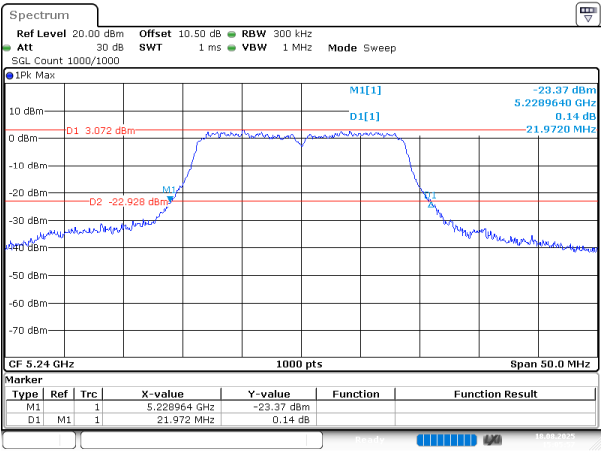


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:05:58

802.11n40_5190MHz

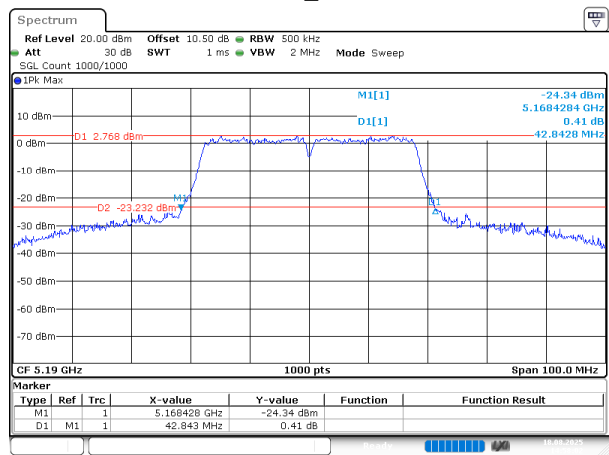

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:58:03


802.11n40_5230MHz

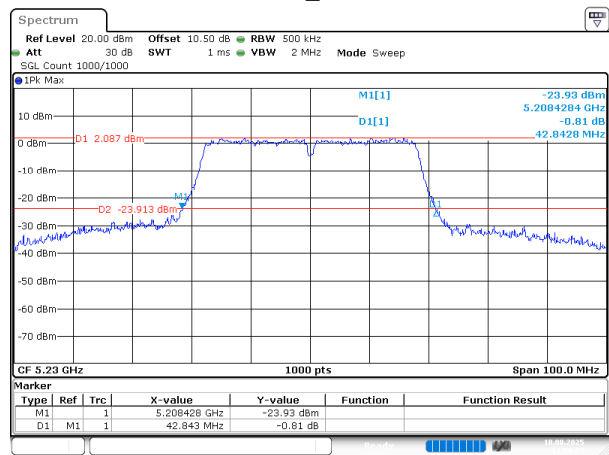

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:59:05


5725-5850MHz

802.11ac80_5210MHz

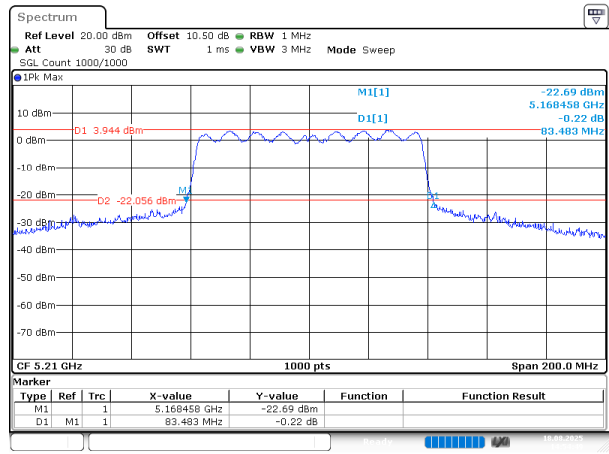


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:54:50

802.11a_5745MHz

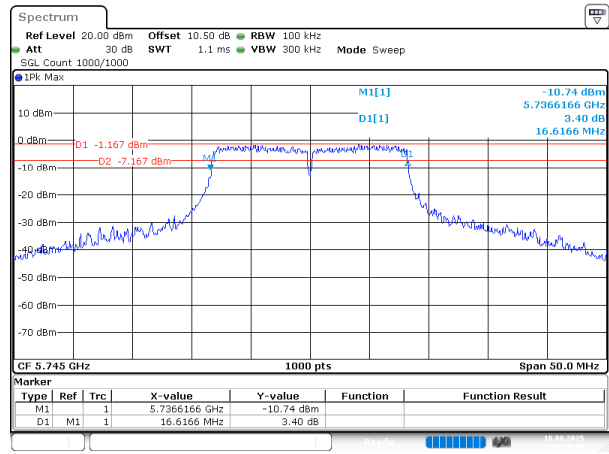


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:16:20

802.11a_5785MHz

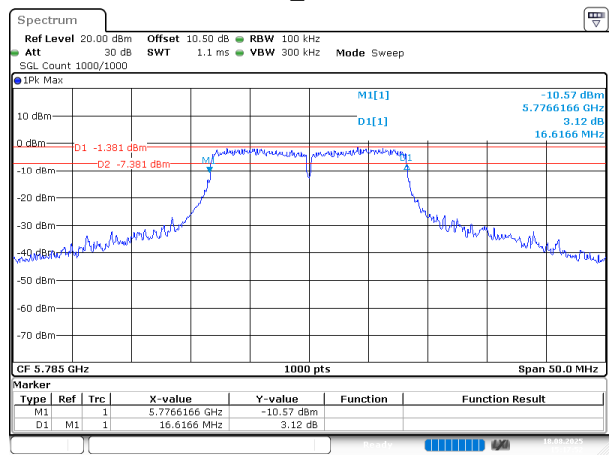


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:17:52

802.11a_5825MHz

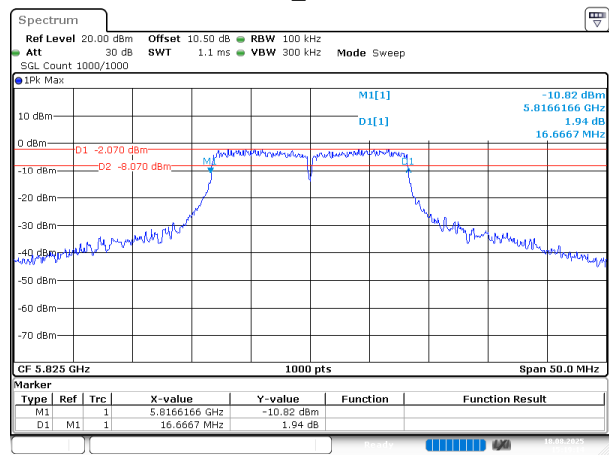


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:19:15

802.11n20_5745MHz

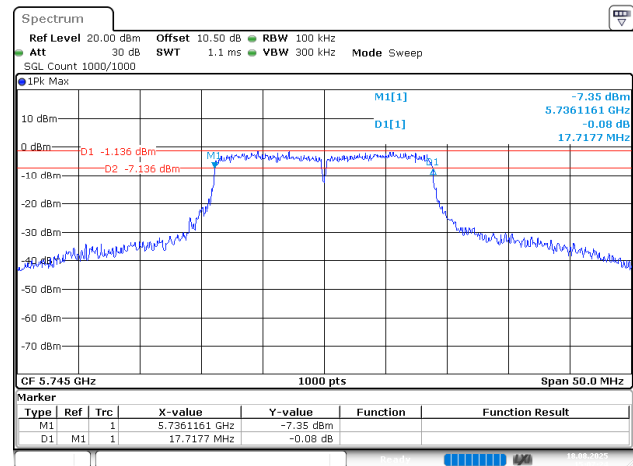


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:07:25

802.11n20_5785MHz

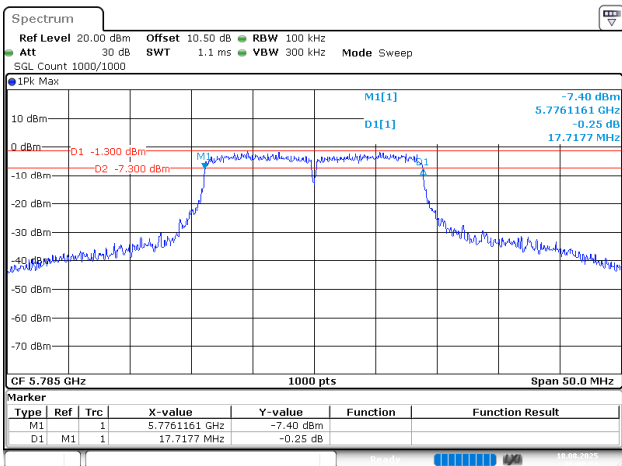


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:08:54

802.11n20_5825MHz

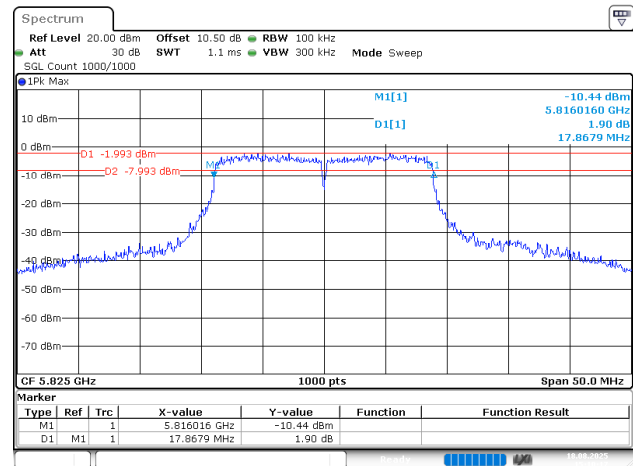


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:10:18

802.11n40_5755MHz

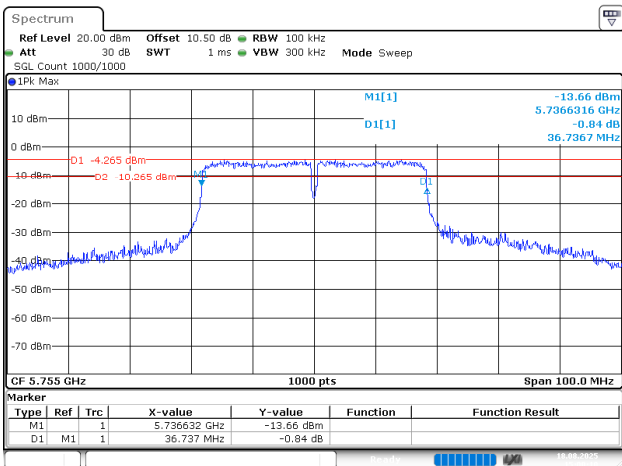


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:00:11

802.11n40_5795MHz

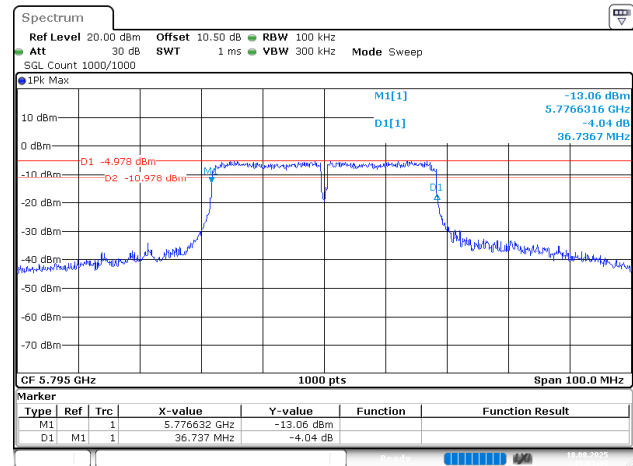

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:01:05

802.11ac80_5775MHz

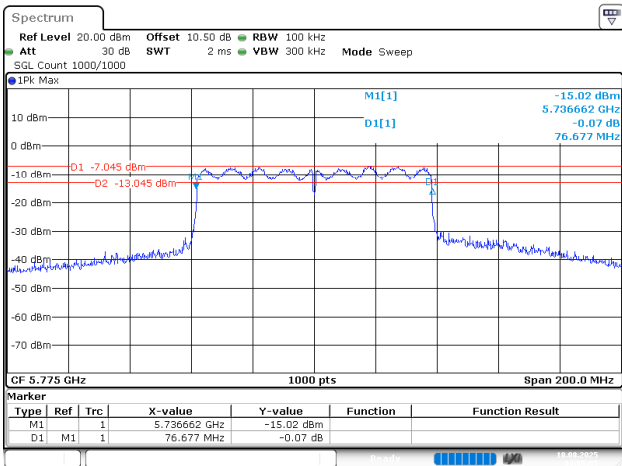

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:55:55

5.4 99% Occupied Bandwidth

Test Information:

Serial No.:	37QT-2	Test Date:	2025/08/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	73	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/09/05	2025/09/04
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/13	2026/06/12

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	16.600
	5200	16.600
	5240	16.600
802.11n20	5180	17.750
	5200	17.750
	5240	17.750
802.11n40	5190	36.500
	5230	36.500
802.11ac80	5210	76

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5725-5850MHz


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5745	16.700
	5785	16.700
	5825	16.700
802.11n20	5745	17.800
	5785	17.800
	5825	17.800
802.11n40	5755	36.800
	5795	36.600
802.11ac80	5775	76

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


5150-5250MHz

802.11a_5180MHz

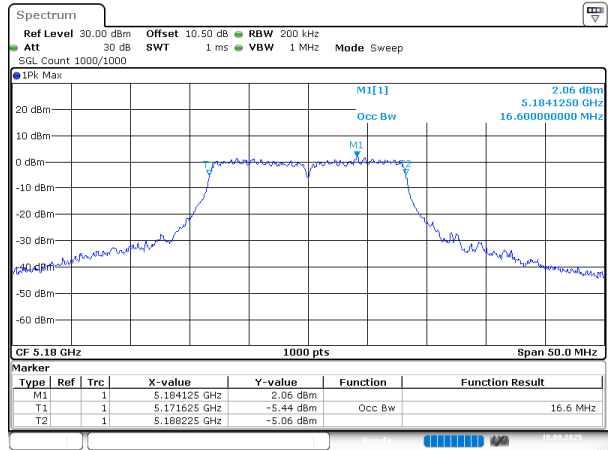


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:12:33

802.11a_5200MHz

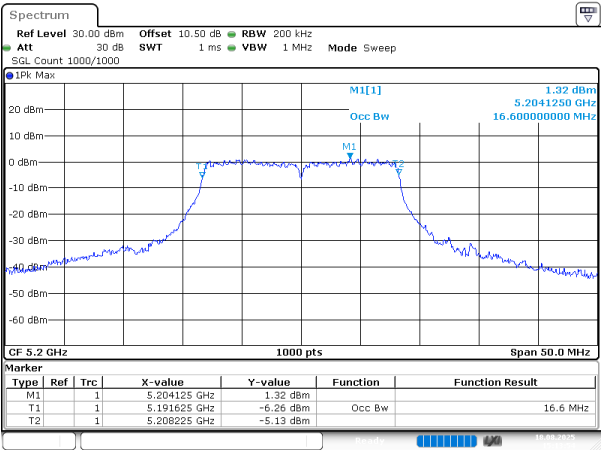


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:13:55

802.11a_5240MHz

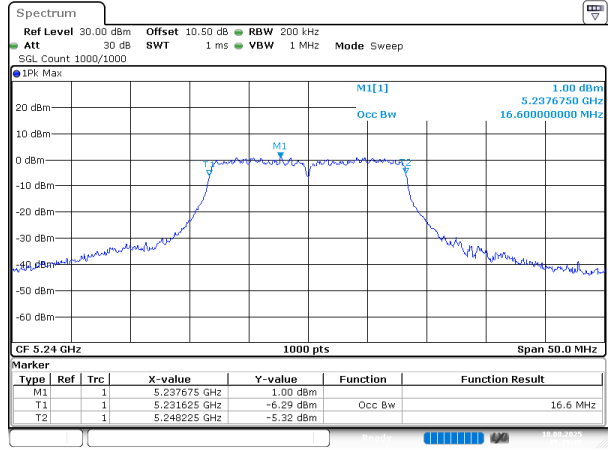


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:15:16

802.11n20_5180MHz

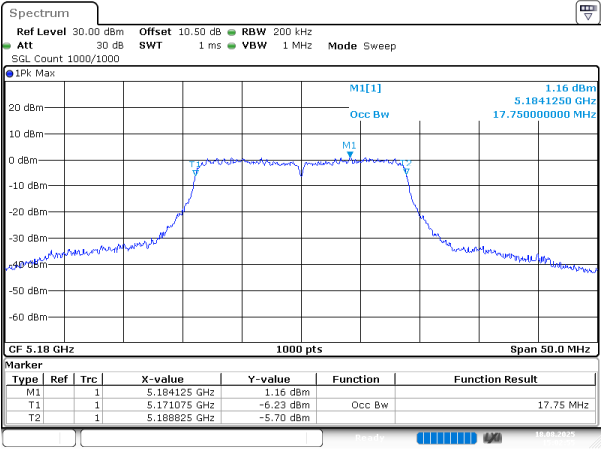


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:02:55

802.11n20_5200MHz

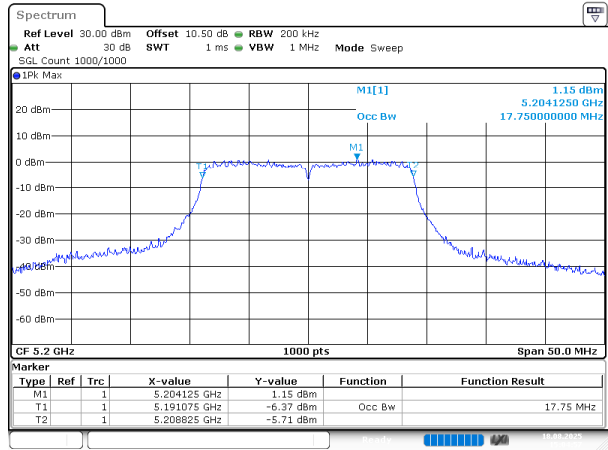


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:04:57

802.11n20_5240MHz

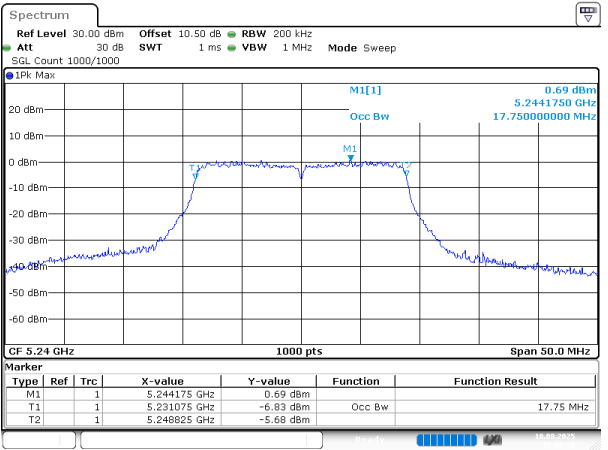


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:06:20

802.11n40_5190MHz

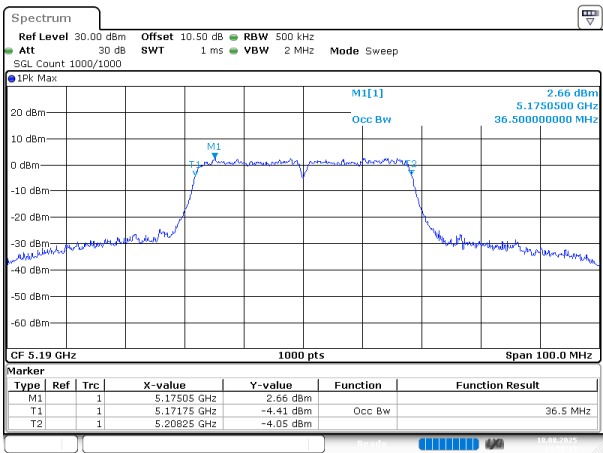

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:58:16


802.11n40_5230MHz

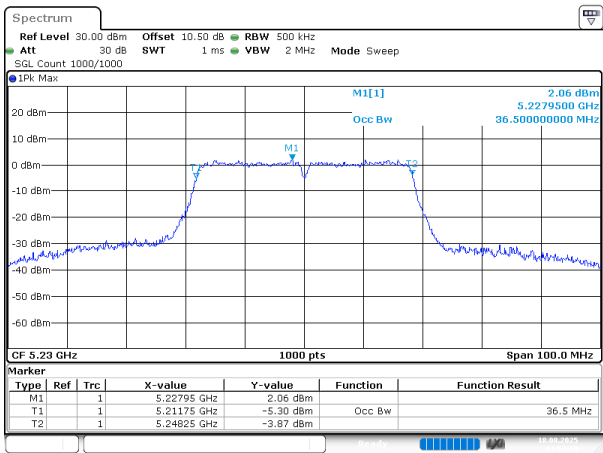

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:59:19


5725-5850MHz

802.11ac80_5210MHz

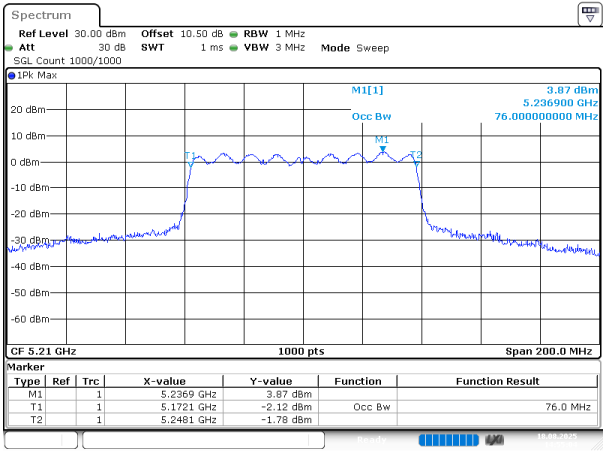


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:55:05

802.11a_5745MHz

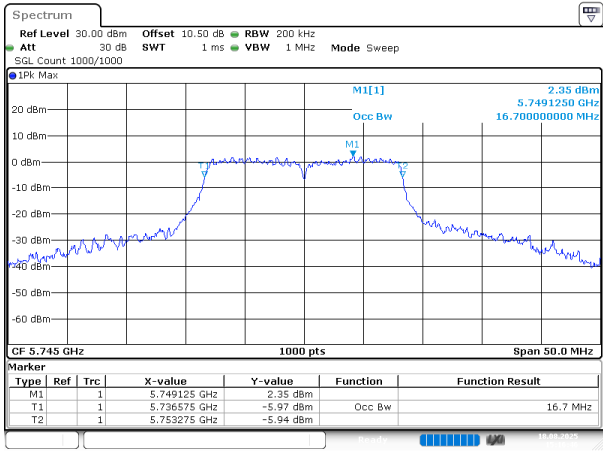


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:16:46

802.11a_5785MHz

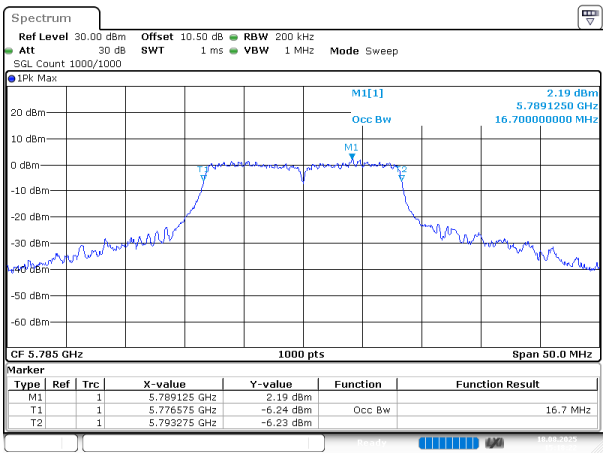


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:18:23

802.11a_5825MHz

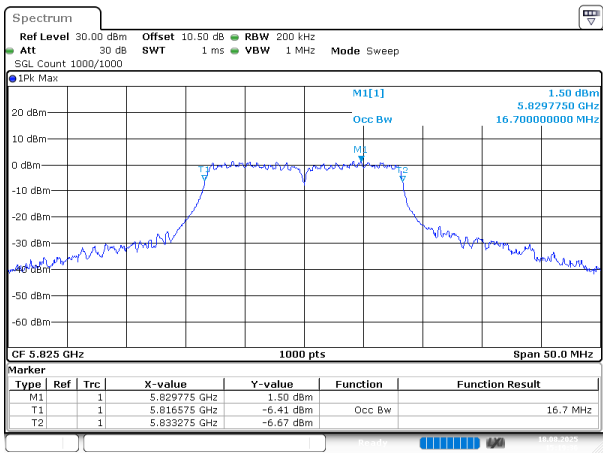


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:19:37

802.11n20_5745MHz

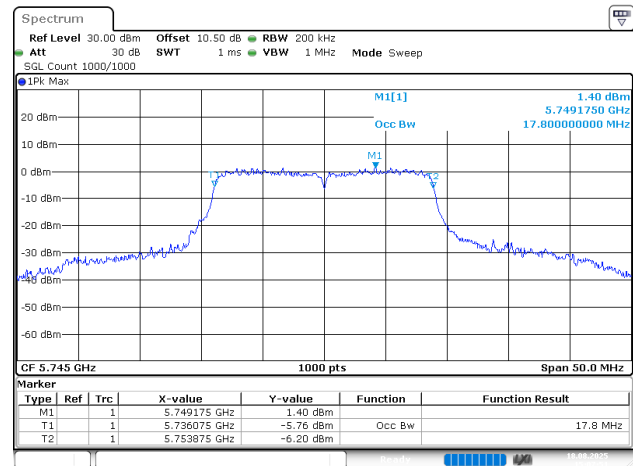


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:07:51

802.11n20_5785MHz

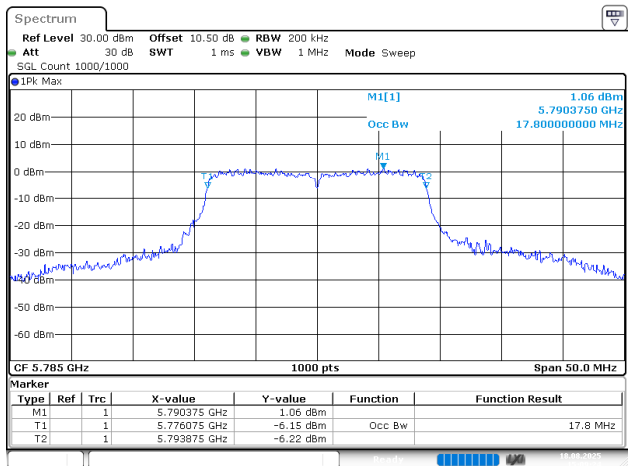


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:09:25

802.11n20_5825MHz

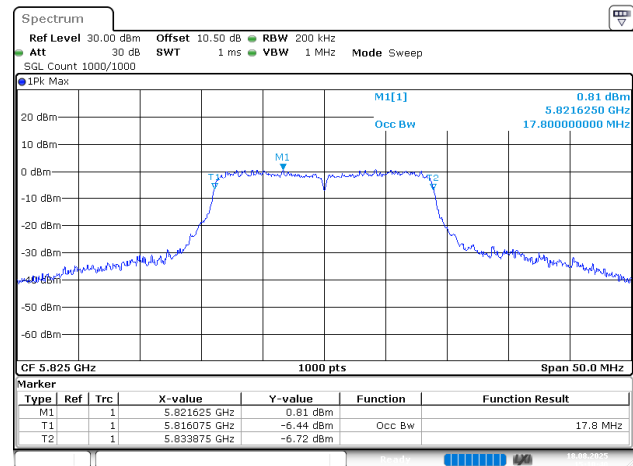


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:10:40

802.11n40_5755MHz

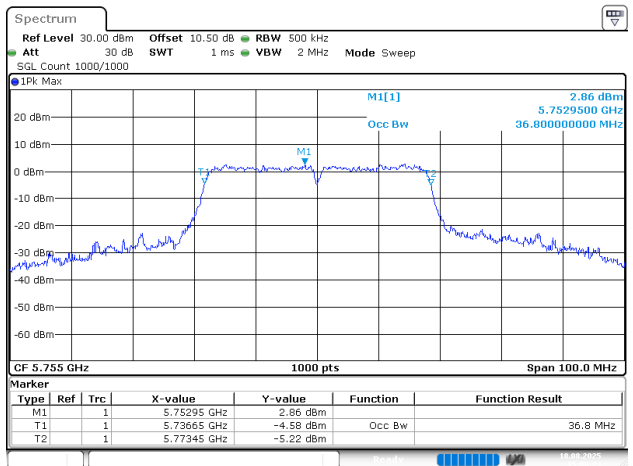


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:00:24

802.11n40_5795MHz

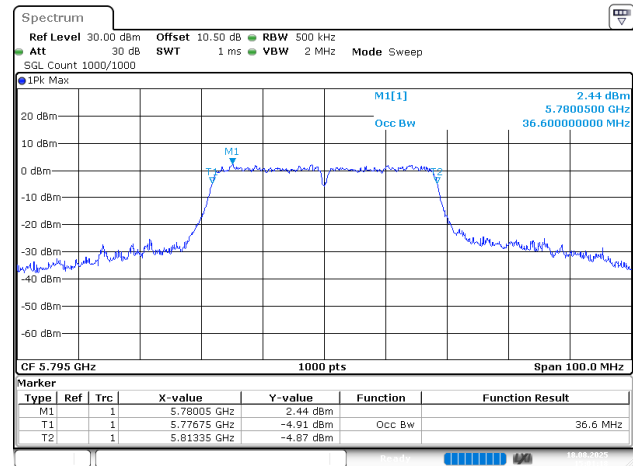

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:01:18

802.11ac80_5775MHz

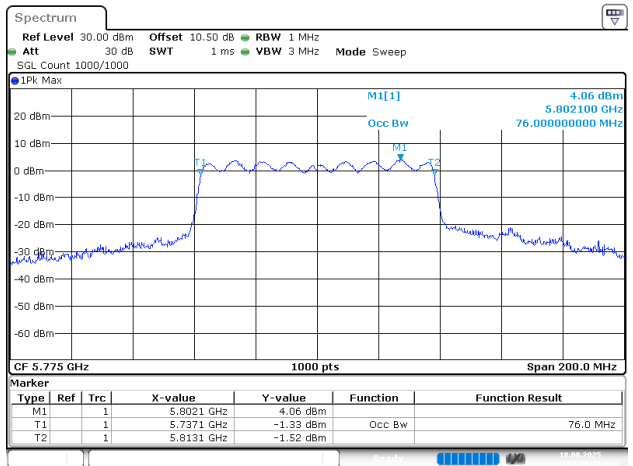

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:56:12

5.5 Maximum Conducted Output Power

Test Information:

Serial No.:	37QT-2	Test Date:	2025/08/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	73	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM504	2025/06/06	2026/06/05
Anritsu	Microwave Peak Power Sensor	MA24418A	12618	2025/06/11	2026/06/10

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Verdict
802.11a	5180	12.17	24	Pass
	5200	11.97	24	Pass
	5240	11.74	24	Pass
802.11n20	5180	12.13	24	Pass
	5200	11.92	24	Pass
	5240	11.72	24	Pass
802.11n40	5190	12.44	24	Pass
	5230	11.88	24	Pass
802.11ac80	5210	11.96	24	Pass

Note: The device is a Client device.

5725-5850MHz

Mode	Test Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Verdict
802.11a	5745	12.59	30	Pass
	5785	12.4	30	Pass
	5825	11.97	30	Pass
802.11n20	5745	12.56	30	Pass
	5785	12.31	30	Pass
	5825	11.92	30	Pass
802.11n40	5755	12.79	30	Pass
	5795	12.12	30	Pass
802.11ac80	5775	12.3	30	Pass

5.6 Power Spectral Density

Test Information:

Serial No.:	37QT-2	Test Date:	2025/08/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	73	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/09/05	2025/09/04
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/13	2026/06/12

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor(dB)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	5180	1.50	0	1.50	11	Pass
	5200	1.16	0	1.16	11	Pass
	5240	0.92	0	0.92	11	Pass
802.11n20	5180	1.14	0	1.14	11	Pass
	5200	0.92	0	0.92	11	Pass
	5240	1.01	0	1.01	11	Pass
802.11n40	5190	-1.70	0	-1.70	11	Pass
	5230	-2.29	0	-2.29	11	Pass
802.11ac80	5210	-4.25	0	-4.25	11	Pass

Note: The device is a Client device.


5725-5850MHz

Mode	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor(dB)	Result (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
802.11a	5745	-0.81	0	-0.81	30	Pass
	5785	-1.29	0	-1.29	30	Pass
	5825	-1.85	0	-1.85	30	Pass
802.11n20	5745	-1.29	0	-1.29	30	Pass
	5785	-1.67	0	-1.67	30	Pass
	5825	-2.27	0	-2.27	30	Pass
802.11n40	5755	-4.28	0	-4.28	30	Pass
	5795	-5.14	0	-5.14	30	Pass
802.11ac80	5775	-6.92	0	-6.92	30	Pass

Result = Reading + Duty Cycle Factor


5150-5250MHz

802.11a_5180MHz

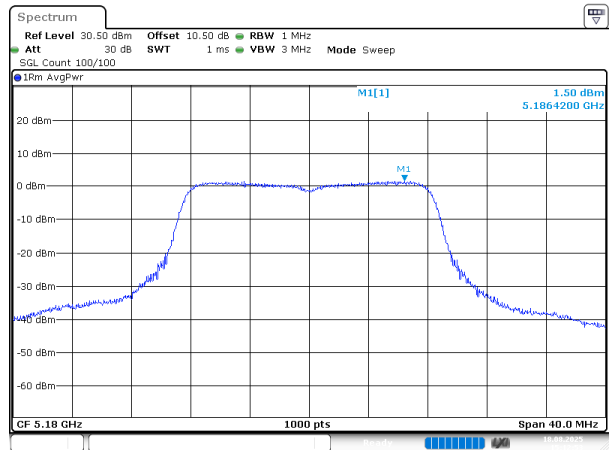


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:12:54

802.11a_5200MHz

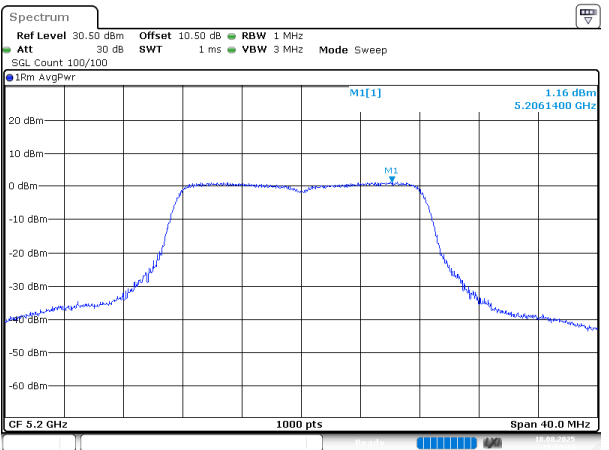


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:14:15

802.11a_5240MHz

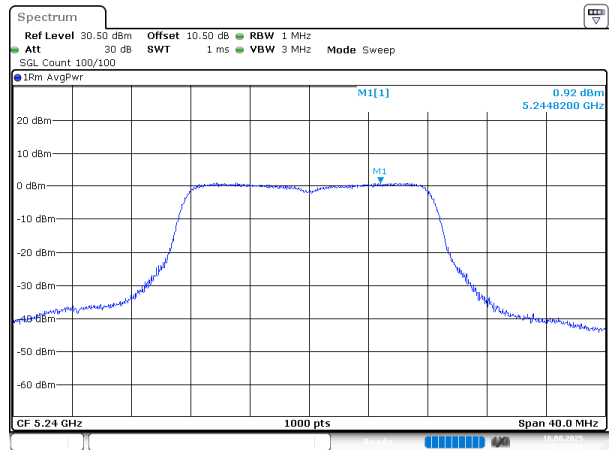


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:15:37

802.11n20_5180MHz

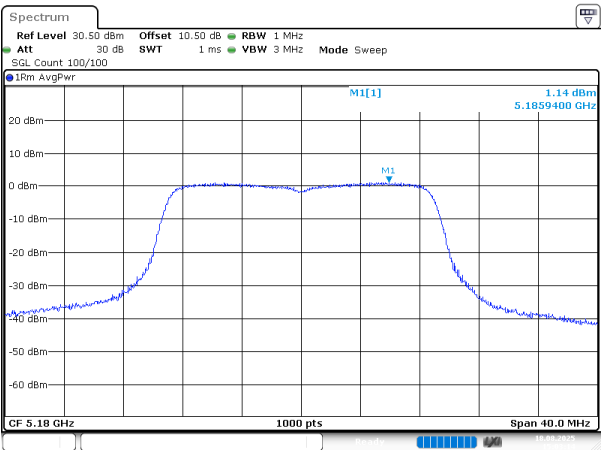


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:03:15

802.11n20_5200MHz

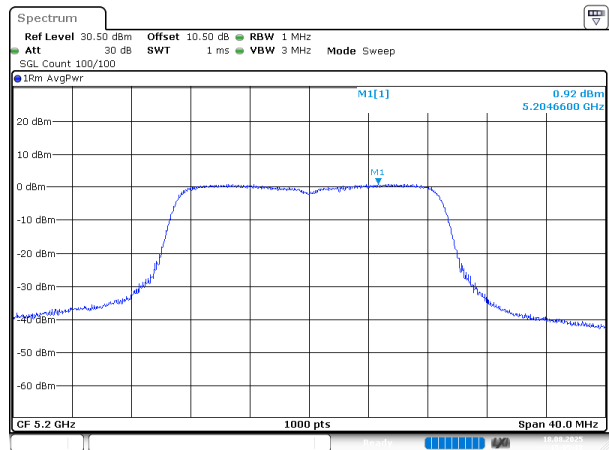


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:05:19

802.11n20_5240MHz

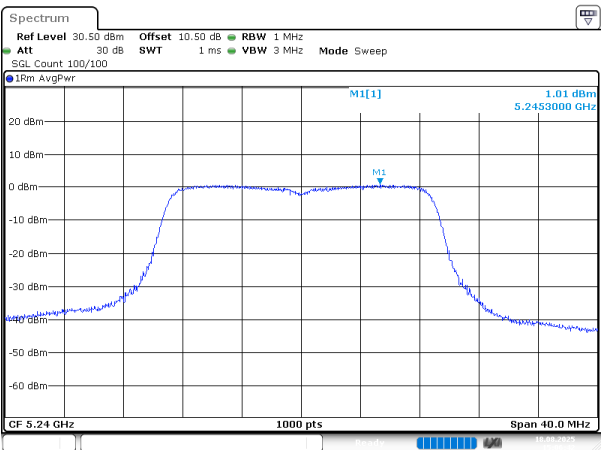


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:06:43

802.11n40_5190MHz

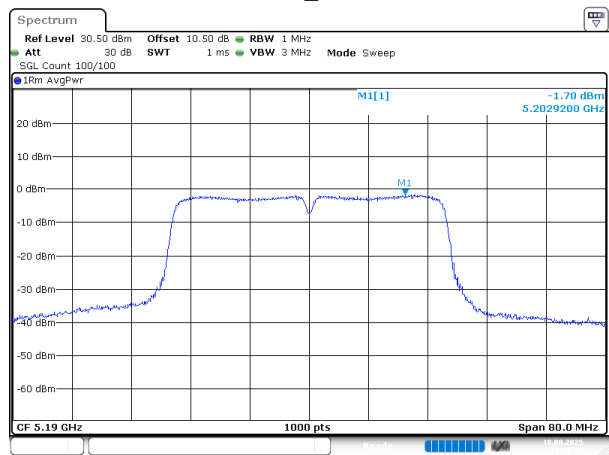

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:58:38


802.11n40_5230MHz

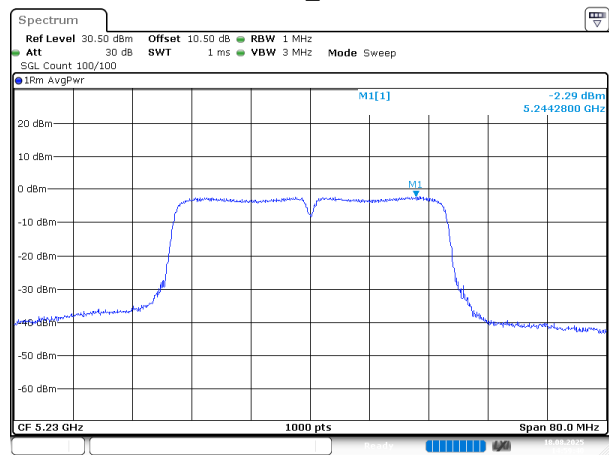

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:59:41


5725-5850MHz

802.11ac80_5210MHz

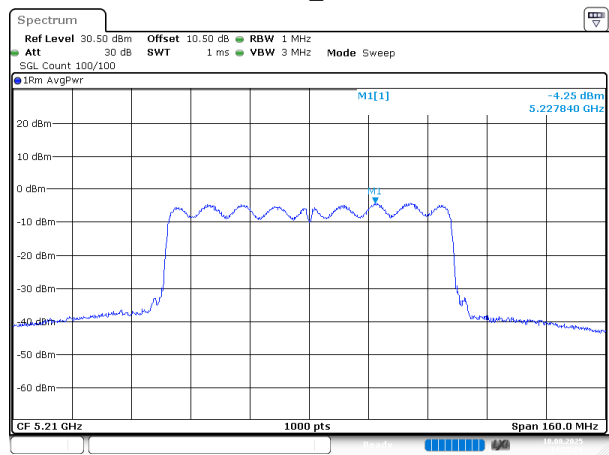


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:55:27

802.11a_5745MHz

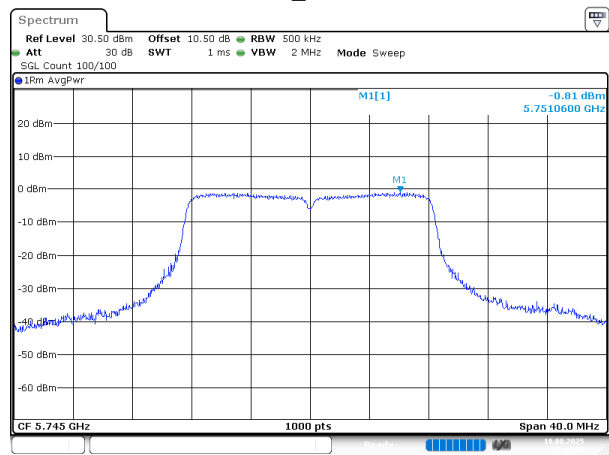


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:17:09

802.11a_5785MHz

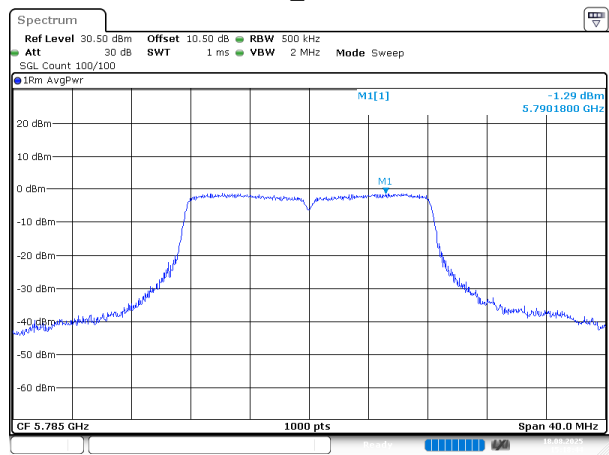


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:18:45

802.11a_5825MHz

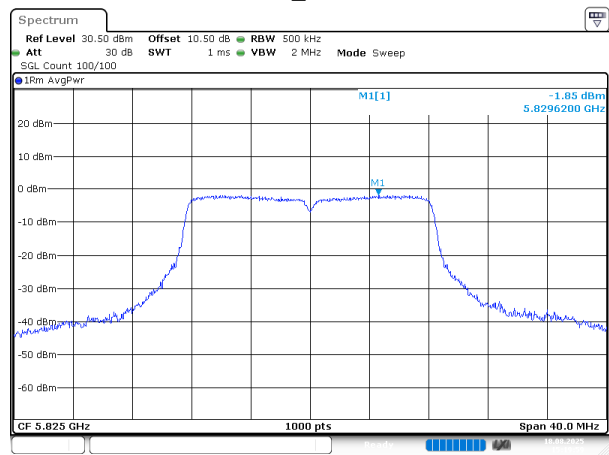


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:19:59

802.11n20_5745MHz

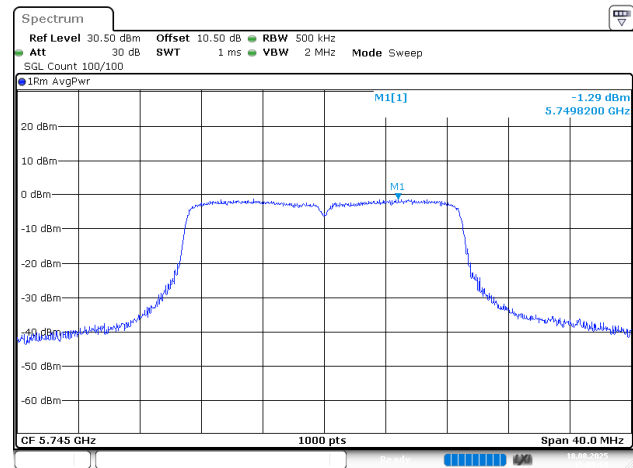


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:08:15

802.11n20_5785MHz

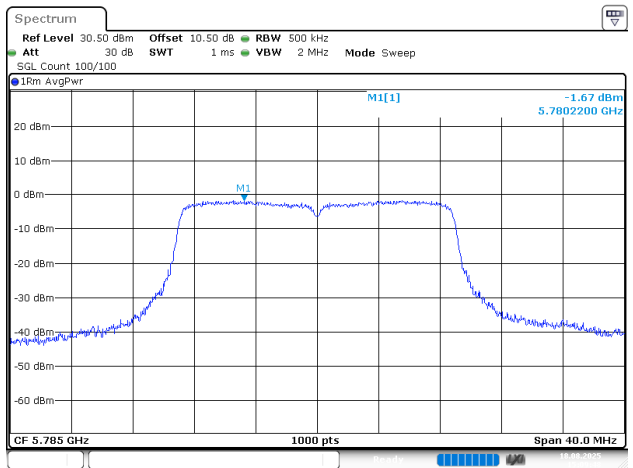


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:09:48

802.11n20_5825MHz

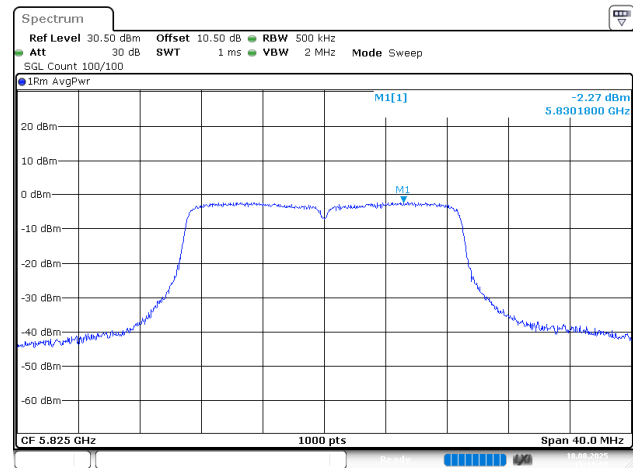


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:11:03

802.11n40_5755MHz

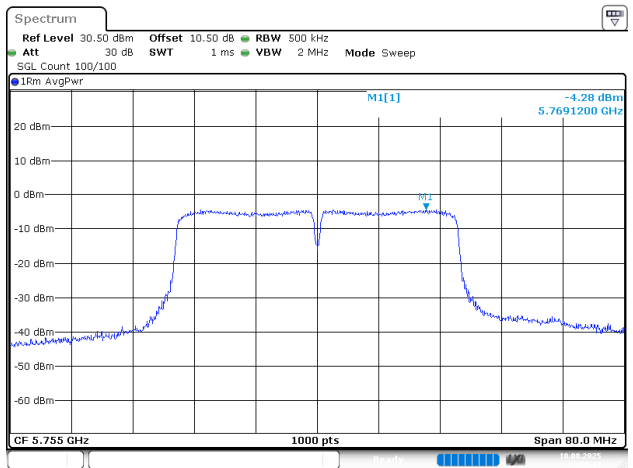


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:00:44

802.11n40_5795MHz

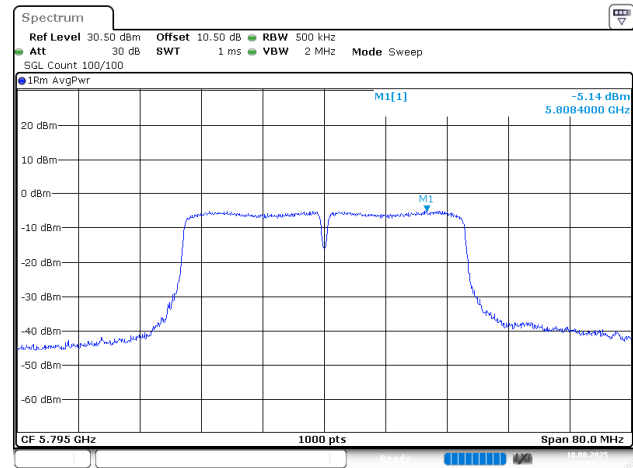

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 15:01:39

802.11ac80_5775MHz

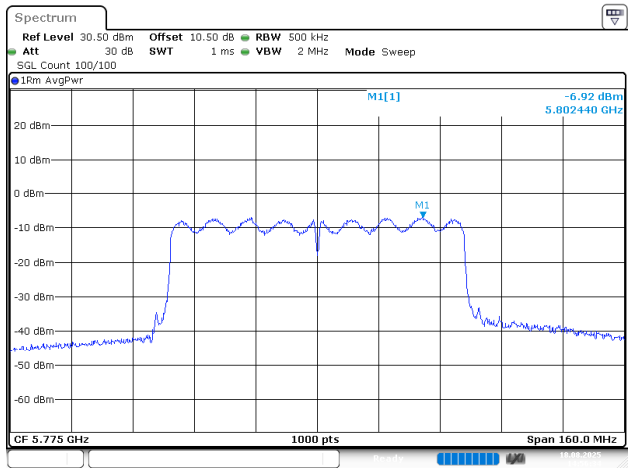

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:56:34

5.7 Duty Cycle

Test Information:

Serial No.:	37QT-2	Test Date:	2025/08/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	73	ATM Pressure: (kPa)	100.4
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2024/09/05	2025/09/04
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/13	2026/06/12


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11a	5200	100	100	100	0	NA	0.010
802.11n20	5200	100	100	100	0	NA	0.010
802.11n40	5190	100	100	100	0	NA	0.010
802.11ac80	5210	100	100	100	0	NA	0.010


Duty Cycle = Ton/(Ton+Toff)*100%

802.11a_5200MHz

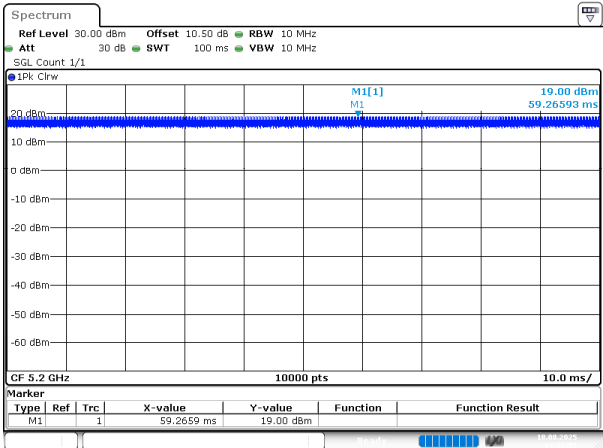


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:52:53

802.11n20_5200MHz

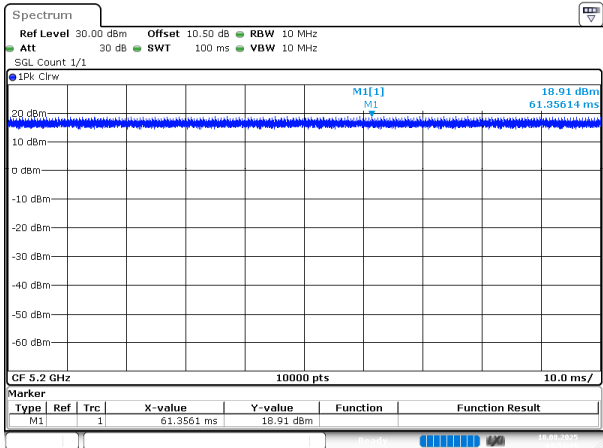


ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:53:16

802.11n40_5190MHz

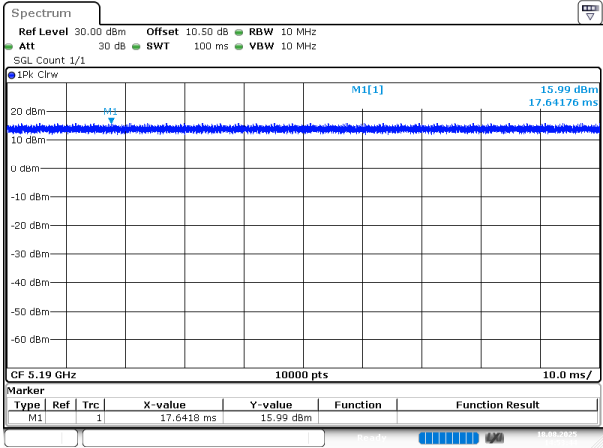

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:53:45

802.11ac80_5210MHz

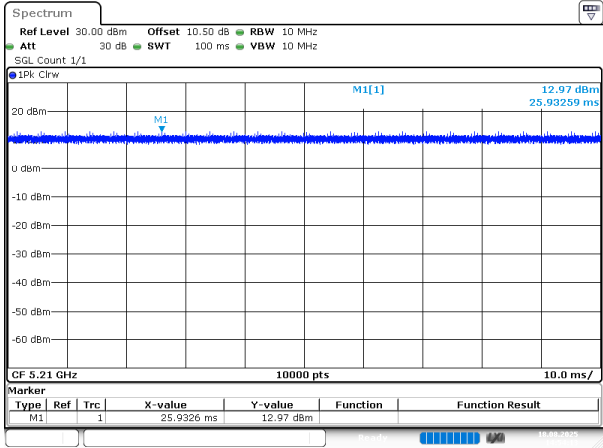

ProjectNo.:2502V37588E-RF Tester:Jeff Wei
Date: 18.AUG.2025 14:54:13

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502V37588E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2502V37588E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502V37588E-RF-00D-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******