


Product Label location

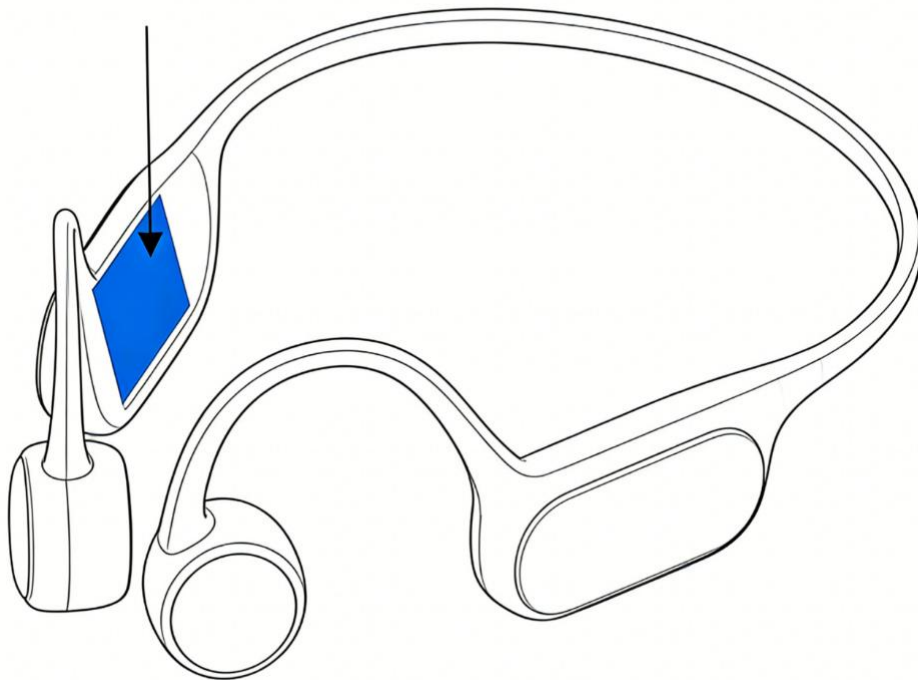

位置:机身主机如图位置

FCC 标签内容:

- **Product Name** Bone Conduction Hearing Aid
- **Manufacture** Zdeer Technology(Henan) Co, Ltd
- **Model:**G45160
- **FCC ID:** 2BRTX-G45160



Made in China

初包装盒

● Product name: BONE CONDUCTION HEARING AID [REF] G45160 [MFG] 2025-08-19 [SN] ZC202508190010001 [LOT] ZC20250819001 ● Internal Power Source: d.c.3.85V (Built-in lithium-ion battery, rated capacity 230mAh) ● Charging Input:5V$\pm$2 A ● Operating mode: Continuous operation ● HFA-OFL₆₀≥95dB ● Frequency response range: The basic frequency response curve of the hearing aid should not be narrower than 300Hz - 4000Hz ● Lifetime:5 years ● Operating Environmental Conditions: Temperature:0°C to +40°C, Relative Humidity: ≤80%, Atmospheric Pressure:700hPa~1060hPa ● Transportation and Storage Environmental Conditions: Temperature: -10°C to +55°C , Relative Humidity: ≤80%, Atmospheric Pressure: 700hPa~1060hPa	 ZDEER TECHNOLOGY(HENAN) CO.,LTD ● East of Wei Wu Road and south of Qin Gong East Road, Toubao Village Committee, Laotown Town, Changge, Xuchang City, Henan Province,China ● NOTE: Other information refers to user manual ● MADE IN CHINA    IP22    
● Product name: BONE CONDUCTION HEARING AID [REF] G45160 [MFG] 2025-08-19 [SN] ZC202508190010003 [LOT] ZC20250819001 ● Internal Power Source: d.c.3.85V (Built-in lithium-ion battery, rated capacity 230mAh) ● Charging Input:5V$\pm$2 A ● Operating mode: Continuous operation ● HFA-OFL₆₀≥95dB ● Frequency response range: The basic frequency response curve of the hearing aid should not be narrower than 300Hz - 4000Hz ● Lifetime:5 years ● Operating Environmental Conditions: Temperature:0°C to +40°C, Relative Humidity: ≤80%, Atmospheric Pressure:700hPa~1060hPa ● Transportation and Storage Environmental Conditions: Temperature: -10°C to +55°C , Relative Humidity: ≤80%, Atmospheric Pressure: 700hPa~1060hPa	 ZDEER TECHNOLOGY(HENAN) CO.,LTD ● East of Wei Wu Road and south of Qin Gong East Road, Toubao Village Committee, Laotown Town, Changge, Xuchang City, Henan Province,China ● NOTE: Other information refers to user manual ● MADE IN CHINA    IP22    
● Product name: BONE CONDUCTION HEARING AID [REF] G45160 [MFG] 2025-08-19 [SN] ZC202508190010005 [LOT] ZC20250819001 ● Internal Power Source: d.c.3.85V (Built-in lithium-ion battery, rated capacity 230mAh) ● Charging Input:5V$\pm$2 A ● Operating mode: Continuous operation ● HFA-OFL₆₀≥95dB ● Frequency response range: The basic frequency response curve of the hearing aid should not be narrower than 300Hz - 4000Hz ● Lifetime:5 years ● Operating Environmental Conditions: Temperature:0°C to +40°C, Relative Humidity: ≤80%, Atmospheric Pressure:700hPa~1060hPa ● Transportation and Storage Environmental Conditions: Temperature: -10°C to +55°C , Relative Humidity: ≤80%, Atmospheric Pressure: 700hPa~1060hPa	 ZDEER TECHNOLOGY(HENAN) CO.,LTD ● East of Wei Wu Road and south of Qin Gong East Road, Toubao Village Committee, Laotown Town, Changge, Xuchang City, Henan Province,China ● NOTE: Other information refers to user manual ● MADE IN CHINA    IP22    