

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	SYX0303
淘 軟 料 號:	
BESOFTP/N:	
產 品 型 號:	
DESC:	Φ 17.2*26.2*9Ts-0.07*100-60mm-CLB
日 期:	
DATE:	2025/04/09
版 本:	
Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Feng Boqun	Su Yanping	Qian Limou	

Shenzhen Taosou Electronics Co., Ltd.

Factory Address: No. 702, Factory Building 1, Old Si Jia Village,
Jiashan Community, Ma Tian Street, Guangming District, Shenzhen City

TEL: 13824883512


Version Change History

[illegible]

SPECIFICATION

Product type number: DESC	Φ 17.2*26.2*9Ts-0.07*100-60mm-CLB	Version Rev: A.0	客户 CUST:	
			淘软料号 Fine P/N:	
			客户料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

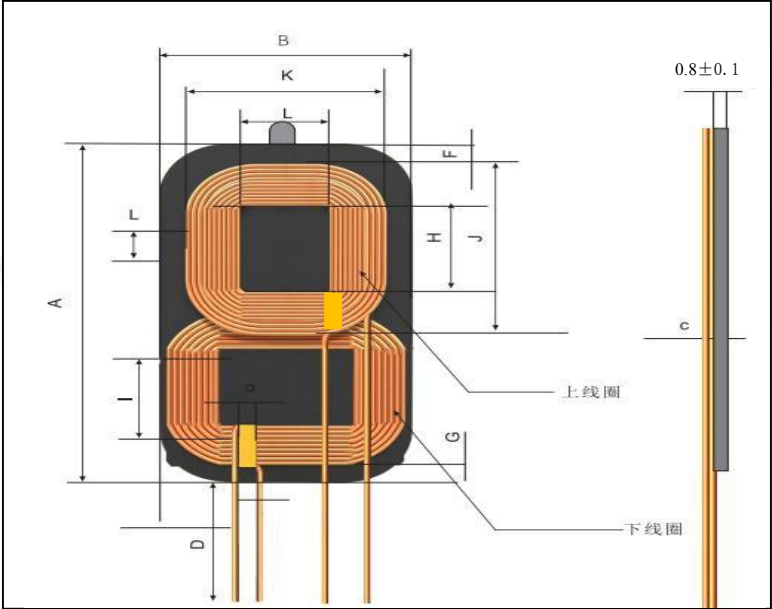

A	83.0±1
B	46±0.5
C	3.5±0.2
D	60±2.0
J	46±1
K	37±1
F	3.5±0.5
G	1.5±0.3
H	26.2±0.5
L	17.2±0.5

Note:

1. Coil with magnetic sheet attached, size of the magnetic sheet 83*46*0.8mm

2. The width of the winding outlet position is 6mm.

±0.5 High-temperature adhesive tape.
3. Stick a 82mm x 45mm ordinary double-sided adhesive tape on the back of the magnetic sheet.

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Silk-covered wire 0.07*100P	9Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25 ±10℃, 湿度 RELATIVE HUMIDITY:65 ±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%Single coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%Add magnetic chips	100KHz/1.0V	LCZ METER 1062B
3	Q 值	S-F	≤70.0(ref) Add magnetic chips	100KHz/1.0V	LCZ METER 1062B
4	DCR	S-F	≤70m Ω		LCZ METER 502B


拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
Feng Boqun 2025/04/09	Su Yanping 2025/04/09

SPECIFICATION

Product type number: DESC	Φ 17.2*26.2*9Ts-0.07x100-60mm-CLB	Version Rev: A.0	客户 CUST:	
			淘软料号 Fine P/N:	
			客户料号 CUST P/N:	

五、包装 PACKONG:

5.1 包装图片Packing pictures:

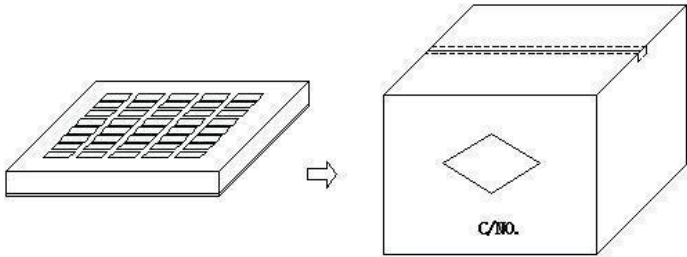

5.2 包装数量及规格Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	150 Pcs	370*265*55mm
箱 Big Carton	600 Pcs	420*270*310mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

六、材料清单 Material list:

序号 number	材料名称 Material name	品名描述 Description	制造商 Manufacturer
1	Silk braided wire: 0.07 * 100 strands	Acetone silk-covered wire, 0.07 * 100 strands	
2	Lead-free tin rod	Lead-free tin rod	
3	magnetic sheet	Φ83*46*0.8mm Manganese-zinc hard magnetic sheet	
4	Glue	201 Glue	
5	High-temperature adhesive tape	6mm Wide and heat-resistant adhesive tape	
6	Double-sided adhesive tape	Diameter 82*45 (ref) Adhesive backing	

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
Feng Boqun 2025/04/09	Su Yanping 2025/04*09