

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC Part 15.247(b)(1) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

■ According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW $\geq$ RBW

Set Sweep = auto

Set Detector function = peak


Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results

Temperature:	24° C
Relative Humidity:	62%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	1.95	30	PASS
	39	2441	1.87	30	PASS
	78	2480	2.59	30	PASS
pi/4-DQPSK	0	2402	2.20	30	PASS
	39	2441	2.15	30	PASS
	78	2480	2.89	30	PASS
Note:N/A					

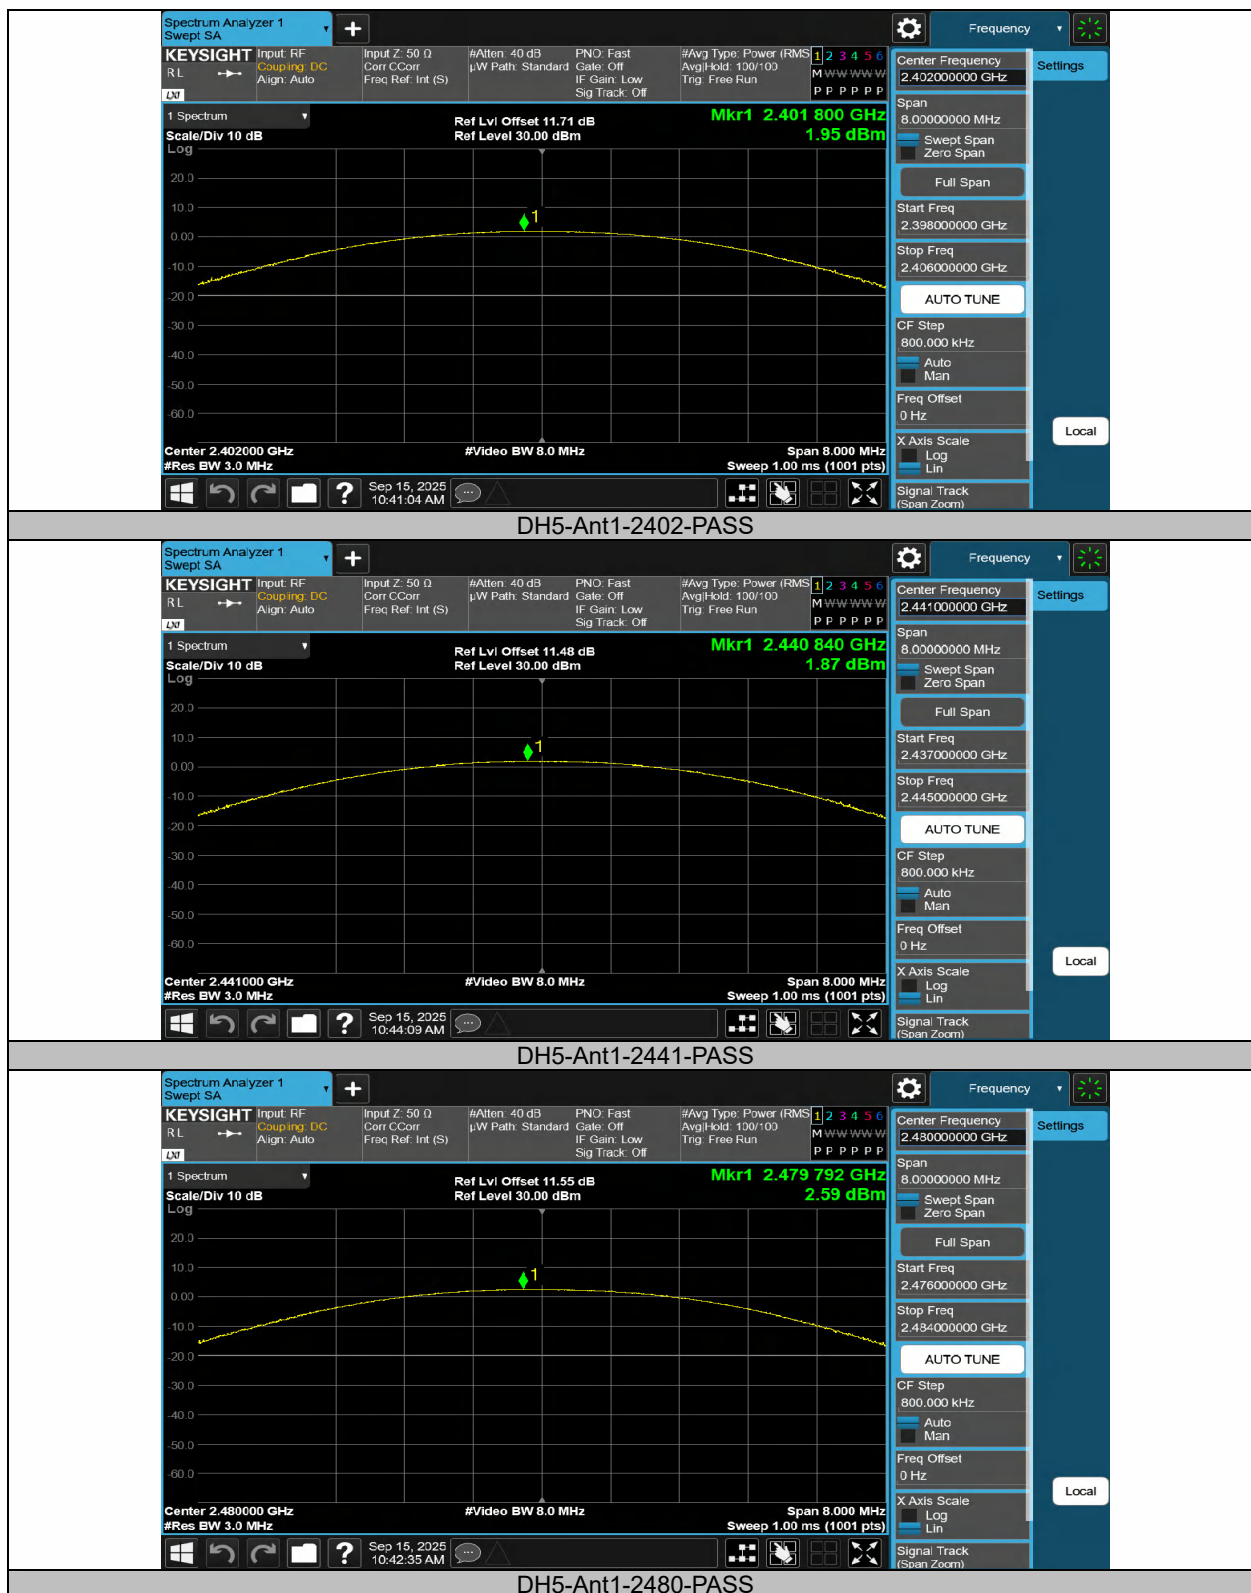



2DH5-Ant1-2402-PASS



2DH5-Ant1-2441-PASS



2DH5-Ant1-2480-PASS

9.6 CONDUCTED SUPRIIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconducetedlevel.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHzSet VBW $\geq$ RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ ConducetedSpurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSetVBW $\geq$ RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

Test Results

Reference level measurement


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2401.82	1.66
DH5	Ant1	2441	2440.98	1.35
DH5	Ant1	2480	2479.82	2.37
2DH5	Ant1	2402	2401.81	1.33
2DH5	Ant1	2441	2441.13	1.36
2DH5	Ant1	2480	2479.83	2.20

Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	1.66	-37.74	≤-18.34	PASS
DH5	Ant1	High	2480	2.37	-44.98	≤-17.63	PASS
DH5	Ant1	Low	Hop_2402	-0.49	-40.46	≤-20.49	PASS
DH5	Ant1	High	Hop_2480	1.40	-48.43	≤-18.61	PASS
2DH5	Ant1	Low	2402	1.33	-37.75	≤-18.67	PASS
2DH5	Ant1	High	2480	2.20	-45.45	≤-17.8	PASS
2DH5	Ant1	Low	Hop_2402	-6.21	-48.88	≤-26.21	PASS
2DH5	Ant1	High	Hop_2480	-2.09	-47.84	≤-22.09	PASS

Conducted Spurious Emission

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	1.66	-60.66	≤-18.34	PASS
DH5	Ant1	2402	1000~26500	1.66	-36.48	≤-18.34	PASS
DH5	Ant1	2441	30~1000	1.35	-60.84	≤-18.65	PASS
DH5	Ant1	2441	1000~26500	1.35	-35.82	≤-18.65	PASS
DH5	Ant1	2480	30~1000	2.37	-61.11	≤-17.63	PASS
DH5	Ant1	2480	1000~26500	2.37	-34.8	≤-17.63	PASS
2DH5	Ant1	2402	30~1000	1.33	-57.38	≤-18.67	PASS
2DH5	Ant1	2402	1000~26500	1.33	-34.2	≤-18.67	PASS
2DH5	Ant1	2441	30~1000	1.36	-60.88	≤-18.64	PASS
2DH5	Ant1	2441	1000~26500	1.36	-37.14	≤-18.64	PASS
2DH5	Ant1	2480	30~1000	2.20	-60.83	≤-17.8	PASS
2DH5	Ant1	2480	1000~26500	2.20	-38.56	≤-17.8	PASS

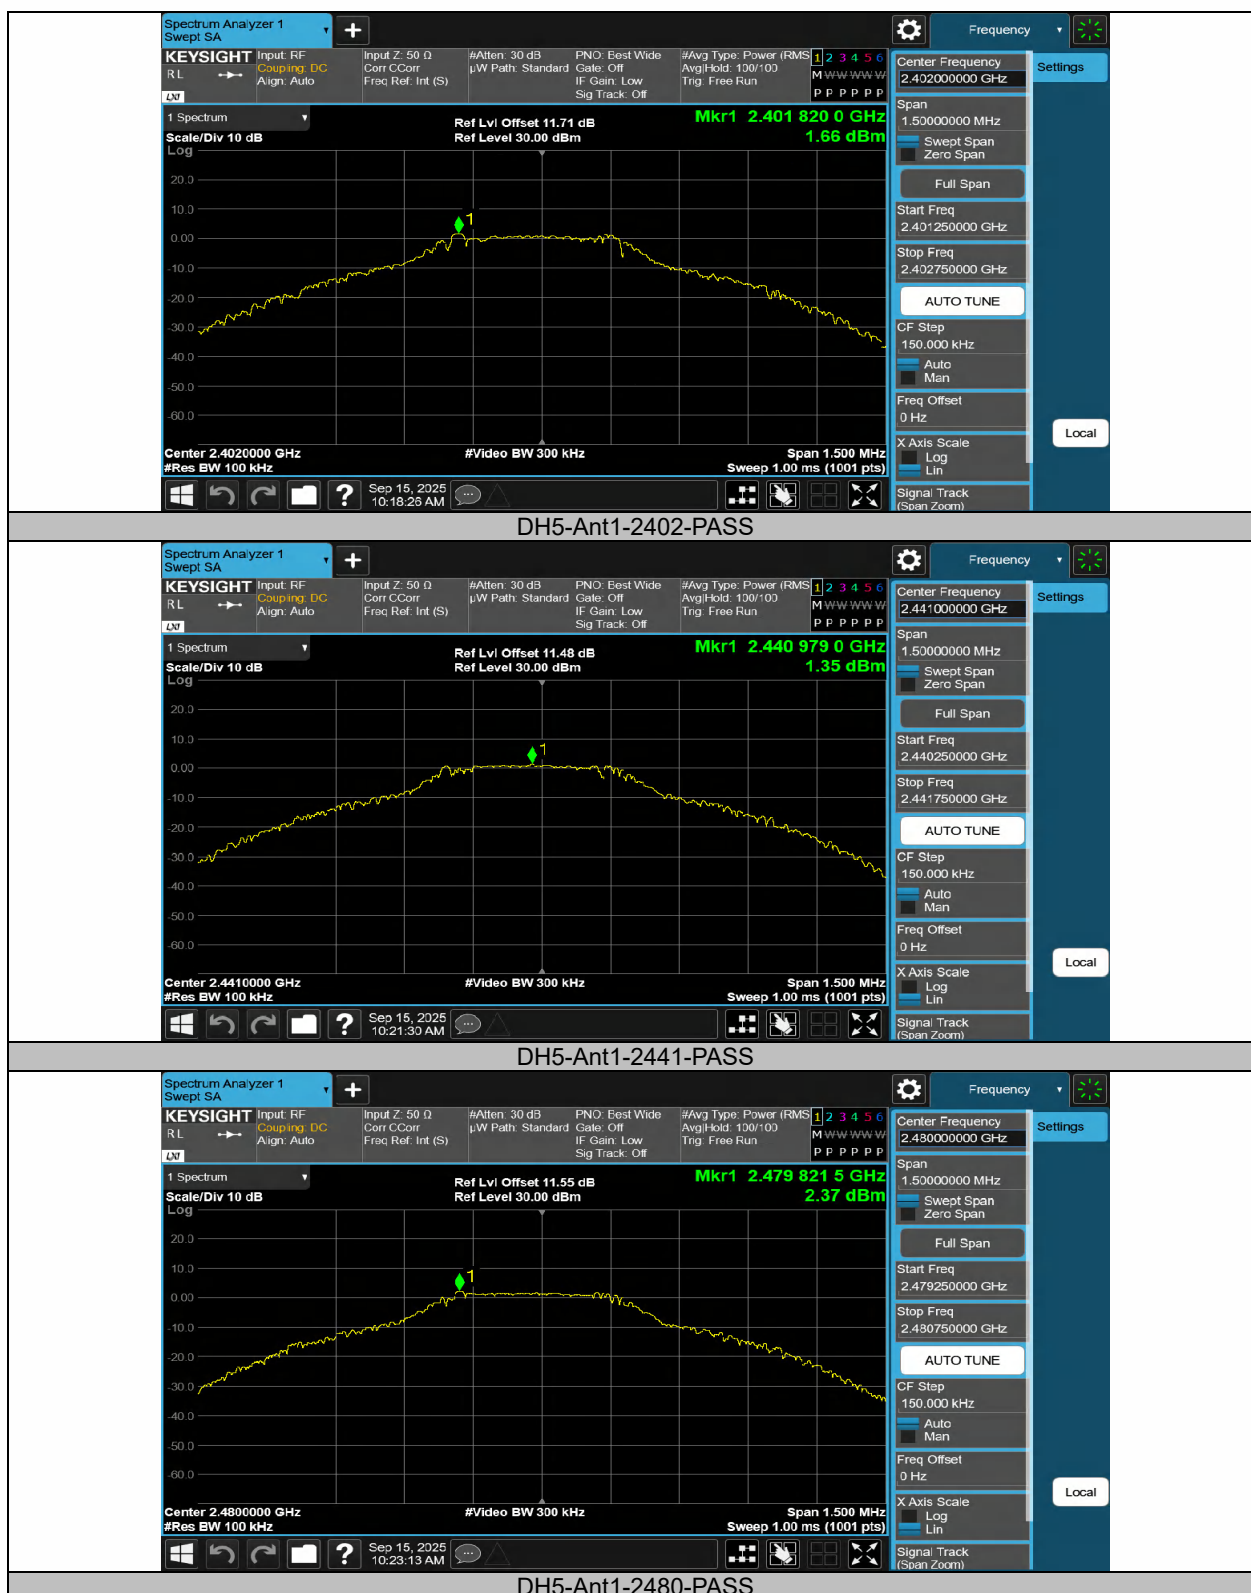




2DH5-Ant1-2402-PASS




2DH5-Ant1-2441-PASS




2DH5-Ant1-2480-PASS

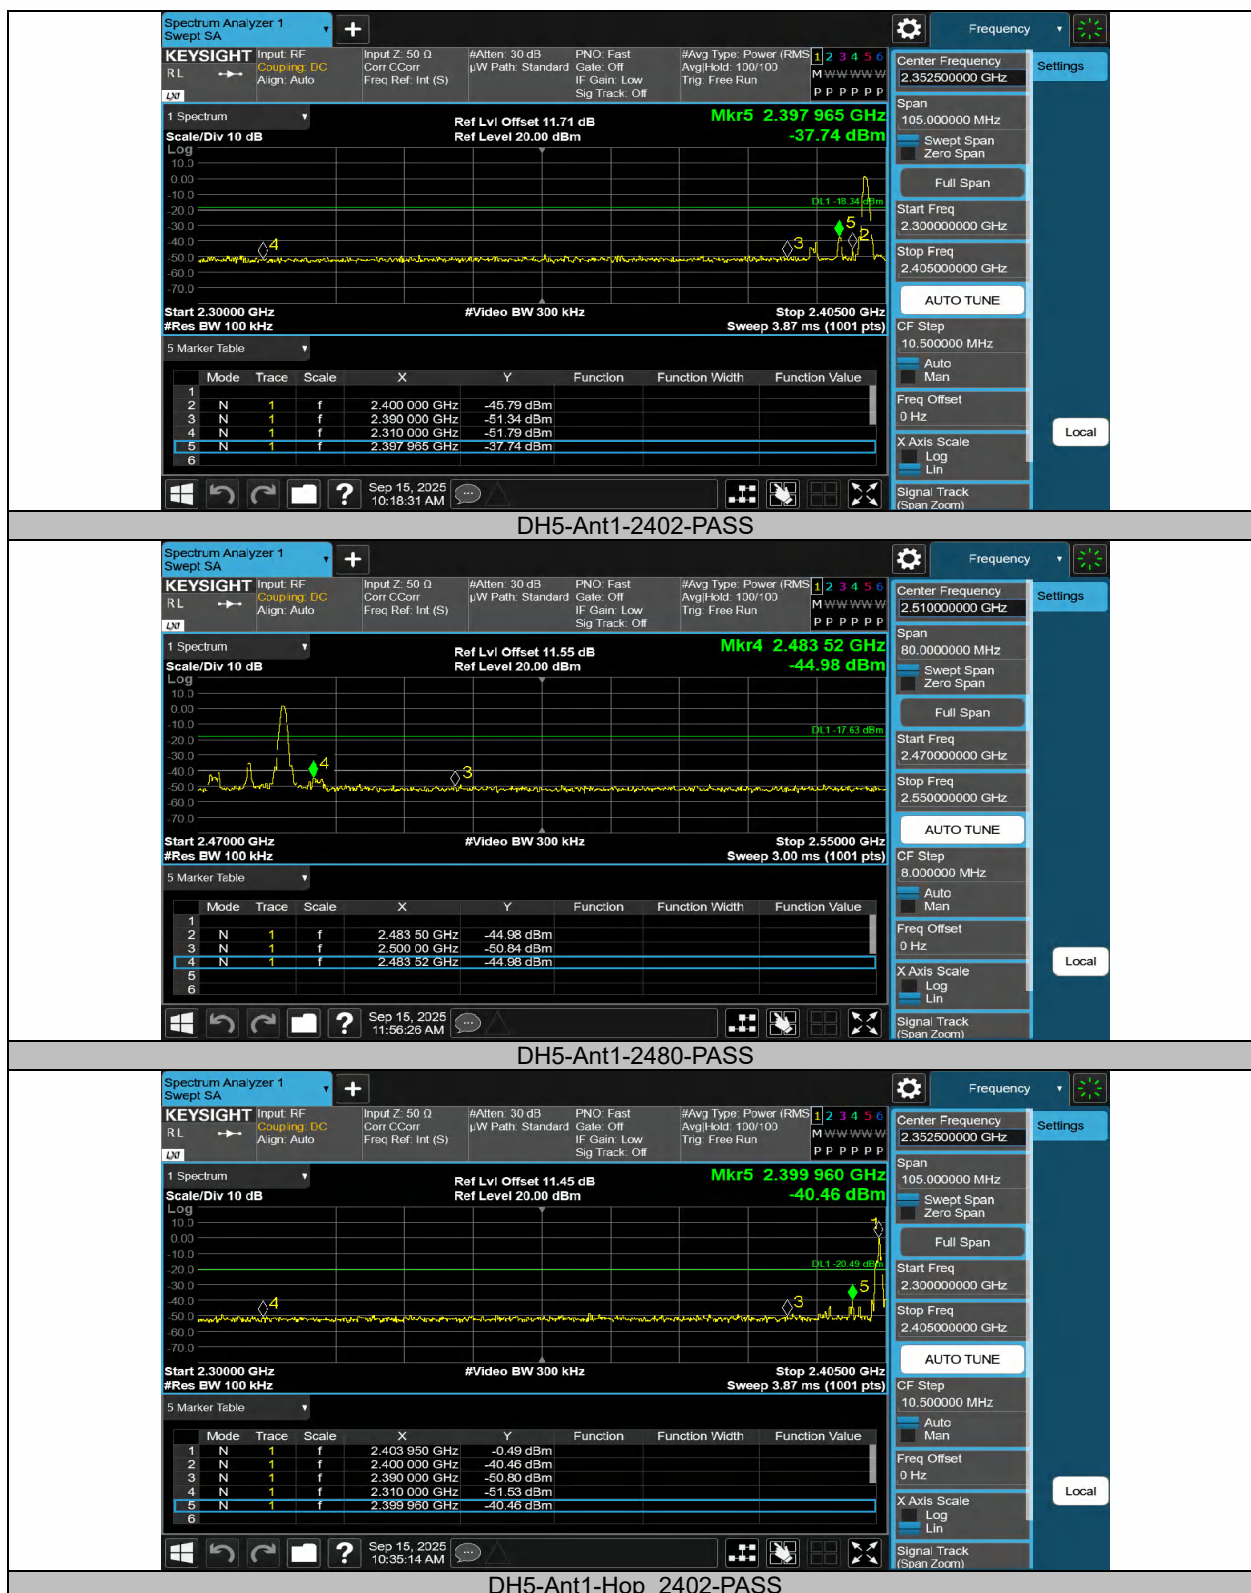


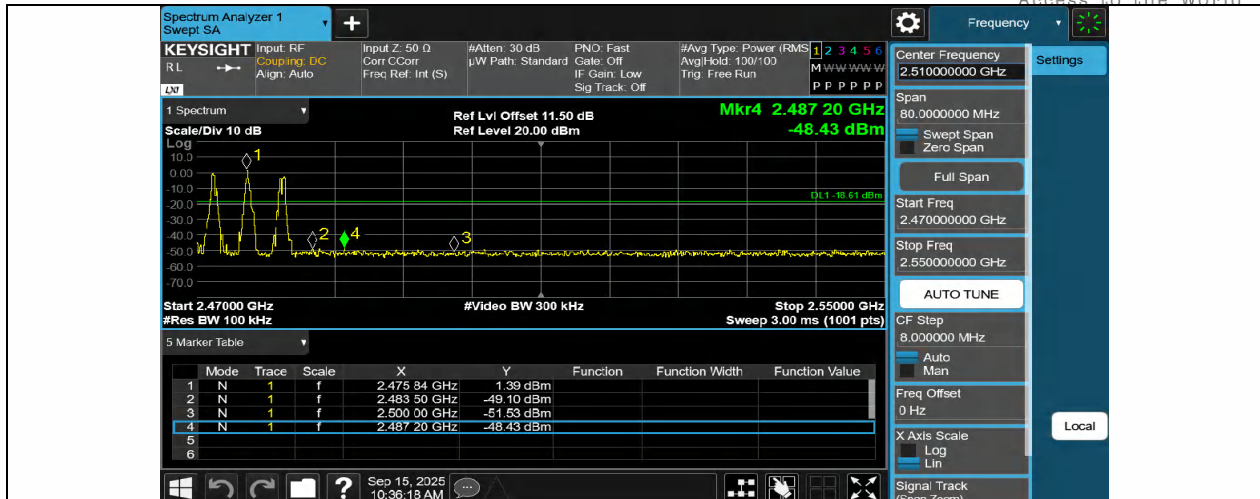

DH5-Ant1-Hop_2480-PASS

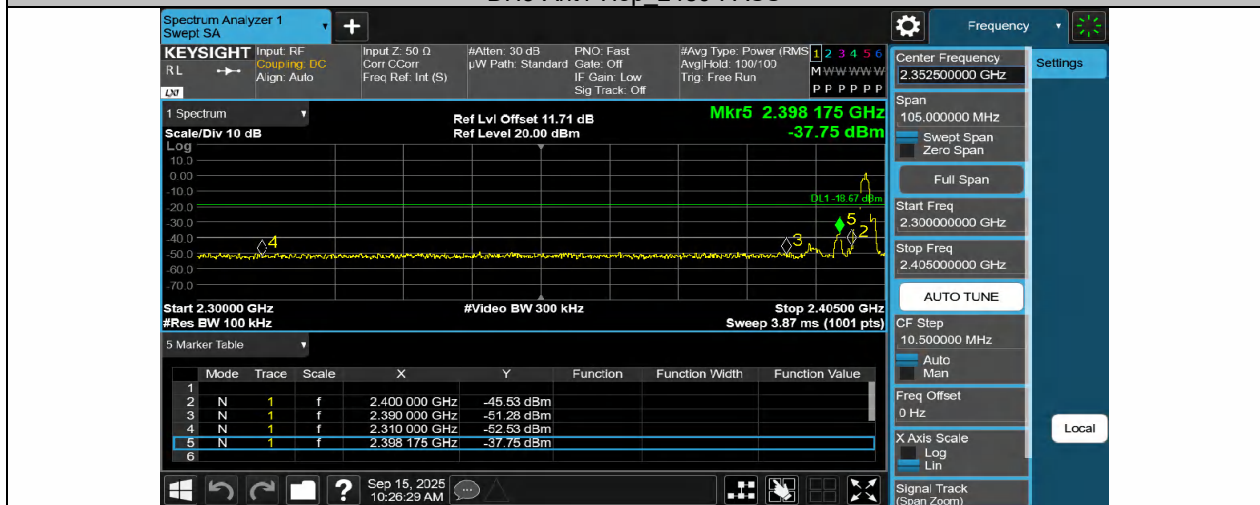


2DH5-Ant1-2402-PASS

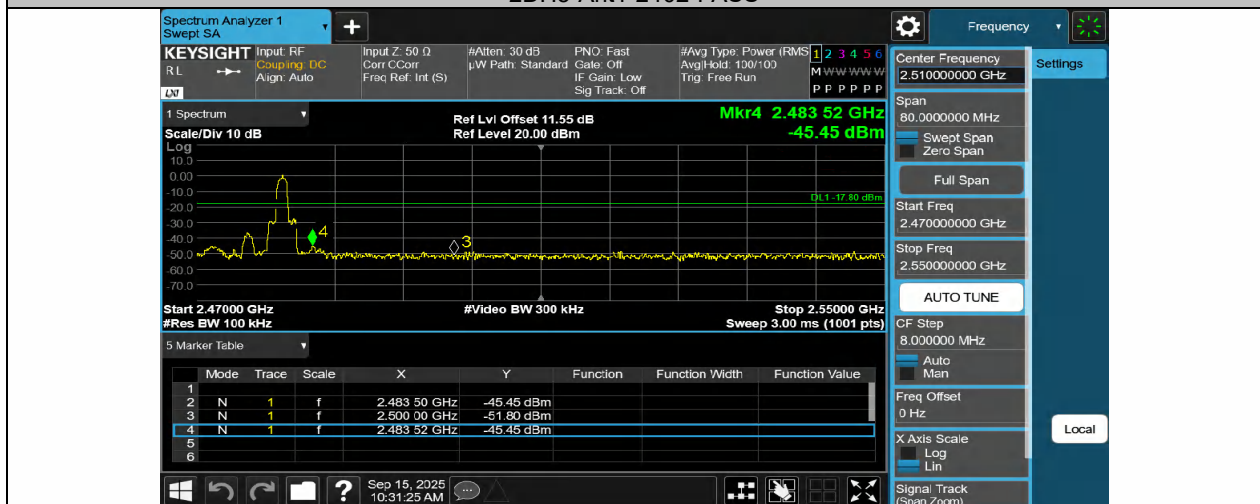


2DH5-Ant1-2480-PASS






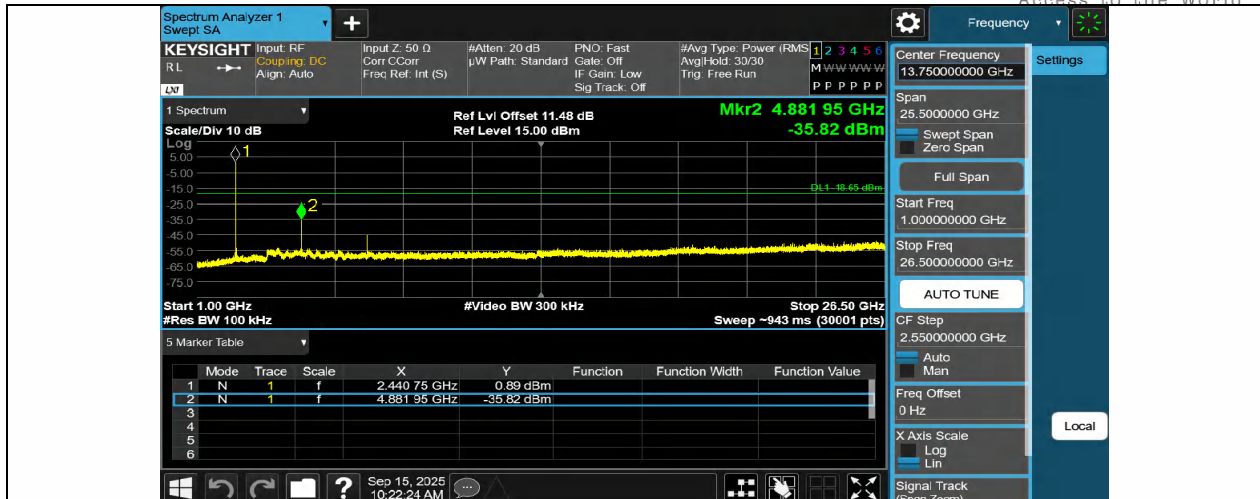

DH5-Ant1-2441-1000~26500-PASS

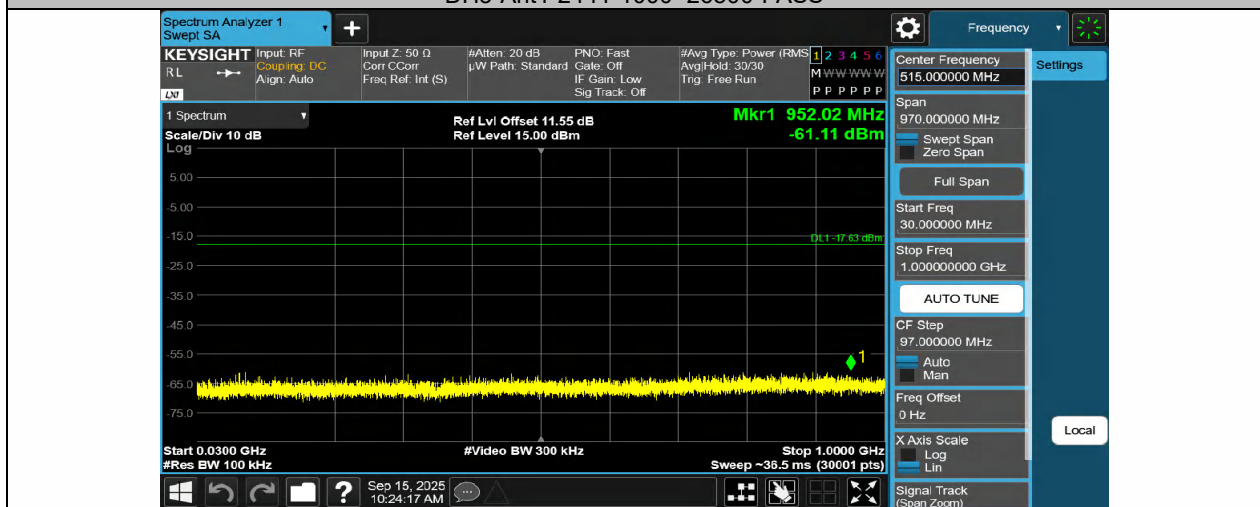


DH5-Ant1-2480-30~1000-PASS

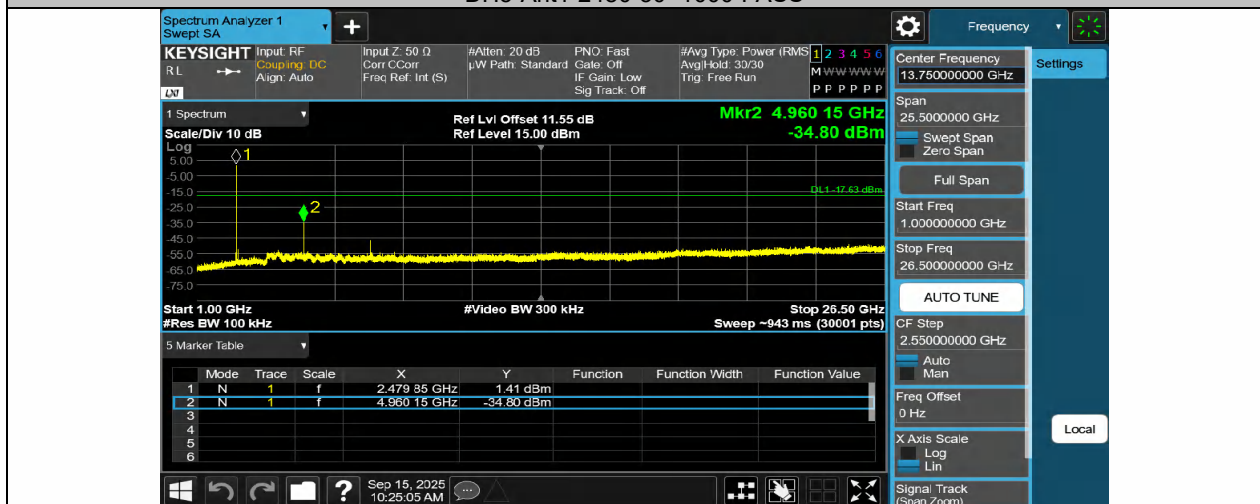


DH5-Ant1-2480-1000~26500-PASS




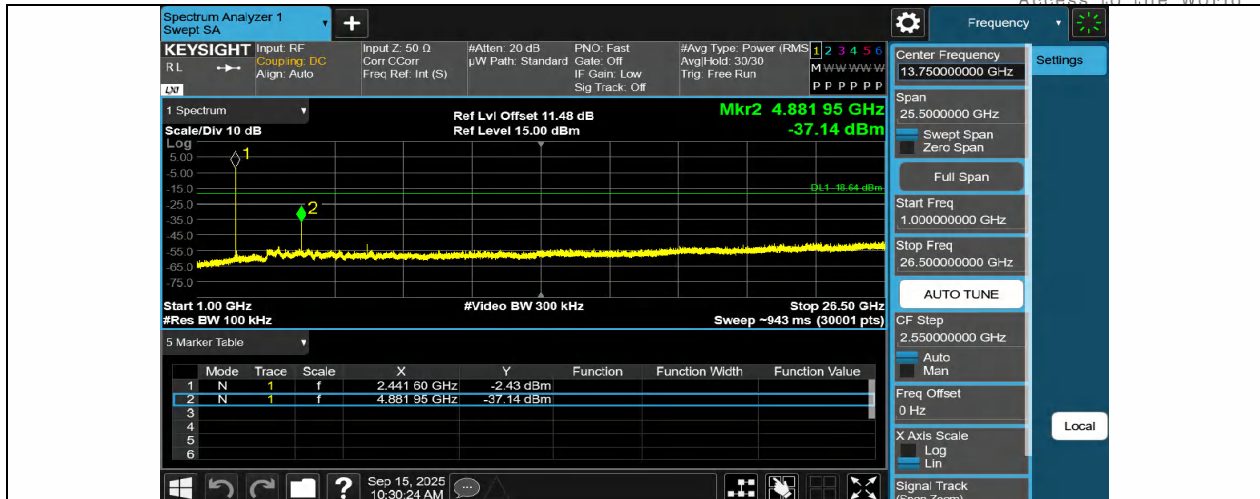

2DH5-Ant1-2441-1000~26500-PASS

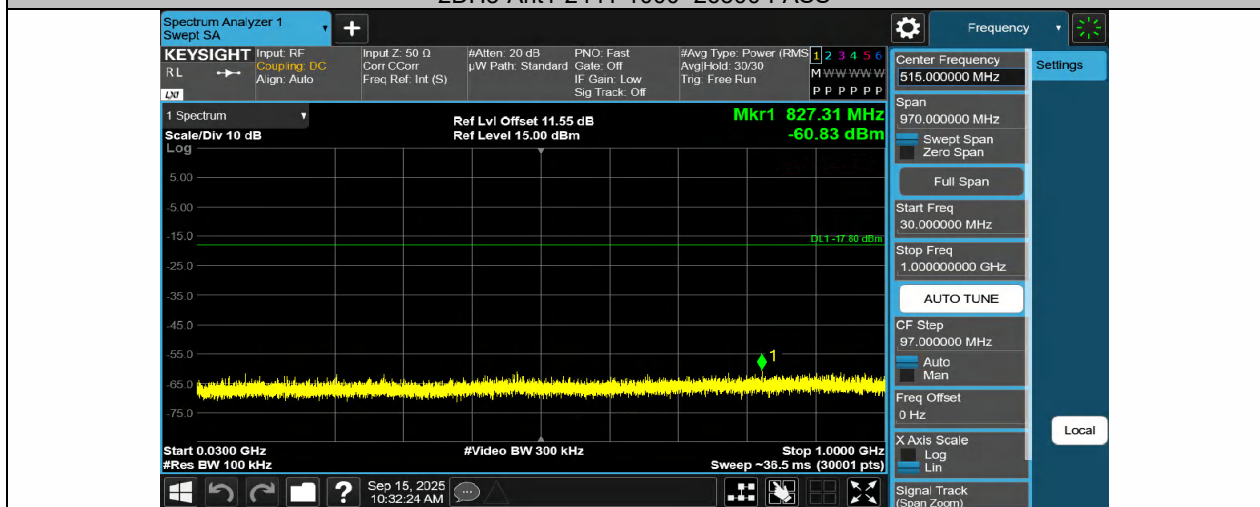

2DH5-Ant1-2480-30~1000-PASS

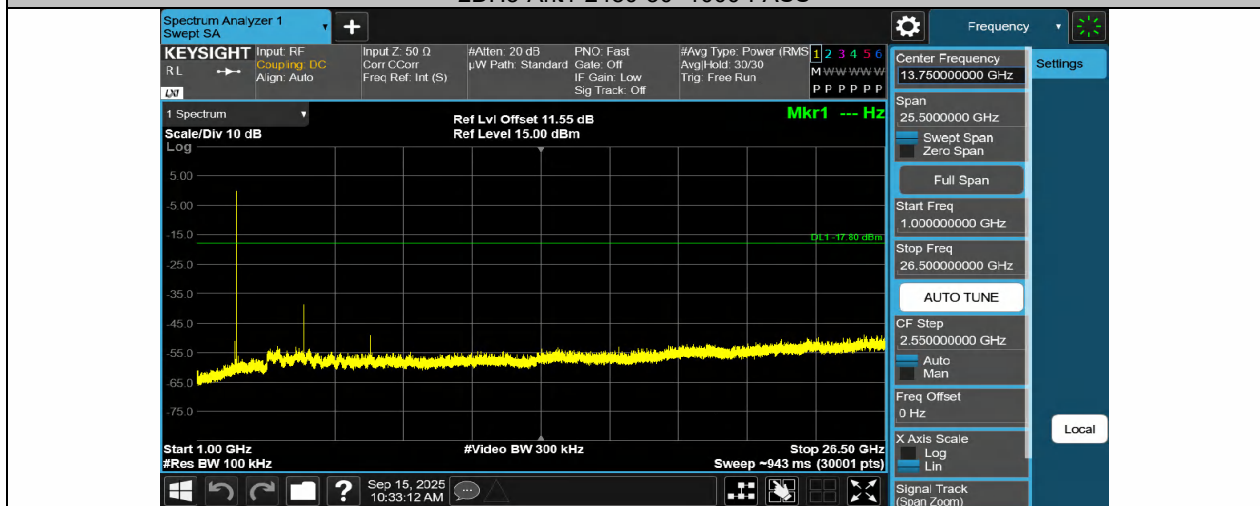

2DH5-Ant1-2480-1000~26500-PASS

9.7 RADIATED SPURIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 15.209 and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.209, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Test Configuration

Test according to clause 7.2 radio frequency test setup 2

Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2014 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	26° C
Relative Humidity:	70%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, non hopping) mode have been tested, and the worst result(GFSK)was report as below:

Test mode:	GFSK	Frequency:	Channel 0: 2402MHz
------------	------	------------	--------------------

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804.500	V	46.15	32.08	74.00	54.00	-27.85	-21.92
7206.000	V	56.45	41.34	74.00	54.00	-17.55	-12.66
12009.00	V	59.12	44.69	74.00	54.00	-14.88	-9.31
4804.000	H	55.52	40.57	74.00	54.00	-18.48	-13.43
7205.500	H	61.36	46.28	74.00	54.00	-12.64	-7.72
12009.50	H	58.09	43.66	74.00	54.00	-15.91	-10.34

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882.000	V	46.85	31.94	74.00	54.00	-27.15	-22.06
7322.500	V	59.13	46.33	74.00	54.00	-14.87	-7.67
12204.00	V	59.38	44.46	74.00	54.00	-14.62	-9.54
4882.000	H	54.82	40.95	74.00	54.00	-19.18	-13.05
7322.500	H	64.82	50.99	74.00	54.00	-9.18	-3.01
12204.000	H	61.02	46.28	74.00	54.00	-12.98	-7.72

Test mode: GFSK Frequency: Channel 79: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960.000	V	47.34	32.13	74.00	54.00	-26.66	-21.87
7439.500	V	58.16	43.69	74.00	54.00	-15.84	-10.31
12399.00	V	60.78	45.97	74.00	54.00	-13.22	-8.03
4959.500	H	53.46	38.25	74.00	54.00	-20.54	-15.75
7439.500	H	62.55	48.08	74.00	54.00	-11.45	-5.92
12399.50	H	57.53	42.66	74.00	54.00	-16.47	-11.34

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2397.923	H	62.61	74.00	48.52	54.00
2397.828	V	60.15	74.00	46.04	54.00

Test mode: GFSK Frequency: Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.863	H	60.72	74.00	46.24	54.00
2483.632	V	59.14	74.00	45.93	54.00

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- Spurious Emission below 1GHz(30MHz to 1GHz)
- All modes have been tested, and the worst result recorded was report as below:

Mode:	BT 2402
Environment:	Temp: 22°C; Humi:69%

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.9973	62.37	-25.53	36.84	QP	40.00	3.16	Vertical
2	53.9574	62.75	-27.07	35.68	QP	40.00	4.32	Vertical
3	57.9789	64.37	-28.26	36.11	QP	40.00	3.89	Vertical
4	75.7379	63.75	-26.83	36.92	QP	40.00	3.08	Vertical
5	86.3513	63.71	-28.54	35.17	QP	40.00	4.83	Vertical
6	171.2724	70.44	-27.89	42.55	QP	43.50	0.95	Vertical

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.9973	61.03	-25.53	35.50	QP	40.00	4.50	Horizontal
2	54.1280	65.73	-27.13	38.60	QP	40.00	1.40	Horizontal
3	75.6848	63.78	-26.83	36.95	QP	40.00	3.05	Horizontal
4	115.2397	65.04	-27.62	37.42	QP	43.50	6.08	Horizontal
5	147.4036	67.41	-28.17	39.24	QP	43.50	4.26	Horizontal
6	173.6308	68.64	-27.82	40.82	QP	43.50	2.68	Horizontal

Mode:	BT 2441
Environment:	Temp: 22°C; Humi:69%

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	43.1714	59.13	-26.14	32.99	QP	40.00	7.01	Vertical
2	48.4845	61.54	-25.55	35.99	QP	40.00	4.01	Vertical
3	53.5991	58.64	-26.92	31.72	QP	40.00	8.28	Vertical
4	57.8165	60.28	-28.23	32.05	QP	40.00	7.95	Vertical
5	75.8177	62.98	-26.82	36.16	QP	40.00	3.84	Vertical
6	86.5939	62.74	-28.59	34.15	QP	40.00	5.85	Vertical

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.5696	57.22	-25.55	31.67	QP	40.00	8.33	Horizontal
2	54.2230	59.91	-27.17	32.74	QP	40.00	7.26	Horizontal
3	76.3512	61.85	-26.83	35.02	QP	40.00	4.98	Horizontal
4	116.3767	60.97	-27.60	33.37	QP	43.50	10.13	Horizontal
5	148.1809	60.38	-28.22	32.16	QP	43.50	11.34	Horizontal
6	173.3266	62.24	-27.83	34.41	QP	43.50	9.09	Horizontal

Mode:	BT 2480
Environment:	Temp: 22℃; Humi:69%

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	42.9299	56.74	-26.20	30.54	QP	40.00	9.46	Vertical
2	48.8429	61.57	-25.54	36.03	QP	40.00	3.97	Vertical
3	53.5991	60.66	-26.92	33.74	QP	40.00	6.26	Vertical
4	57.8774	61.01	-28.24	32.77	QP	40.00	7.23	Vertical
5	74.8141	62.75	-26.85	35.90	QP	40.00	4.10	Vertical
6	86.4726	61.46	-28.57	32.89	QP	40.00	7.11	Vertical

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.8943	57.78	-25.53	32.25	QP	40.00	7.75	Horizontal
2	54.7388	62.28	-27.38	34.90	QP	40.00	5.10	Horizontal
3	75.5523	63.82	-26.82	37.00	QP	40.00	3.00	Horizontal
4	118.0206	61.19	-27.57	33.62	QP	43.50	9.88	Horizontal
5	147.4036	61.22	-28.17	33.05	QP	43.50	10.45	Horizontal
6	172.9623	63.18	-27.84	35.34	QP	43.50	8.16	Horizontal

9.8 CONDUCTED EMISSION TEST

Applicable Standard

According to FCC Part 15.207(a)

Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

Test according to clause 7.3 conducted emission test setup

Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

Test Results

Mode:	BT 2402
Environment:	Temp: 25°C; Humi:71%

Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.1500	40.44	10.16	50.60	66.00	15.40	QPK	N	GND	PASS
2	0.1500	23.57	10.16	33.73	56.00	22.27	AVG	N	GND	PASS
3	0.1900	36.92	10.18	47.10	64.04	16.94	QPK	N	GND	PASS
4	0.1900	18.60	10.18	28.78	54.04	25.26	AVG	N	GND	PASS
5	0.4420	30.69	10.20	40.89	57.02	16.13	QPK	N	GND	PASS
6	0.4420	20.91	10.20	31.11	47.02	15.91	AVG	N	GND	PASS
7	7.8300	25.34	10.11	35.45	60.00	24.55	QPK	N	GND	PASS
8	7.8300	13.31	10.11	23.42	50.00	26.58	AVG	N	GND	PASS
9	15.5260	21.40	10.34	31.74	60.00	28.26	QPK	N	GND	PASS
10	15.5260	8.56	10.34	18.90	50.00	31.10	AVG	N	GND	PASS
11	24.0020	23.81	10.61	34.42	60.00	25.58	QPK	N	GND	PASS
12	24.0020	17.85	10.61	28.46	50.00	21.54	AVG	N	GND	PASS

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.1500	40.92	10.17	51.09	66.00	14.91	QPK	L1	GND	PASS
2	0.1500	23.63	10.17	33.80	56.00	22.20	AVG	L1	GND	PASS
3	0.1819	37.91	10.18	48.09	64.40	16.31	QPK	L1	GND	PASS
4	0.1819	19.33	10.18	29.51	54.40	24.89	AVG	L1	GND	PASS
5	0.4351	33.84	10.16	44.00	57.15	13.15	QPK	L1	GND	PASS
6	0.4351	23.24	10.16	33.40	47.15	13.75	AVG	L1	GND	PASS
7	7.8940	23.58	10.12	33.70	60.00	26.30	QPK	L1	GND	PASS
8	7.8940	9.70	10.12	19.82	50.00	30.18	AVG	L1	GND	PASS
9	15.6580	21.29	10.30	31.59	60.00	28.41	QPK	L1	GND	PASS
10	15.6580	8.57	10.30	18.87	50.00	31.13	AVG	L1	GND	PASS
11	24.0020	23.91	10.58	34.49	60.00	25.51	QPK	L1	GND	PASS
12	24.0020	17.75	10.58	28.33	50.00	21.67	AVG	L1	GND	PASS

9.9 ANTENNA APPLICATION

Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Result

Pass.

The EUT has 1 PCB Antenna: The PCB Antenna Gain is 1.7 dBi;

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

*** End of Report ***

10 APPENDIX PHOTOGRAPHS OF EUT

Please refer to the file of External Photo and Internal Photo.



11 APPENDIX PHOTOGRAPHS OF TEST SETUP

Please refer to the file of Test Setup Photo.

