

Prüfbericht-Nr.: <i>Test report no.:</i>	IN25YJ2Z 001	Auftrags-Nr.: <i>Order no.:</i>	146968508 020	Seite 1 von 53 Page 1 of 53
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	2620198	Auftragsdatum: <i>Order date:</i>	2024-09-30	
Auftraggeber: <i>Client:</i>	BLAZETRACK PRIVATE LIMITED 12-1/b/302, Rajapushpa ATRIA, Golden Mile Road, Kokapet, Hyderabad, Ranga Reddy, Telangana- 500030 India			
Prüfgegenstand: <i>Test item:</i>	DASHPOD			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	DPFHSDBT			
Auftrags-Inhalt: <i>Order content:</i>	Testing and issue of Test Report with Grant Certificate			
Prüfgrundlage: <i>Test specification:</i>	FCC Part15 SubpartC 15.247; 15.205; 15.207; 15.209			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-10-13			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004111647-001 A004111647-002			
Prüfzeitraum: <i>Testing period:</i>	2025-10-15 - 2025-10-30			
Ort der Prüfung: <i>Place of testing:</i>	Wireless laboratory, Bangalore			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (India) Pvt.Ltd., 27/B, 2nd Cross, Electronic City Phase1 Bangalore -560 100, India FCC Test site registration number: 496599 ISED Test site registration number: 27711			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	Ausstellungsdatum: <i>Issue date:</i>			
Stellung / Position:	Senior Engineer	Stellung / Position:	Assistant Manager	
Sonstiges / <i>Other:</i>	FCC ID: 2BS2J-DPFHSDBT			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	* Legend:			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.:

IN25YJ2Z 001

Seite 2 von 53

Test Report No.:

Page 2 of 53

- | | |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 3 von 53

Page 3 of 53

TEST SUMMARY

Test Item	FCC	Result
Maximum conducted (Peak) output power	FCC 15.247 (b)(3)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	Pass
DTS Bandwidth & 99% Bandwidth	FCC 15.247(a)(2)	Pass
Emissions in non-restricted frequency bands	FCC 15.247 (d)	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	FCC 15.247 (d) / FCC 15.209 / FCC 15.205	Pass
AC Power lines Conducted emission	FCC 15.207	Pass
Antenna Requirement	FCC 15.203	Complied

Product Category: Electronics Testing

Test Discipline: EMC Test Facility

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 4 von 53

Page 4 of 53

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
IN25YJ2Z 001	01	Initial issue of report	2025-12-22

Table of Contents

1	GENERAL REMARKS	6
1.1	Attachments	6
2	TEST SITES	7
2.1	Testing Facilities	7
2.2	List of Test and Measurement Instruments.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	Product Function and Intended Use	8
3.2	Ratings and System Details of Equipment under Test	8
3.3	Measurement Uncertainty:	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	Principle of Configuration Selection	10
4.2	Test Operation and Test Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Simultaneous Transmission	10
4.5	Countermeasures to achieve EMC Compliance	10
4.6	List of frequencies	10
4.7	TUV Sample Identification.....	11
5	Operational Description	12
6	TEST METHODOLOGY	13
6.1	AC Power lines Conducted emission	13
6.1.1	Test Setup Configuration.....	13
6.2	Radiated Emission Test	14
6.2.1	Test Setup Configuration.....	14
7	TEST RESULTS FOR BLE.....	16
7.1	Maximum Peak Conducted Output Power	16
7.2	DTS Bandwidth & 99% Bandwidth.....	19
7.3	Power Spectral Density.....	24
7.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	27
7.4.1	Out-Of-Band Emissions.....	31
7.5	Spurious Radiated Emissions & Restricted Bands of Operation	33
8	AC Powerlines Conducted Emission	50
9	LIST OF TABLES.....	53
10	List of Figures.....	53

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 6 von 53

Page 6 of 53

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. Test Setup photos
2. EUT External Photos
3. EUT Internal Photos
4. FCC Label and Label Location
5. Block Diagram
6. Specification of EUT
7. Schematic Diagrams
8. Bill of Material
9. User Manual
10. Maximum Permissible Exposure Information

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108, Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	103384	3.20SP2	24.06.2026	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	LAX-10	LAX-10-800	-	16.04.2026	Yearly	
Balun & Biconical Antenna	Schwarzbeck mess-elektronik	BBA 9106+VH BB 9124	9124-1117	-	27.05.2026	Yearly	
Log-Periodic Antenna	Schwarzbeck mess-elektronik	VUSLP 9111B	9111B-324	-	26.05.2026	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-01944	-	12.11.2025	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-0904	-	14.02.2026	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESW44	101773	1.72.SP1	26.01.2026	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
Spectrum Analyzer	Agilent	E4407B	US411927 72	A.14.07	16.01.2026	Yearly	Conducted Test Parameters
10 dB RF Attenuator (DUT-1)	Rohde & Schwarz	-	-	-	10.10.2026	Yearly	
EMI Receiver	Rohde & Schwarz	ESR7	101133	3.48 SP3	20.05.2026	Yearly	Conducted AC Power line Test
Two Line LISN	Scientific	SMLIN6 3-2	161101	-	06.03.2026	Yearly	
Pulse limiter [0 - 30 MHz]	Rohde & Schwarz	ESH3-Z2	100811	-	26.06.2026	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in FAC	EMC 32	10.60.20
2	Radiated spurious emission measurement in 10mtr SAC	BAT EMC	3.20.0.17
3	Conducted Emissions on a.c power Lines	BAT EMC	3.20.0.17

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

The Dashpod is a rechargeable electronic device intended for use in physical rehabilitation, physiotherapy, and sports training applications. The product integrates wave-detection and impact sensors to register user interactions, such as hand movements or physical taps, and provides immediate visual and/or auditory feedback. Device operation is managed wirelessly via Bluetooth communication with a dedicated mobile application, enabling configuration of training programs, monitoring of device status, and data logging of user performance. The Dashpod is designed for repeated use in controlled indoor or outdoor environments under supervision of a therapist, trainer, or end user. The intended purpose of the device is to support improvement of motor skills, coordination, reaction time, endurance, and functional mobility across diverse user groups, including children, adults, and athletes.

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Protocol		BLE (Bluetooth Low Energy)
Operating Frequency Range		2402MHz to 2480MHz
Channel Spacing		2MHz
Maximum measured Power (dBm)		6.58dBm@2402MHz_2Mbps
Modulation		GFSK
Data Rate		1Mbps, 2Mbps
Number of antennas		1
Antenna Gain & Antenna Type		2dBi & inverted-F PCB antenna
Supply Voltage to Product		3.6 V to 4.2 VDC through AC-DC Adapter
Environmental conditions	Operating Condition	-20°C to +40°C; 5% to 85% non-condensing
	Storage Condition	-20°C to +50°C; 5% to 85% non-condensing
EUT Dimension		42mm height, 90 mm length and breadth

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	± 0.71 dB
Power Spectral Density, conducted	± 1.22 dB
Unwanted Emissions, conducted	± 1.50 dB
Bandwidth, Conducted	0.21
All emissions, radiated	± 4.61 dB

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 10 von 53
Page 10 of 53

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Test Firmware:	DTM_Code_v2.0
Software Name:	NRF Connect for Desktop v5.2.0 Direct Test Mode V2.5.3
Hardware Name:	Dashpod_V4.2_Dec2024
Hardware revision:	V4.2 Dec2024

4.3 Special Accessories and Auxiliary Equipment

- None

4.4 Simultaneous Transmission

- None

4.5 Countermeasures to achieve EMC Compliance

- None

4.6 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2402 – 2480 BLE	0	2402
	1	2404
	2	2406
	3	2408
	:	:
	11	2424
	12	2426
	:	:
	19	2440
	20	2442
	:	:
	:	:
	:	:
	:	:
	36	2474
	37	2476
	38	2478
	39	2480

Table 5: List of BLE Centre frequencies

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 11 von 53

Page 11 of 53

Channel used for BLE testing.

Channel low: 2402MHz

Channel mid: 2440MHz

Channel high : 2480MHz

4.7 TUV Sample Identification

TUV Sample Identification number: A004111647-001 – Radiated test Sample.

A004111647-002 --Conducted test Sample

5 Operational Description

The Dashpod operates as a portable, battery-powered electronic training device equipped with integrated wave and impact sensors. Upon activation, the device enters an idle or active mode and responds to user interaction through pre-programmed visual (LED light) and auditory (sound) signals. Control and configuration are performed via Bluetooth Low Energy (BLE) communication with a mobile application, which allows the operator to select activity modes, adjust parameters, and monitor performance data. The device supports multiple units operating simultaneously in synchronized or independent configurations. Dashpod is designed for repeated operational cycles and incorporates power management features such as sleep and deep-sleep modes to conserve energy.


6 TEST METHODOLOGY

6.1 AC Power lines Conducted emission

Measured levels of ac powerline conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150 kHz to 30MHz, this measurement was performed an AC adaptor 110V AC 60Hz supply

6.1.1 Test Setup Configuration

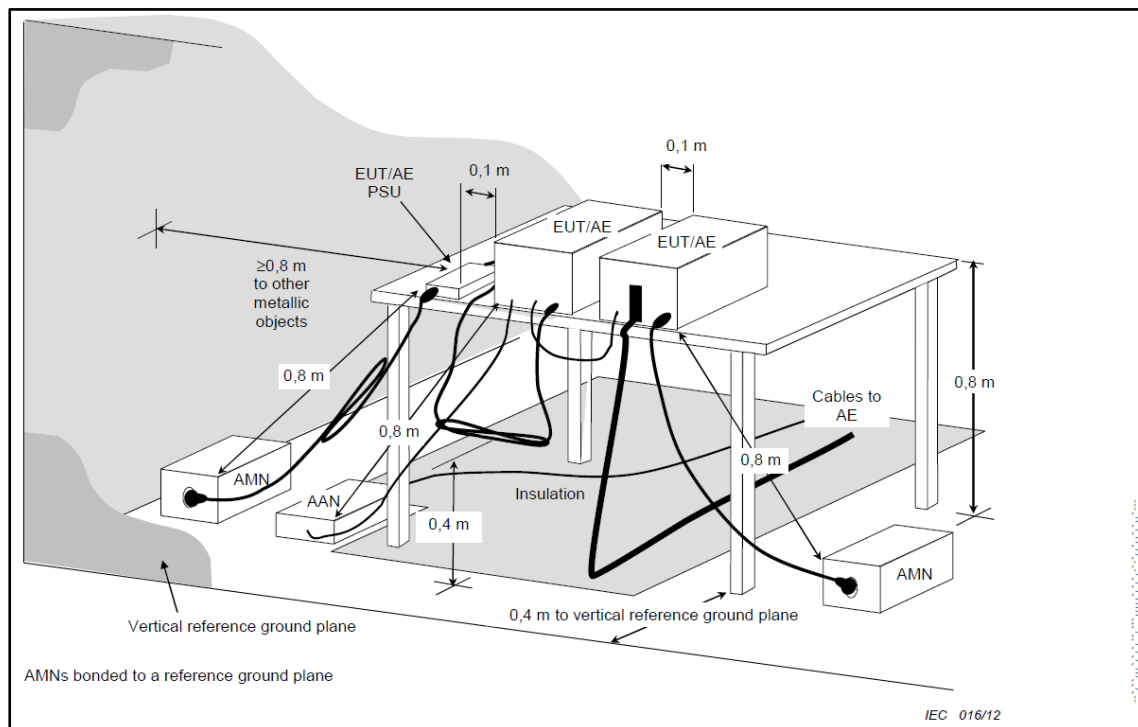

6.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2020. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, the measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Balloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

6.2.1 Test Setup Configuration

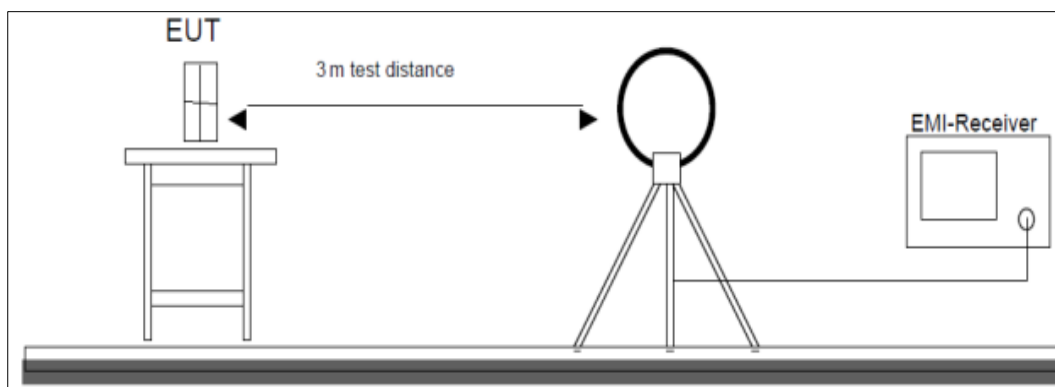


Figure 1: Frequency Range 9 kHz- 30 MHz

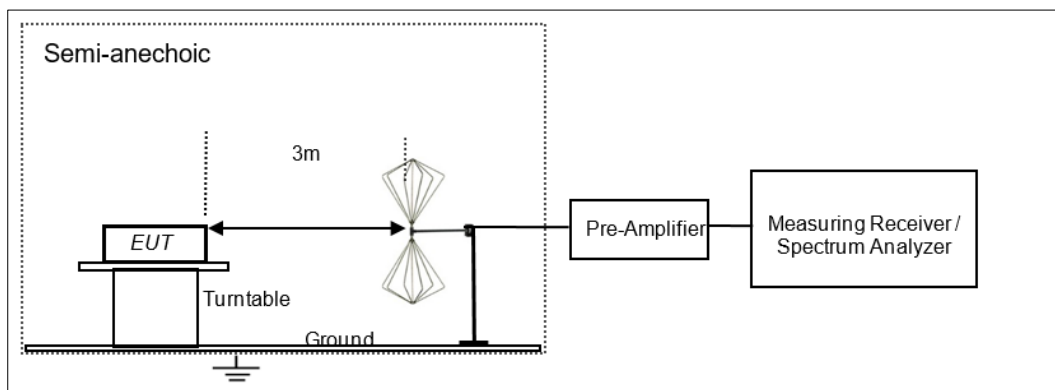


Figure 2: Frequency Range 30 MHz – 200 MHz

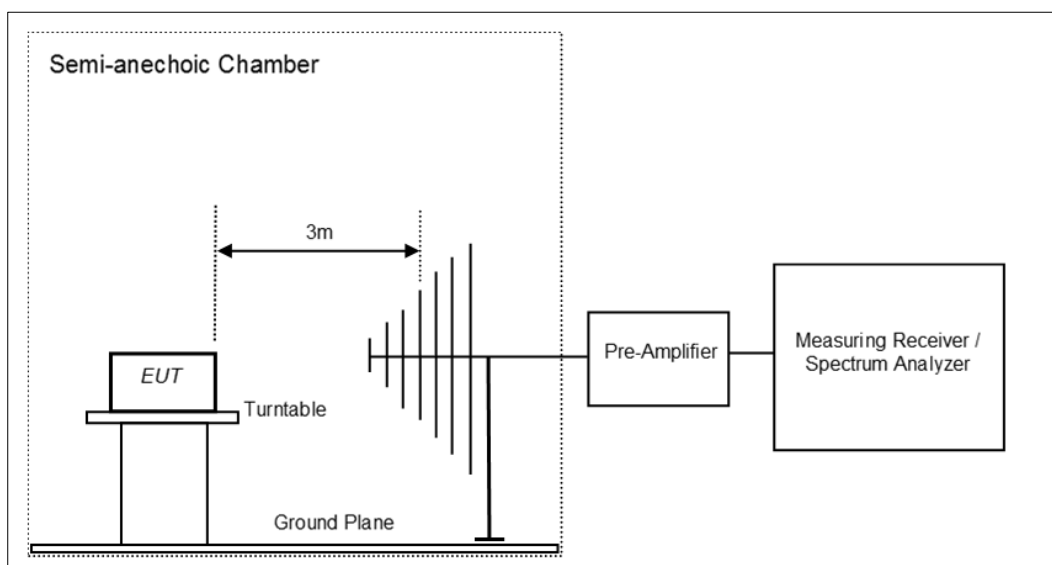


Figure 3: Frequency Range 200 MHz - 1GHz

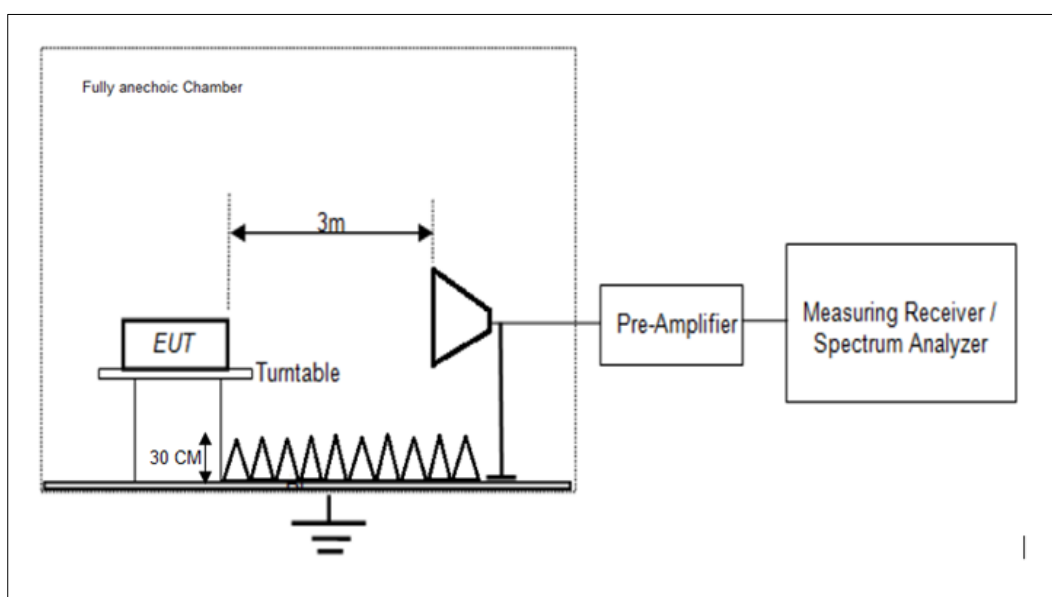


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 16 von 53
Page 16 of 53

7 TEST RESULTS FOR BLE

7.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3)
Test Method	Subclause 11.9.1.1 of ANSI C63.10:2020
Measurement Bandwidth	1MHz
Detector	Peak
Port of testing	Conducted mode
Requirement	Power $\leq$ 1 W (30 dBm)

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C	Voltage = 4.2 VDC through AC-DC Adapter	Relative humidity: 55%
------------------------------	---	------------------------

KDB Guidelines applied:

Measurements were made as per section 8.3.1.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 17 von 53
Page 17 of 53

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Cable loss (0.8dB)
3. This product does not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 2 dBi

Data rate	Channel frequency	Measured power (dBm)	Limit (dBm)
1 Mbps	2402.00	6.57	30.00
	2440.00	6.30	30.00
	2480.00	6.37	30.00
2 Mbps	2402.00	6.58	30.00
	2440.00	6.30	30.00
	2480.00	6.37	30.00

Test Plots:

Data Rate: 1Mbps

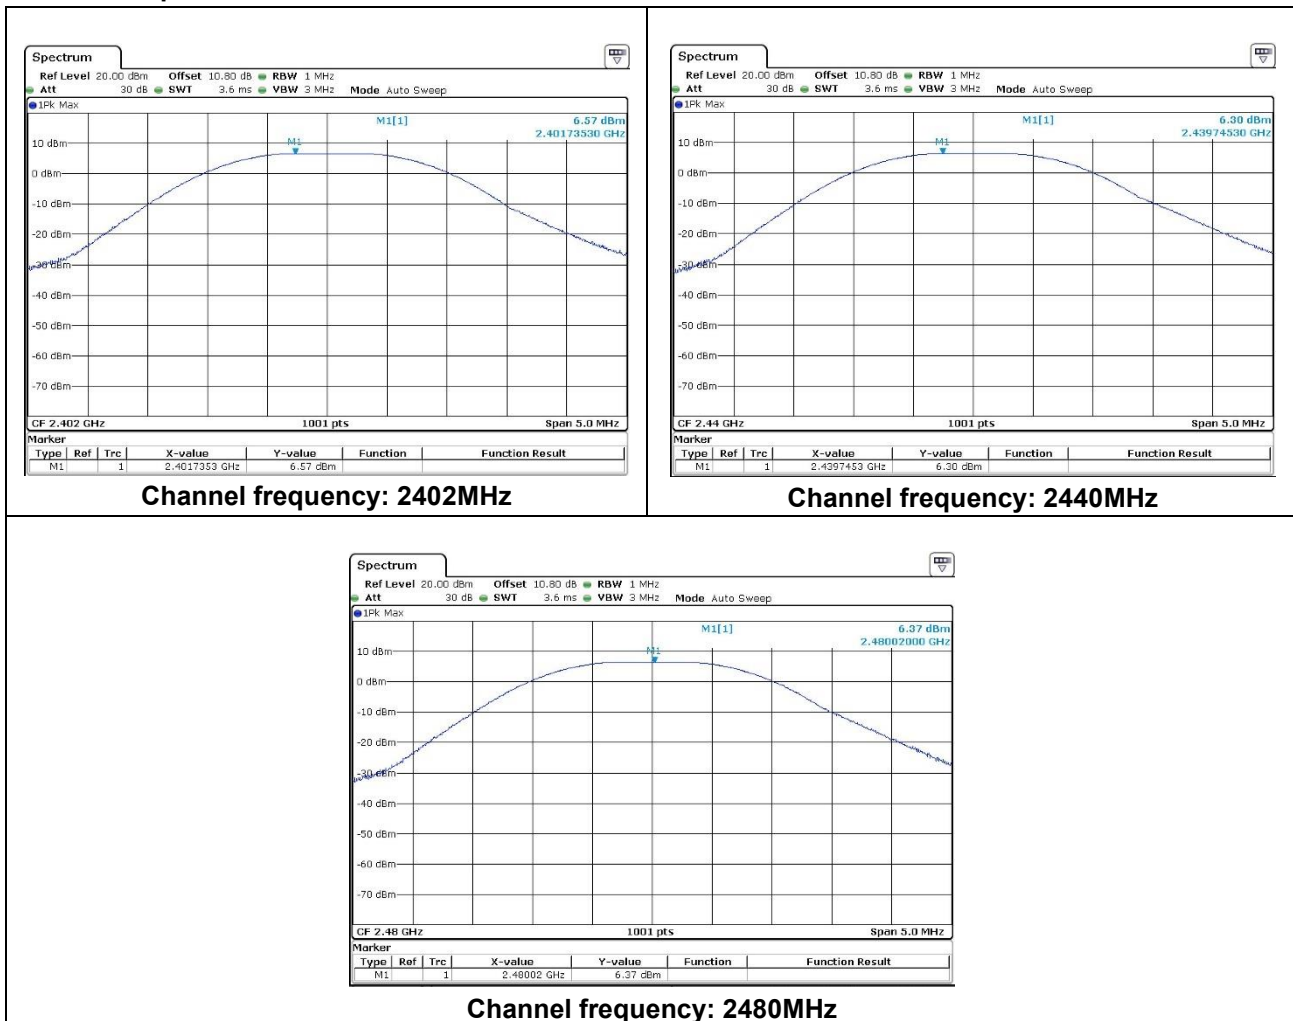


Prüfbericht - Nr.:
Test Report No.:


IN25YJ2Z 001

Seite 18 von 53
Page 18 of 53


Data Rate: 2Mbps

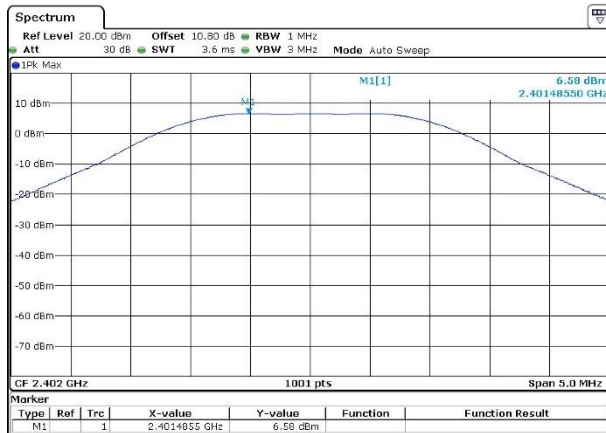

Channel frequency: 2402MHz

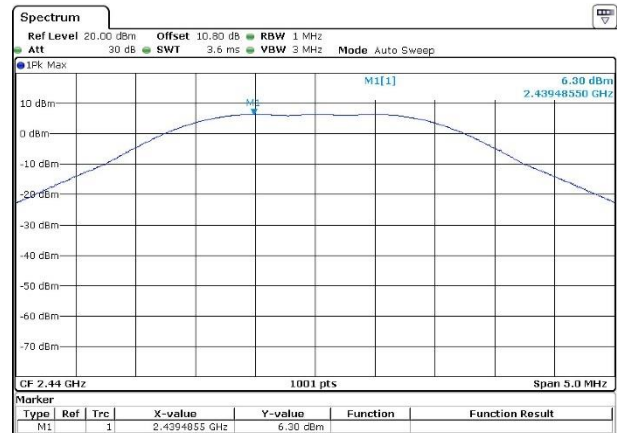

Channel frequency: 2440MHz

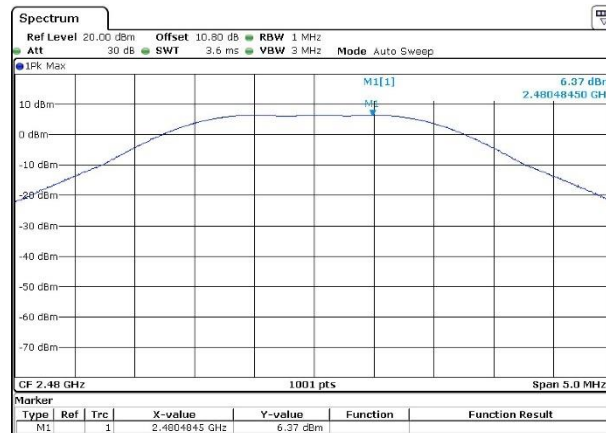

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 19 von 53
Page 19 of 53

7.2 DTS Bandwidth & 99% Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2)
Test Method	Subclause 11.8.1 of ANSI C63.10:2020 for DTS
Measurement Bandwidth	100 kHz for DTS Bandwidth 1% to 5% of OBW
Detector	Peak
Port of testing	Conducted mode
Requirement	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C	Voltage = 4.2 VDC through AC-DC Adapter	Relative humidity: 55%
------------------------------	---	------------------------

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 20 von 53
Page 20 of 53


Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.


Data rate	Channel frequency	99% BW (MHz)	6dB BW (MHz)	Limit (MHz)
1 Mbps	2402.00	1.05	719.30	0.50
	2440.00	1.06	719.30	0.50
	2480.00	1.06	729.30	0.50
2 Mbps	2402.00	2.04	754.20	0.50
	2440.00	2.05	749.30	0.50
	2480.00	2.06	739.30	0.50

Test Plots:


**99% Bandwidth:
Data Rate: 1Mbps**

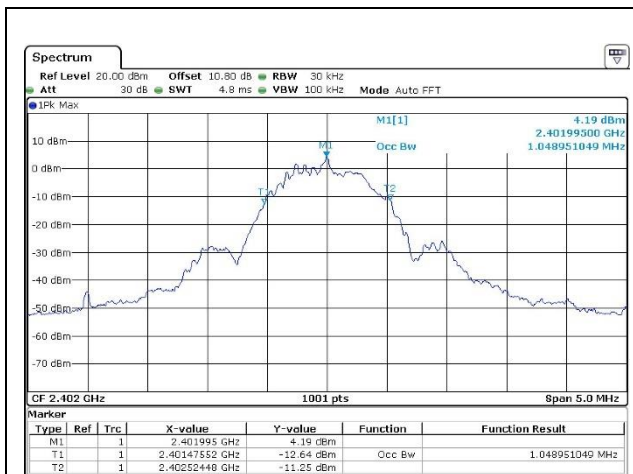

Channel frequency: 2402MHz

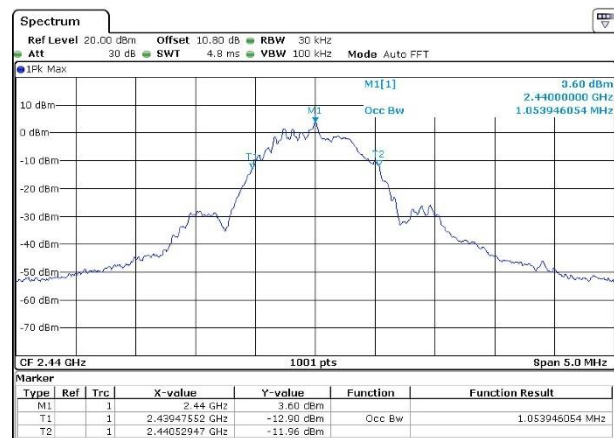

Channel frequency: 2440MHz

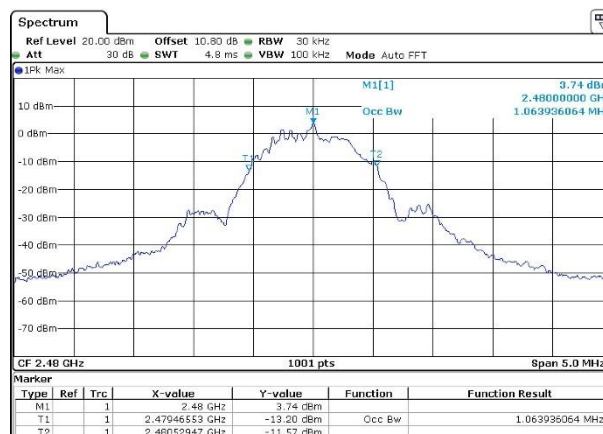

Channel frequency: 2480MHz


Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001


Seite 21 von 53
Page 21 of 53

Data Rate: 2Mbps


Test Plots:

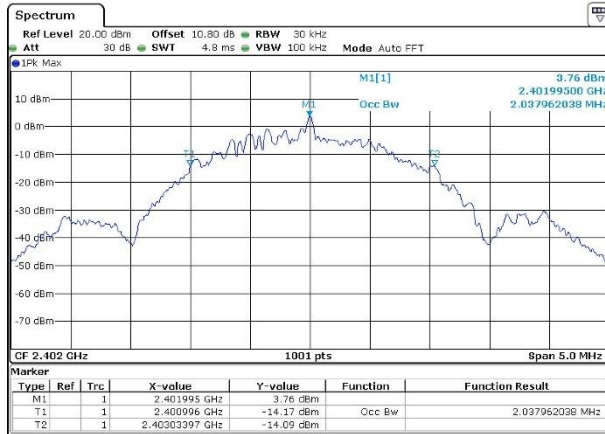

Channel frequency: 2402MHz

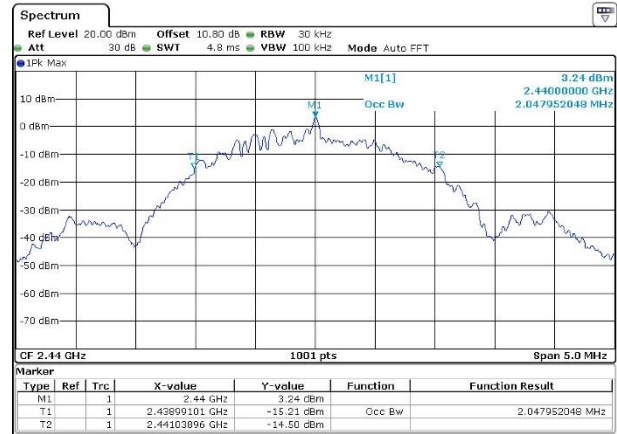

Channel frequency: 2440MHz

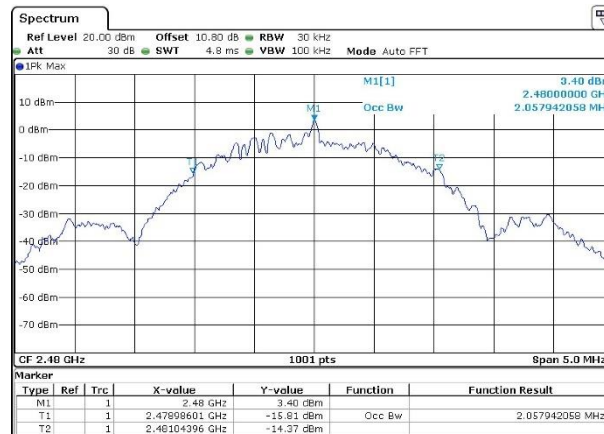


Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:


IN25YJ2Z 001

Seite 22 von 53
Page 22 of 53


DTS Bandwidth:
Data Rate: 1Mbps

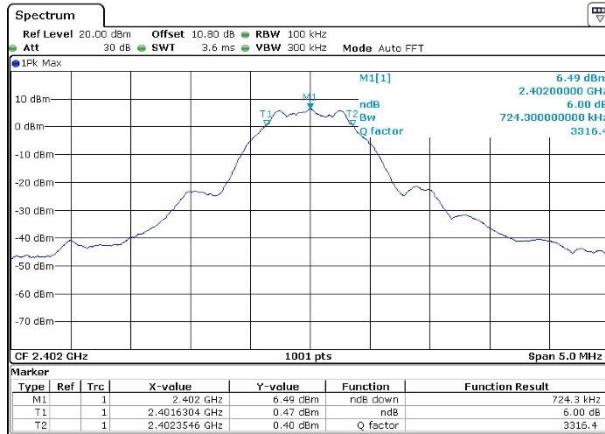

Channel frequency: 2402MHz

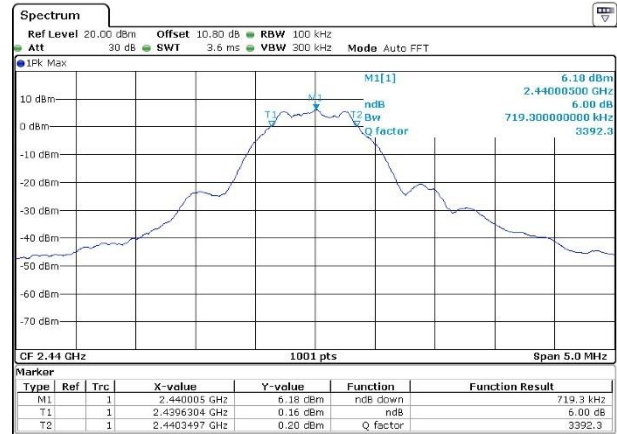


Channel frequency: 2440MHz

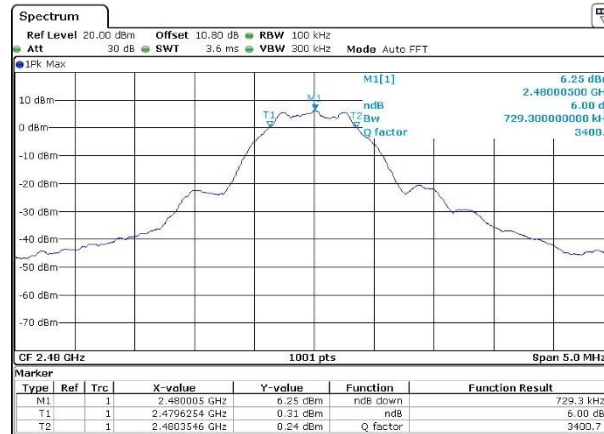


Channel frequency: 2480MHz

Data Rate: 2Mbps


Test Plots:

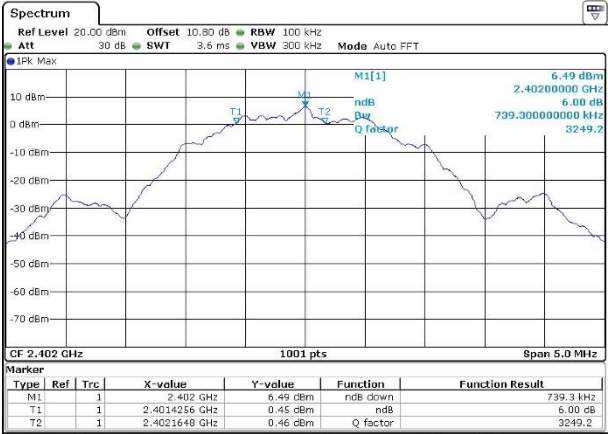

Channel frequency: 2402MHz

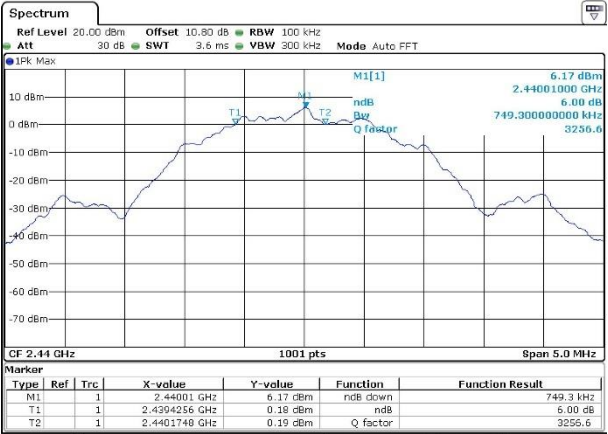

Channel frequency: 2440MHz

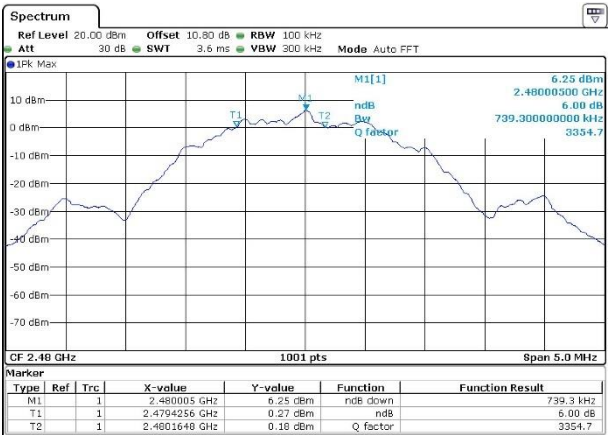

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 24 von 53
Page 24 of 53

7.3 Power Spectral Density

Result

Pass

Test Specification	FCC Part 15 Subpart C Section 15.247 (e)
Test Method	Subclause 11.10.2 of ANSI C63.10:2020
Measurement Bandwidth	3 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 100 kHz band during any time interval of continuous transmission.

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C Voltage = 4.2 VDC through Adapter Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 25 von 53

Page 25 of 53




Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.

Data rate	Channel frequency	PSD (dBm)	Limit (dBm in any 3kHz)
1 Mbps	2402.00	-8.97	8.00
	2440.00	-9.30	8.00
	2480.00	-9.27	8.00
2 Mbps	2402.00	-11.42	8.00
	2440.00	-12.08	8.00
	2480.00	-11.97	8.00

Data Rate: 1Mbps

Test Plots:

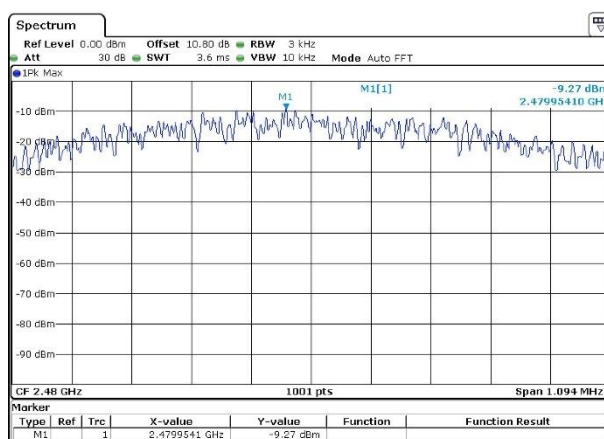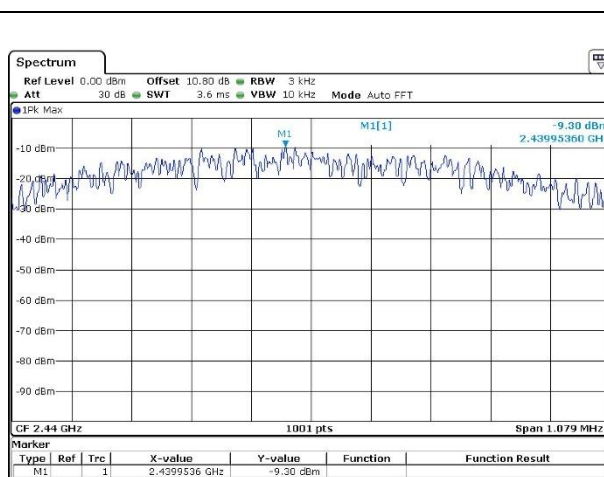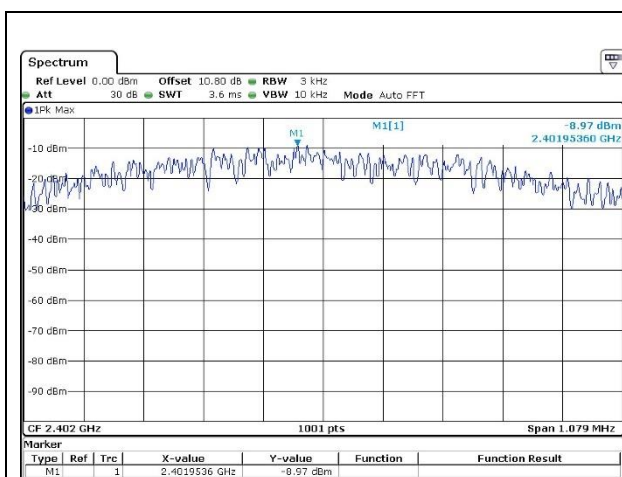

Prüfbericht - Nr.:

Test Report No.:


IN25YJ2Z 001

Seite 26 von 53

Page 26 of 53

Data Rate: 2Mbps

Test Plots:

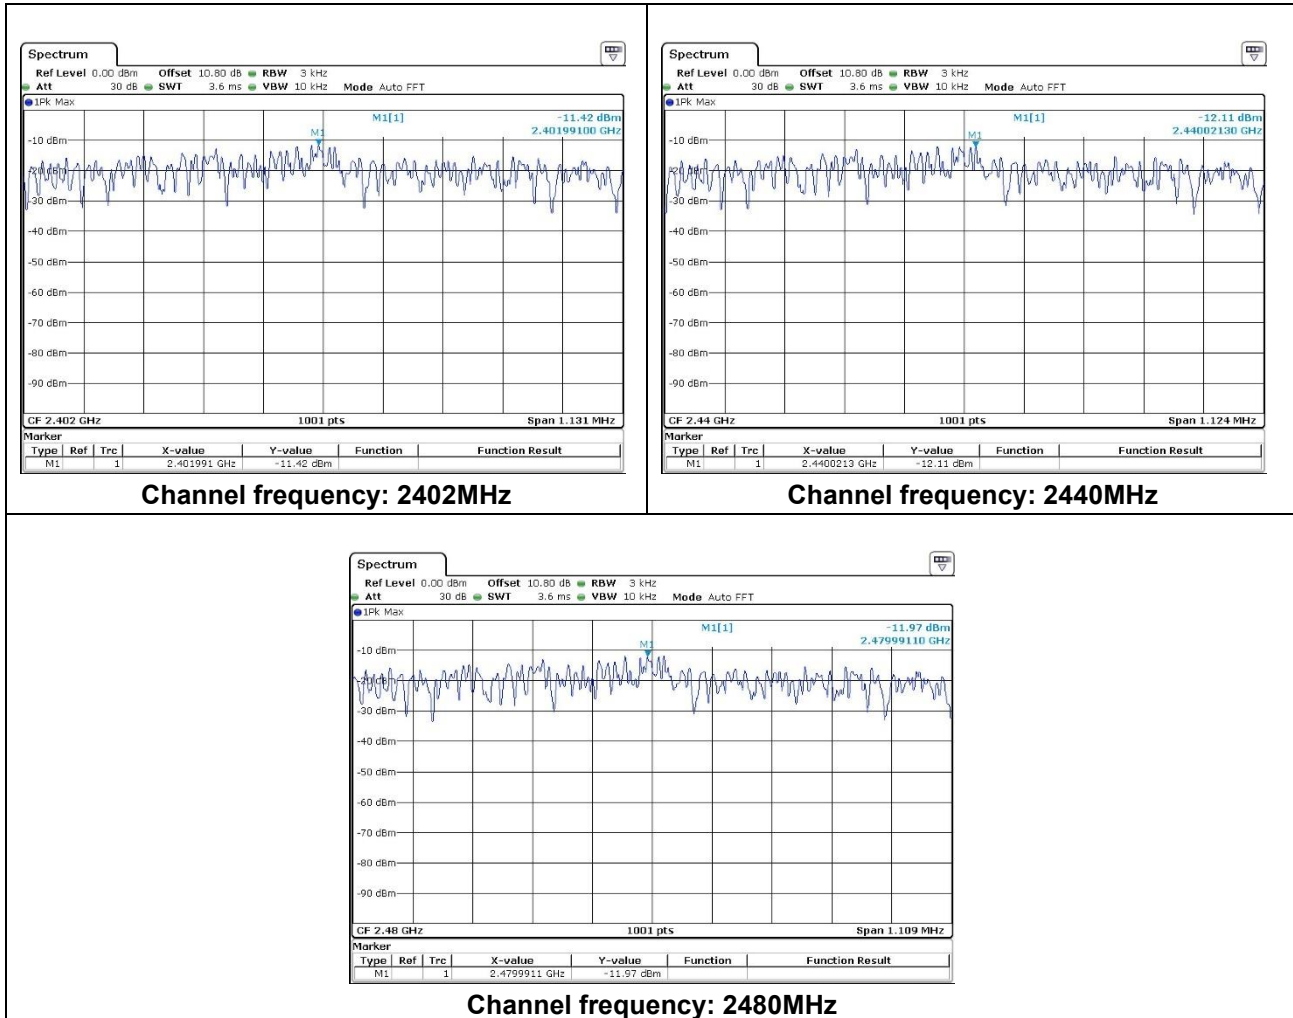

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 27 von 53
Page 27 of 53

7.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification

FCC part 15 Subpart C 15.247 (d)

Test Method

Subclause 11.11.3 of ANSI C63.10:2020

Measurement Bandwidth

100 kHz

Detector

Peak

Port of testing

Conducted mode

Requirement

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

Test Condition

Normal Test Condition:

Temperature (Norm) = +21.8°C

Voltage = 4.2 VDC through Adapter

Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 28 von 53

Page 28 of 53

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report


Band edge

Data rate	Channel Frequency (MHz)	Band edge frequency (MHz)	Value at band edge (A) (dBm)	Reference value (B) (dBm)	A-B (dBc)	Minimum Limit (dBc)
1 Mbps	2402.00	2390.00	-51.24	-13.46	-37.78	-20.00
	2480.00	2483.50	-48.31	-13.68	-34.63	-20.00
2 Mbps	2402.00	2390.00	-51.66	-13.46	-38.20	-20.00
	2480.00	2483.50	-47.92	-13.69	-34.23	-20.00


Data Rate: 1Mbps

Test Plots:


Reference Plots:

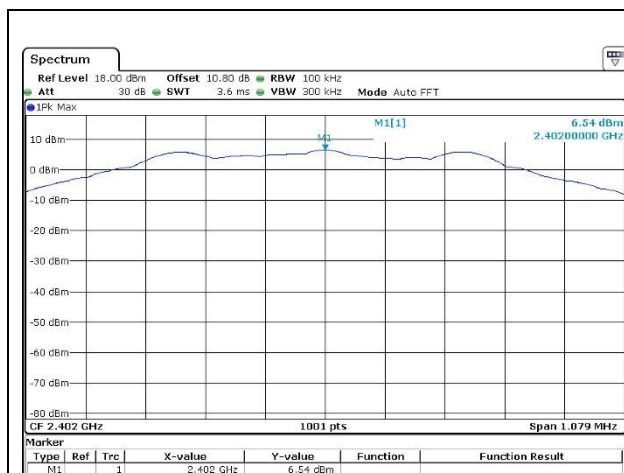

Channel frequency: 2402MHz

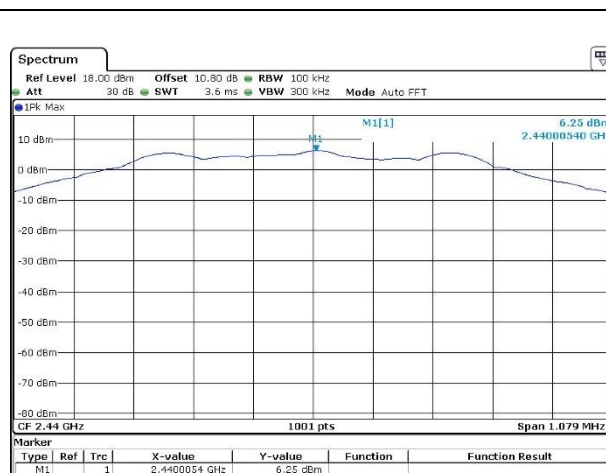

Channel frequency: 2440MHz

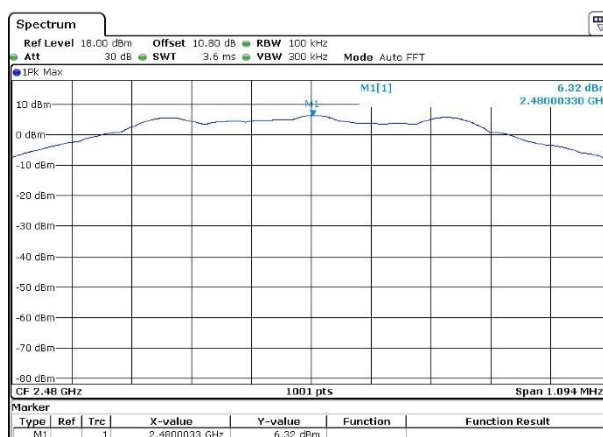

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 29 von 53
Page 29 of 53

Data Rate: 2Mbps
Test Plots:




Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001


Seite 30 von 53
Page 30 of 53

Bandedge Plots:

Data Rate: 1Mbps

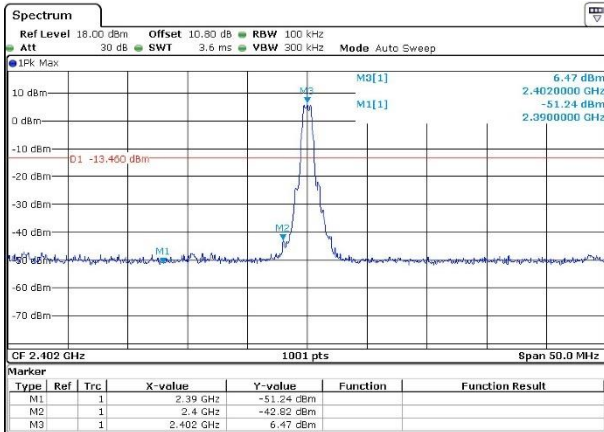


Channel frequency: 2402MHz

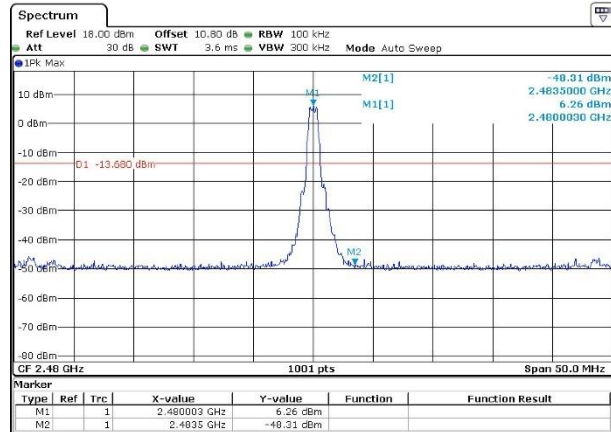


Channel frequency: 2480MHz

Data Rate: 2Mbps

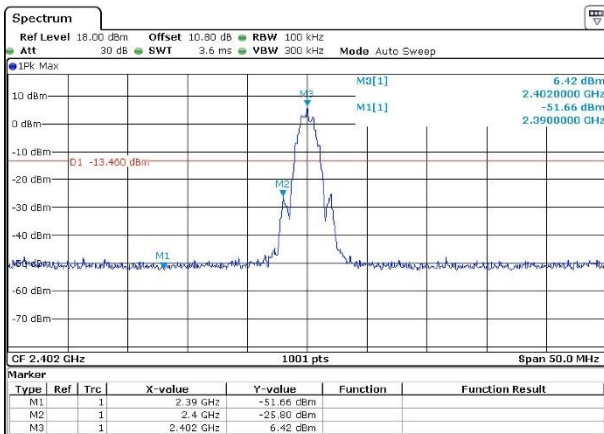

Channel frequency: 2402MHz

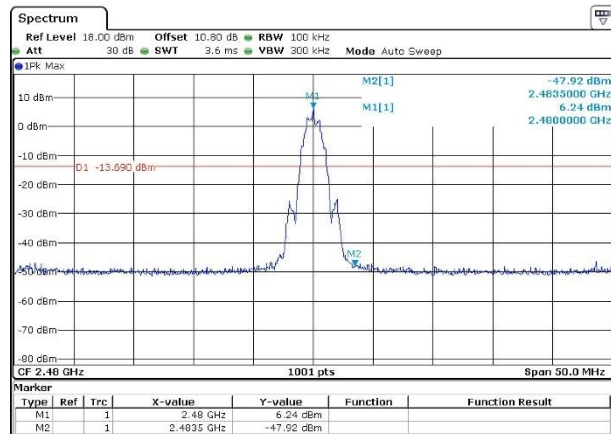


Channel frequency: 2480MHz


7.4.1 Out-Of-Band Emissions

Data Rate: 1Mbps

Channel Frequency: 2402MHz

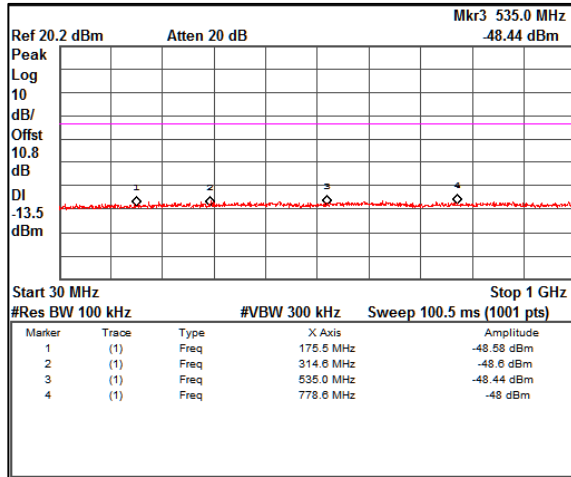


Frequency Range: 30MHz to 1GHz

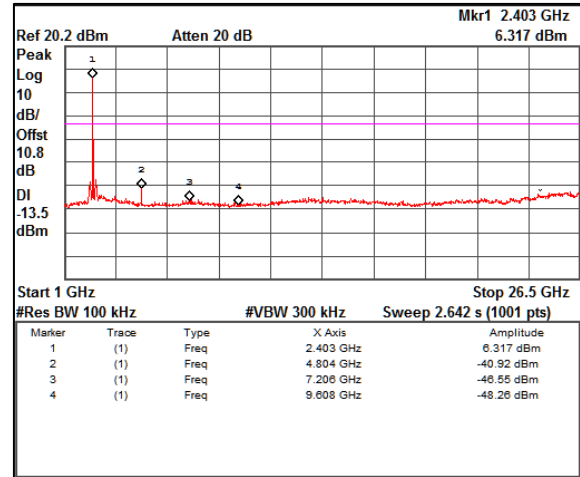


Frequency Range: 1GHz to 26.5GHz

Channel Frequency: 2440MHz

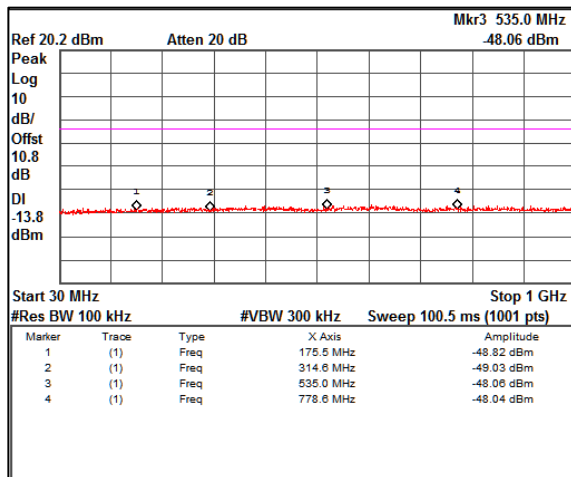


Frequency Range: 30MHz to 1GHz

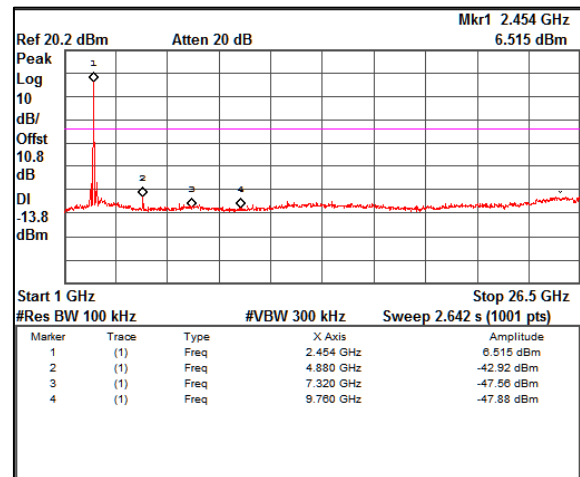


Frequency Range: 1GHz to 26.5GHz

Channel Frequency: 2480MHz

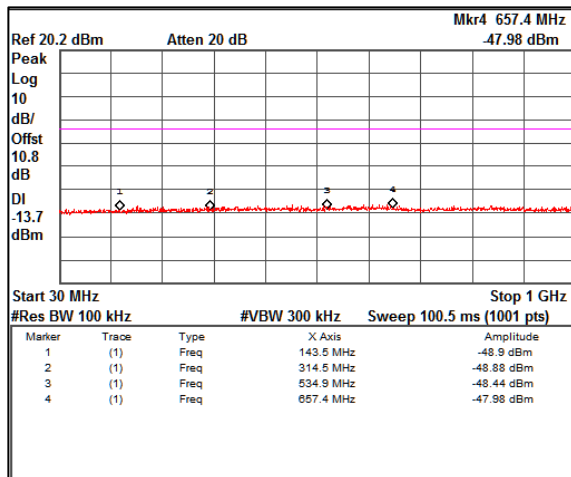

Frequency Range: 30MHz to 1GHz

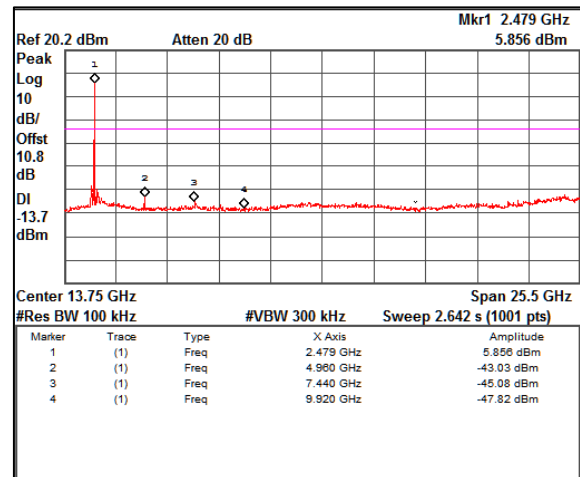

Frequency Range: 1GHz to 26.5GHz


Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001


Seite 32 von 53
Page 32 of 53

Data Rate: 2Mbps

Channel Frequency: 2402MHz

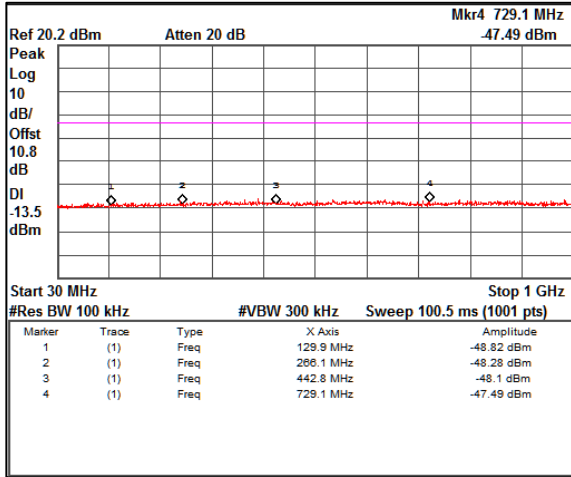


Frequency Range: 30MHz to 1GHz

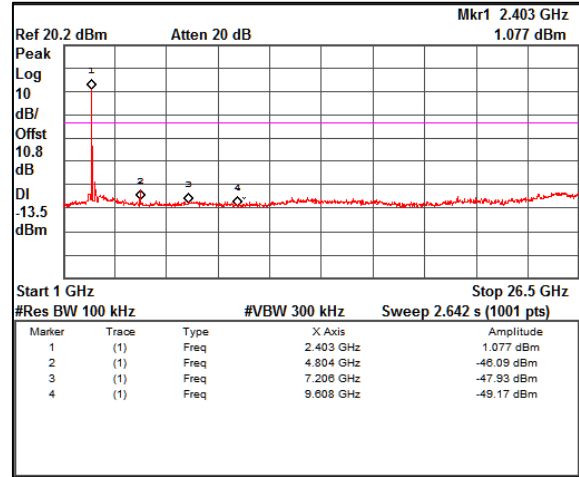


Frequency Range: 1GHz to 26.5GHz

Channel Frequency: 2440MHz

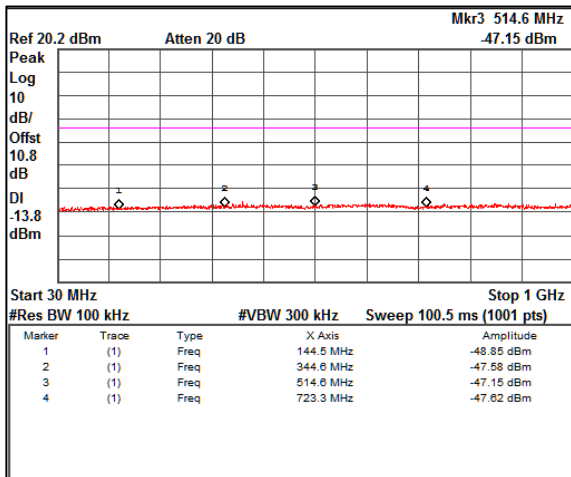


Frequency Range: 30MHz to 1GHz

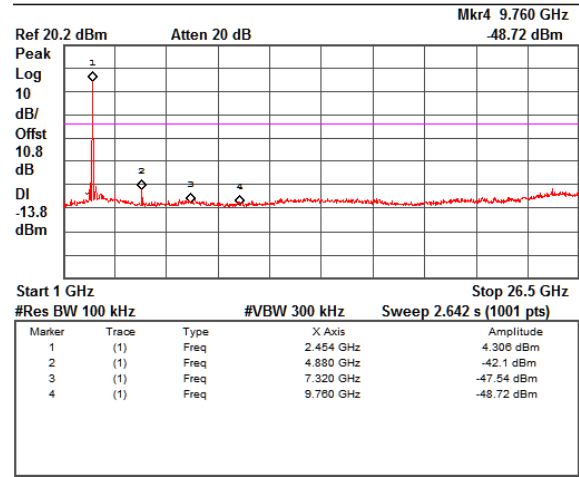


Frequency Range: 1GHz to 26.5GHz

Channel Frequency: 2480MHz

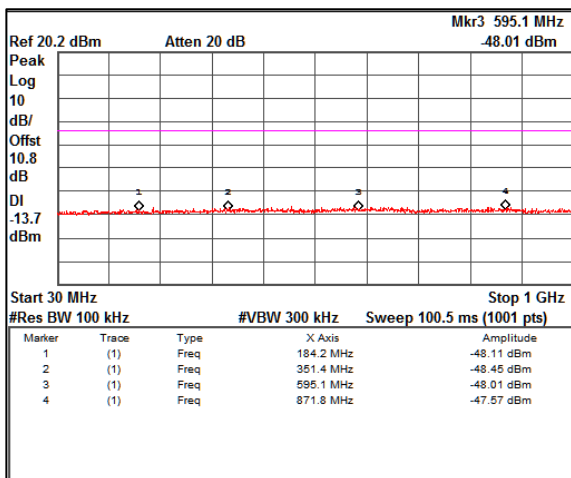

Frequency Range: 30MHz to 1GHz

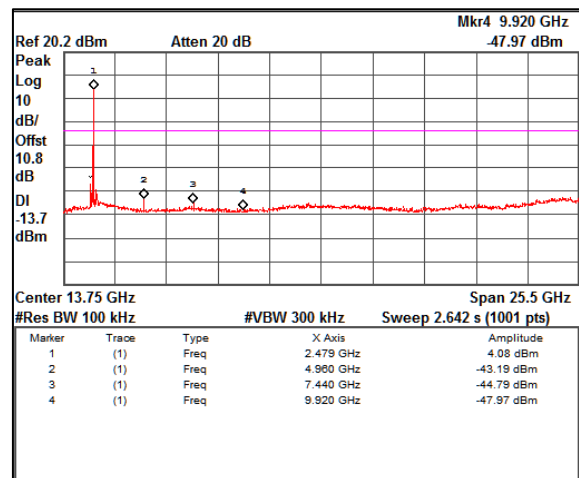

Frequency Range: 1GHz to 26.5GHz

7.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205)
Test Method	ANSI C63.10:2020
Measurement Location	Semi Anechoic Chamber 9kHz - 1 GHz Fully Anechoic Chamber 1 GHz - 26GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = +21.8°C

Voltage = 4.2 VDC through Adapter

Relative humidity: 55%

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 34 von 53

Page 34 of 53

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details


Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported.

Table 7: Test results for frequency range 30MHz – 200MHz


Polarization	Measured Frequency (MHz)	Measured emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Vertical	46.29	21.30	40.00	-18.70
	68.37	25.50	40.00	-14.50
	79.14	27.90	40.00	-12.10
	192.54	26.00	43.50	-17.50
Horizontal	32.37	32.10	40.00	-7.90
	40.11	28.30	40.00	-11.70
	114.42	18.30	43.50	-25.20
	157.05	26.80	43.50	-16.70

Test Plots:

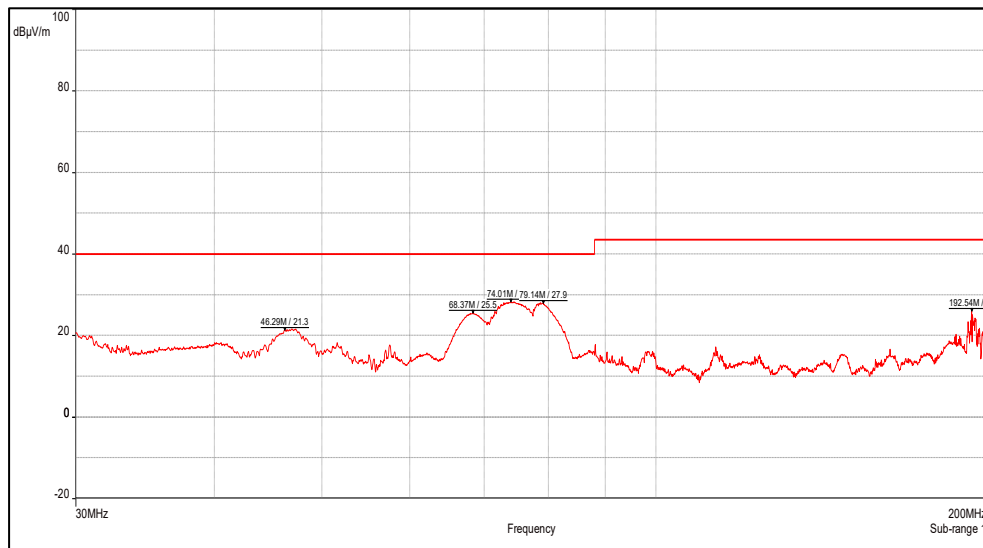

Channel Frequency 30MHz – 200MHz

Polarization Vertical

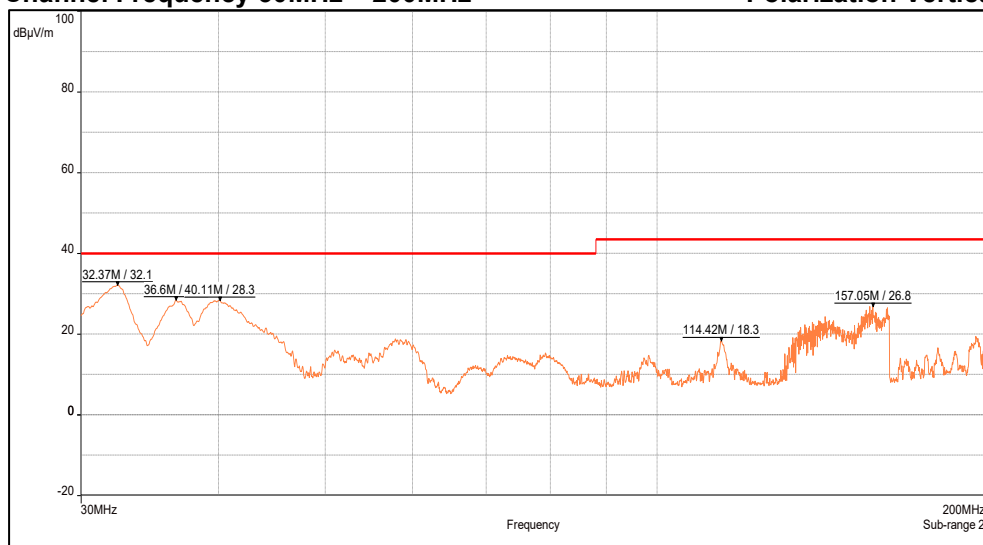

Channel Frequency 30MHz – 200MHz

Polarization Horizontal



Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 35 von 53
Page 35 of 53

Table 8: Test results for frequency range 200MHz – 1GHz

Polarization	Measured Frequency (MHz)	Measured emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Vertical	203.48	19.20	43.50	-24.30
	307.19	20.10	46.00	-25.90
	448.22	17.70	46.00	-28.30
Horizontal	239.87	16.40	46.00	-29.60
	311.75	15.70	46.00	-30.30
	385.91	18.20	46.00	-27.80

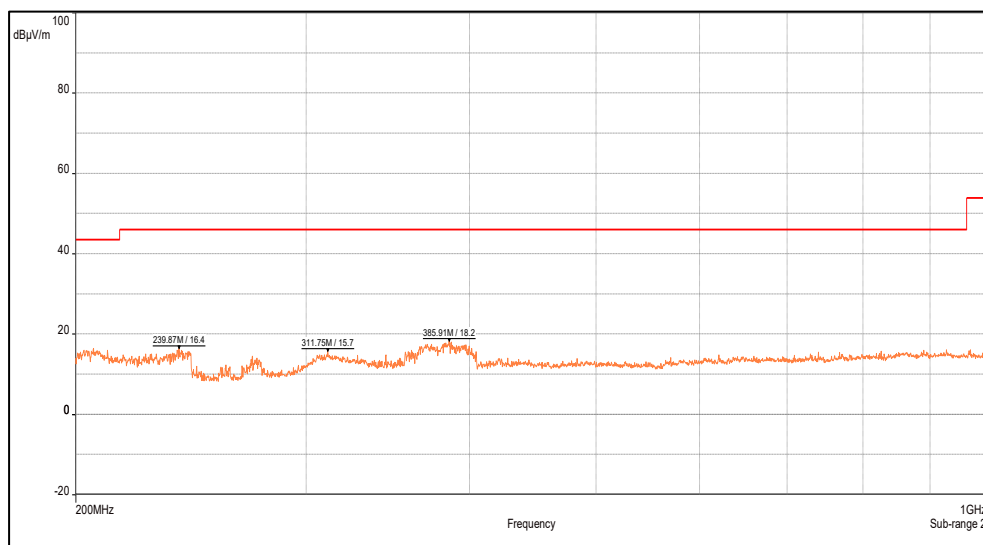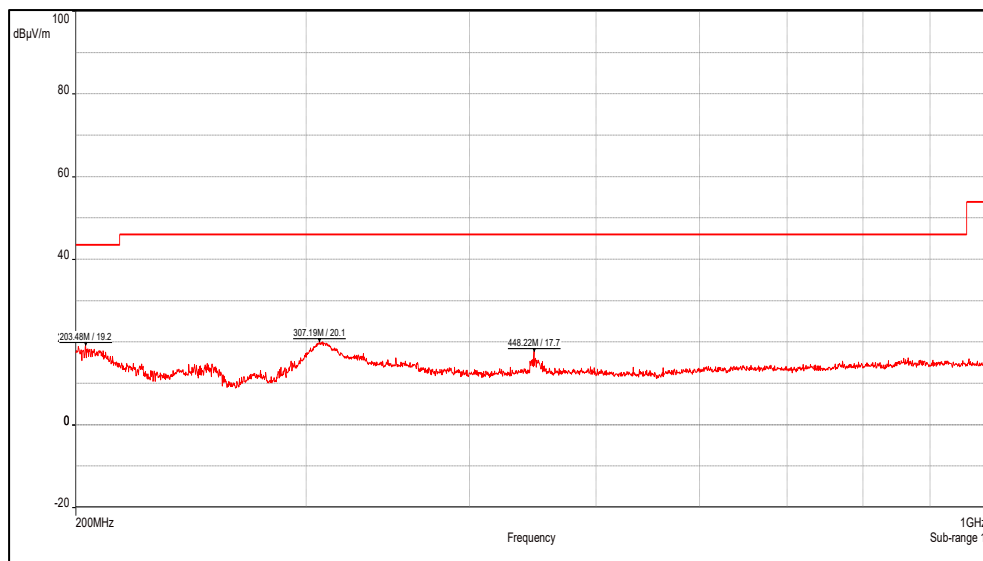

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 36 von 53

Page 36 of 53

Table 9: Test results for the frequencies above 1GHz:

Data Rate: 1Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2402	2402(Pk)	Vertical	86.80	-	-
	2402(Av)		82.21	-	-
	2361(Pk)		47.04	74.00*	-26.96
	2361(Av)		37.86	54.00*	-16.14
	4804(Pk)		50.71	74.00	-23.29
	4804(Av)		40.46	54.00	-13.54
	7206(Pk)		60.16	74.00	-13.84
	7206(Av)		49.58	54.00	-4.42
	2402(Pk)	Horizontal	96.08	-	-
	2402(Av)		91.50	-	-
	2360(Pk)		52.60	74.00*	-21.40
	2361(Av)		44.28	54.00*	-9.72
	4804(Pk)		56.94	74.00	-17.06
	4804(Av)		48.31	54.00	-5.69
	7206(Pk)		52.49	74.00	-21.51
	7206(Av)		40.96	54.00	-13.04
2440	2440(Pk)	Vertical	86.84	-	-
	2440(Av)		82.24	-	-
	4880(Pk)		53.76	74.00	-20.24
	4880(Av)		44.70	54.00	-9.30
	7320(Pk)		60.06	74.00	-13.94
	7320(Av)		49.75	54.00	-4.25
	2440(Pk)	Horizontal	97.08	-	-
	2440(Av)		92.49	-	-
	4880(Pk)		57.18	74.00	-16.82
	4880(Av)		48.47	54.00	-5.53
	7320(Pk)		51.11	74.00	-22.89
	7320(Av)		38.28	54.00	-15.72
2480	2480(Pk)	Vertical	86.18	-	-
	2480(Av)		81.57	-	-
	2483.5(Pk)		44.67	74.00*	-29.33
	2483.5(Av)		27.11	54.00*	-26.89
	4960(Pk)		54.52	74.00	-19.48
	4960(Av)		45.85	54.00	-8.15
	7440(Pk)		62.10	74.00	-11.90
	7440(Av)		51.79	54.00	-2.21
	2480(Pk)	Horizontal	96.31	-	-
	2480(Av)		91.72	-	-
	2483.5(Pk)		53.76	74.00*	-20.24
	2483.5(Av)		32.43	54.00*	-21.57
	4960(Pk)		56.59	74.00	-17.41
	4960(Av)		47.92	54.00	-6.08
	7440(Pk)		54.21	74.00	-19.79
	7440(Av)		42.17	54.00	-11.83

_ → Fundamental Frequency

*→ Restricted Band edges

Pk: Peak Detector;

Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001

Seite 37 von 53

Page 37 of 53

Data Rate: 2Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	86.77	-	-
	2402(Av)		75.70	-	-
	2361(Pk)		45.94	74.00*	-28.06
	2361(Av)		33.77	54.00*	-20.23
	4804(Pk)		55.43	74.00	-18.57
	4804(Av)		40.11	54.00	-13.89
	7206(Pk)		59.85	74.00	-14.15
	7206(Av)		44.70	54.00	-9.30
	2402(Pk)	Horizontal	96.00	-	-
	2402(Av)		84.95	-	-
	2361(Pk)		52.04	74.00*	-21.96
	2361(Av)		38.97	54.00*	-15.03
	4804(Pk)		56.93	74.00	-17.07
	4804(Av)		41.48	54.00	-12.52
	7206(Pk)		52.11	74.00	-21.89
	7206(Av)		38.01	54.00	-15.99
2440	2440(Pk)	Vertical	86.78	-	-
	2440(Av)		75.72	-	-
	4880(Pk)		52.73	74.00	-21.27
	4880(Av)		37.78	54.00	-16.22
	7320(Pk)		60.05	74.00	-13.95
	7320(Av)		44.80	54.00	-9.20
	2440(Pk)	Horizontal	97.07	-	-
	2440(Av)		86.01	-	-
	4880(Pk)		55.88	74.00	-18.12
	4880(Av)		40.43	54.00	-13.57
	7320(Pk)		48.97	74.00	-25.03
	7320(Av)		36.80	54.00	-17.20
2480	2480(Pk)	Vertical	86.19	-	-
	2480(Av)		75.07	-	-
	2483.5(Pk)		43.58	74.00*	-30.42
	2483.5(Av)		28.10	54.00*	-25.90
	4960(Pk)		53.42	74.00	-20.58
	4960(Av)		38.16	54.00	-15.84
	7440(Pk)		64.12	74.00	-9.88
	7440(Av)		48.69	54.00	-5.31
	2480(Pk)	Horizontal	96.52	-	-
	2480(Av)		85.41	-	-
	2483.5(Pk)		52.72	74.00*	-21.28
	2483.5(Av)		33.81	54.00*	-20.19
	4960(Pk)		56.57	74.00	-17.43
	4960(Av)		40.97	54.00	-13.03
	7440(Pk)		55.75	74.00	-18.25
	7440(Av)		40.48	54.00	-13.52

_ → Fundamental Frequency

*→ Restricted Band edges


Pk: Peak Detector;

Av: Average Detector

Test Plots:


Restricted Bands of Operation

Data Rate: 1Mbps

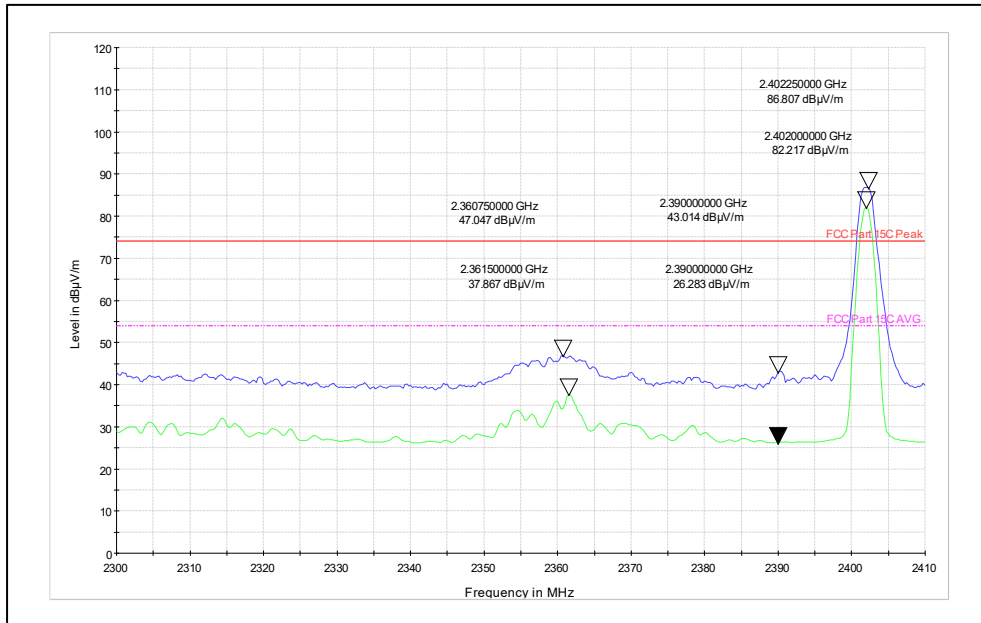


Channel Frequency: 2402MHz

Polarization: Vertical

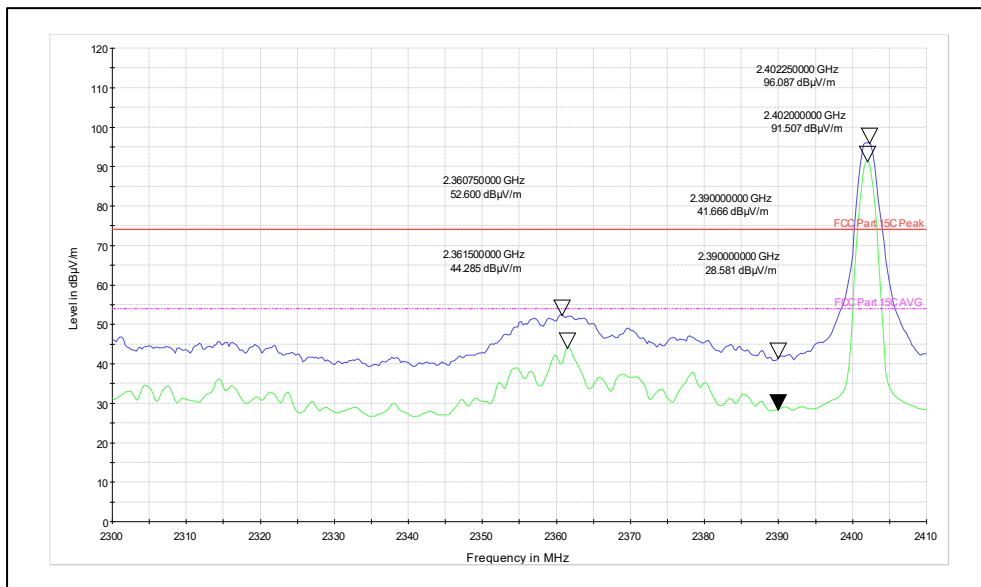


Channel Frequency: 2402MHz

Polarization: Horizontal

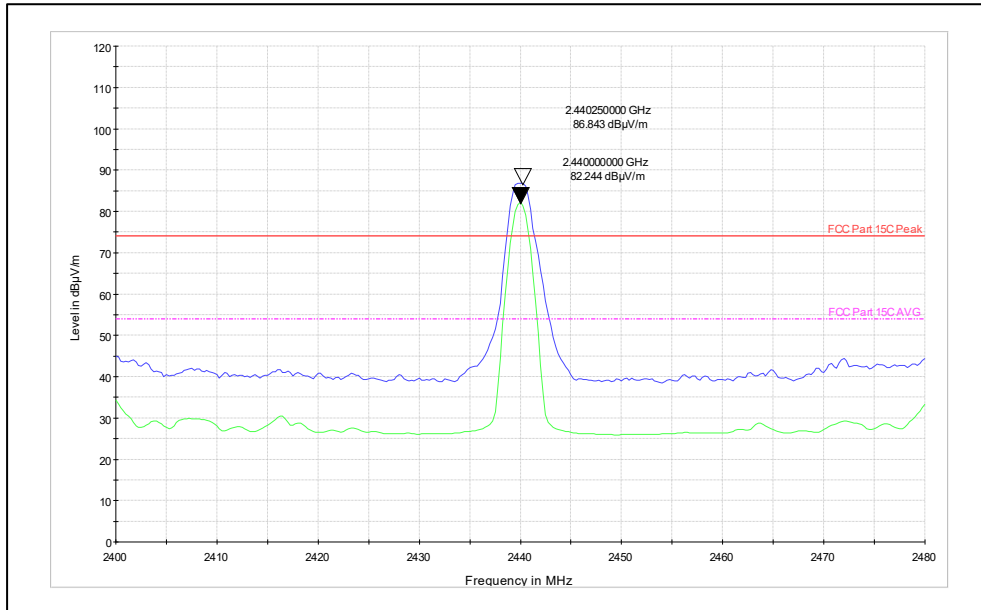


Channel Frequency: 2440MHz

Polarization: Vertical

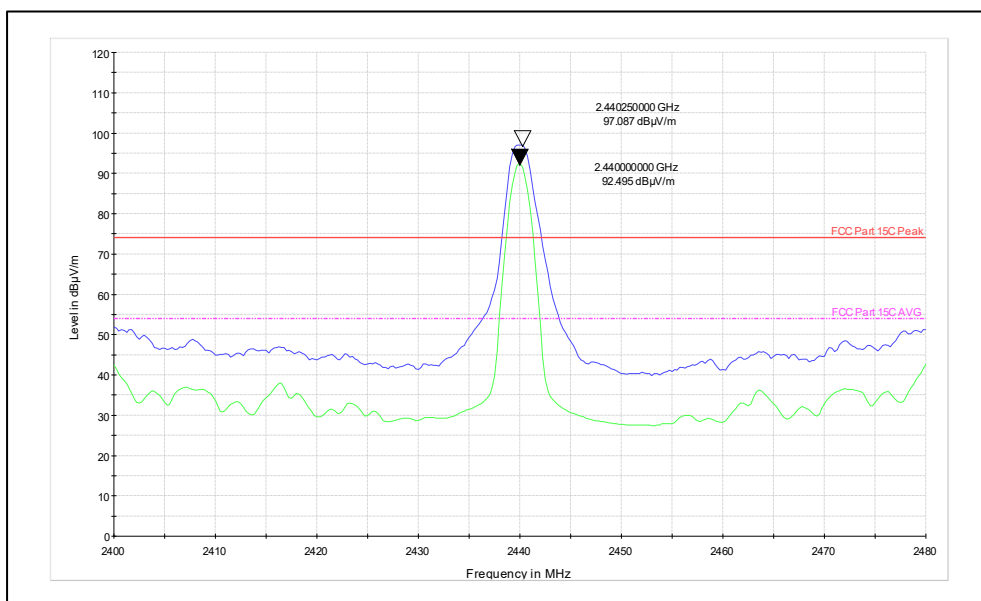


Channel Frequency: 2440MHz

Polarization: Horizontal

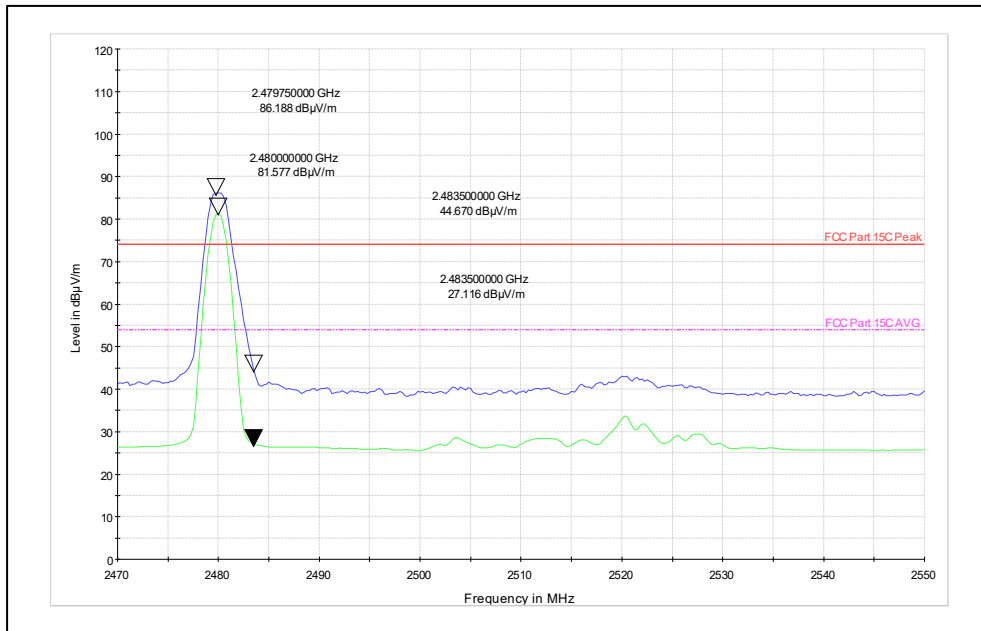

Channel Frequency: 2480MHz

Polarization: Vertical

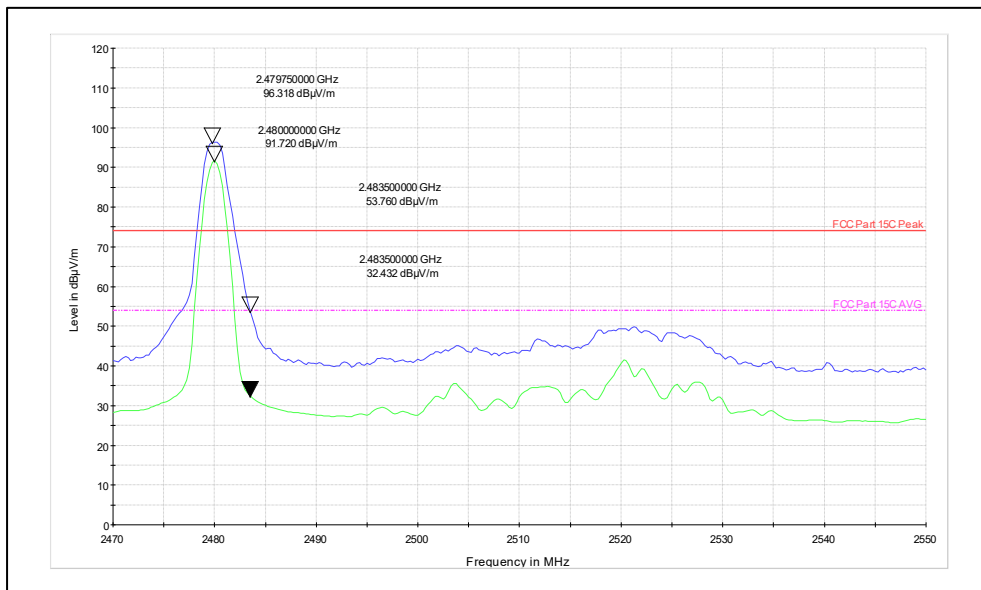

Channel Frequency: 2480MHz


Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001


Seite 41 von 53
Page 41 of 53

Data Rate: 1Mbps

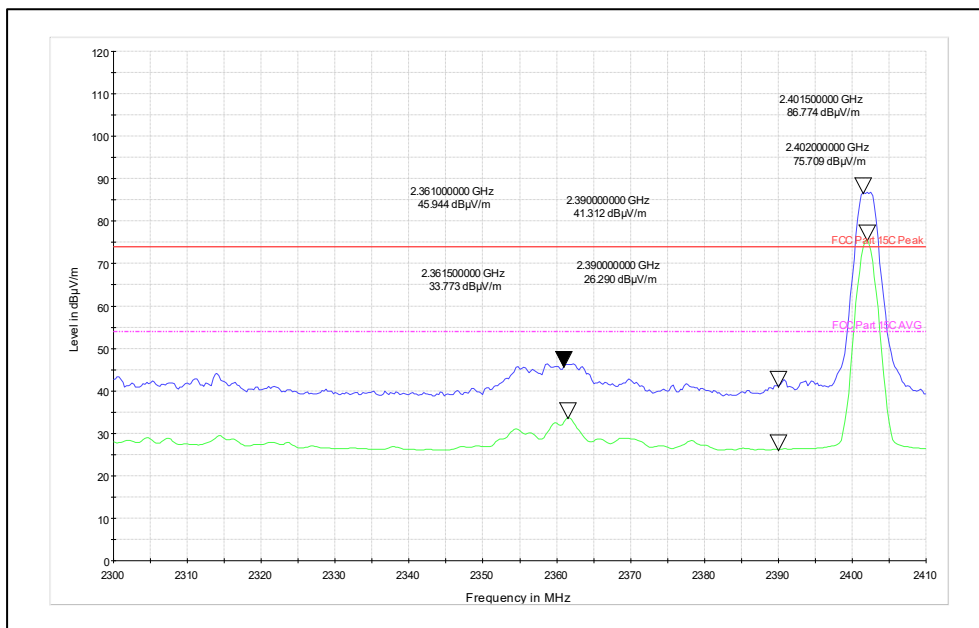


Channel Frequency: 2402MHz

Polarization: Vertical

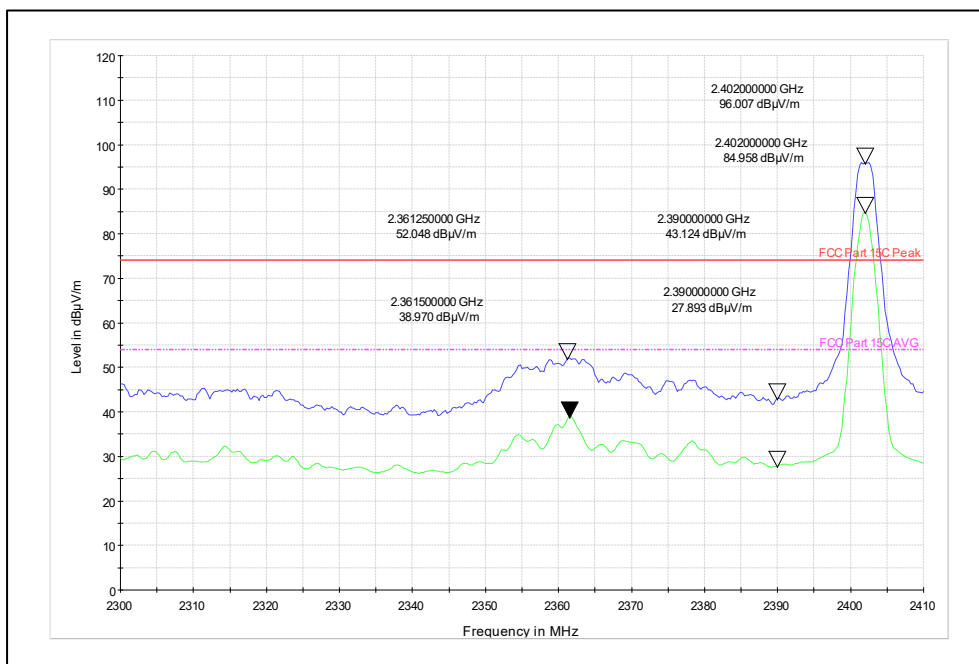


Channel Frequency: 2402MHz

Polarization: Horizontal

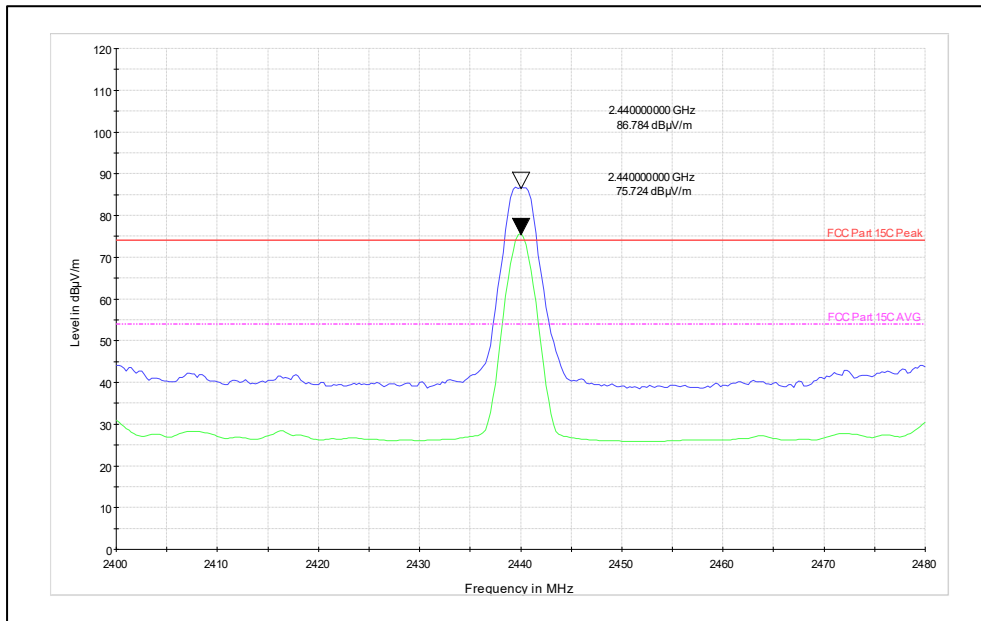


Channel Frequency: 2440MHz

Polarization: Vertical

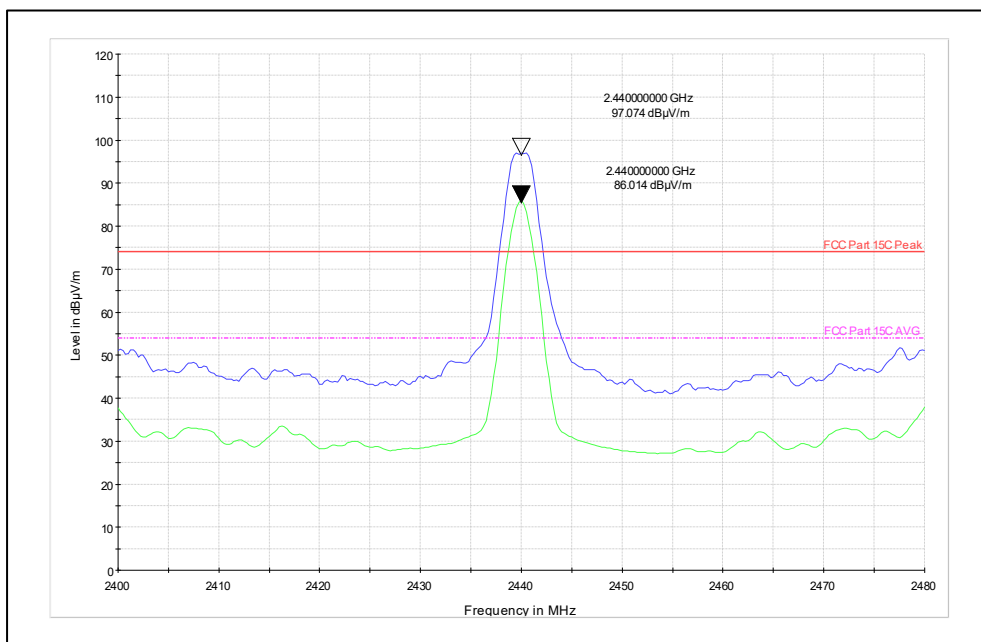


Channel Frequency: 2440MHz

Polarization: Horizontal

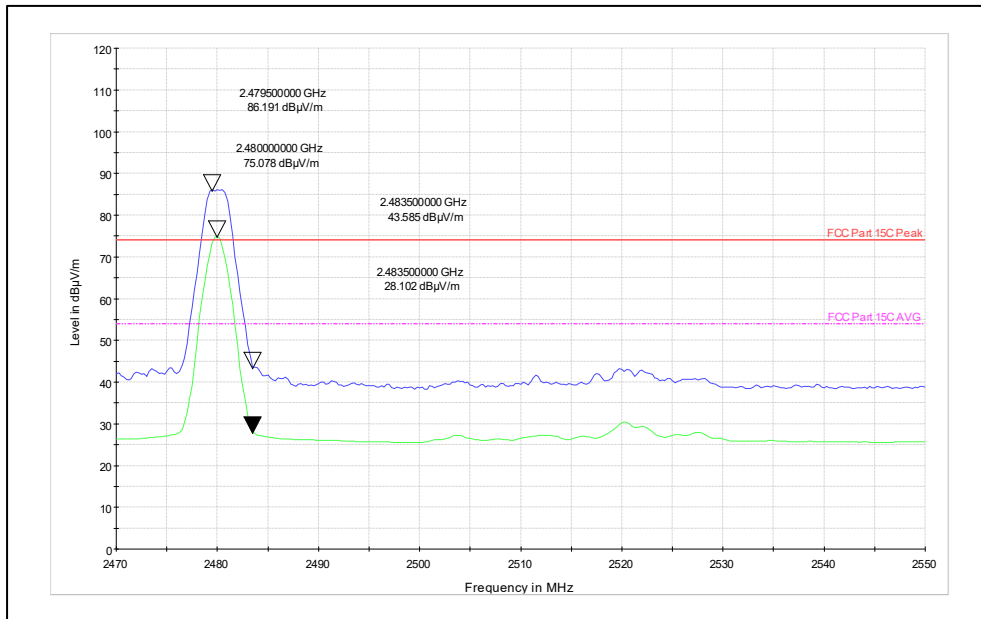

Channel Frequency: 2480MHz

Polarization: Vertical

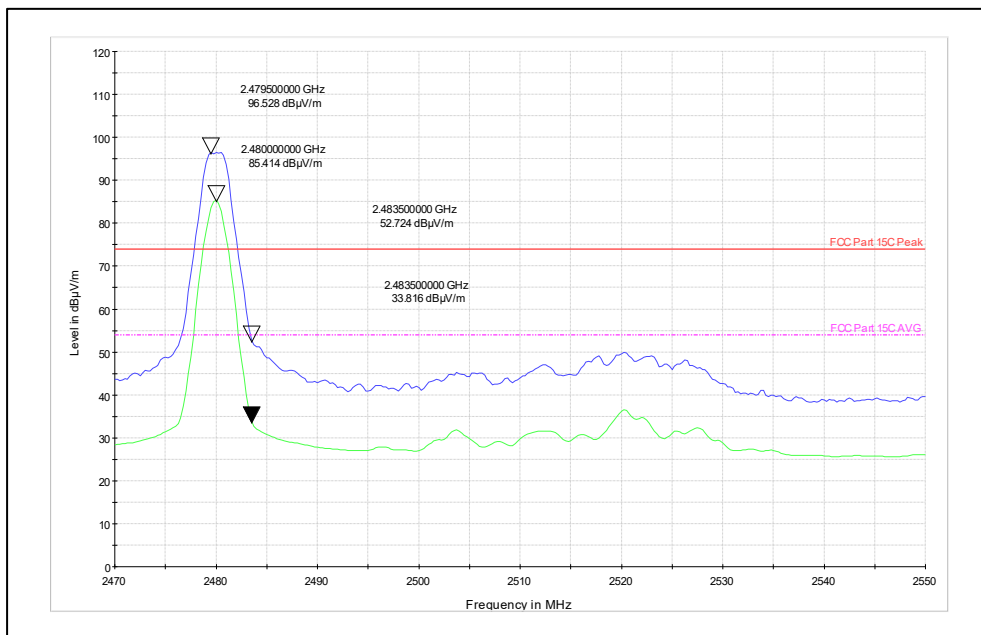

Channel Frequency: 2480MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN25YJ2Z 001

Seite 44 von 53
Page 44 of 53

Spurious Radiated emission:


Data Rate: 1Mbps

Channel frequency: 2402MHz

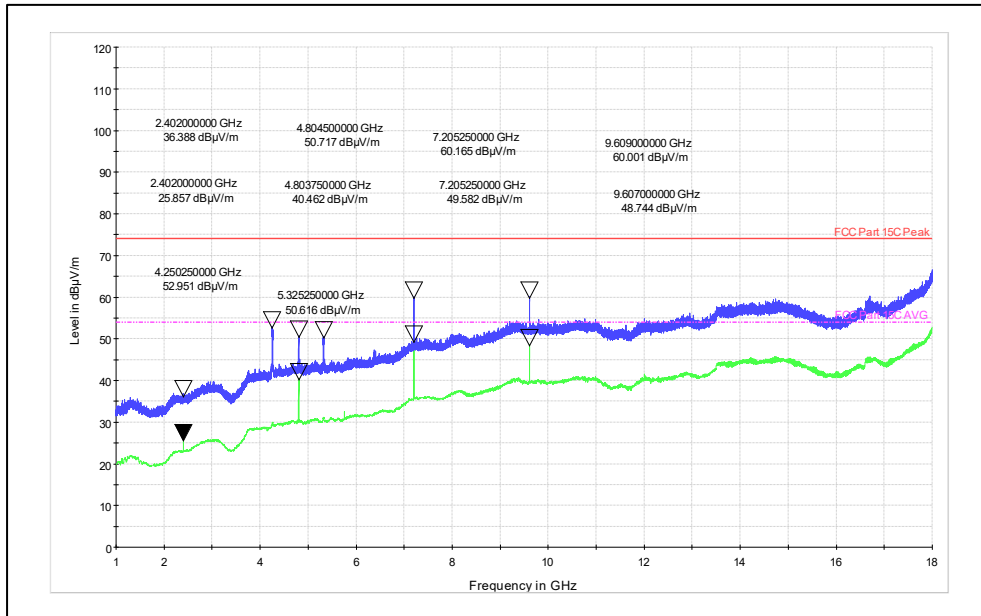

Polarization: Vertical


Frequency range: 1GHz to 18GHz

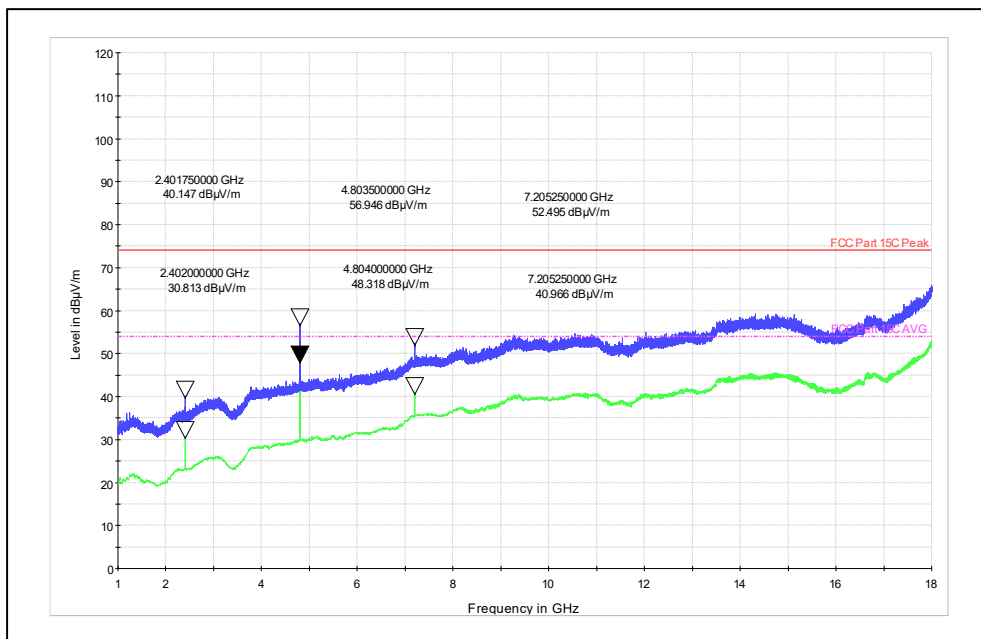

Polarization: Horizontal


Frequency range: 1GHz to 18GHz

Channel frequency: 2440MHz

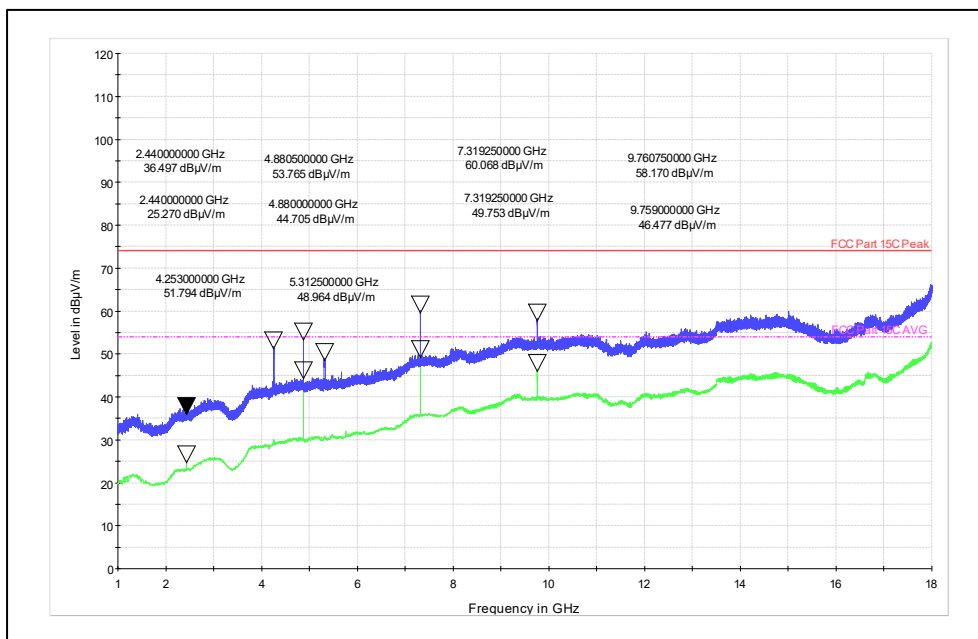

Polarization: Vertical

Frequency range: 1GHz to 18GHz

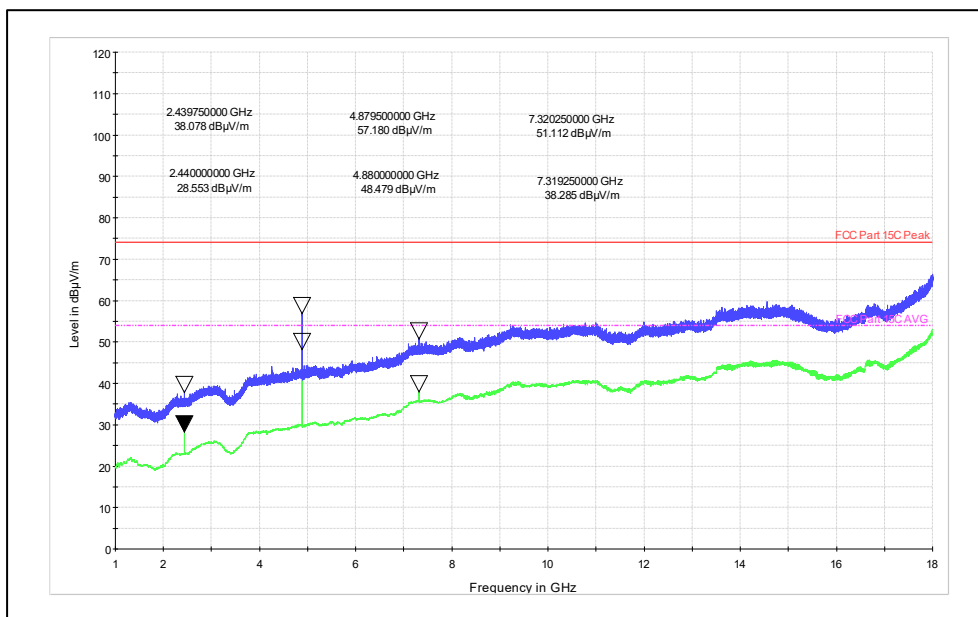

Polarization: Horizontal


Frequency range: 1GHz to 18GHz

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001


Seite 46 von 53
Page 46 of 53

Channel frequency: 2480MHz

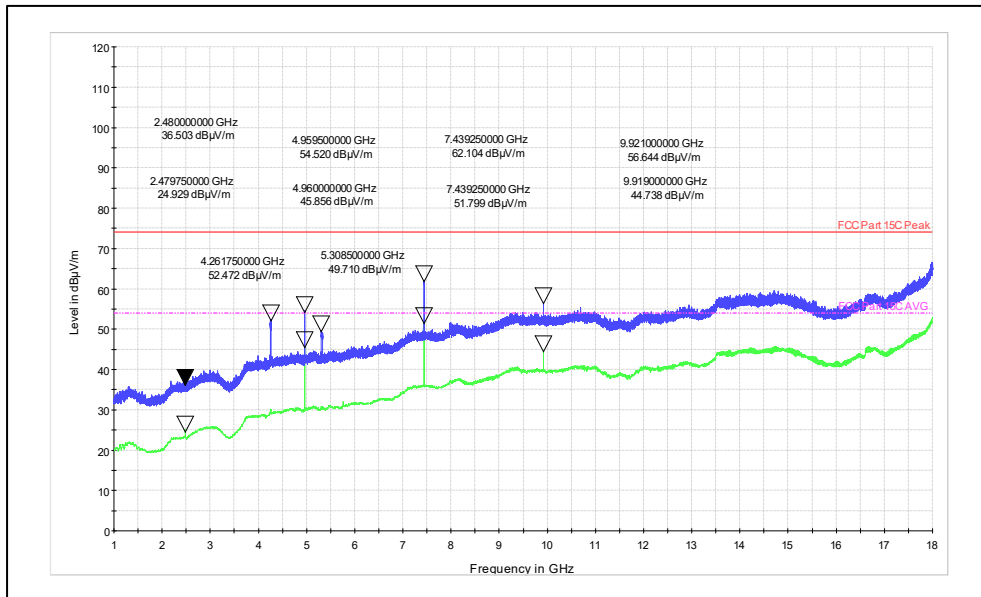

Polarization: Vertical

Frequency range: 1GHz to 18GHz

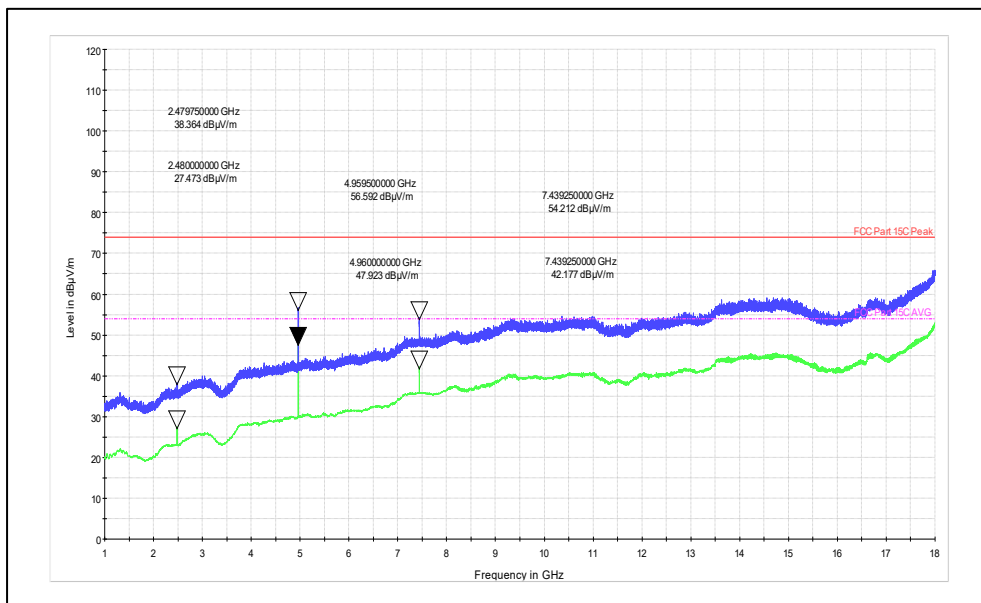

Polarization: Horizontal

Frequency range: 1GHz to 18GHz


Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 47 von 53
Page 47 of 53


Data Rate: 2Mbps

Channel Frequency: 2402MHz

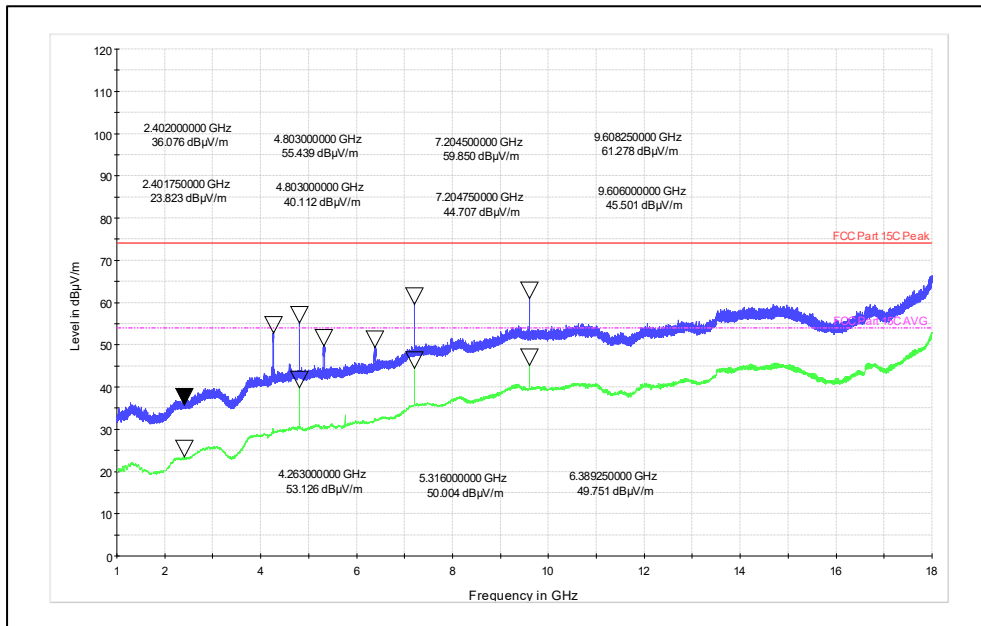

Frequency Range: 1GHz – 18GHz


Antenna Polarization: Vertical

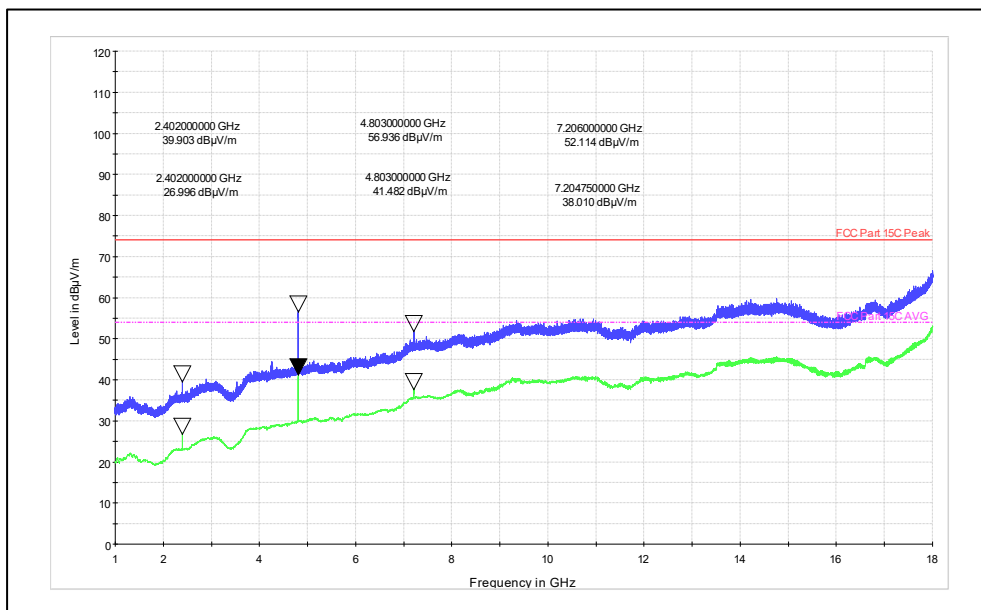

Frequency Range: 1GHz – 18GHz


Antenna Polarization: Horizontal

Channel Frequency: 2440MHz

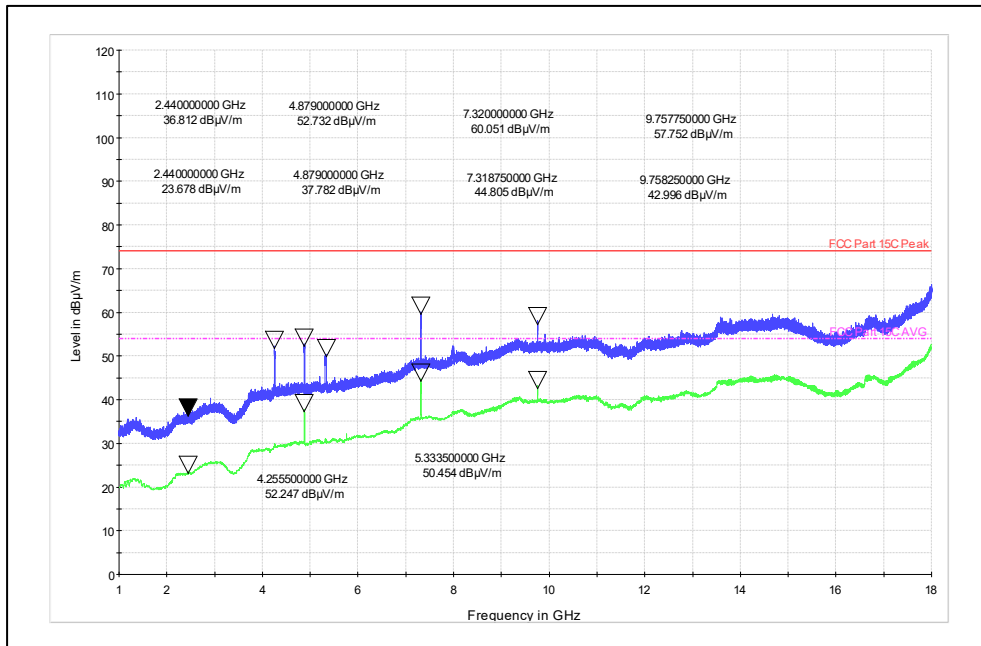

Frequency Range: 1GHz – 18GHz



Antenna Polarization: Vertical

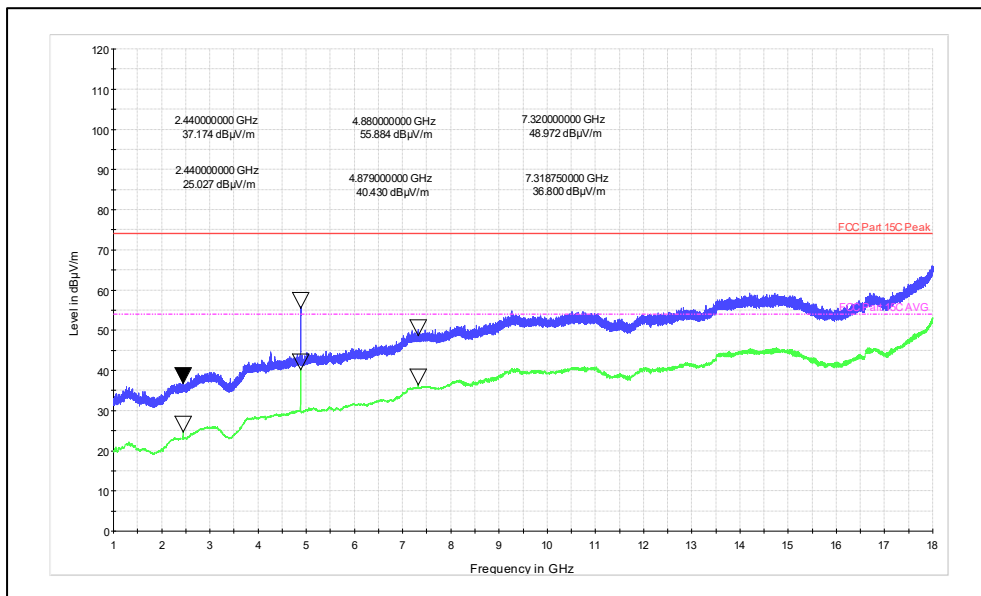

Frequency Range: 1GHz – 18GHz

Antenna Polarization: Horizontal

Channel Frequency: 2480MHz

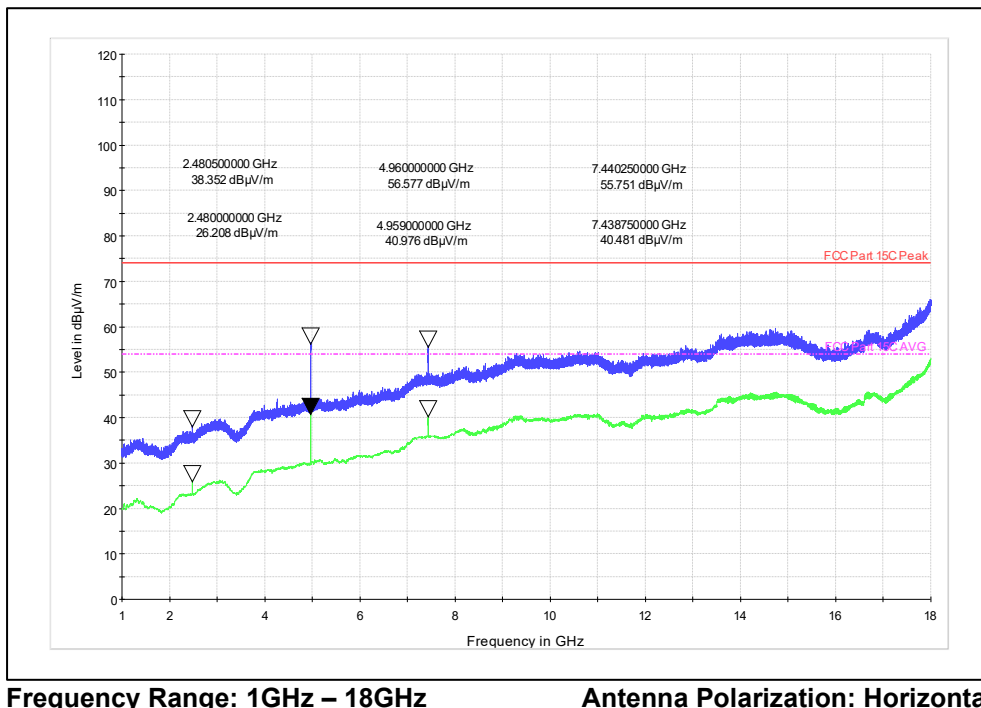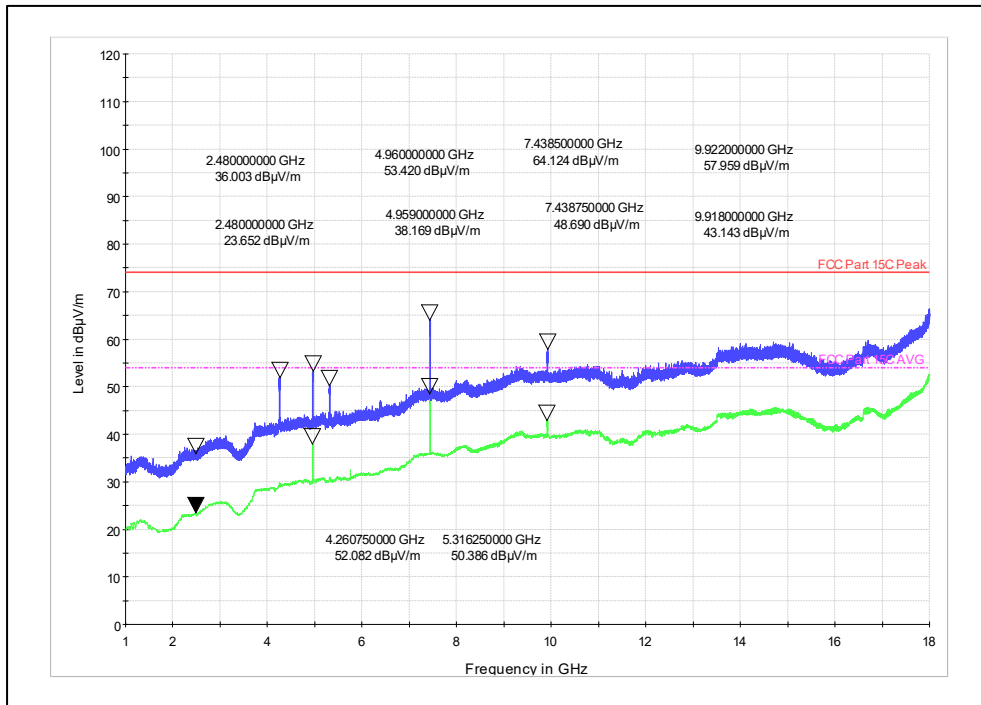

Prüfbericht - Nr.:
Test Report No.:

IN25YJ2Z 001

Seite 50 von 53
Page 50 of 53

8 AC Powerlines Conducted Emission

Result

Pass

Test Specification : FCC Part 15C Section 15.207
Test Method : ANSI C 63.10-2020
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

Table 10: Limits for Conducted power line emission

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

Test Conditions:

Temperature (Norm) = +22.3°C Voltage = 110VAC through AC-DC Adapter Relative humidity: 57%

Prüfbericht - Nr.:

Test Report No.:

IN25YJ2Z 001


Seite 51 von 53

Page 51 of 53

Test Plot:

Line:

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	150.000000000 kHz	49.16		Quasi Peak	-6.84
1	606.000000000 kHz	38.00		Quasi Peak	-8.00
1	542.000000000 kHz	37.82		Quasi Peak	-8.18
1	12.142000000 MHz	38.51		Quasi Peak	-11.49
1	262.000000000 kHz	39.55		Quasi Peak	-11.82
1	522.000000000 kHz	33.92		Quasi Peak	-12.08
1	470.000000000 kHz	34.34		Quasi Peak	-12.17
1	362.000000000 kHz	33.47		Quasi Peak	-15.21
1	574.000000000 kHz	27.48		Quasi Peak	-18.52
2	606.000000000 kHz	28.33		Average	-27.67
2	582.000000000 kHz	26.06		Average	-29.94
2	542.000000000 kHz	25.50		Average	-30.50
2	12.142000000 MHz	28.04		Average	-31.96
2	478.000000000 kHz	21.68		Average	-34.69
2	154.000000000 kHz	30.21		Average	-35.57
2	346.000000000 kHz	21.45		Average	-37.61
2	430.000000000 kHz	18.47		Average	-38.78
2	258.000000000 kHz	21.29		Average	-40.21

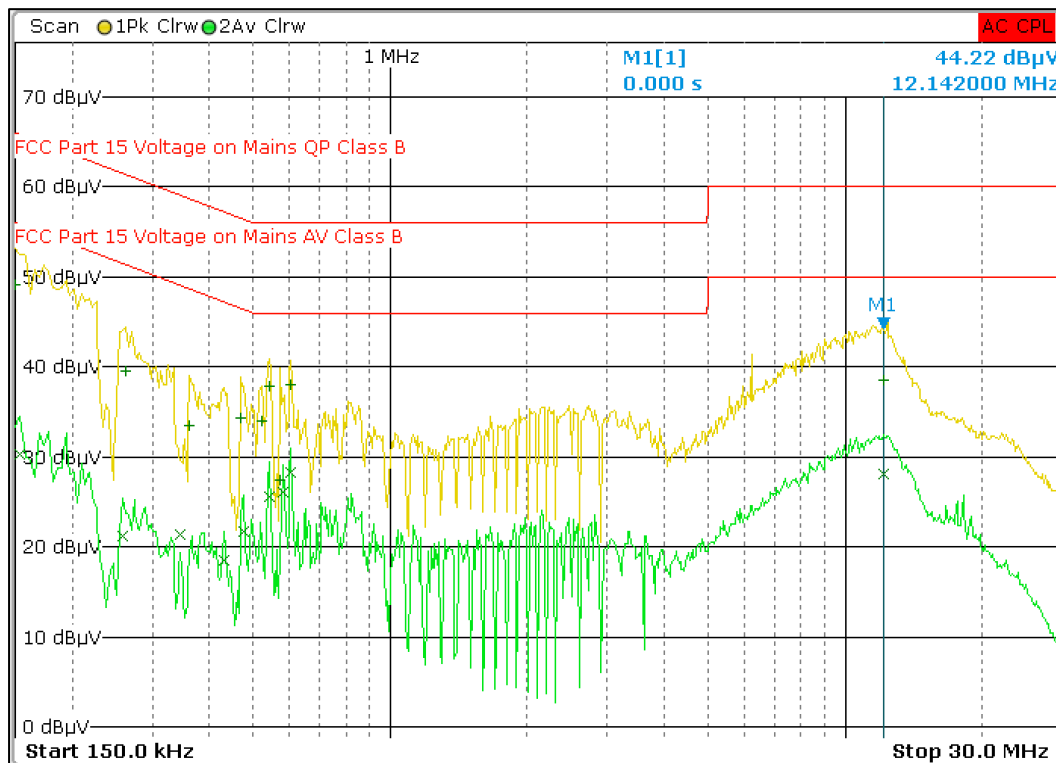

Prüfbericht - Nr.:

Test Report No.:


IN25YJ2Z 001

Seite 52 von 53

Page 52 of 53

Neutral:

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	194.000000000 kHz	44.94		Quasi Peak	-8.92
1	562.000000000 kHz	36.85		Quasi Peak	-9.15
1	606.000000000 kHz	35.70		Quasi Peak	-10.30
1	478.000000000 kHz	35.27		Quasi Peak	-11.10
1	282.000000000 kHz	37.24		Quasi Peak	-13.52
1	386.000000000 kHz	34.10		Quasi Peak	-14.05
1	9.150000000 MHz	34.34		Quasi Peak	-15.66
1	1.042000000 MHz	28.10		Quasi Peak	-17.90
2	562.000000000 kHz	25.46		Average	-30.54
2	606.000000000 kHz	25.26		Average	-30.74
2	586.000000000 kHz	21.01		Average	-34.99
2	586.000000000 kHz	20.95		Average	-35.05
2	474.000000000 kHz	21.34		Average	-35.10
2	11.882000000 MHz	24.26		Average	-35.74
2	498.000000000 kHz	18.83		Average	-37.20
2	198.000000000 kHz	26.14		Average	-37.55
2	2.238000000 MHz	18.18		Average	-37.82
2	2.110000000 MHz	17.07		Average	-38.93

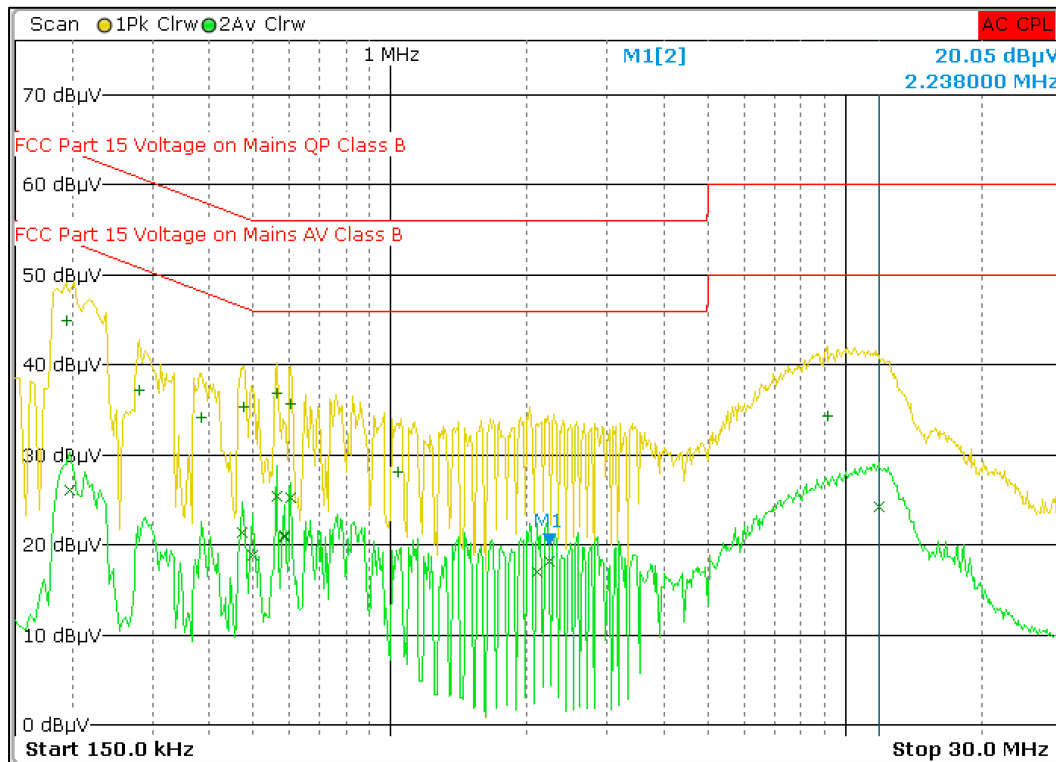

9 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	7
Table 3: Ratings and System Details as declared by Client*	8
Table 4: Measurement Uncertainty	9
Table 5: List of BLE Centre frequencies	10
Table 6: Transmitter limits for Radiated emission	33
Table 7: Test results for frequency range 30MHz – 200MHz	34
Table 8: Test results for frequency range 200MHz – 1GHz	35
Table 9: Test results for the frequencies above 1GHz:	36
Table 10: Limits for Conducted power line emission	50

10 List of Figures

Figure 1: Frequency Range 9 kHz- 30 MHz	14
Figure 2: Frequency Range 30 MHz – 200 MHz	14
Figure 3: Frequency Range 200 MHz - 1GHz	15
Figure 4: Frequency Range above 1 GHz	15

End of test report