

FCC PART 15.247

TEST REPORT

For

XIAMEN ZHOULONG SPORTING GOODS CO., LTD

NO. 77 LIANMEI SAN ROAD, TONG'AN DISTRICT, XIAMEN, FUJIAN, China

FCC ID: 2BS2S-CT21PRO


Report Type: Original Report	Product Name: Elliptical Trainer
Report Number:	2507X19514E-RF-01
Report Date:	2025-11-21
Reviewed By:	Ash Lin 
Approved By:	Miles Chen
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION.....	7
TEST MODE AND VOLTAGE.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
★EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
RESULT & MARGIN CALCULATION.....	17
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	25
RESULT & MARGIN CALCULATION.....	26
TEST DATA	26
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	72
APPLICABLE STANDARD	72
EUT SETUP	72
TEST PROCEDURE	72
TEST DATA	72
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	74
APPLICABLE STANDARD	74
EUT SETUP	74
TEST PROCEDURE	74
TEST DATA	75
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	76
APPLICABLE STANDARD	76
EUT SETUP	76

TEST PROCEDURE	76
TEST DATA	76
FCC §15.247(e) - POWER SPECTRAL DENSITY	78
APPLICABLE STANDARD	78
EUT SETUP	78
TEST PROCEDURE	78
TEST DATA	78
EUT PHOTOGRAPHS.....	80
TEST SETUP PHOTOGRAPHS	81

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2507X19514E-RF-01	R1V1	2025-11-21	Initial Release

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Applicant:		XIAMEN ZHOULONG SPORTING GOODS CO., LTD
Product Name:		Elliptical Trainer
Tested Model:		CT21PRO, CT51
Series Model(s):		N/A
Trade Mark:		N/A
Adapter Information	Model:	E15.2-0900-1000L
	Input:	AC 100-240V, 50/60Hz, 0.6A
	Output:	DC 9V, 1A
Power Supply:		AC 120V/60Hz
Maximum Conducted Output Peak Power:		-0.24 dBm
Frequency Range:		2402-2480MHz
Modulation Technique:		GFSK
Antenna Type:		PCB antenna
★Maximum Antenna Gain:		-4.26 dBi
EUT Received Status:		Good
<i>Note:</i> 1. The Maximum Antenna Gain was declared by manufacturer. 2. All measurement and test data in this report was gathered from production sample serial number: 3A1E-3 (RF conducted), 3A1E-4(CT21PRO), 3A1E-5(CT51) (Conducted Spurious Emission and Radiated Spurious Emission) (Assigned by the BACL (Xiamen). The EUT supplied by the applicant was received on 2025-09-12)		

Objective

This report is prepared on behalf of XIAMEN ZHOULONG SPORTING GOODS CO., LTD in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Xiamen).

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Measurement Uncertainty

Item		U_{lab}
Conducted Spurious Emission	150kHz-30MHz	2.45dB
Radiated Spurious Emission	9kHz-150kHz	2.82dB
	150kHz-30MHz	2.74dB
	30MHz~200MHz	3.47dB
	200MHz~1GHz	4.86dB
	1GHz~6GHz	4.88dB
	6GHz~18GHz	4.95dB
	18GHz~40GHz	4.45dB
Occupied Channel Bandwidth		2%
Transmitter Conducted Power(Conducted RF power)		± 1.49 dB
Conducted Spurious Emission		± 2.92 dB
Power Spectral Density		2.52dB
Duty Cycle		1%
Temperature		$\pm 1^{\circ}\text{C}$
Humidity		$\pm 5\%$
Supply voltages		$\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Transmitting
Test voltage:	DC 5V from Adapter (AC 120V/60Hz)
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

★EUT Exercise Software

RF Test Tool: SSCOM V5.13.1

Mode	Power level		
	Low channel	Middle channel	High channel
BLE 1Mbps	25	25	25


Note: the applicant declared the power level.

Duty cycle

Test Mode:		Transmitting		Test Engineer:		Braylon Ma	
Test Date:		2025-09-29		Environment:		Temp.: 23.5°C Humi.: 63% Atm :100.1 kPa	
Test Modes	Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (kHz)	
BLE 1Mbps	2440	100	100	100.00	10	0.01	

BLE 1M

BLE_1M_Middle_Channel

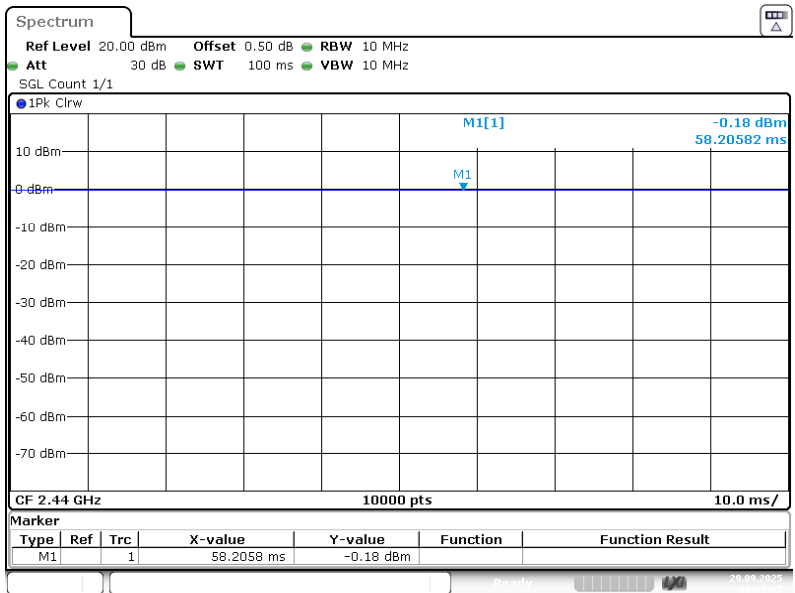

ProjectNo.:2507X19514E-RF Tester:Braylon Ma
Date: 29.SEP.2025 10:52:17

Support Equipment List and Details

For CT21PRO

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T480	PF1P5K4F
Unknown	Debug board	Unknown	Unknown
Apple	iPhone	iPhone 13Pro	Unknown

For CT51

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T480	PF1P5K4F
Unknown	Debug board	Unknown	Unknown

External I/O Cable

For CT21PRO

Cable Description	Length (m)	From Port	To
Jumper Wire	0.2	EUT	Debug board
USB cable	1.5	Laptop	Debug board
USB cable	1	EUT	iPhone
USB cable	10	Laptop	Debug board
RF Cable	0.1	EUT antenna port	Spectrum Analyzer


For CT51

Cable Description	Length (m)	From Port	To
Jumper Wire	0.2	EUT	Debug board
USB cable	1.5	Laptop	Debug board
USB cable	10	Laptop	Debug board
RF Cable	0.1	EUT antenna port	Spectrum Analyzer


Block Diagram of Test Setup

Conducted Emission:

CT21PRO:

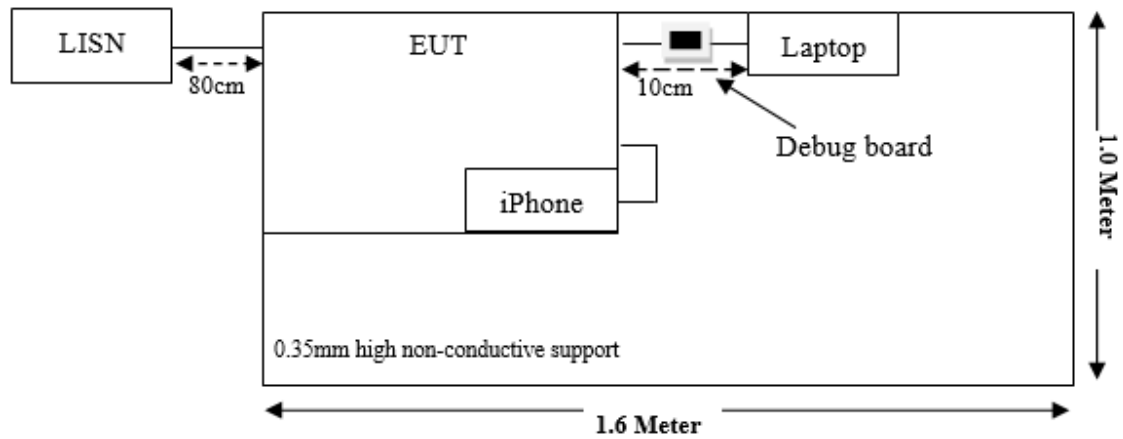


CT51:

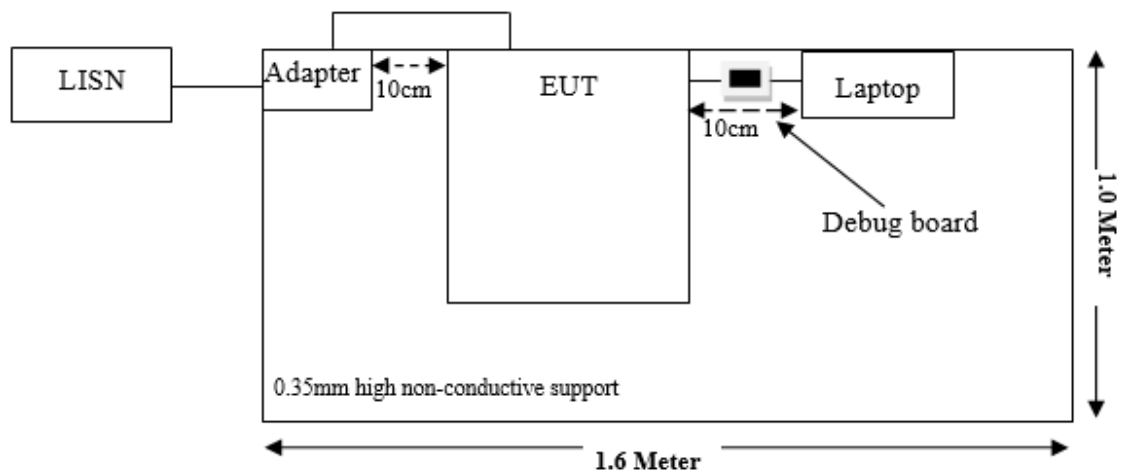

Radiated Emission


Below 1GHz:

CT21PRO:

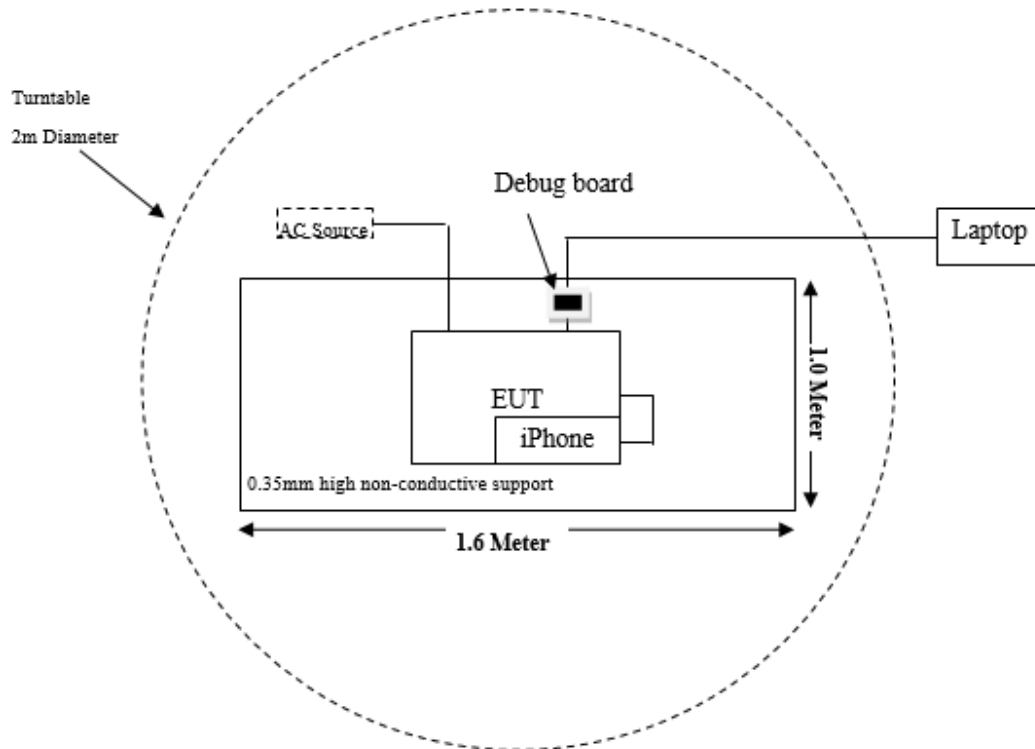


Above 1GHz:

CT21PRO:

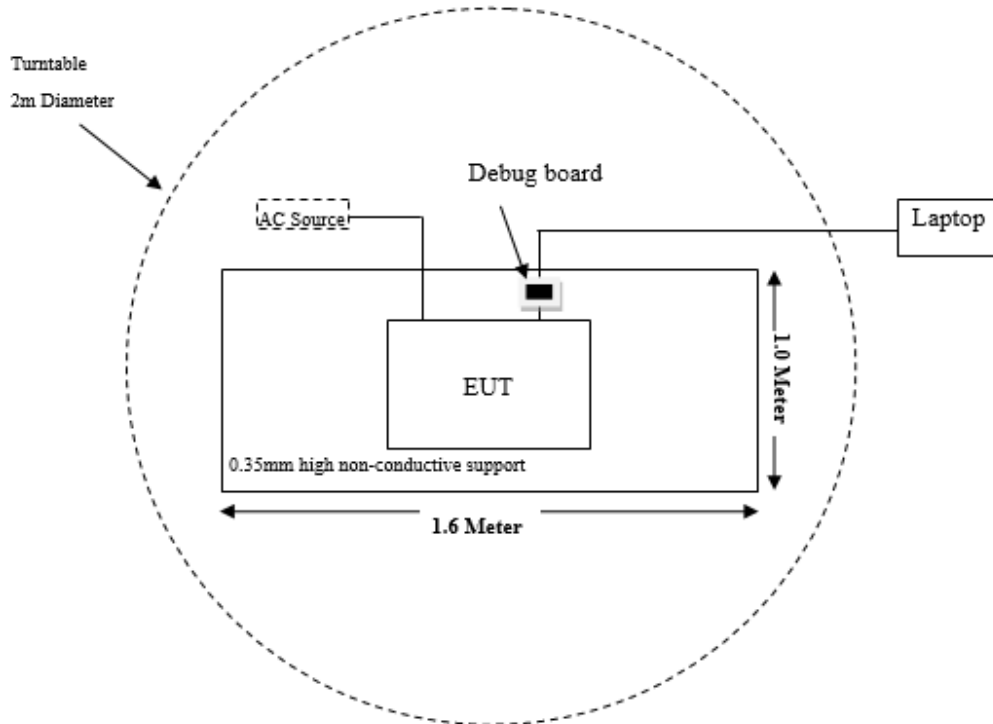


Radiated Emission (Below 1GHz & Above 1GHz):

CT51:

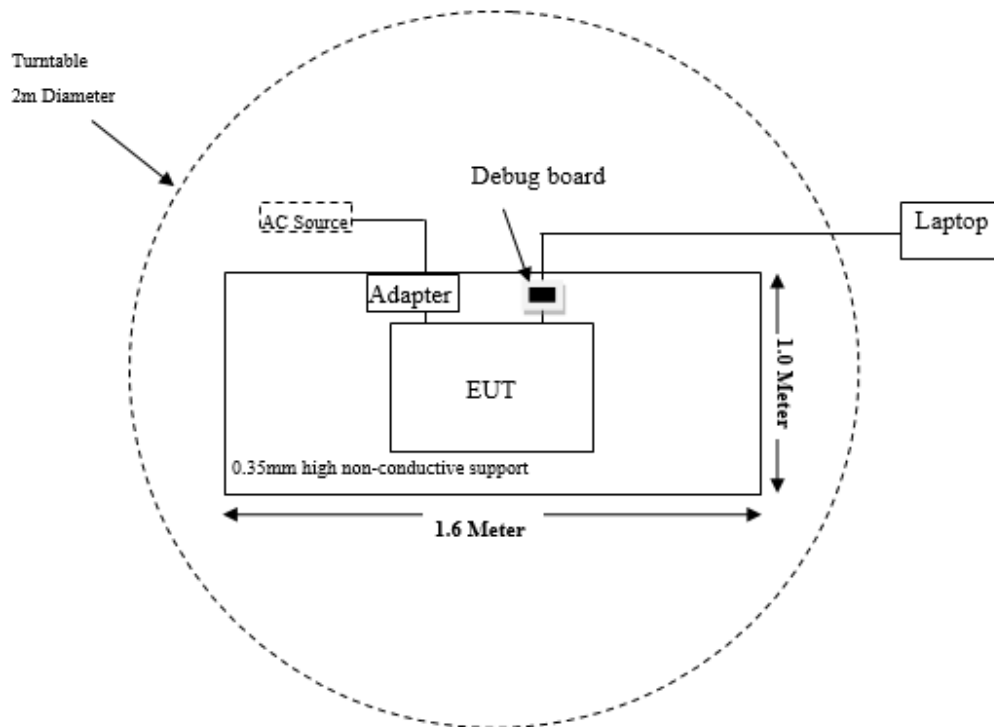

RF Conduction:



Note: A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable was offset into the setting of test equipment:

Offset/TDF = Insert loss of RF cable

★ The Insert loss was declared by manufacturer.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emissions & Restricted Bands Emissions & Antenna-port conducted emission	Compliant
§15.247(a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR	103105	2025/02/20	2026/02/19
LISN	Rohde & Schwarz	ENV216	100129	2025/02/20	2026/02/19
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2025/02/20	2026/02/19
EMI Test software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2025/02/20	2026/02/19
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2025/02/20	2026/02/19
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2025/02/20	2026/02/19
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2025/02/21	2026/02/20
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2025/02/21	2026/02/20
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Preamplifier	GLOBAL	1313-A100M18G	4121301	2025/01/16	2026/01/15
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2025/02/20	2026/02/19
Horn Antenna	EMCO	3116	9407-2232	2023/07/31	2026/07/30
Preamplifier	A.H.Systems	PAM-1840	200	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2025/02/20	2026/02/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2025/02/20	2026/02/19
Test Software	Audix	E3	18621a	N/A	N/A
RF Conducted Test					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2025/2/20	2026/2/19
Test Software	JD	JDAutoTestSystem	1.0.0.3813	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one PCB antenna arrangement for BLE, which was permanently attached and the antenna gain is -4.26 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

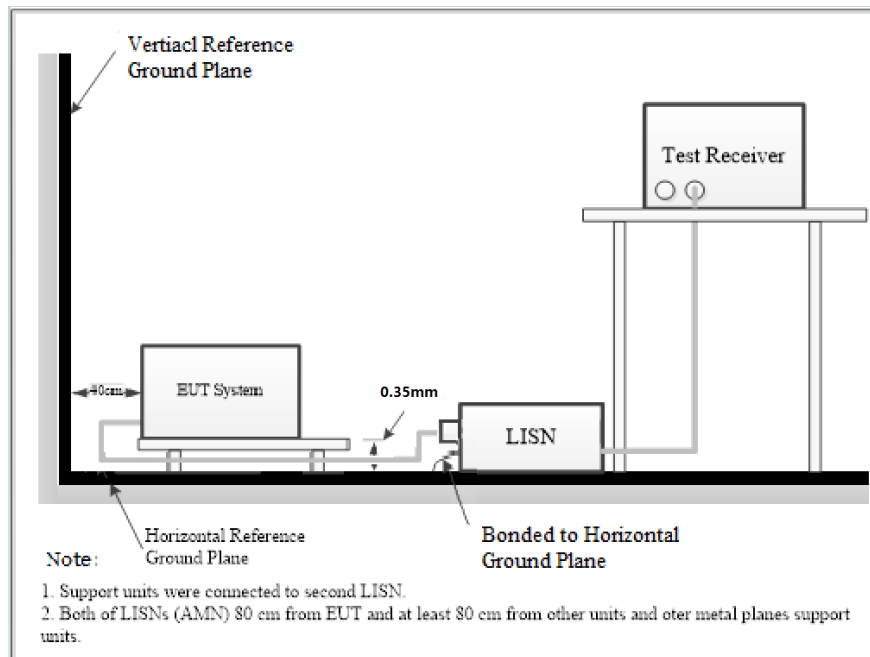

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Result & Margin Calculation

The Result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

$$\text{Result (dB}\mu\text{V)} = \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$

Test Data


Frequency Range:	150kHz~30MHz
Temperature:	21.5°C~24.6°C
Relative Humidity:	47%~60%
ATM Pressure:	100.1kPa
Test Date:	2025-09-30~2025-11-19
Test Engineer:	Wlif Wu

Note: The maximum output power mode: BLE 1Mbps middle channel was tested.

CT21PRO

Project No.: 2507X19514E-RF
 Test Mode: BLE 1M 2440MHz
 EUT Model: CT21PRO

Temp/Humi/ATM: 24.6°C/60%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

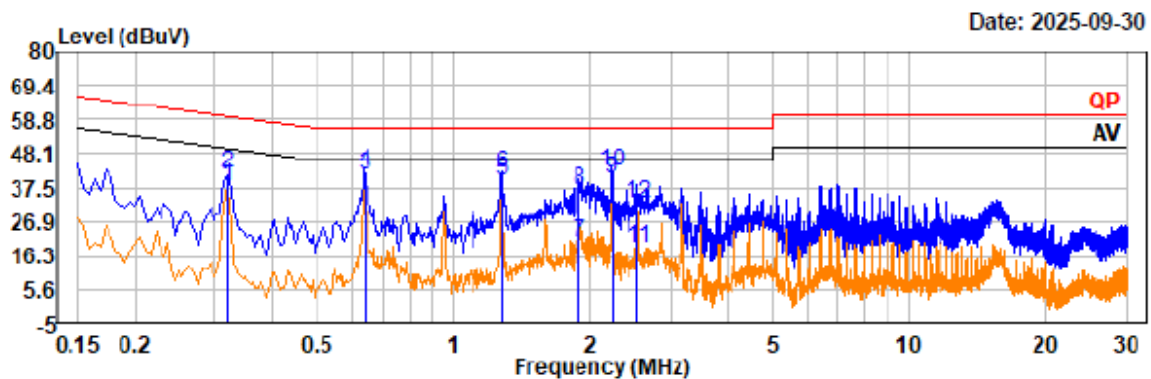

Trace: 1


Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.319	17.50	20.56	38.06	49.73	11.67	Line	Average
0.319	21.52	20.56	42.08	59.73	17.65	Line	QP
0.637	20.74	20.31	41.05	46.00	4.95	Line	Average
0.637	22.32	20.31	42.63	56.00	13.37	Line	QP
1.272	19.48	20.24	39.72	46.00	6.28	Line	Average
1.272	21.48	20.24	41.72	56.00	14.28	Line	QP
1.888	-0.45	20.88	20.43	46.00	25.57	Line	Average
1.888	15.58	20.88	36.46	56.00	19.54	Line	QP
2.225	18.88	20.97	39.85	46.00	6.15	Line	Average
2.225	21.53	20.97	42.50	56.00	13.50	Line	QP
2.533	-2.62	20.96	18.34	46.00	27.66	Line	Average
2.533	11.44	20.96	32.40	56.00	23.60	Line	QP

Project No.: 2507X19514E-RF
 Test Mode: BLE 1M 2440MHz
 EUT Model: CT21PRO

Temp/Humi/ATM: 24.6°C/60%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

Date: 2025-09-30

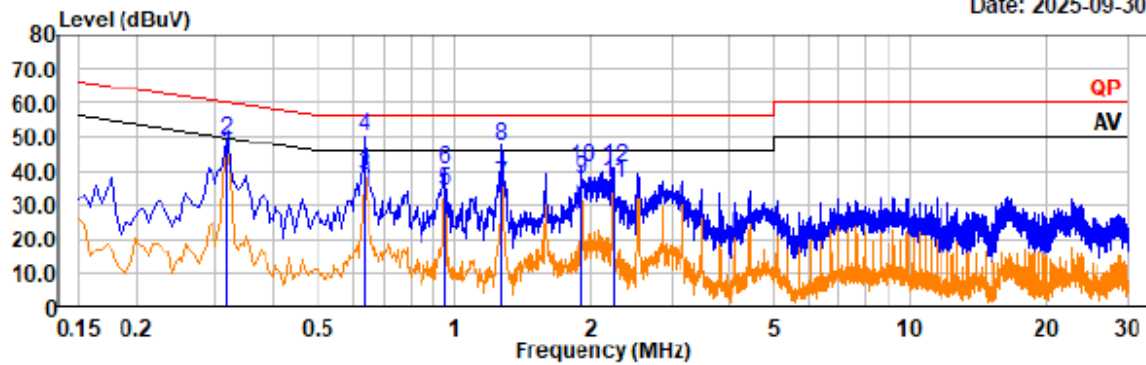

Trace: 1


Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.316	24.76	20.67	45.43	49.80	4.37	Neutral	Average
0.316	28.49	20.67	49.16	59.80	10.64	Neutral	QP
0.636	18.26	20.51	38.77	46.00	7.23	Neutral	Average
0.636	29.45	20.51	49.96	56.00	6.04	Neutral	QP
0.951	13.98	20.39	34.37	46.00	11.63	Neutral	Average
0.951	20.01	20.39	40.40	56.00	15.60	Neutral	QP
1.270	15.49	20.53	36.02	46.00	9.98	Neutral	Average
1.270	26.90	20.53	47.43	56.00	8.57	Neutral	QP
1.905	16.61	20.83	37.44	46.00	8.56	Neutral	Average
1.905	20.12	20.83	40.95	56.00	15.05	Neutral	QP
2.229	15.37	20.89	36.26	46.00	9.74	Neutral	Average
2.229	19.83	20.89	40.72	56.00	15.28	Neutral	QP

CT51

Project No.: 2507X19514E-RF
 Test Mode: BLE 1M 2440MHz
 EUT Model: CT51

Temp/Humi/ATM: 21.5°C/47%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

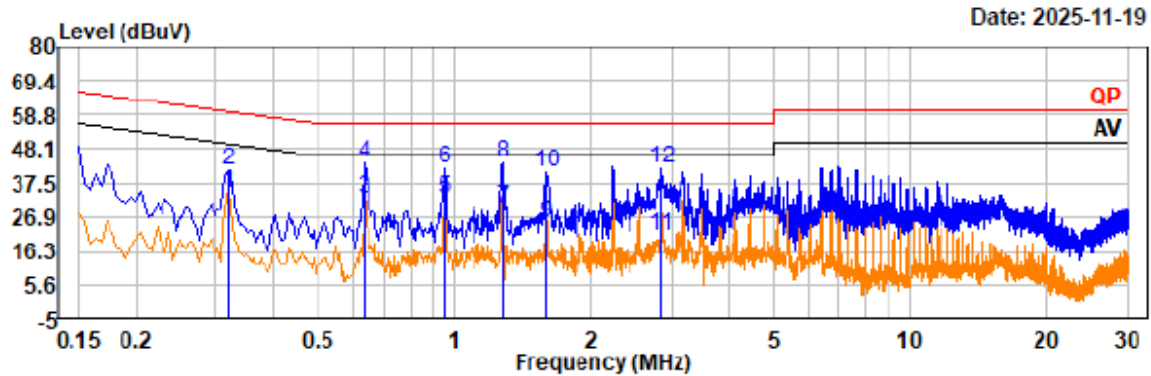

Trace: 1


Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.321	13.63	20.56	34.19	49.68	15.49	Line	Average
0.321	20.88	20.56	41.44	59.68	18.24	Line	QP
0.636	12.13	20.31	32.44	46.00	13.56	Line	Average
0.636	23.32	20.31	43.63	56.00	12.37	Line	QP
0.955	12.43	19.92	32.35	46.00	13.65	Line	Average
0.955	21.88	19.92	41.80	56.00	14.20	Line	QP
1.275	9.17	20.25	29.42	46.00	16.58	Line	Average
1.275	23.25	20.25	43.50	56.00	12.50	Line	QP
1.594	4.14	20.61	24.75	46.00	21.25	Line	Average
1.594	20.23	20.61	40.84	56.00	15.16	Line	QP
2.836	-0.19	20.96	20.77	46.00	25.23	Line	Average
2.836	20.85	20.96	41.81	56.00	14.19	Line	QP

Project No.: 2507X19514E-RF
 Test Mode: BLE 1M 2440MHz
 EUT Model: CT51

Temp/Humi/ATM: 21.5°C/47%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

Date: 2025-11-19

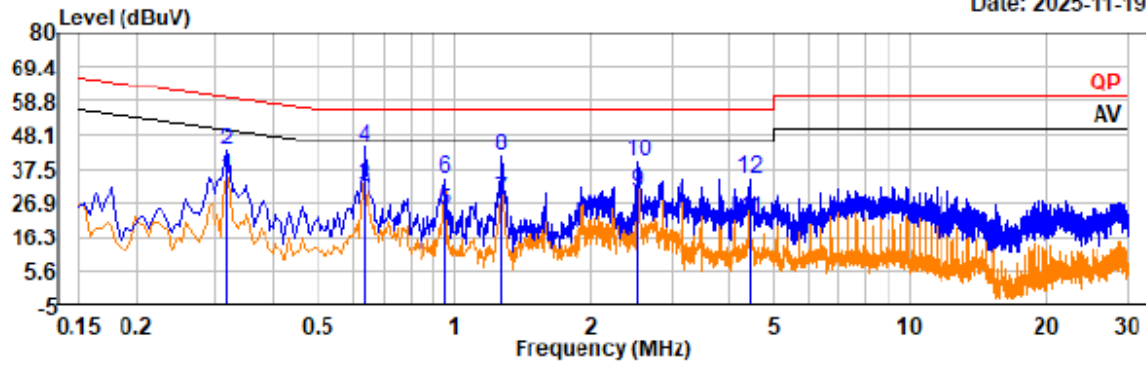

Trace: 1

Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.316	13.76	20.67	34.43	49.80	15.37	Neutral	Average
0.316	22.49	20.67	43.16	59.80	16.64	Neutral	QP
0.636	11.26	20.51	31.77	46.00	14.23	Neutral	Average
0.636	23.45	20.51	43.96	56.00	12.04	Neutral	QP
0.951	4.10	20.39	24.49	46.00	21.51	Neutral	Average
0.951	14.01	20.39	34.40	56.00	21.60	Neutral	QP
1.270	7.49	20.53	28.02	46.00	17.98	Neutral	Average
1.270	20.90	20.53	41.43	56.00	14.57	Neutral	QP
2.539	9.28	20.89	30.17	46.00	15.83	Neutral	Average
2.539	18.38	20.89	39.27	56.00	16.73	Neutral	QP
4.447	0.61	20.83	21.44	46.00	24.56	Neutral	Average
4.447	13.19	20.83	34.02	56.00	21.98	Neutral	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS


Applicable Standard



FCC §15.247 (d); §15.209; §15.205;

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EUT Setup

9 kHz-30MHz:

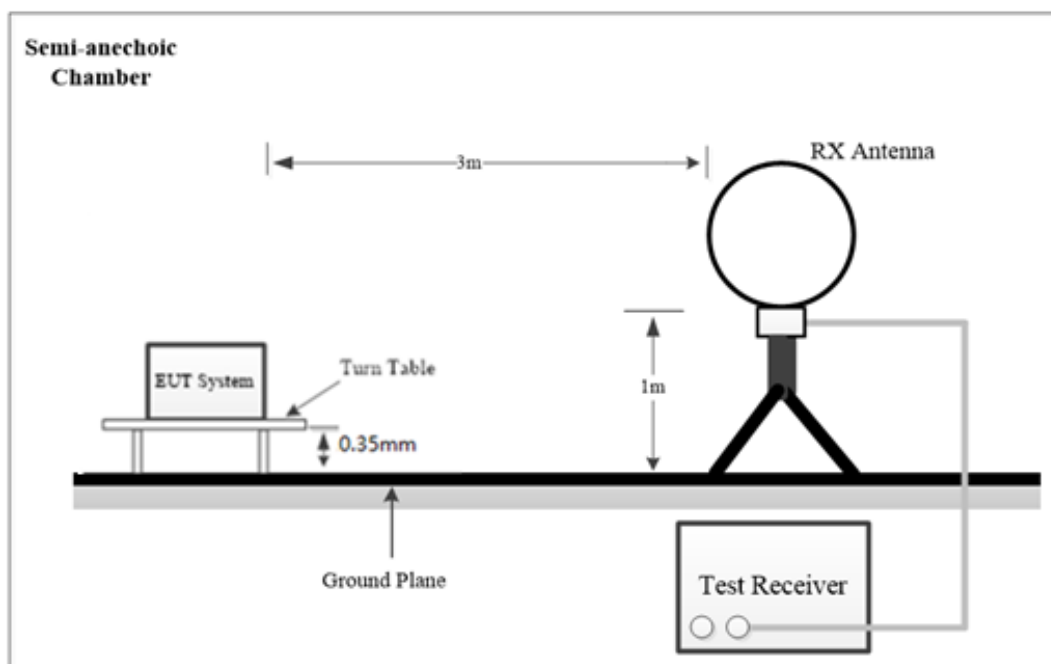

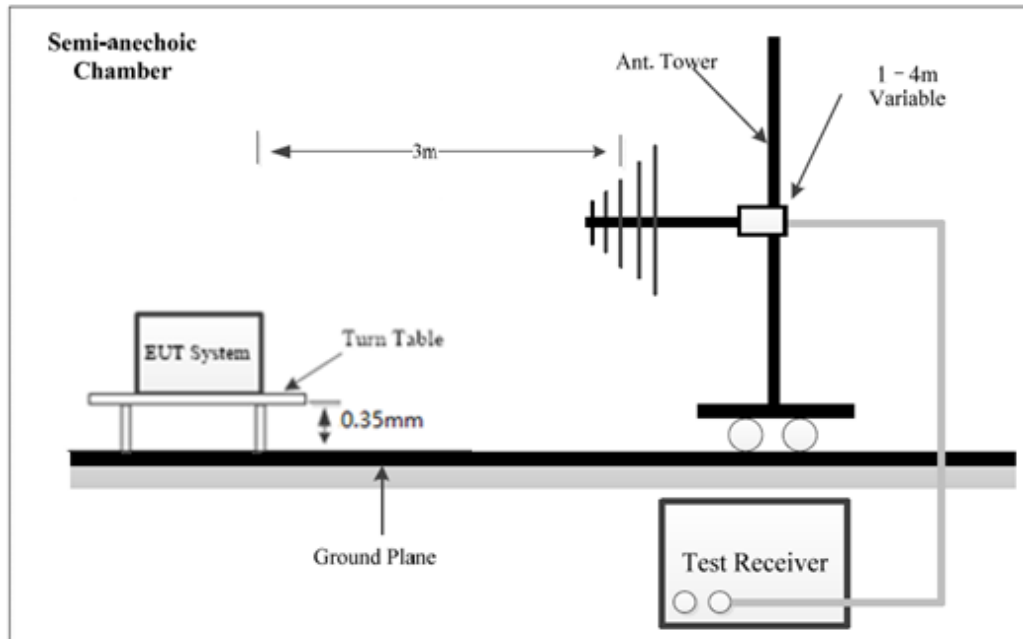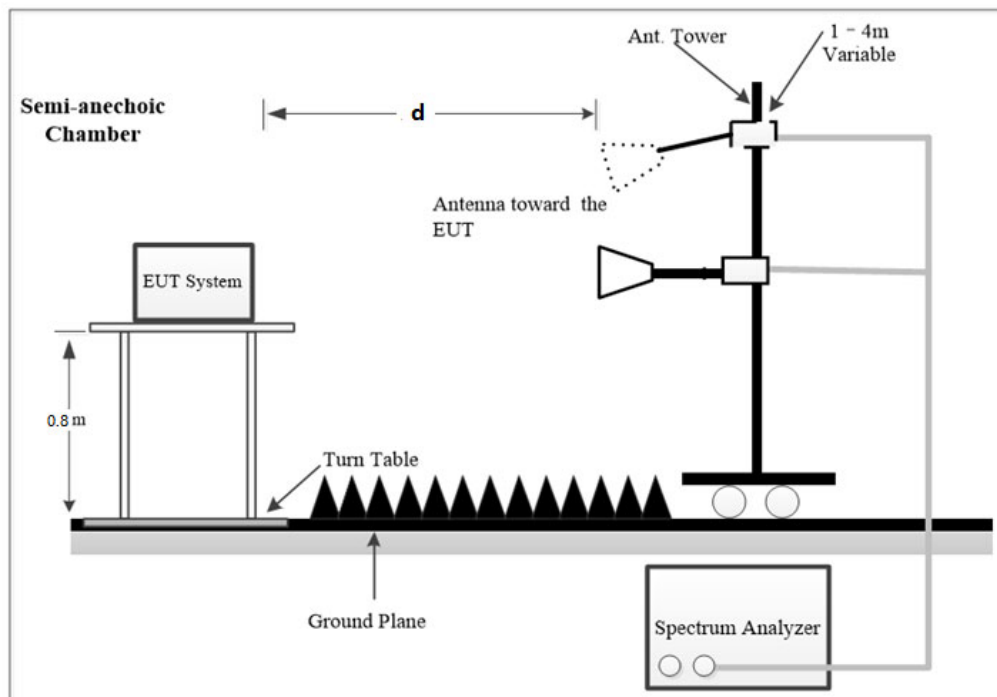30MHz -1 GHz:**Above 1GHz:**

The radiated emission tests using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.


NOTE: d is testing distance;

For Radiated Emission test (1GHz-18GHz) and Bandedge Emission test, which was performed at 3 m distance.

For Radiated Emission test (18GHz-25GHz), which was performed at 1.5 m distance, according to ANSI C63.10-2020, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m.

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.0 dB

Antenna-port conducted emission:



Note: A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable was offset into the setting of test equipment:

TDF = Insert loss of RF cable

★ The Insert loss was declared by manufacturer.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Below 1GHz:

Frequency Range	RBW	VBW	Measurement
9 kHz – 150 kHz	300Hz	1 kHz	PK
	200Hz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	PK
	9kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	PK
	120kHz	/	QP

Above 1GHz:

Pre-scan:

Measurement	Duty Cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3MHz	PK
Ave.	>98%	1MHz	5kHz	PK
	<98%	1MHz	1/T, not less than 5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	Duty Cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3MHz	PK
Ave.	>98%	1MHz	10Hz	PK
	<98%	1MHz	1/T	PK

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform an QP measurement.

If the maximized peak measured value complies with under the Average limit, then it is unnecessary to perform an Average measurement.

Test Procedure

Radiated Spurious Emission:

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground parallel) unless the margin is greater than 20 dB, then the following statement shall be made: "all emissions were greater than 20 dB below the limit."

Below 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Above 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is below the AV emission limit, there's no need to record the measured AV level of the emissions in the report.

Antenna-port conducted emission:

Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The frequency range of testing shall span 30 MHz to 10 times the operating frequency and this may be done in a single sweep or, to aid resolution, across a number of sweeps. The resolution bandwidth shall be 100 kHz, video bandwidth 300 kHz, and a coupled sweep time with a peak detector.

The limit is based on the highest in-band level across all channels measured using the same instrument settings (resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector). To help clearly demonstrate compliance a display line may be set at the required offset (typically 20 dB) below the highest in-band level. Where the highest in-band level is not clearly identified in the out-of-band measurements a separate spectral plot showing the in-band level shall be provided. When conducted measurements cannot be made (for example a device with integrated, non-removable antenna) radiated measurements shall be used. The reference level for determining the limit shall be established by maximizing the field strength from the highest power channel and measuring using the resolution and video bandwidth settings and peak detector as described above. The field strength limit for spurious emissions outside of restricted-bands shall then be set at the required offset (typically 20 dB) below the highest in-band level. Radiated measurements will follow the standards measurement procedures described in Clause 6 with the exception that the resolution bandwidth shall be 100 kHz, video bandwidth 300 kHz, and a coupled sweep time with a peak detector. Note that use of wider measurement bandwidths are acceptable for measuring the spurious emissions provided that the peak detector is used and that the measured value of spurious emissions are compared to the highest in-band level measured with the 100 kHz / 300 kHz bandwidth settings to determine compliance.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

For 9 kHz to 18GHz Radiated emission test and Bandedge emissions test

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

For 18GHz to 25GHz Radiated emission test

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} - \text{Extrapolation factor (dB)}$$

$$\text{Extrapolation factor} = 6\text{dB (distance} = 1.5\text{m)}$$

$$\text{Result (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Factor (dB/m)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Result (dB}\mu\text{V/m)}$$

Test Data

Please refer to the below table and plots.

Frequency Range:	Below 1 GHz	Above 1 GHz	Antenna-port conducted emission
Temperature:	22.4°C~23.7°C	22.4°C~23.7°C	23.5°C
Relative Humidity:	48%~52%	48%~52%	63%
ATM Pressure:	100.1kPa	100.1kPa	100.1kPa
Test Date:	2025-10-30~2025-11-19	2025-10-30~2025-11-19	2025-09-29
Test Engineer:	Wlif Wu	Wlif Wu	Braylon Ma

1) 9 kHz~30MHz


Pre-scan in parallel, ground-parallel and perpendicular of orientation of loop antenna, parallel is worst case.

Note: The maximum output power mode: BLE 1Mbps middle channel was tested.

CT21PRO

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

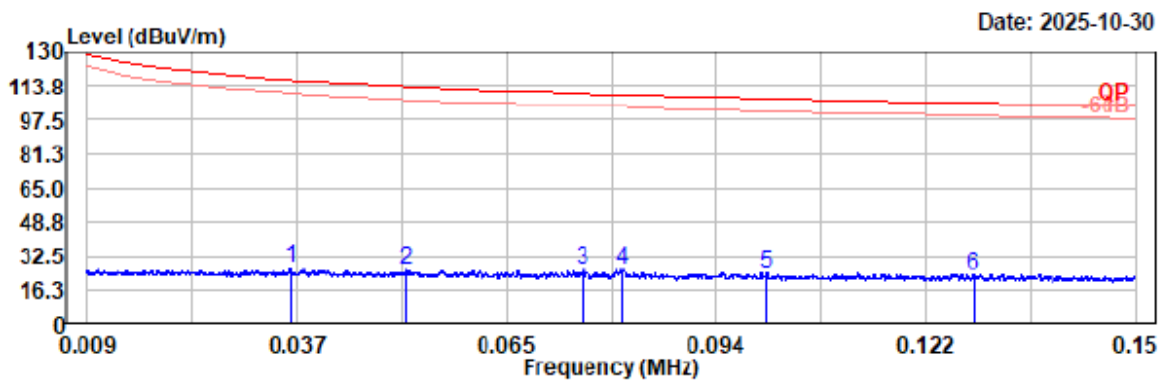


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.036	6.63	19.91	26.54	116.41	89.87	Peak
0.052	5.89	19.91	25.80	113.32	87.52	Peak
0.076	6.48	19.75	26.23	110.03	83.80	Peak
0.081	6.72	19.72	26.44	109.45	83.01	Peak
0.100	4.92	19.73	24.65	107.57	82.92	Peak
0.128	3.95	19.73	23.68	105.45	81.77	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

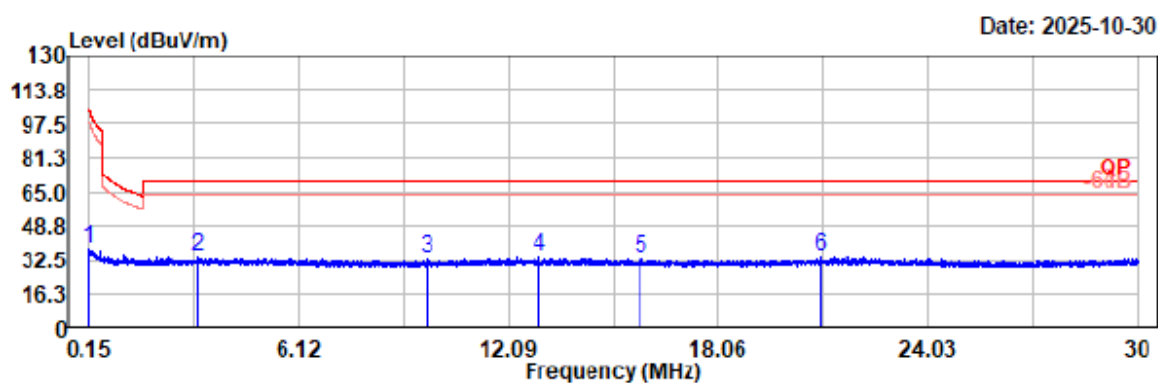


Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.156	17.81	19.72	37.53	103.74	66.21	Peak
3.228	13.81	19.83	33.64	69.54	35.90	Peak
9.756	13.46	19.70	33.16	69.54	36.38	Peak
12.965	14.25	19.74	33.99	69.54	35.55	Peak
15.872	13.29	19.82	33.11	69.54	36.43	Peak
20.979	13.90	20.12	34.02	69.54	35.52	Peak

CT51

Project No.: 2507X19514E-RF
 Test Mode: BLE 1M 2440MHz
 EUT Model: CT51
 Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

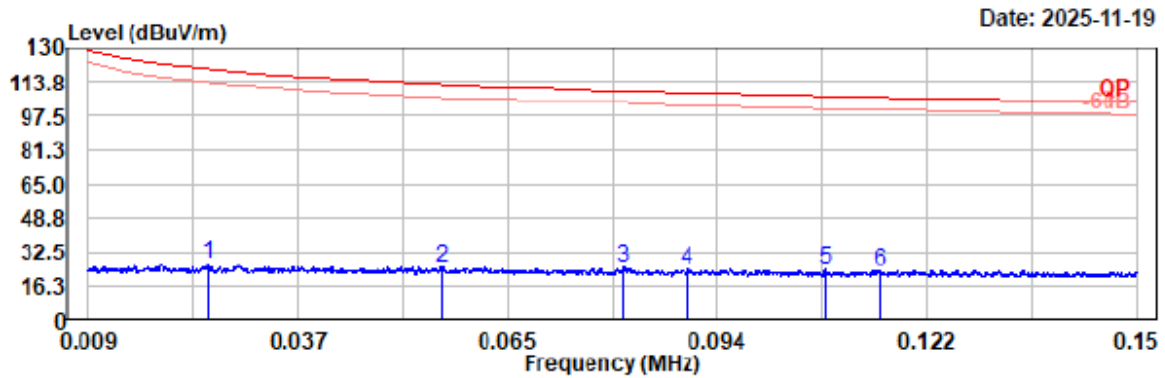


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.025	6.75	19.86	26.61	119.65	93.04	Peak
0.057	5.23	19.91	25.14	112.55	87.41	Peak
0.081	5.29	19.72	25.01	109.44	84.43	Peak
0.090	4.23	19.81	24.04	108.56	84.52	Peak
0.108	4.27	19.73	24.00	106.93	82.93	Peak
0.115	3.96	19.73	23.69	106.36	82.67	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

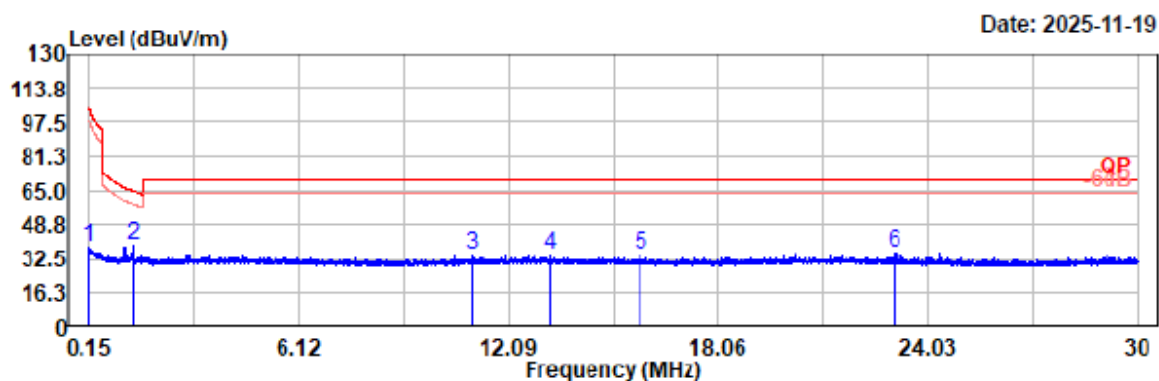

Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.162	18.29	19.72	38.01	103.42	65.41	Peak
1.410	18.48	19.67	38.15	64.62	26.47	Peak
11.066	14.23	19.71	33.94	69.54	35.60	Peak
13.281	14.72	19.74	34.46	69.54	35.08	Peak
15.830	14.16	19.81	33.97	69.54	35.57	Peak
23.072	14.54	20.17	34.71	69.54	34.83	Peak


2) 30MHz-1GHz

Note: The maximum output power mode: BLE 1Mbps middle channel was tested.

CT21PRO

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

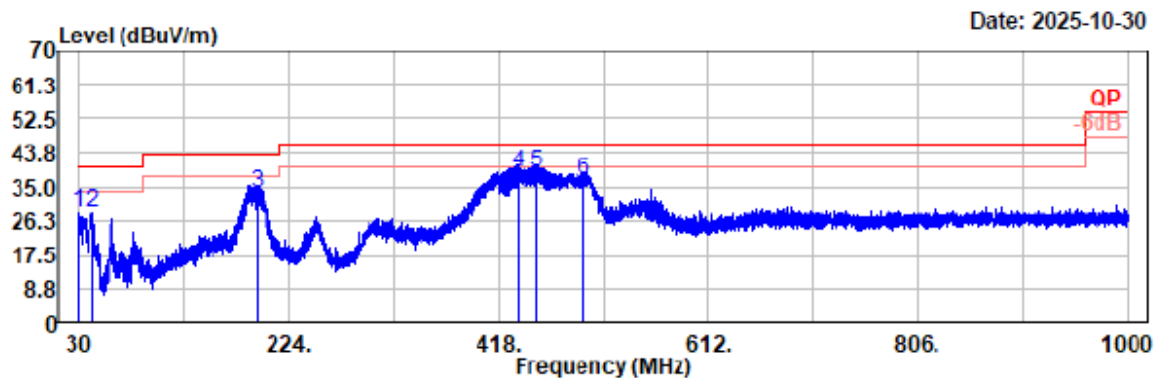


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
30.19	34.05	-5.65	28.40	40.00	11.60	Horizontal	Peak
41.16	40.78	-12.44	28.34	40.00	11.66	Horizontal	Peak
195.00	45.23	-11.96	33.27	43.50	10.23	Horizontal	QP
436.62	43.71	-5.21	38.50	46.00	7.50	Horizontal	QP
454.08	43.20	-4.75	38.45	46.00	7.55	Horizontal	QP
496.86	40.07	-3.48	36.59	46.00	9.41	Horizontal	QP

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

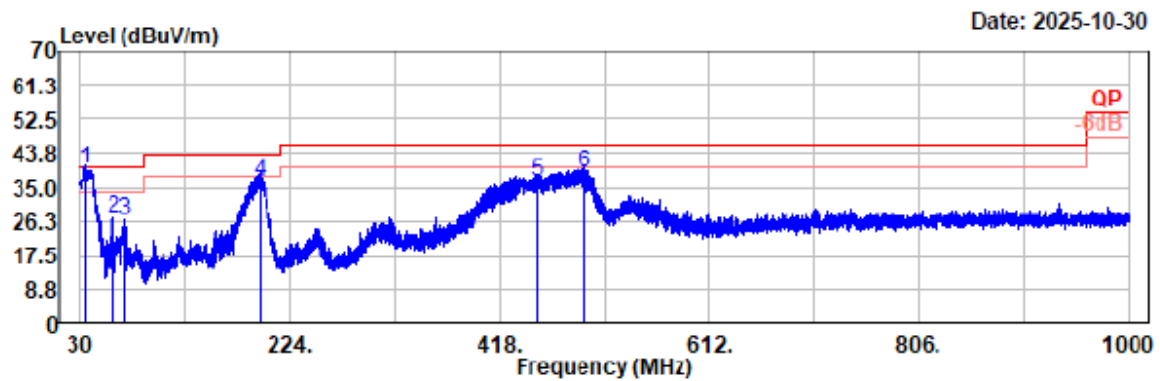


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
35.14	47.61	-8.15	39.46	40.00	0.54	Vertical	QP
60.36	44.24	-17.43	26.81	40.00	13.19	Vertical	Peak
71.03	43.38	-17.05	26.33	40.00	13.67	Vertical	Peak
195.97	48.33	-11.95	36.38	43.50	7.12	Vertical	QP
454.18	40.77	-4.73	36.04	46.00	9.96	Vertical	QP
496.28	41.98	-3.49	38.49	46.00	7.51	Vertical	QP

CT51

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

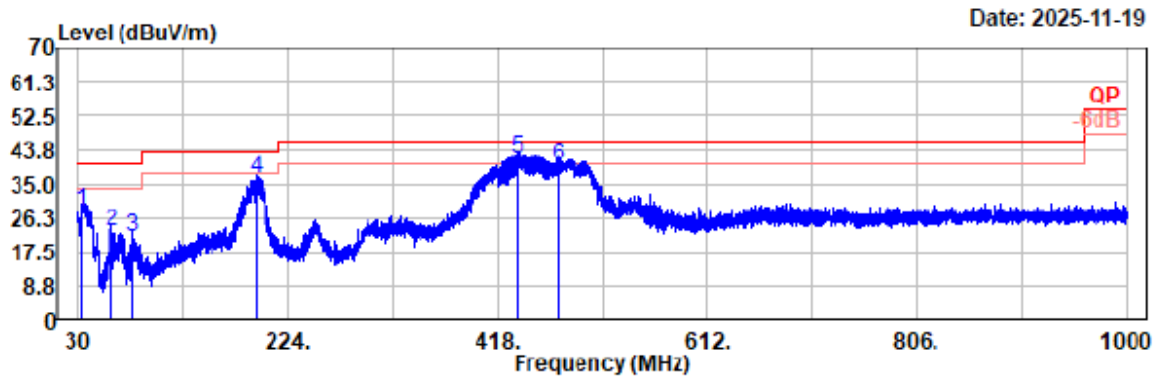


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
32.91	34.73	-6.90	27.83	40.00	12.17	Horizontal	Peak
60.26	39.91	-17.44	22.47	40.00	17.53	Horizontal	Peak
80.73	38.09	-17.06	21.03	40.00	18.97	Horizontal	Peak
195.00	48.37	-11.96	36.41	43.50	7.09	Horizontal	QP
436.62	46.71	-5.21	41.50	46.00	4.50	Horizontal	QP
473.87	43.90	-4.10	39.80	46.00	6.20	Horizontal	QP

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

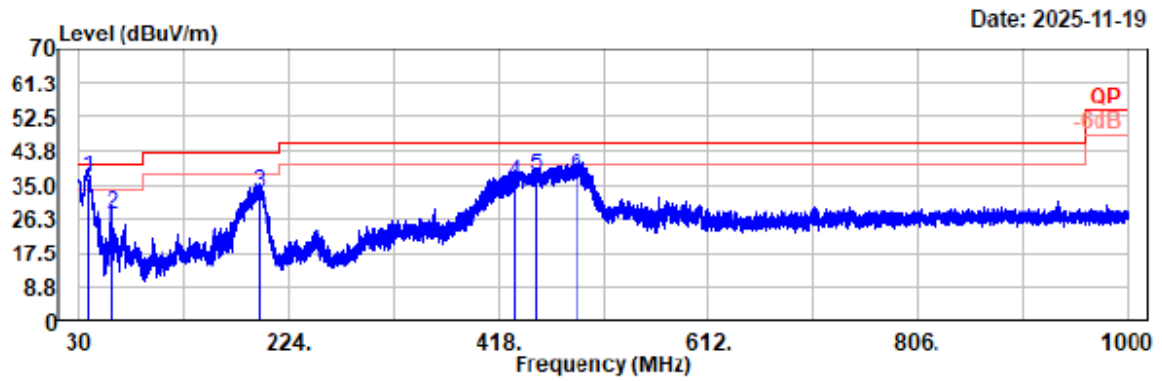

Condition: PK RBW:100kHz VBW:300kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
38.54	47.11	-10.59	36.52	40.00	3.48	Vertical	QP
60.36	44.88	-17.43	27.45	40.00	12.55	Vertical	Peak
195.97	44.91	-11.95	32.96	43.50	10.54	Vertical	QP
433.13	40.70	-5.32	35.38	46.00	10.62	Vertical	QP
454.18	41.67	-4.73	36.94	46.00	9.06	Vertical	QP
490.36	40.88	-3.66	37.22	46.00	8.78	Vertical	QP

3) 1GHz~3GHz

CT21PRO

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

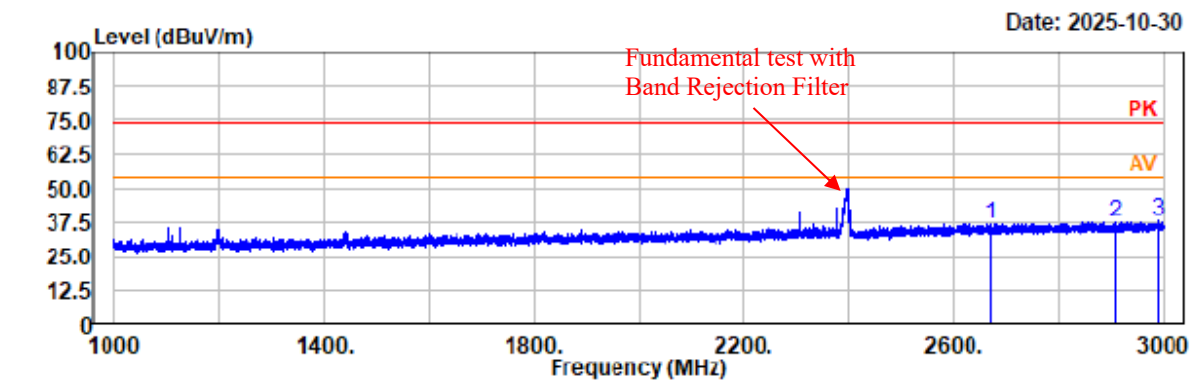


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2672.40	46.88	-10.11	36.77	74.00	37.23	horizontal	Peak
2908.40	46.75	-9.49	37.26	74.00	36.74	horizontal	Peak
2989.60	46.61	-9.00	37.61	74.00	36.39	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

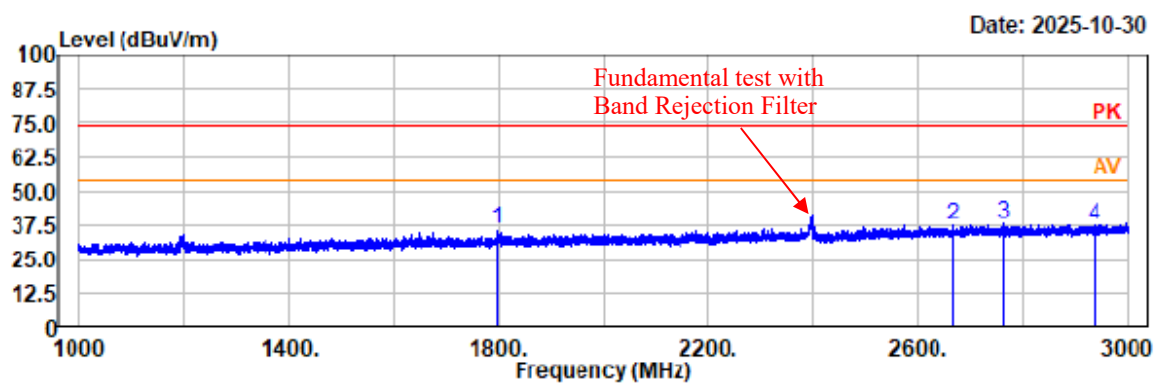


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1798.00	49.06	-13.23	35.83	74.00	38.17	vertical	Peak
2666.20	47.42	-10.14	37.28	74.00	36.72	vertical	Peak
2763.00	47.82	-9.90	37.92	74.00	36.08	vertical	Peak
2937.20	46.76	-9.30	37.46	74.00	36.54	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

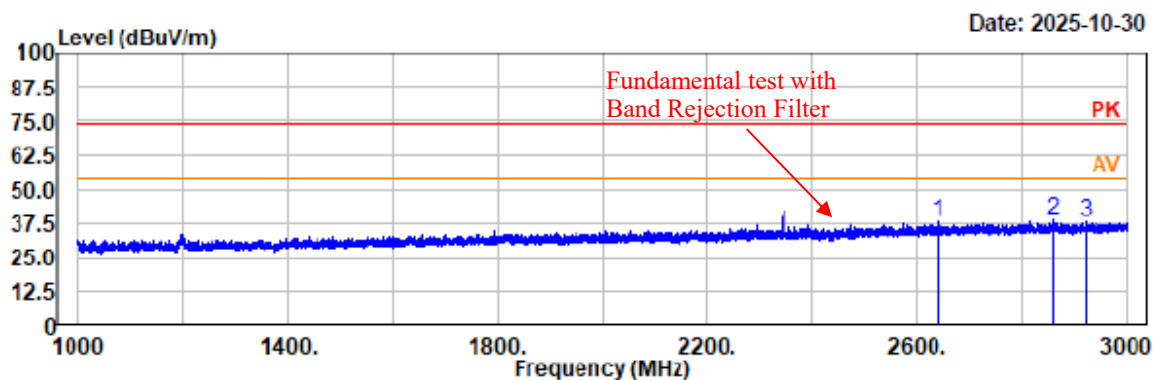


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2638.40	47.89	-10.25	37.64	74.00	36.36	horizontal	Peak
2862.40	47.90	-9.61	38.29	74.00	35.71	horizontal	Peak
2920.40	47.48	-9.41	38.07	74.00	35.93	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

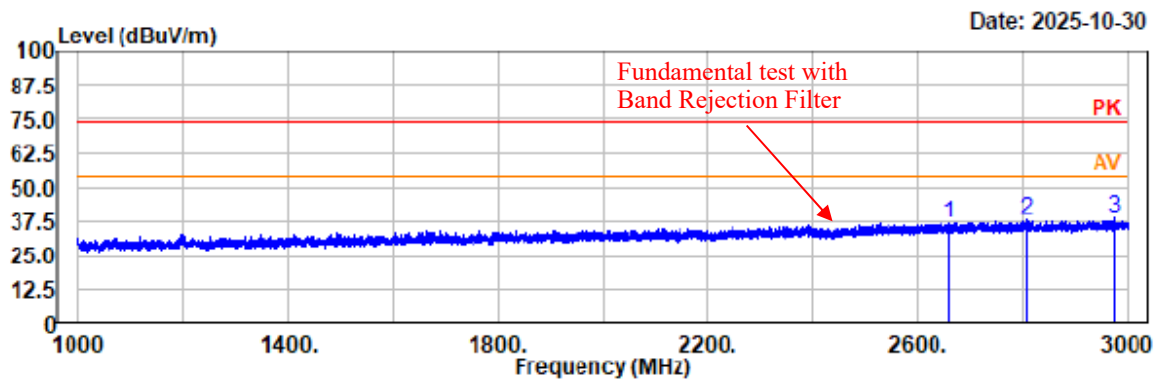


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2659.20	46.76	-10.16	36.60	74.00	37.40	vertical	Peak
2805.80	47.66	-9.77	37.89	74.00	36.11	vertical	Peak
2976.20	47.51	-9.07	38.44	74.00	35.56	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

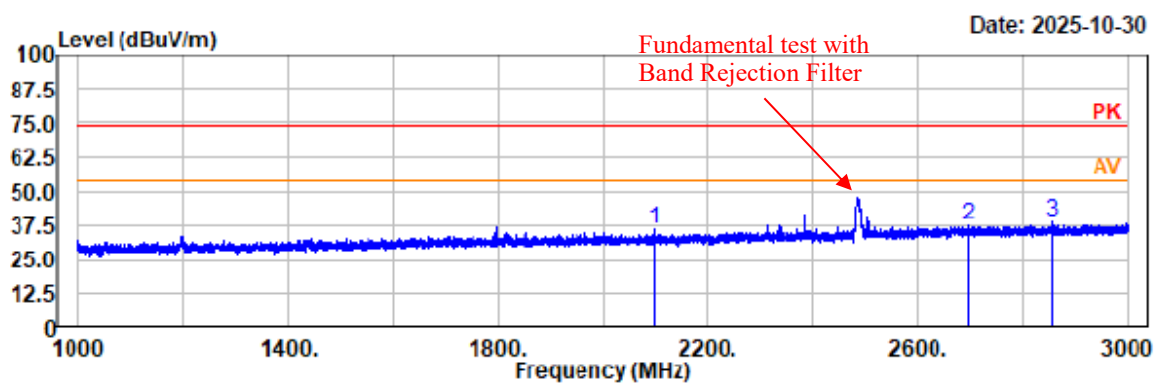


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2098.00	48.14	-12.24	35.90	74.00	38.10	horizontal	Peak
2697.00	46.97	-10.01	36.96	74.00	37.04	horizontal	Peak
2857.20	47.97	-9.62	38.35	74.00	35.65	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

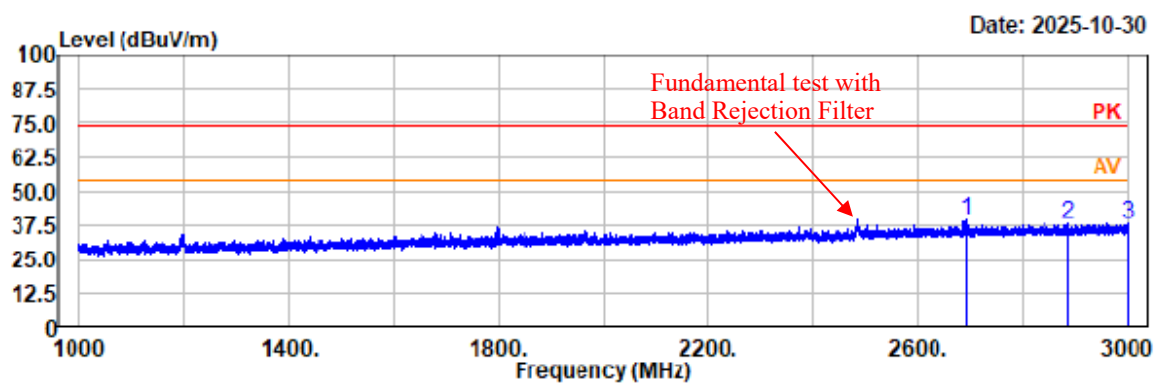


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2693.00	49.23	-10.03	39.20	74.00	34.80	vertical	Peak
2887.00	47.26	-9.58	37.68	74.00	36.32	vertical	Peak
2999.00	46.89	-8.95	37.94	74.00	36.06	vertical	Peak

CT51

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

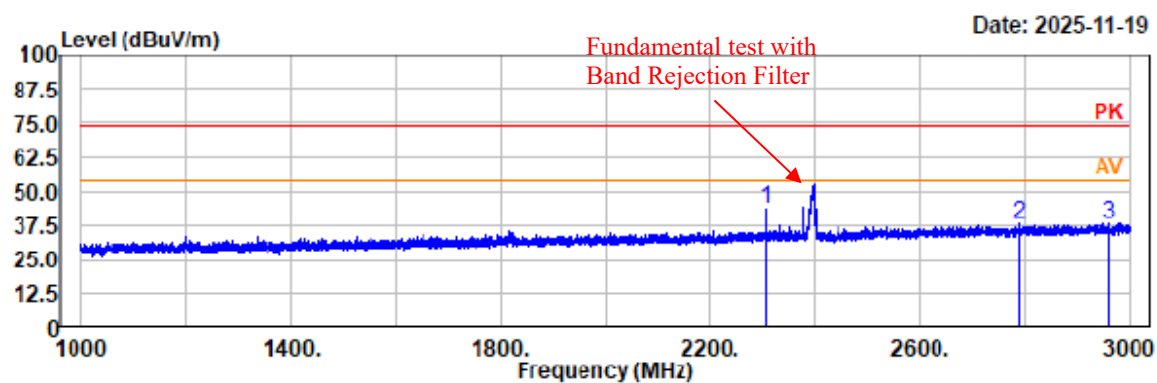


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2306.00	54.99	-11.41	43.58	74.00	30.42	horizontal	Peak
2788.80	48.07	-9.82	38.25	74.00	35.75	horizontal	Peak
2962.40	47.15	-9.14	38.01	74.00	35.99	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

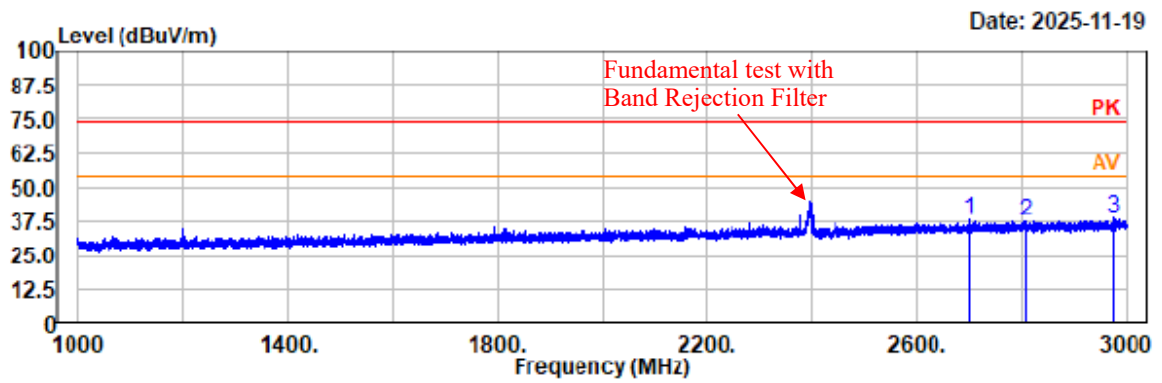


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2698.40	48.12	-10.01	38.11	74.00	35.89	vertical	Peak
2806.60	47.24	-9.77	37.47	74.00	36.53	vertical	Peak
2975.80	47.44	-9.07	38.37	74.00	35.63	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

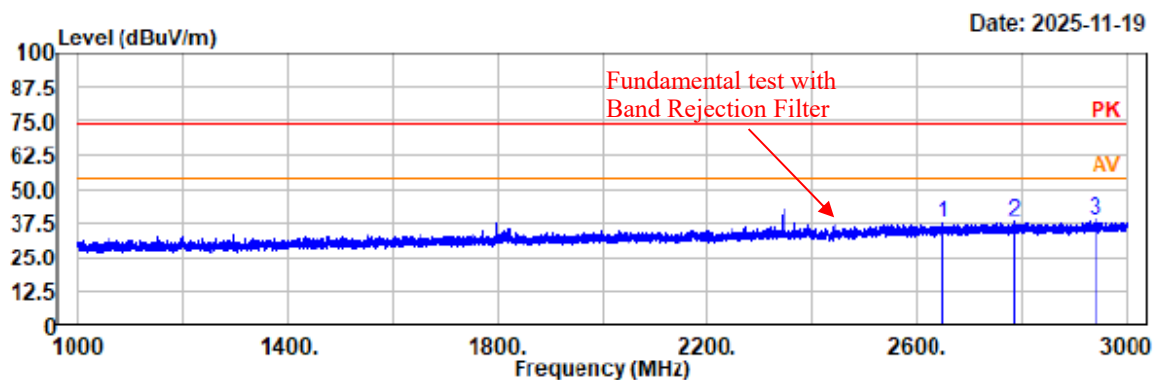


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2648.40	47.34	-10.21	37.13	74.00	36.87	horizontal	Peak
2785.40	47.57	-9.84	37.73	74.00	36.27	horizontal	Peak
2939.60	47.69	-9.27	38.42	74.00	35.58	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

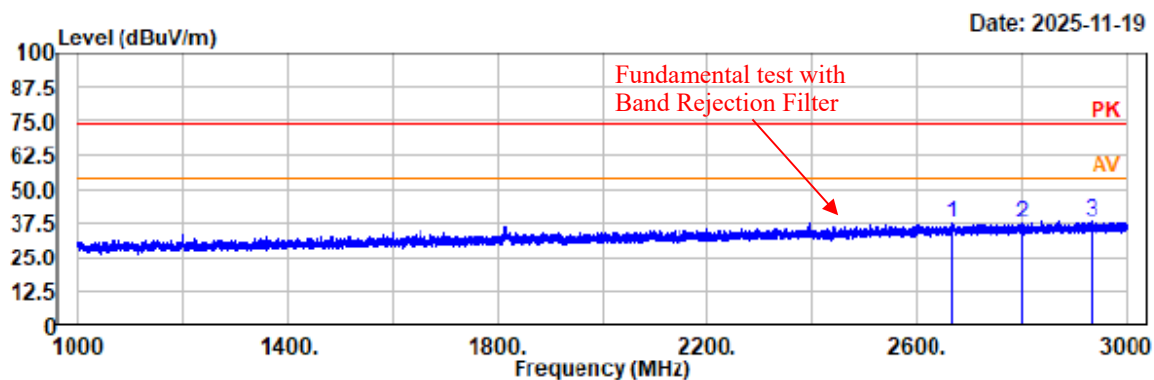


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2667.40	47.14	-10.13	37.01	74.00	36.99	vertical	Peak
2798.60	47.18	-9.80	37.38	74.00	36.62	vertical	Peak
2934.00	47.12	-9.32	37.80	74.00	36.20	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

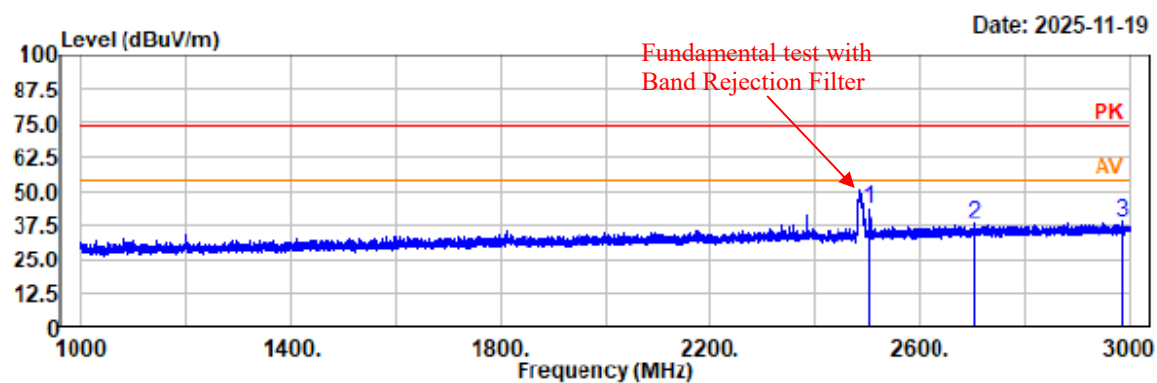


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2504.40	54.09	-10.69	43.40	74.00	30.60	horizontal	Peak
2703.60	47.80	-9.99	37.81	74.00	36.19	horizontal	Peak
2985.80	47.76	-9.02	38.74	74.00	35.26	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

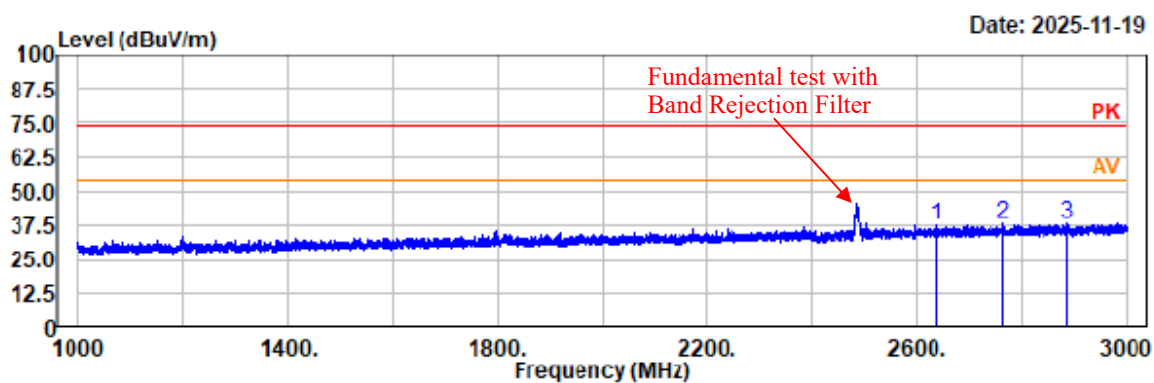

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2634.40	47.77	-10.26	37.51	74.00	36.49	vertical	Peak
2765.20	47.71	-9.90	37.81	74.00	36.19	vertical	Peak
2887.00	47.43	-9.58	37.85	74.00	36.15	vertical	Peak

4) 3 GHz ~18 GHz

CT21PRO

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

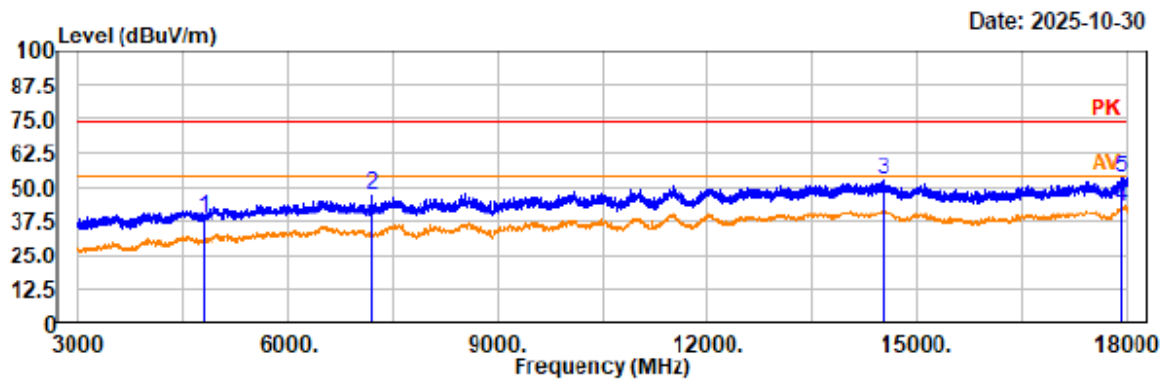

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	43.87	-5.24	38.63	74.00	35.37	horizontal	Peak
7206.00	49.29	-2.55	46.74	74.00	27.26	horizontal	Peak
14509.50	47.35	5.06	52.41	74.00	21.59	horizontal	Peak
17914.50	35.68	6.81	42.49	54.00	11.51	horizontal	Average
17914.50	46.19	6.81	53.00	74.00	21.00	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

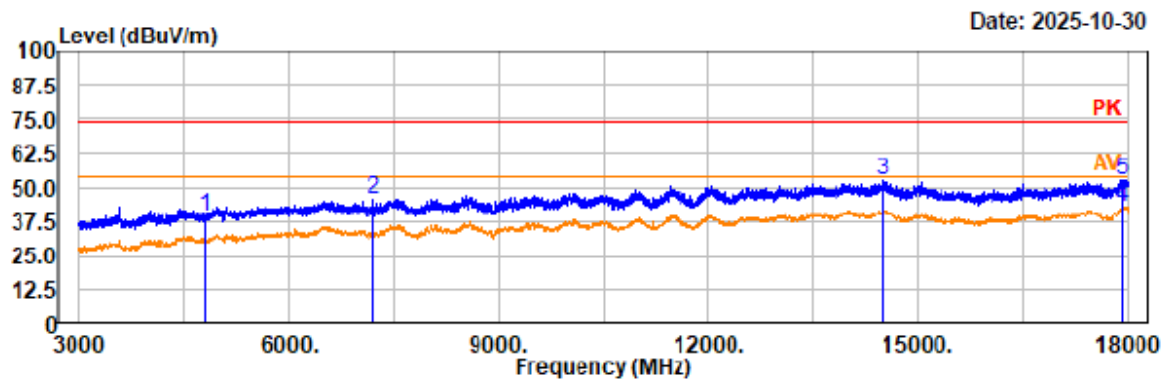

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	44.29	-5.24	39.05	74.00	34.95	vertical	Peak
7206.00	48.20	-2.55	45.65	74.00	28.35	vertical	Peak
14500.50	47.27	5.07	52.34	74.00	21.66	vertical	Peak
17932.50	36.00	6.83	42.83	54.00	11.17	vertical	Average
17932.50	45.87	6.83	52.70	74.00	21.30	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

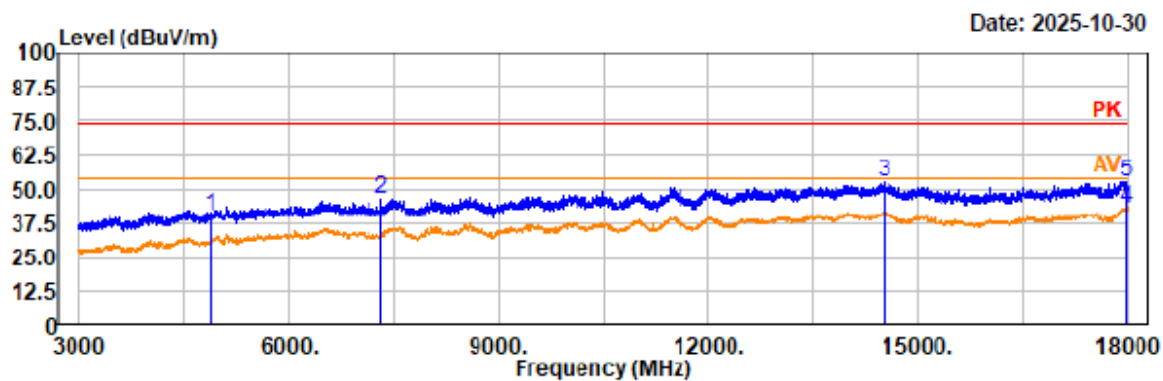

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	45.27	-5.30	39.97	74.00	34.03	horizontal	Peak
7320.00	48.67	-2.25	46.42	74.00	27.58	horizontal	Peak
14514.00	47.34	5.07	52.41	74.00	21.59	horizontal	Peak
17988.00	36.18	6.89	43.07	54.00	10.93	horizontal	Average
17988.00	45.79	6.89	52.68	74.00	21.32	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

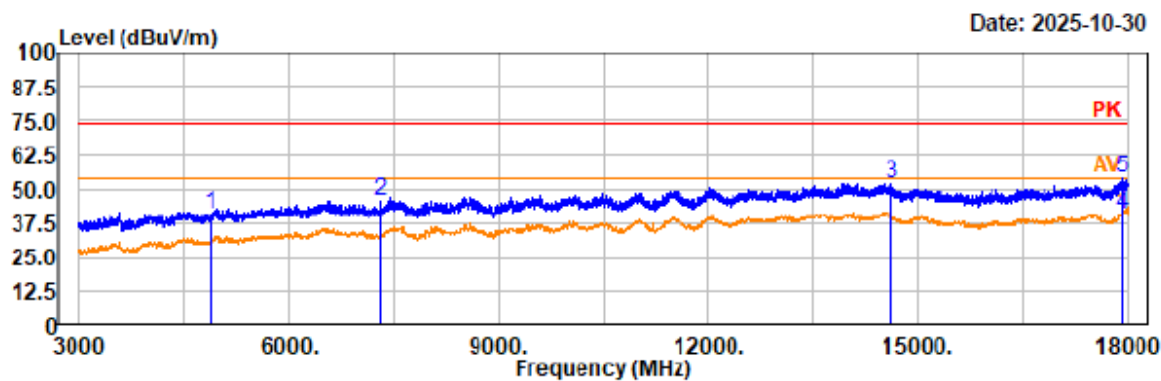

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4879.50	46.26	-5.30	40.96	74.00	33.04	vertical	Peak
7320.00	48.05	-2.25	45.80	74.00	28.20	vertical	Peak
14631.00	47.06	4.99	52.05	74.00	21.95	vertical	Peak
17919.00	34.16	6.82	40.98	54.00	13.02	vertical	Average
17919.00	46.71	6.82	53.53	74.00	20.47	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

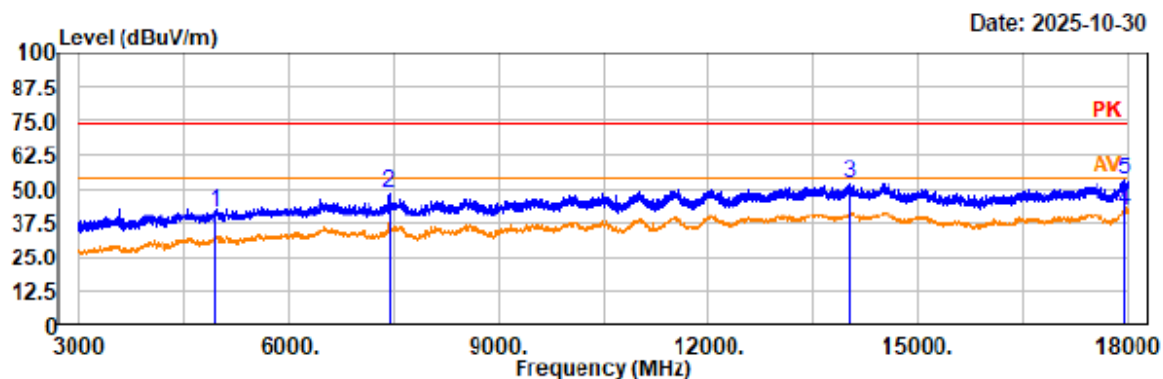

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	46.66	-5.11	41.55	74.00	32.45	horizontal	Peak
7440.00	50.37	-2.03	48.34	74.00	25.66	horizontal	Peak
14035.50	46.65	5.25	51.90	74.00	22.10	horizontal	Peak
17959.50	35.06	6.86	41.92	54.00	12.08	horizontal	Average
17959.50	46.37	6.86	53.23	74.00	20.77	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

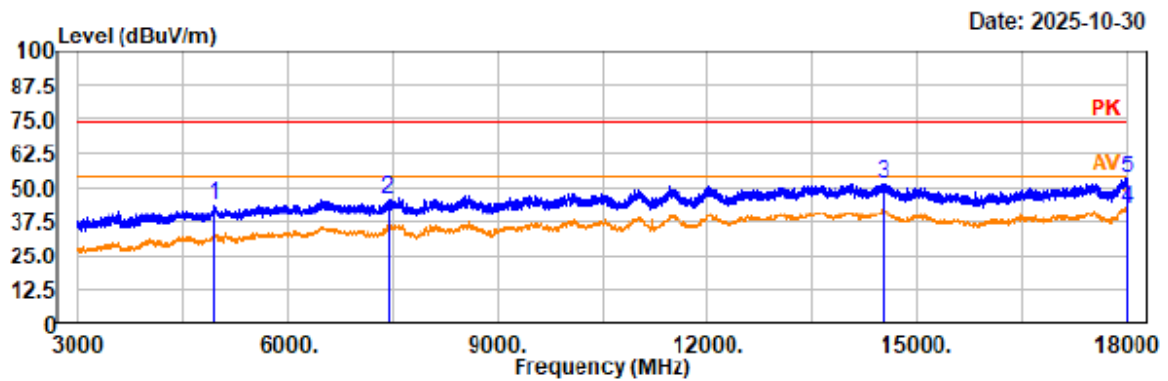

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	48.55	-5.11	43.44	74.00	30.56	vertical	Peak
7440.00	47.56	-2.03	45.53	74.00	28.47	vertical	Peak
14527.50	46.18	5.05	51.23	74.00	22.77	vertical	Peak
17994.00	35.48	6.90	42.38	54.00	11.62	vertical	Average
17994.00	46.21	6.90	53.11	74.00	20.89	vertical	Peak

CT51

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

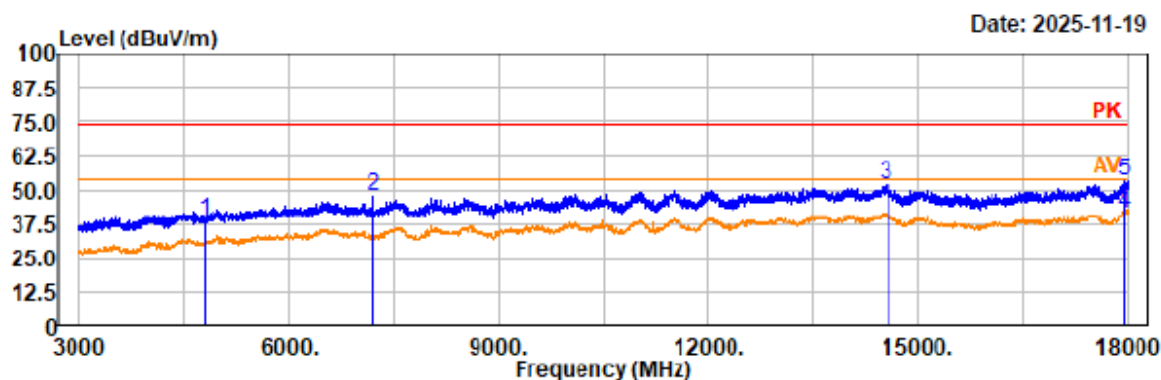

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	43.56	-5.24	38.32	74.00	35.68	horizontal	Peak
7206.00	49.94	-2.55	47.39	74.00	26.61	horizontal	Peak
14554.50	46.58	5.04	51.62	74.00	22.38	horizontal	Peak
17940.00	34.87	6.84	41.71	54.00	12.29	horizontal	Average
17940.00	46.13	6.84	52.97	74.00	21.03	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

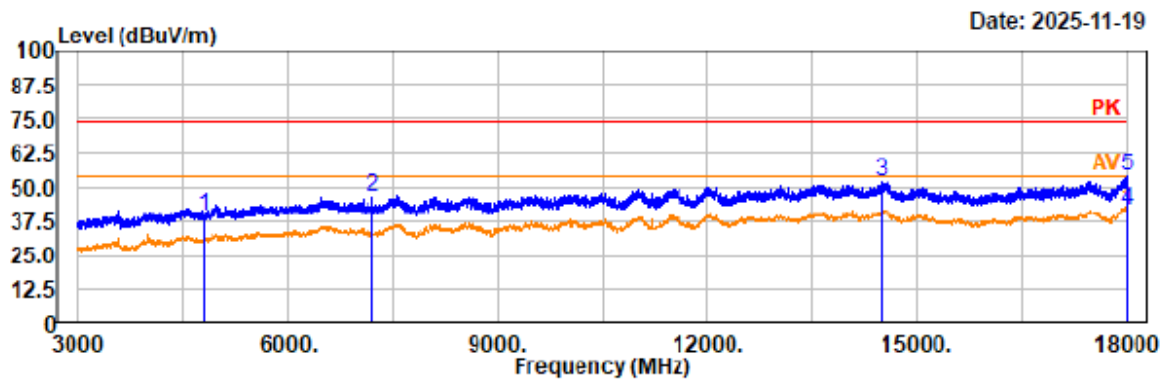

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	44.53	-5.24	39.29	74.00	34.71	vertical	Peak
7204.50	48.74	-2.55	46.19	74.00	27.81	vertical	Peak
14478.00	46.79	5.11	51.90	74.00	22.10	vertical	Peak
17997.00	34.25	6.91	41.16	54.00	12.84	vertical	Average
17997.00	46.66	6.91	53.57	74.00	20.43	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

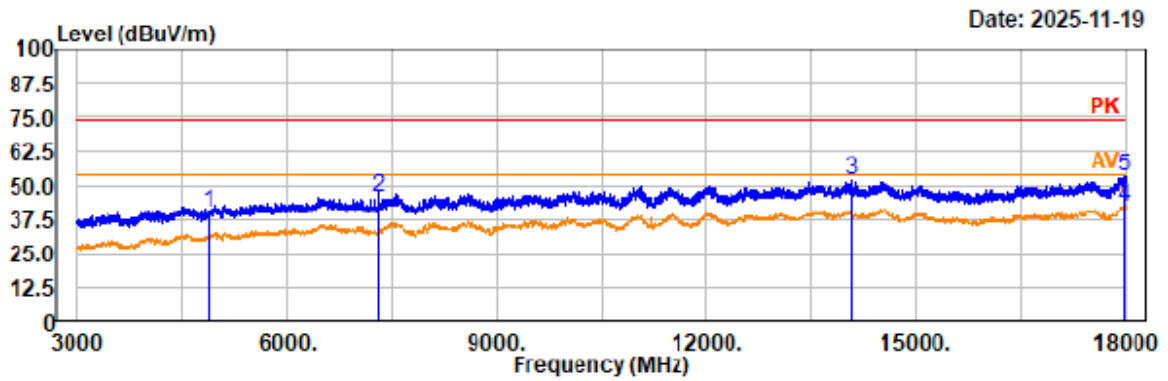

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	45.64	-5.30	40.34	74.00	33.66	horizontal	Peak
7320.00	47.91	-2.25	45.66	74.00	28.34	horizontal	Peak
14074.50	46.23	5.30	51.53	74.00	22.47	horizontal	Peak
17971.50	35.32	6.88	42.20	54.00	11.80	horizontal	Average
17971.50	46.49	6.88	53.37	74.00	20.63	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

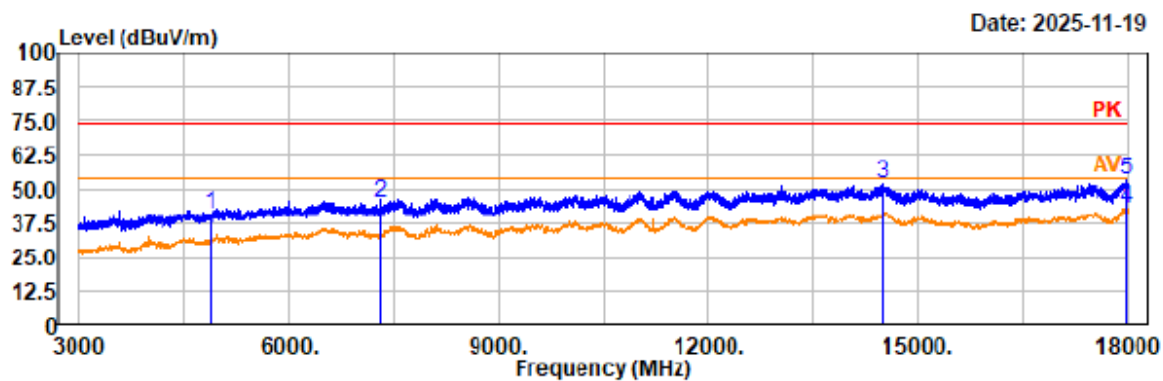

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	46.29	-5.30	40.99	74.00	33.01	vertical	Peak
7320.00	46.82	-2.25	44.57	74.00	29.43	vertical	Peak
14499.00	46.47	5.07	51.54	74.00	22.46	vertical	Peak
17991.00	35.66	6.90	42.56	54.00	11.44	vertical	Average
17991.00	45.94	6.90	52.84	74.00	21.16	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

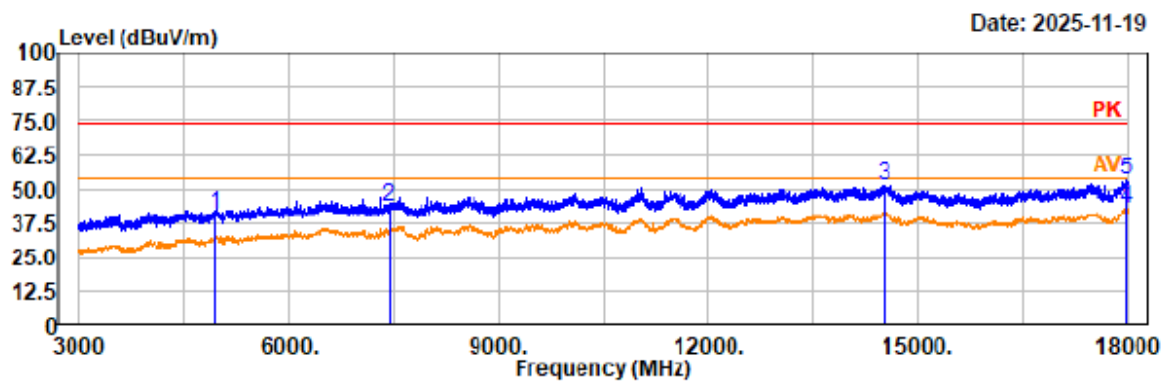

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	45.93	-5.11	40.82	74.00	33.18	horizontal	Peak
7440.00	45.72	-2.03	43.69	74.00	30.31	horizontal	Peak
14512.50	46.31	5.07	51.38	74.00	22.62	horizontal	Peak
17985.00	35.79	6.89	42.68	54.00	11.32	horizontal	Average
17985.00	46.06	6.89	52.95	74.00	21.05	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

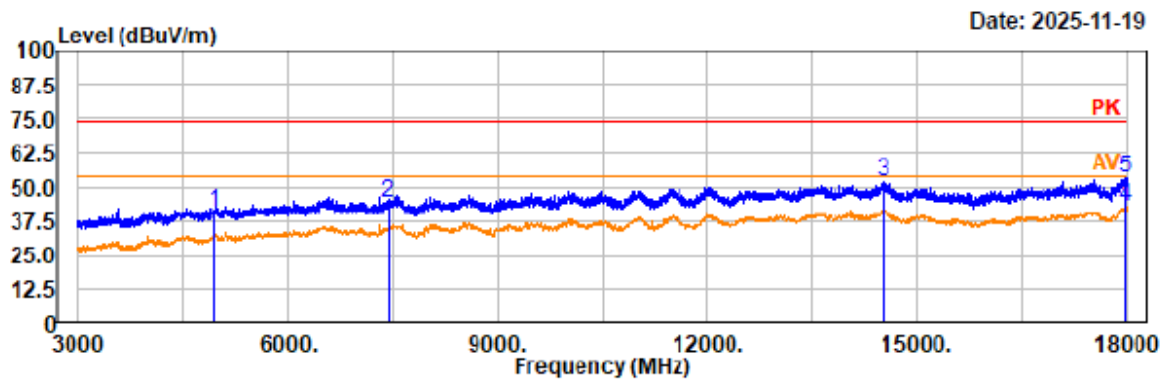

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.00	45.49	-5.11	40.38	74.00	33.62	vertical	Peak
7440.00	45.90	-2.03	43.87	74.00	30.13	vertical	Peak
14512.50	46.38	5.07	51.45	74.00	22.55	vertical	Peak
17988.00	35.62	6.89	42.51	54.00	11.49	vertical	Average
17988.00	46.21	6.89	53.10	74.00	20.90	vertical	Peak


5) 18 GHz ~25 GHz

Note: The maximum output power mode: BLE 1Mbps middle channel was tested.

CT21PRO

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT21PRO
Test distance: 1.5m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

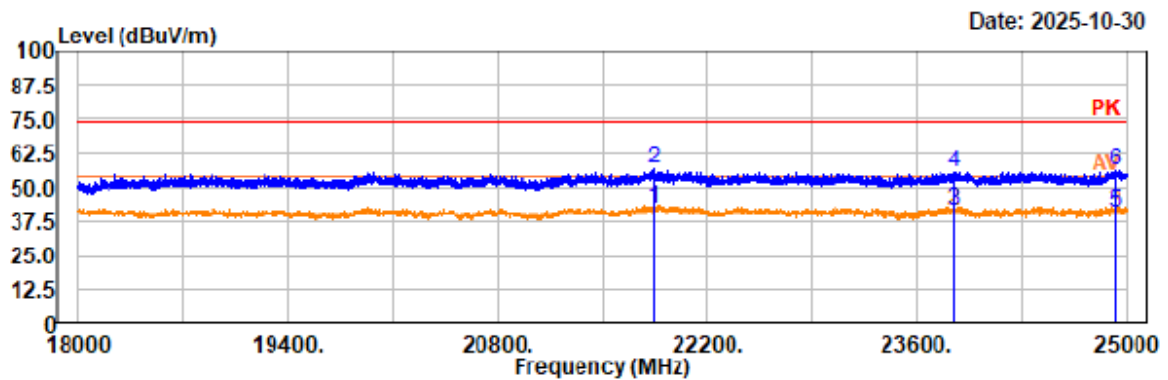


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21848.60	37.16	5.01	42.17	54.00	11.83	horizontal	Average
21848.60	51.49	5.01	56.50	74.00	17.50	horizontal	Peak
23849.90	35.89	5.30	41.19	54.00	12.81	horizontal	Average
23849.90	50.20	5.30	55.50	74.00	18.50	horizontal	Peak
24924.40	34.61	6.31	40.92	54.00	13.08	horizontal	Average
24924.40	49.69	6.31	56.00	74.00	18.00	horizontal	Peak

Project No.: 2507X19514E-RF
 Test Mode: BLE 1M 2440MHz
 EUT Model: CT21PRO
 Test distance: 1.5m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

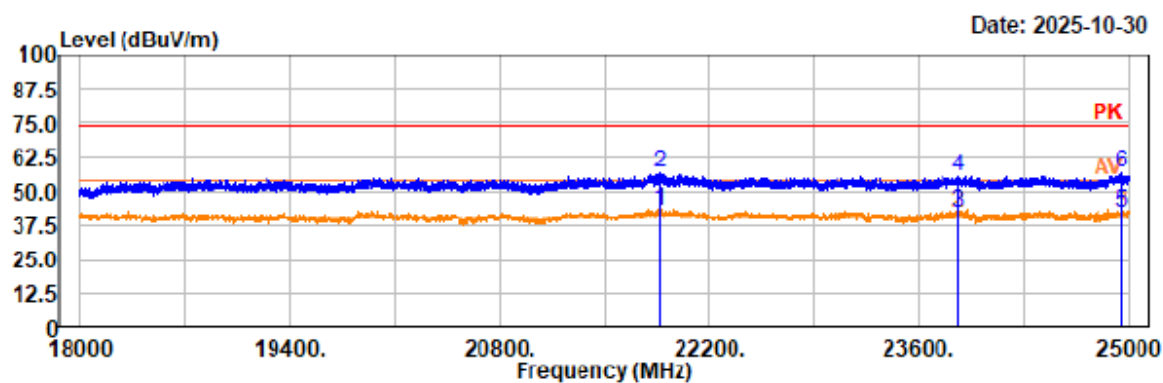

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21864.70	37.29	5.15	42.44	54.00	11.56	vertical	Average
21864.70	51.42	5.15	56.57	74.00	17.43	vertical	Peak
23856.90	36.78	5.31	42.09	54.00	11.91	vertical	Average
23856.90	49.90	5.31	55.21	74.00	18.79	vertical	Peak
24947.50	35.63	6.32	41.95	54.00	12.05	vertical	Average
24947.50	50.49	6.32	56.81	74.00	17.19	vertical	Peak

CT51

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 1.5m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

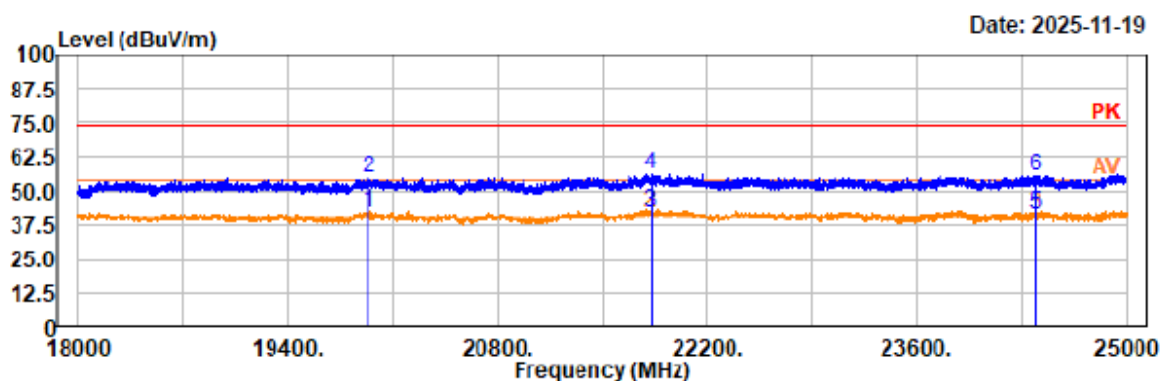

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19939.00	38.67	3.50	42.17	54.00	11.83	horizontal	Average
19939.00	51.18	3.50	54.68	74.00	19.32	horizontal	Peak
21826.20	37.02	5.01	42.03	54.00	11.97	horizontal	Average
21826.20	50.82	5.01	55.83	74.00	18.17	horizontal	Peak
24382.60	35.36	6.05	41.41	54.00	12.59	horizontal	Average
24382.60	49.22	6.05	55.27	74.00	18.73	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: CT51
Test distance: 1.5m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

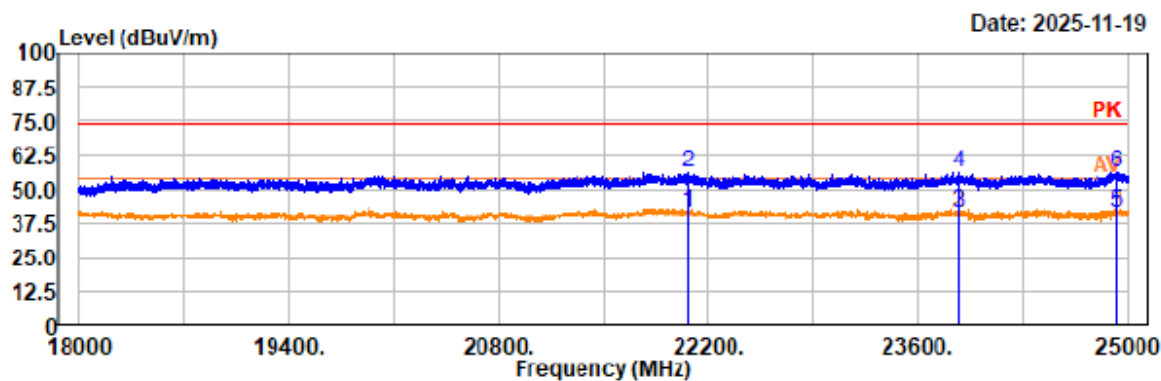

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
22067.70	36.43	5.07	41.50	54.00	12.50	vertical	Average
22067.70	50.58	5.07	55.65	74.00	18.35	vertical	Peak
23880.70	36.02	5.34	41.36	54.00	12.64	vertical	Average
23880.70	50.70	5.34	56.04	74.00	17.96	vertical	Peak
24927.20	34.89	6.32	41.21	54.00	12.79	vertical	Average
24927.20	49.56	6.32	55.88	74.00	18.12	vertical	Peak

Restricted Bands Emissions:

CT21PRO

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

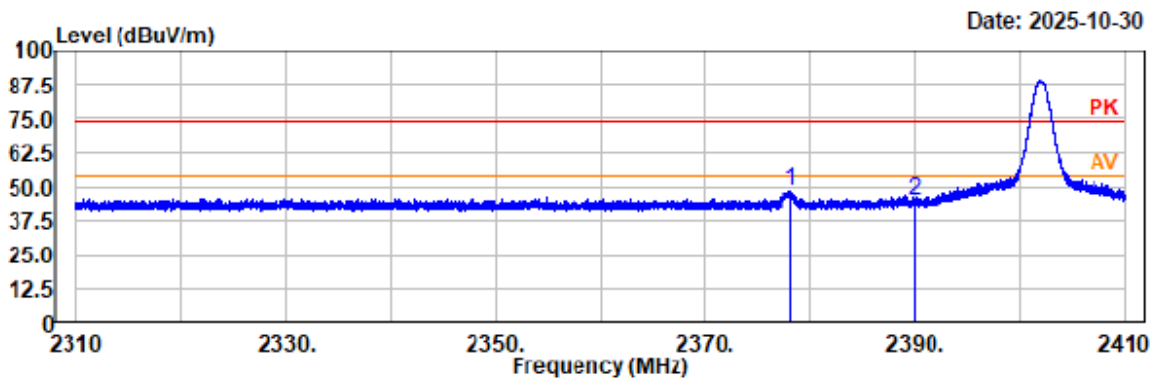


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2378.21	49.42	-1.21	48.21	74.00	25.79	horizontal	Peak
2390.00	46.10	-1.15	44.95	74.00	29.05	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

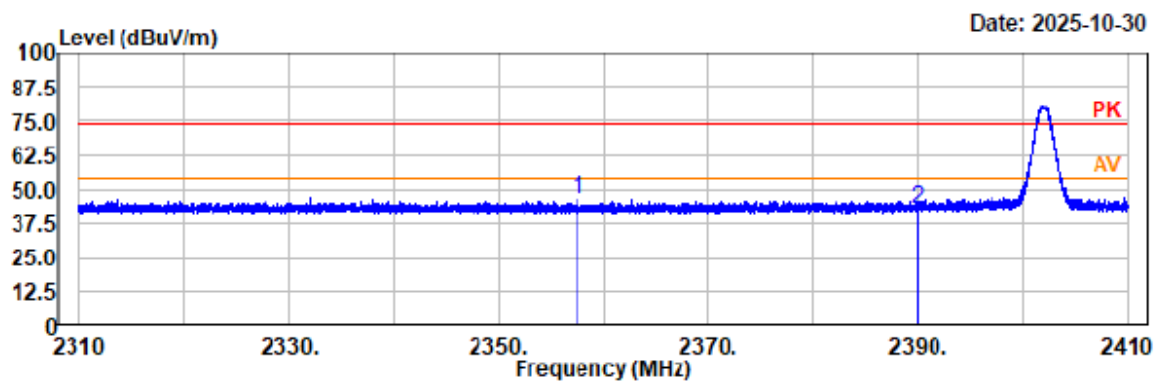


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2357.54	47.48	-1.29	46.19	74.00	27.81	vertical	Peak
2390.00	44.21	-1.15	43.06	74.00	30.94	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

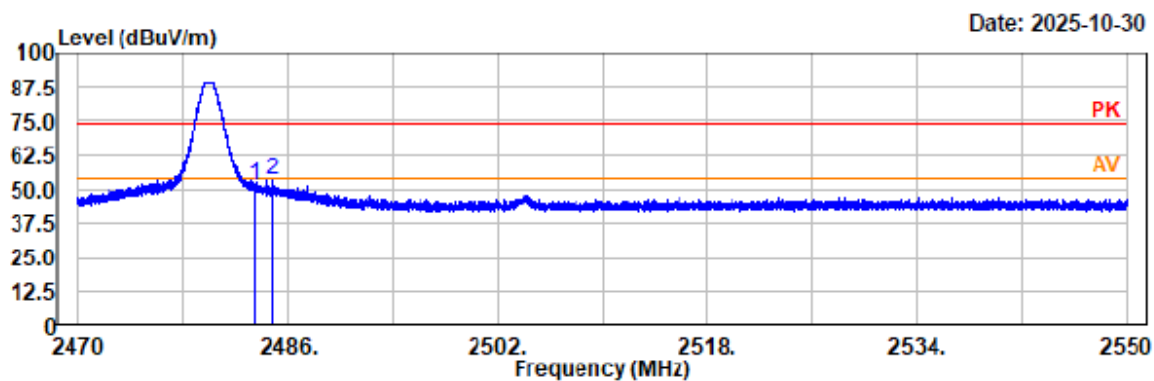


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	51.97	-0.77	51.20	74.00	22.80	horizontal	Peak
2484.90	53.64	-0.76	52.88	74.00	21.12	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT21PRO
Test distance: 3m

Temp/Humi/ATM: 23.7°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

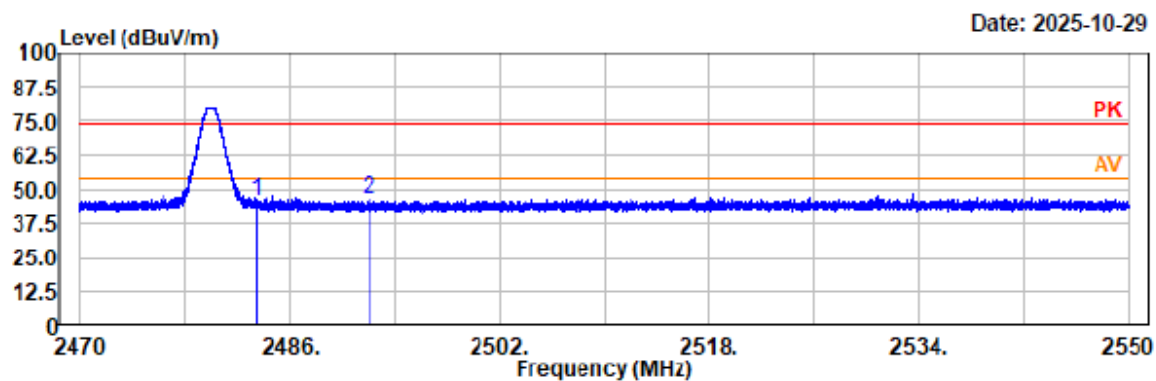


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	45.99	-0.77	45.22	74.00	28.78	vertical	Peak
2492.05	46.86	-0.73	46.13	74.00	27.87	vertical	Peak

CT51

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

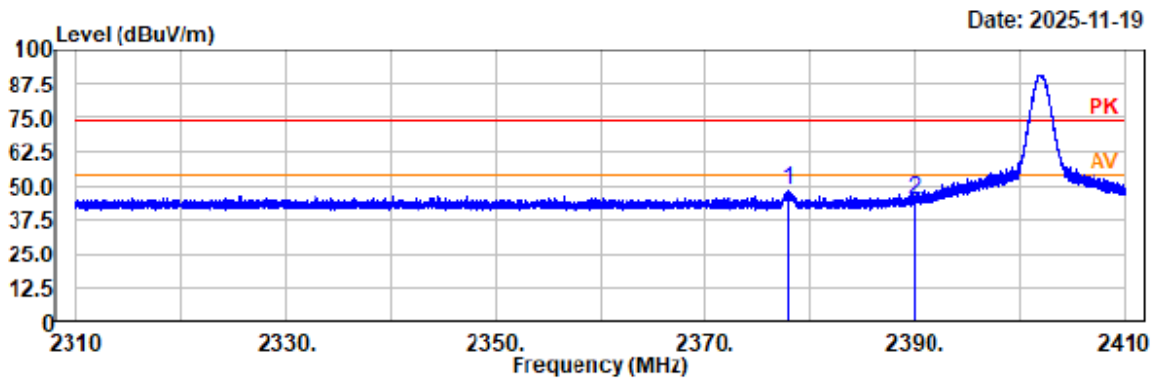


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2378.05	49.45	-1.21	48.24	74.00	25.76	horizontal	Peak
2390.00	45.88	-1.15	44.73	74.00	29.27	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

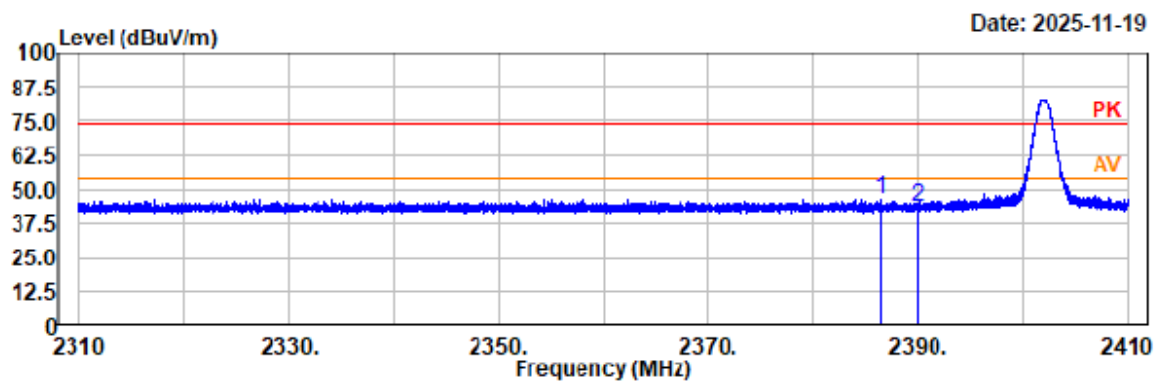


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2386.38	47.69	-1.16	46.53	74.00	27.47	vertical	Peak
2390.00	44.37	-1.15	43.22	74.00	30.78	vertical	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

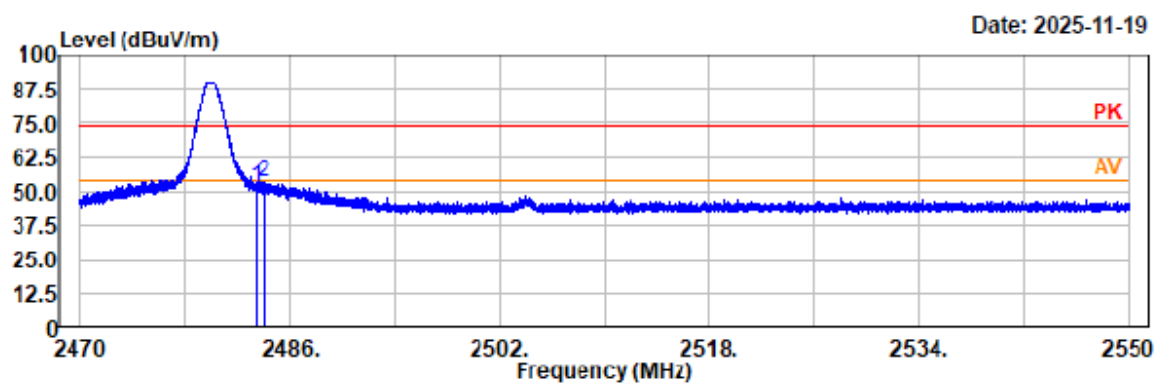


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	51.52	-0.77	50.75	74.00	23.25	horizontal	Peak
2484.06	53.92	-0.76	53.16	74.00	20.84	horizontal	Peak

Project No.: 2507X19514E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: CT51
Test distance: 3m

Temp/Humi/ATM: 22.4°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

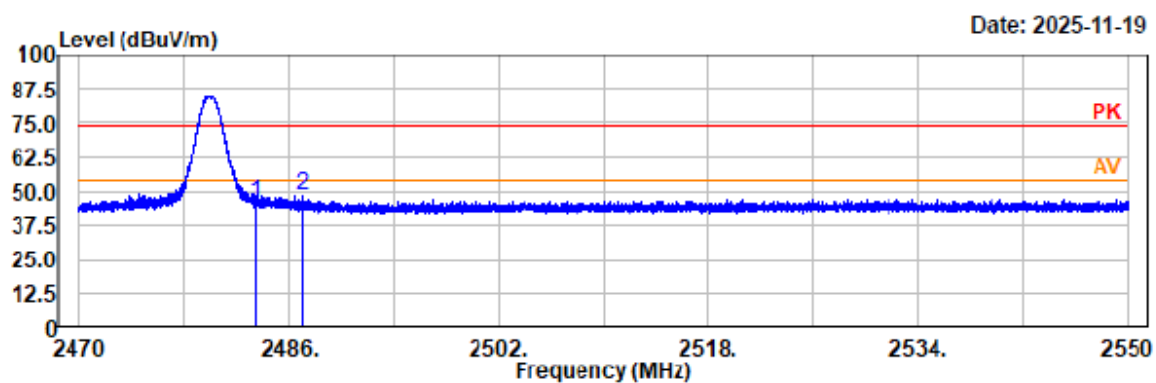


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	46.47	-0.77	45.70	74.00	28.30	vertical	Peak
2487.01	49.27	-0.75	48.52	74.00	25.48	vertical	Peak


Antenna-port conducted emission

BLE 1M


BLE_1M_Low_Channel

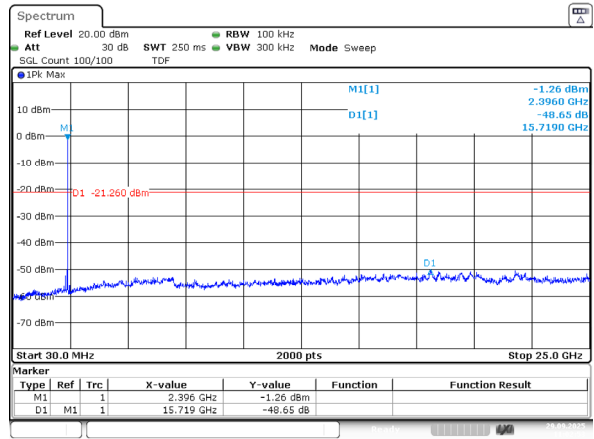

BLE_1M_Middle_Channel

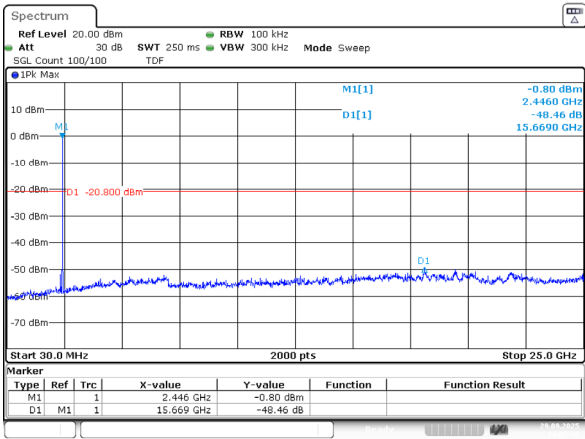


BLE_1M_High_Channel

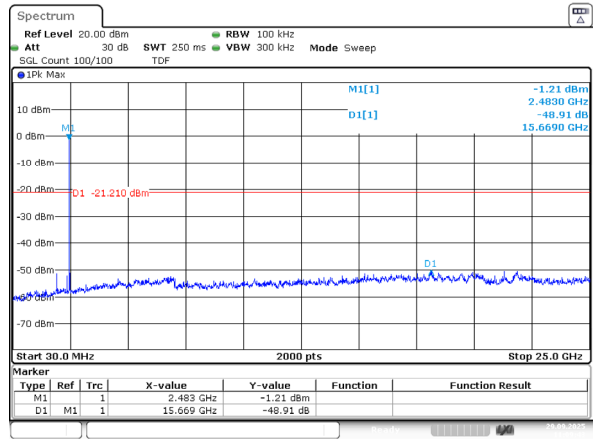

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.8

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.

Test Data


Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-09-29	Environment:	Temp.: 23.5°C Humi.: 63% Atm :100.1 kPa

Test Result: Compliant

Test Modes	Test Channel	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	Lowest	2402	0.673	≥ 0.5
	Middle	2440	0.669	≥ 0.5
	Highest	2480	0.669	≥ 0.5


BLE 1M

BLE_1M_Low_Channel

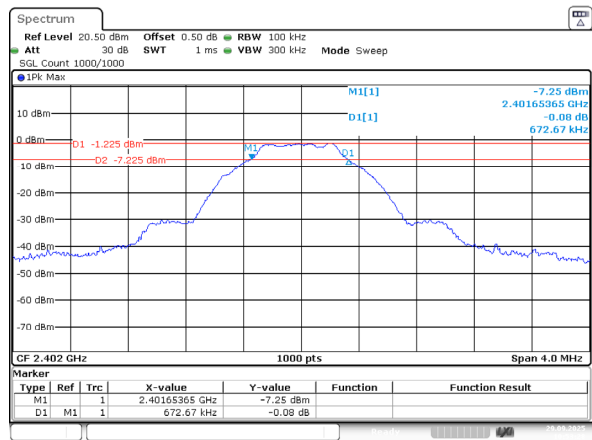


ProjectNo.: 2507X19514E-RF Tester: Braylon Ma
Date: 29_SEP_2025 10:53:28

BLE_1M_Middle_Channel

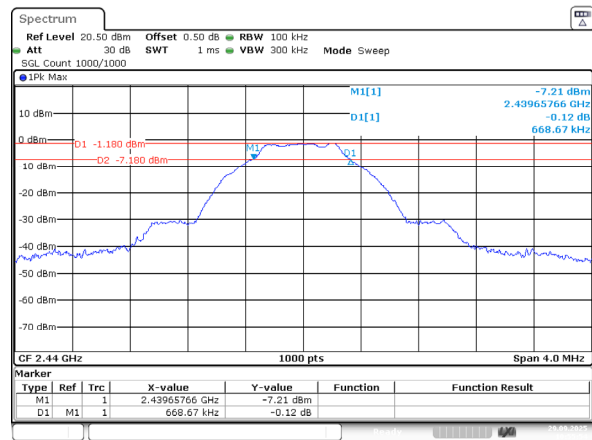

ProjectNo.: 2507X19514E-RF Tester: Braylon Ma
Date: 29_SEP_2025 10:55:55

BLE_1M_High_Channel

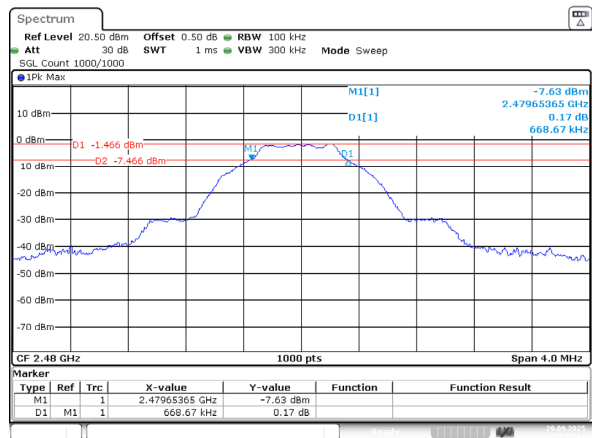


ProjectNo.: 2507X19514E-RF Tester: Braylon Ma
Date: 29_SEP_2025 10:57:40

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

EUT Setup



Test Procedure

According to ANSI C63.10-2020 Section 11.9.1.1

the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = No faster than coupled (auto) time.
- Detector = peak.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.




Test Data

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-09-29	Environment:	Temp.: 23.5°C Humi.: 63% Atm :100.1 kPa

Test Result: Compliant


Test Modes	Test Channel	Test Frequency (MHz)	Maximum Conducted Peak Output Power(dBm)	Limit (dBm)
BLE 1Mbps	Lowest	2402	-0.28	≤30
	Middle	2440	-0.24	≤30
	Highest	2480	-0.54	≤30

BLE 1M

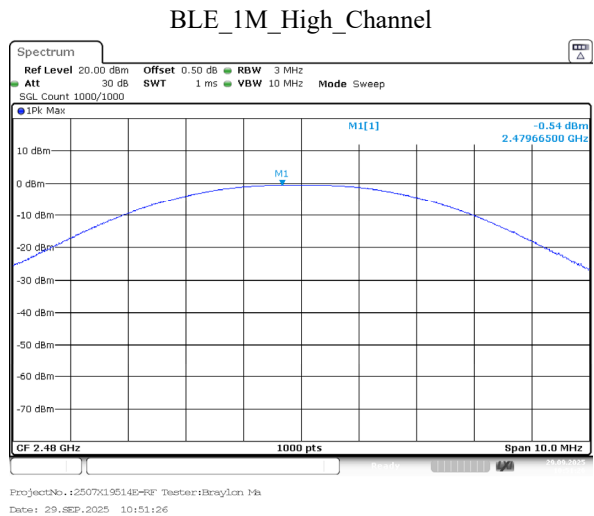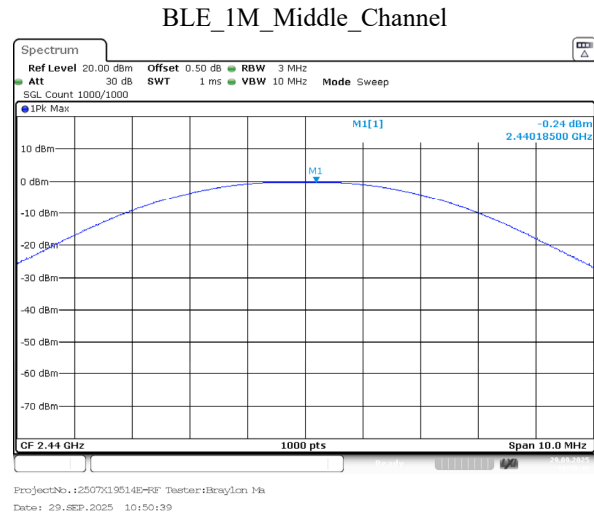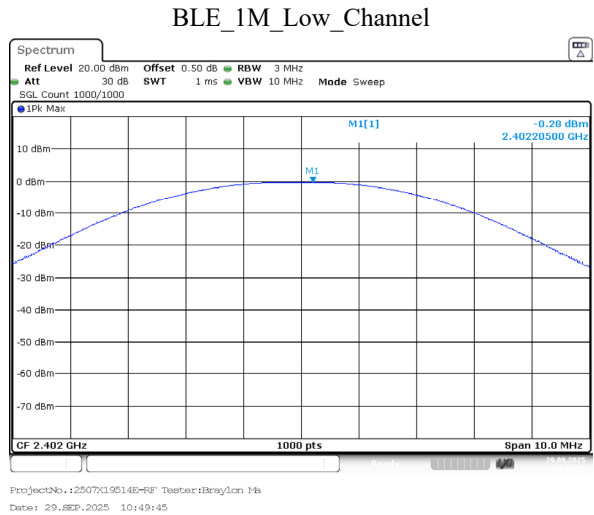

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution. NOTE—the number of points can also be increased for large spans to retain frequency resolution
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.


Test Data

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-09-29	Environment:	Temp.: 23.5°C Humi.: 63% Atm :100.1 kPa


Test Result: Compliant

BLE 1M

BLE_1M_Low_Channel

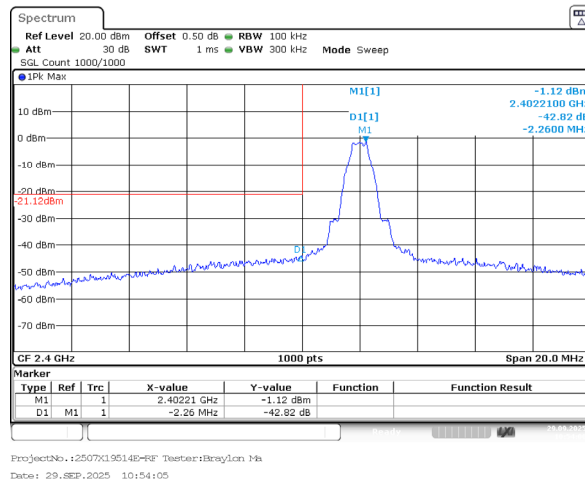


BLE_1M_High_Channel

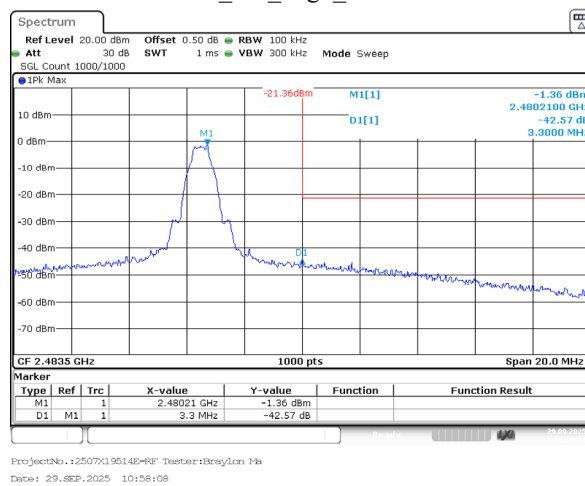

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span >1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test Data


Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2025-09-29	Environment:	Temp.: 23.5°C Humi.: 63% Atm :100.1 kPa

Test Result: Compliant

Test Modes	Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	Lowest	2402	-13.87	≤ 8.00
	Middle	2440	-13.83	≤ 8.00
	Highest	2480	-14.2	≤ 8.00


BLE 1M

BLE_1M_Low_Channel

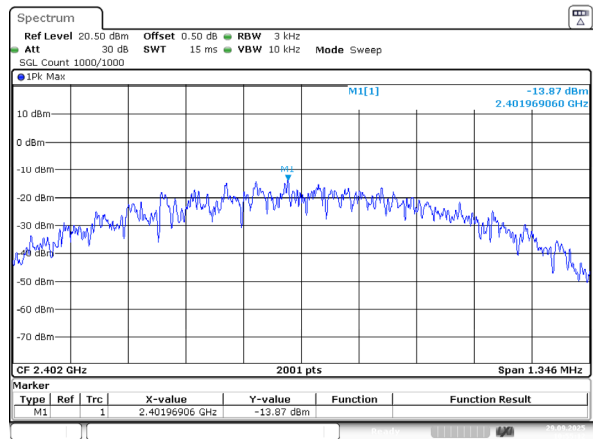


ProjectNo.: 2507X19514E-RF Tester: Braylon Ma
Date: 29_SEP_2025 10:55:12

BLE_1M_Middle_Channel

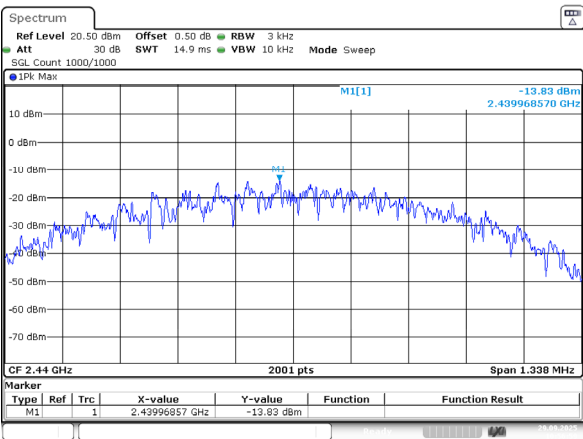

ProjectNo.: 2507X19514E-RF Tester: Braylon Ma
Date: 29_SEP_2025 10:57:00

BLE_1M_High_Channel

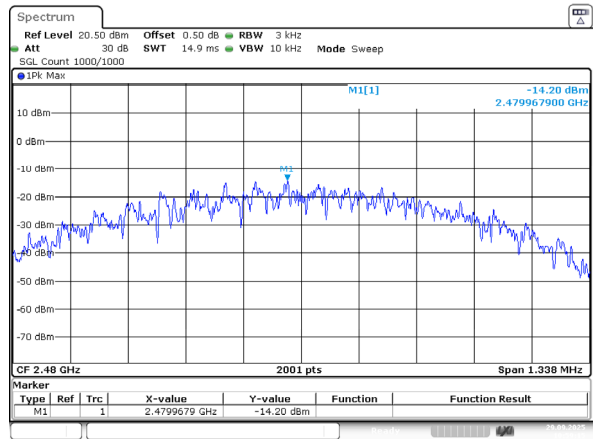

ProjectNo.: 2507X19514E-RF Tester: Braylon Ma
Date: 29_SEP_2025 10:59:15

EUT PHOTOGRAPHS

Please refer to the attachment 2507X19514E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2507X19514E-RF-INP EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2507X19514E-RF-TSP SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

******* END OF REPORT *******