

Test Laboratory: BTL Inc. (Dongguan)

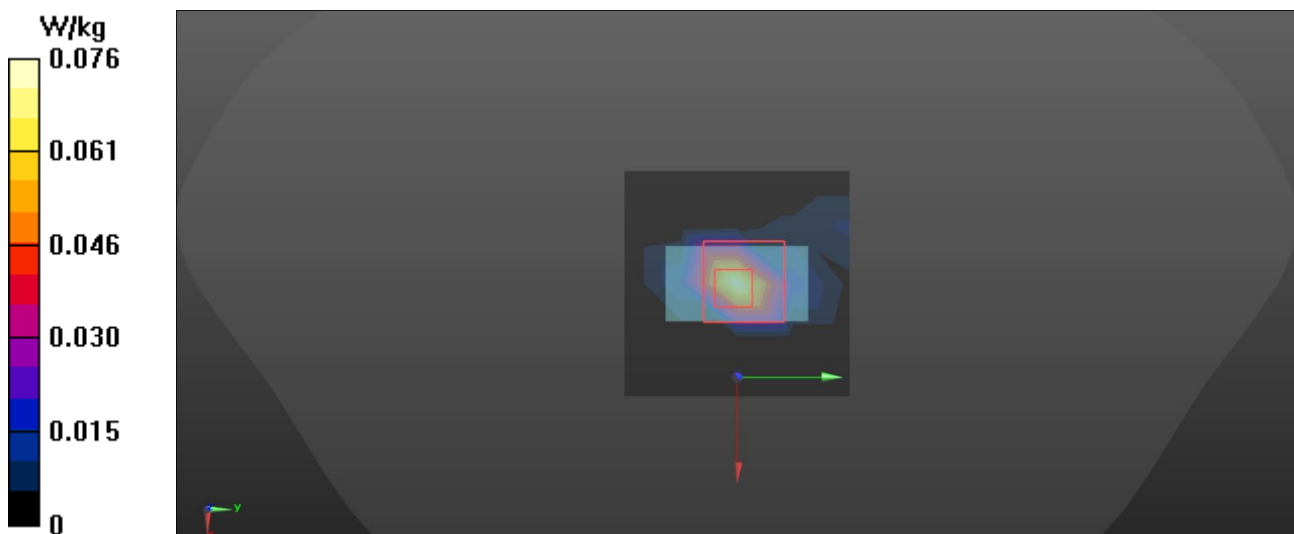
Date: 2026/1/22

B07_BT DH5_CH39_Right Side_Left Earphone_0mm**DUT: Test sample;**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2441 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.332$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$ **DASY Configuration:**

- Probe: EX3DV4 -SN7693;ConvF(7.29, 7.14, 7.75) @2441MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2025/4/8
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 2081
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.0762 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.647 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.204 W/kg **SAR(1 g) = 0.035 W/kg ; SAR(10 g) = 0.010 W/kg** Smallest distance from peaks to all points 3 dB below = 13.5 mm Ratio of SAR at M2 to SAR at M1 = 18.1% Maximum value of SAR (measured) = 0.0645 W/kg 

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/1/22

B13_BT DH5_CH0_Right Side_Right Earphone_0mm

DUT: Test sample;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2402 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 38.481$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4-SN7693; ConvF(7.29, 7.14, 7.75)@2402 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2025/4/8
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 2081
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.0640 W/kg

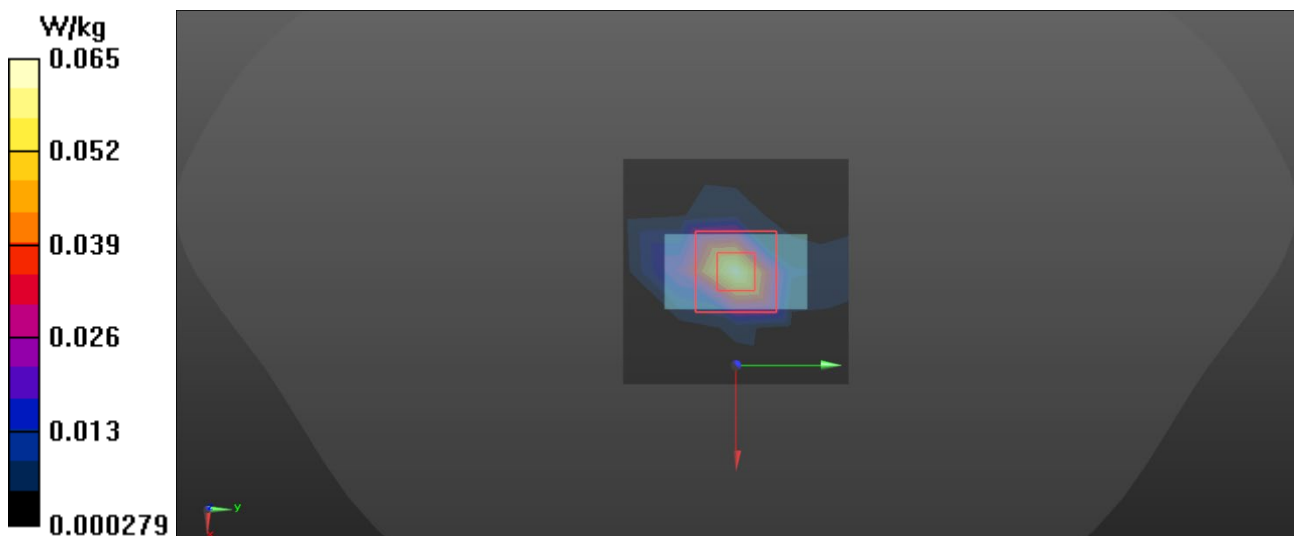
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.739 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0960 W/kg
SAR(1 g) = 0.032 W/kg ; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 14 mm

Ratio of SAR at M2 to SAR at M1 = 35.5%

Maximum value of SAR (measured) = 0.0651 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/1/22

B22_BT BLE_CH0_Right Side_Left Earphone_0mm

DUT: Test sample;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2402 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 38.481$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV -SN7693; ConvF(7.29, 7.14, 7.75) @2402MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2025/4/8
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial:2081
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.0574 W/kg

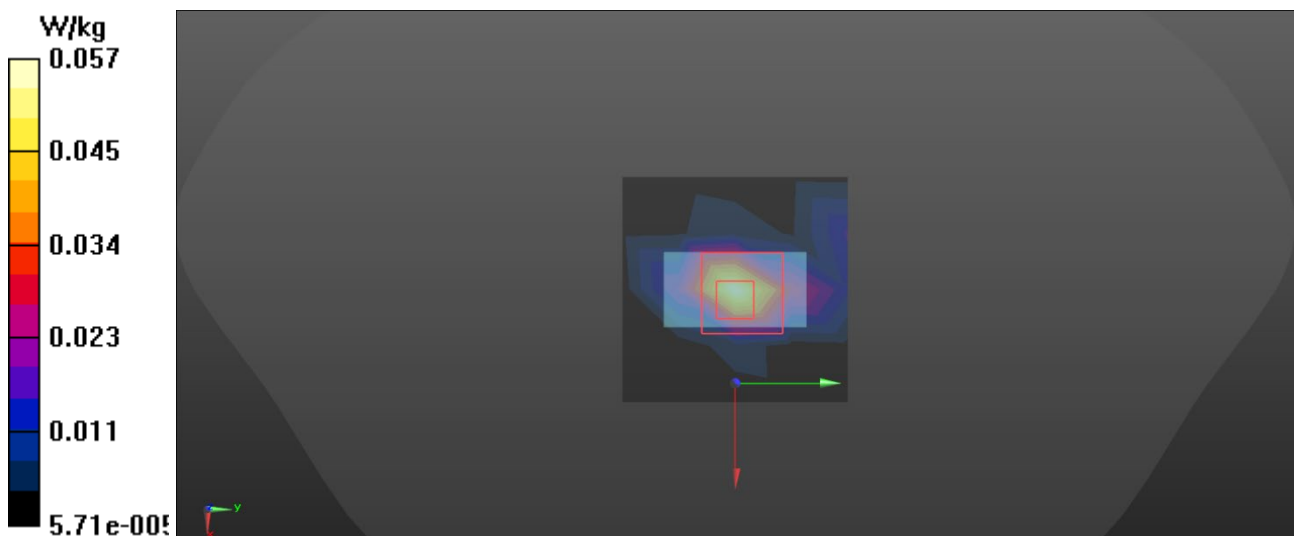
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.280 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.101 W/kg
SAR(1 g) = 0.034 W/kg ; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 30.7%

Maximum value of SAR (measured) = 0.0567 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/1/22

B31_BT BLE_CH0_Right Side_Right Earphone_0mm

DUT: Test sample;

Communication System: UID 0, Bluetooth (0); Frequency: 2404 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2402 \text{ MHz}$; $\sigma = 1.836 \text{ S/m}$; $\epsilon_r = 38.481$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4-SN7693; ConvF(7.29, 7.14, 7.75)@2404MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2025/4/8
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 2081
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.0798 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.174 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.116 W/kg
SAR(1 g) = 0.040 W/kg ; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 36.9%

Maximum value of SAR (measured) = 0.0808 W/kg
