

Test Laboratory: BTL Inc.(Dongguan)

Date: 2026/3/30

B07_Bluetooth_BLE2M_CH39_Rear Face_Left Earphone_0mm**DUT: Test sample;**

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 39.815$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.05, 6.88, 7.15) @2480MHz;Calibrated: 2026/1/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (5x5x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00891 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.401 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.00519 W/kg

SAR(1 g) = 0.00164 W/kg; SAR(10 g) = 0.00101 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid=12.5mm

Ratio of SAR at M2 to SAR at M1 = 2.1%

Maximum value of SAR (measured) = 0.00302 W/kg

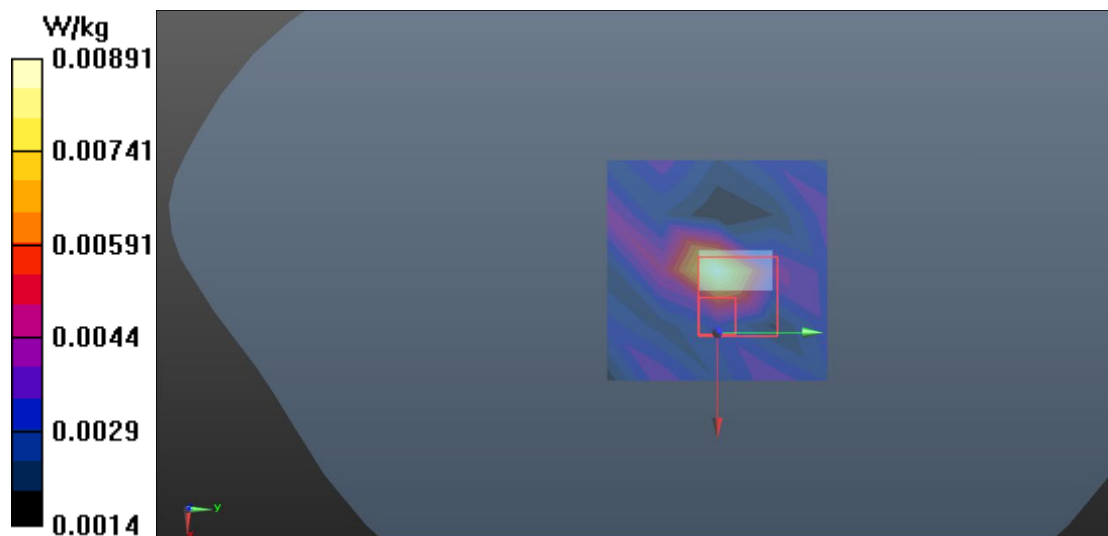

Test Laboratory: BTL Inc.(Dongguan)

Date: 2026/3/30

B17_Bluetooth_BLE2M_CH19_Rear Face_Right Earphone_0mm**DUT: Test sample;**

Communication System: UID 0, Bluetooth (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.846 \text{ S/m}$; $\epsilon_r = 39.926$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$ **DASY Configuration:**

- Probe: EX3DV4 - SN7515; ConvF(7.05, 6.88, 7.15) @2440MHz;Calibrated: 2026/1/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (5x5x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.0112 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.316 V/m ; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.0120 W/kg **SAR(1 g) = 0.0037 W/kg ; SAR(10 g) = 0.0017 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid= 13.8mm Ratio of SAR at M2 to SAR at M1 = 23% Maximum value of SAR (measured) = 0.00835 W/kg 