



深圳市天逸源电子科技有限公司
Shenzhen Tianyiyuan Elec&Technology CO.,Ltd

Recognition book

SPECIFICATION FOR APPROVAL

Name: WIFI/BT 2.4/5.8G Antenna

Item No: TTY-TX2811

Custoer name: Shenzhen dry sound Technology Co., LTD.

Company stamp: _____

drawing			Customer approve
MADE	CHECKED	APPROVED	
QIU	jack	Miketang	
DATE: 2023.09.26			DATE

6th Floor, No. 50A, Fengtang Avenue, Xintian Community,
Fuhai Subdistrict, Bao'an District, Shenzhen City

1、Specifications

The report provides a test of the electrical performance parameters of the TYY-TX2811 Shenzhen dry sound Technology Co., LTD. antenna, which is a science and technology model.TYY-TX2811 WIFI Built in antenna,WIFIAntenna is made bycopper pipe+RF Line composition。 (As follows 1 Shown)

Electrical technical parameters			
电 性 能 指 标		Electrical Specifications	
频率范围	2400~2500MHZ 5180~5320MHZ 5700~5800MHZ	Frequency Range	2400~2500MHZ 5180~5320MHZ 5700~5800MHZ
电压驻波比	≤2.0	VSWR	≤2.0
增益	4.23dBi (MAK)	GAIN	4.23dBi (MAK)
输入阻抗	50 Ω	Input Impedance	50 Ω
机 械 指 标		Mechanical Specifications	
天线颜色	黑色	Antenna Color	BLACK
接口形式	IPEX-1	Input connector	IPEX-1
线长度	150mm	Cable length	150mm
工作温度	-40℃~+85℃	Working Temperature	-40℃~+85℃
工作湿度	20~80%	Working Humidity	20~80%

Chart 1 TYY-TX2811 Product size

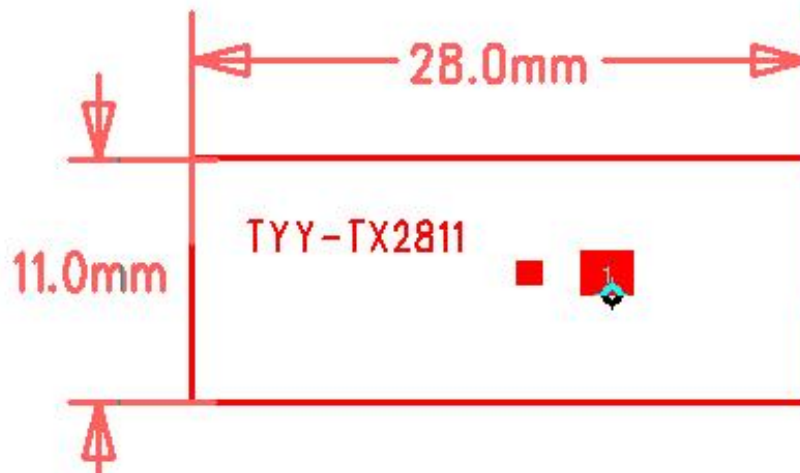
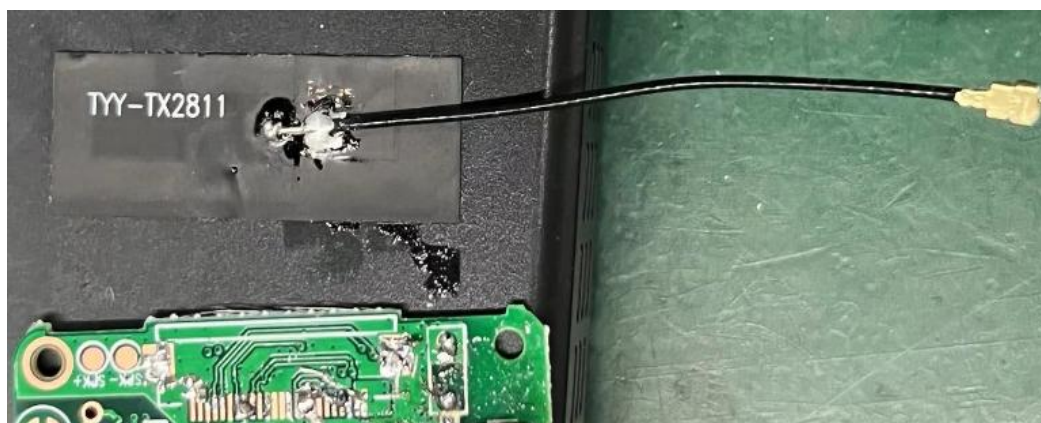


Chart 2 TYY-TX2811 (WIFI antenna (line length 150mm with 1 generation terminal))

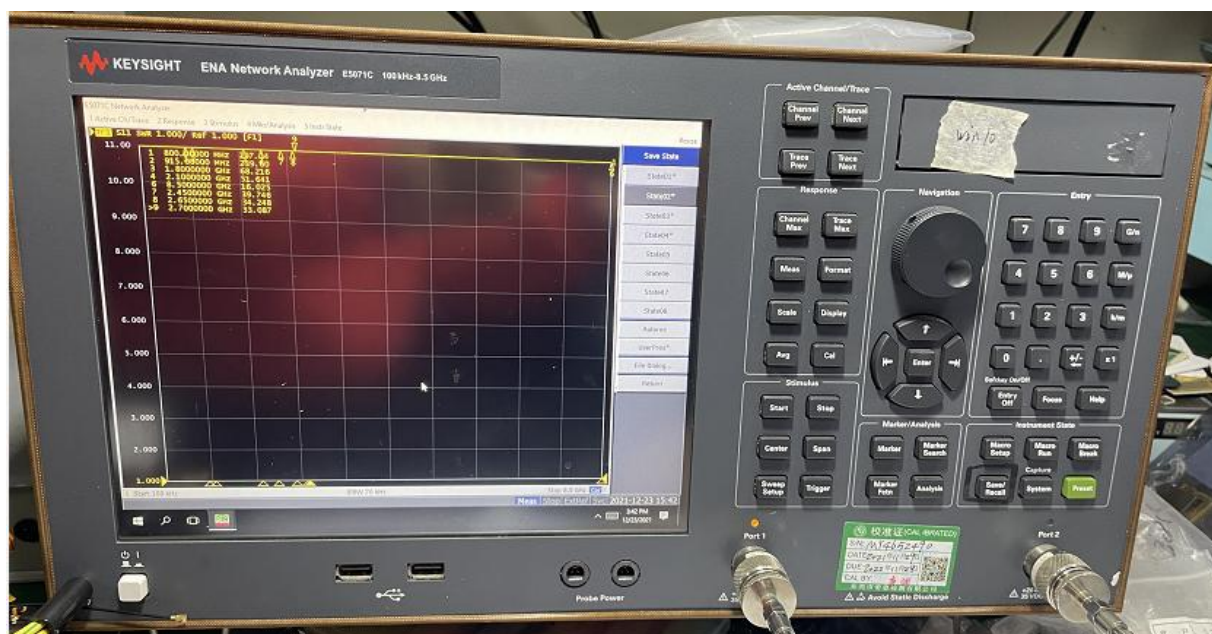


Chart 3 Location of antenna patch



Matters needing attention: WIFI antenna behind the tear tape on the back glue stick flat side, away from the screen on the back of the metal, away from the loudspeaker hardware, if the antenna near the metal lead to WIFI signal frequency deviation, make the antenna standing wave ratio and power and efficiency will become poor, and the signal will become worse, the frequency shift signal variation can also cause interference, so must be in accordance with our marking the location of the antenna, thank you!


Chart 4 Agilent E5071C Network analyzer



2. Electrical properties

2.1 WIFI Antenna matching circuit

This item matching circuit is provided by the customer.

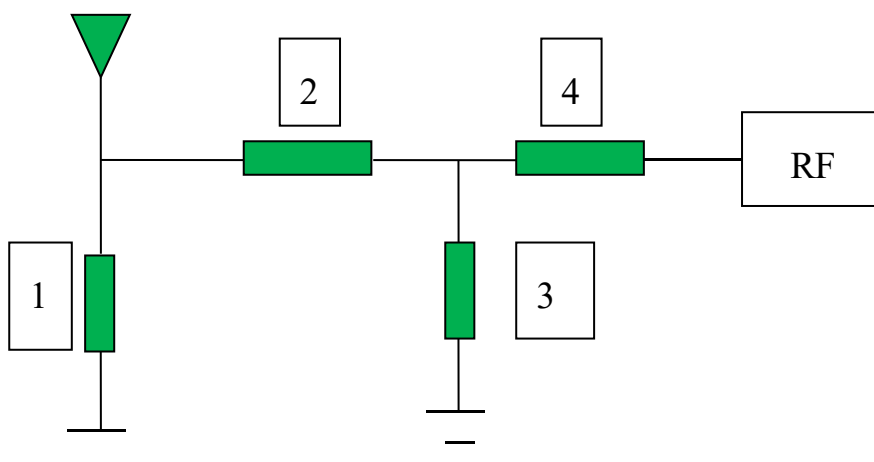

Element number	1	2	3	4
WIFI optimum	NC	0 ohm	NC	
Original (spare)	50 ohm matching (inductance capacitance / sunlord Darfon)			

Chart 5 WIFI Return loss


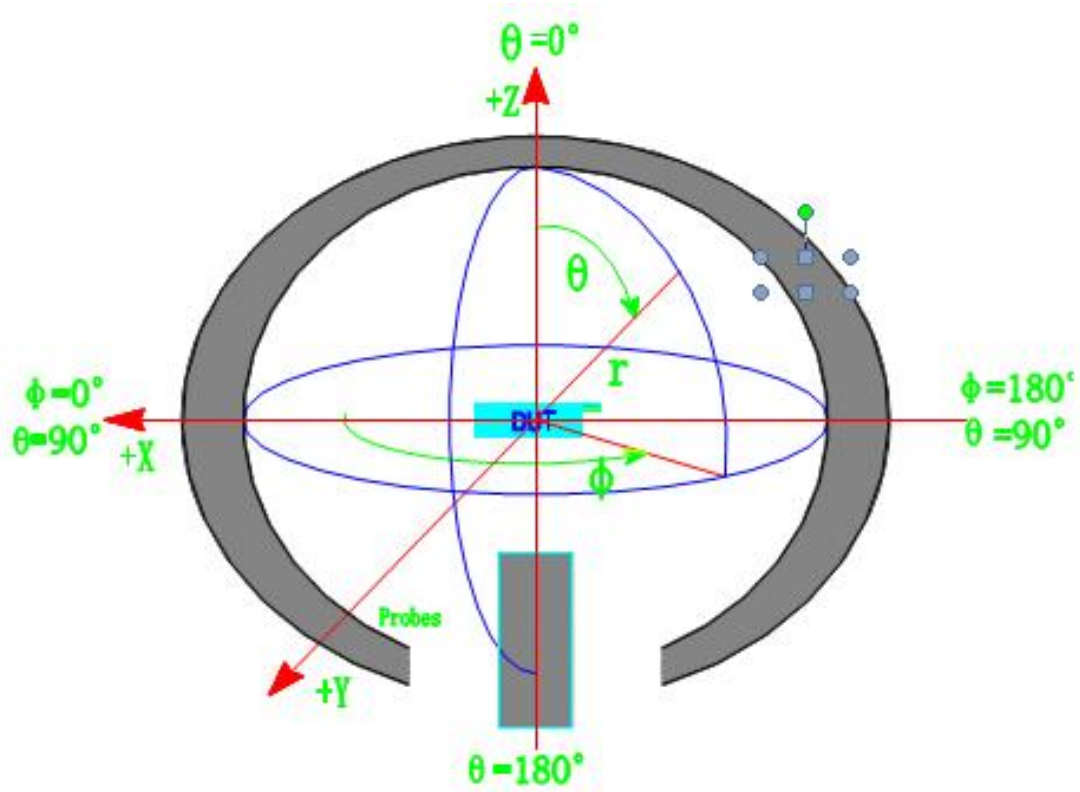


Chart 6 OTA Microwave dark room



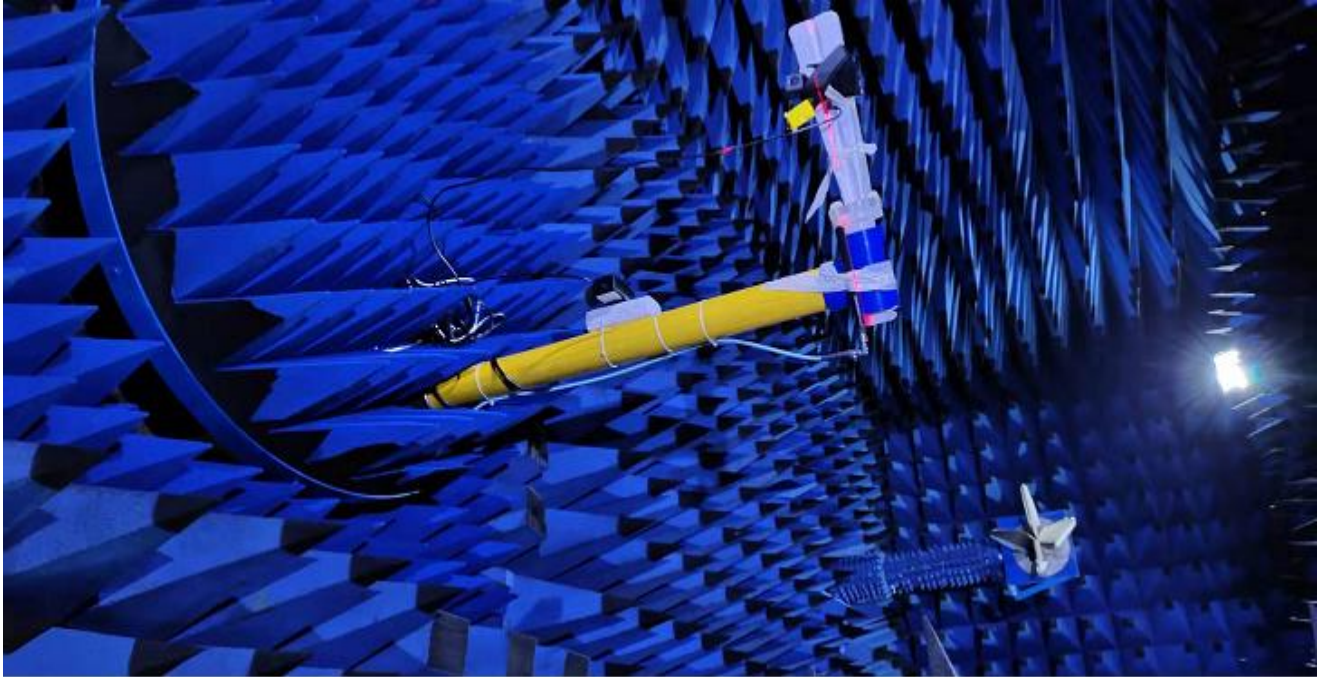

Test environment: OTA743 darkroom, 8960/W500/8703ES/5071C, the machine is placed back to 4 meters away from the standard horn antenna turntable

2.3 Bobbi (VSWR) test

2.3.1. Test setup

Connect the VSWR test device are: Agilent E5071B network analyzer from 50 ohm coaxial Cable 120mm long

Brass & test fixture

Processing test fixture: 50 ohm antenna leads to SMA-J connector from the test point on the plate PCB with a rigid cable, and a

Connect the choke tube, and then sequentially connected with other devices.

WIFI In Bobbi

4. 3D dynamic test of the whole machine

4.1 Test site

TCT microwave anechoic chamber: the test frequency range is 800MHz-6GHz, the quiet zone range is 50cm circle, and the reflectivity is less than -90 dB.

Chart 7 Agilent E5071C network analyzer


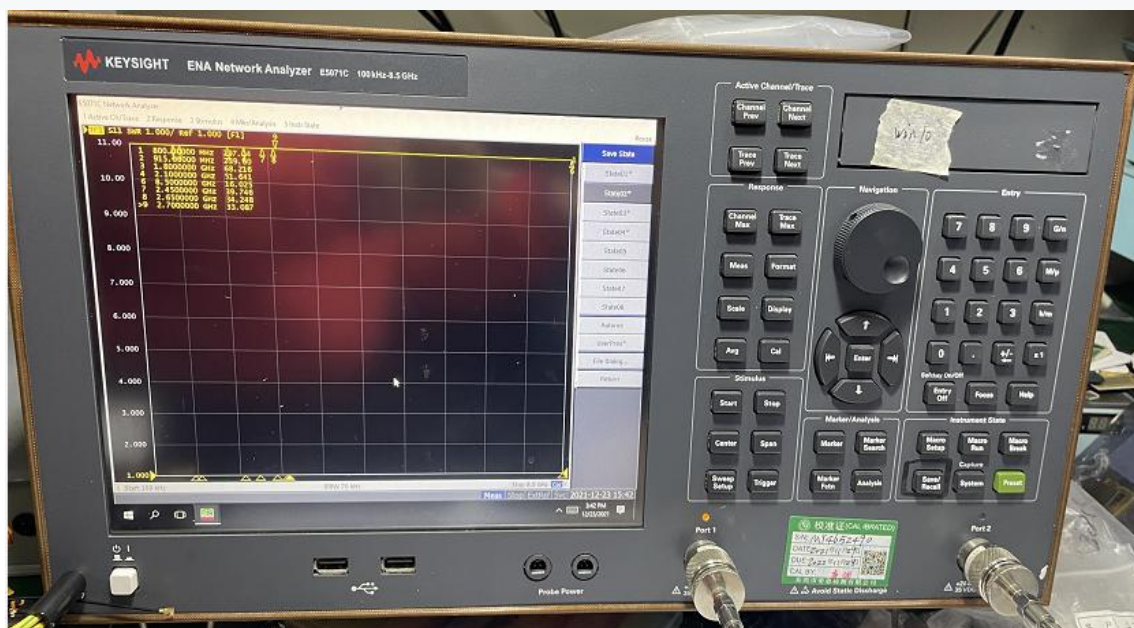


Chart 8 WIFI VSWR

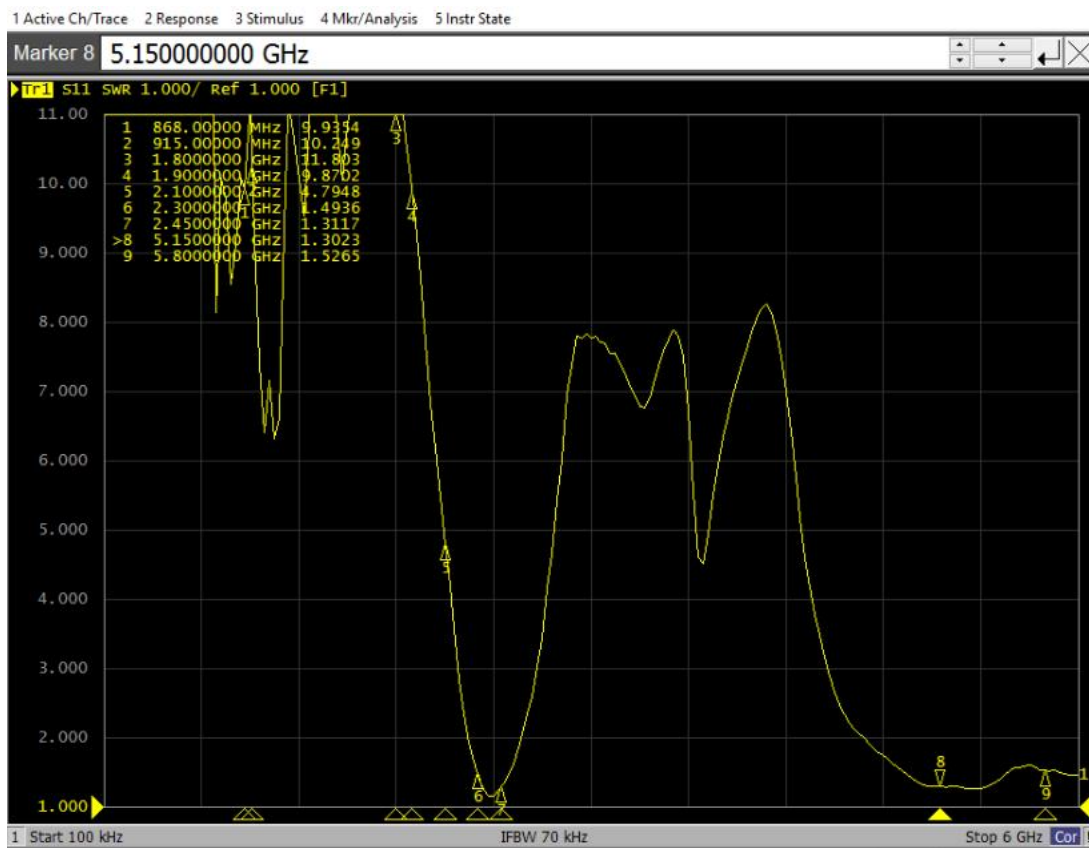

standard	Low frequency		High frequency		
frequency (MHz)	2400	2450	5150	5800	

VSWR	1.3	1.3	1.3	1.5	
------	-----	-----	-----	-----	--

Chart 9 Elevation map coverage

Frequency ID	1	3	4	7	8	9	10	12	12	13	14	15	16	22	22
Frequency (MHz)	2400.0	2420.0	2450.0	2460.0	2470.0	2480.0	2490.0	5180.0	5220.0	5230.0	5250.0	5350.0	5720.0	5745.0	5800.0
Efficiency (dBi)	-2.44	-2.50	-2.22	-1.59	-1.52	-1.47	-1.86	-1.49	-1.49	-1.54	-1.08	-2.03	-2.62	-1.55	-1.55
Gain (dBi)	2.22	2.61	3.19	3.80	3.39	2.91	2.31	2.39	2.39	2.22	2.13	2.71	2.22	2.82	2.83
Efficiency (%)	57.02	56.28	59.97	69.33	70.41	71.29	65.19	71.01	71.01	70.17	78.01	62.63	54.67	70.06	70.17
Directivity (dB)	4.66	5.11	5.41	5.39	4.92	4.38	4.17	4.88	4.88	4.76	5.21	4.74	4.85	4.37	4.57
Peak Gain Position (Theta)	144.00	141.00	144.00	124.00	144.00	144.00	144.00	80.00	80.00	139.00	127.00	86.00	79.00	81.00	82.00
Peak Gain Position (Phi)	180.00	180.00	180.00	210.00	180.00	180.00	180.00	90.00	90.00	60.00	90.00	270.00	90.00	90.00	91.00
Efficiency ThetaPol (%)	39.41	39.00	41.74	49.26	49.81	50.37	45.84	22.93	22.93	22.25	23.88	22.95	24.09	23.39	23.29
Efficiency PhiPol (%)	17.60	17.28	18.23	20.07	20.59	20.92	19.35	48.08	48.08	47.91	54.13	39.67	30.58	46.67	46.35
Upper Hem. Efficiency (%)	21.62	20.70	21.72	25.75	26.56	27.24	24.88	33.45	33.45	33.00	36.85	29.73	26.01	31.23	32.23
Lower Hem. Efficiency (%)	35.39	35.57	38.25	43.58	43.84	44.04	40.30	37.56	37.56	37.17	41.16	32.89	28.66	38.83	38.65








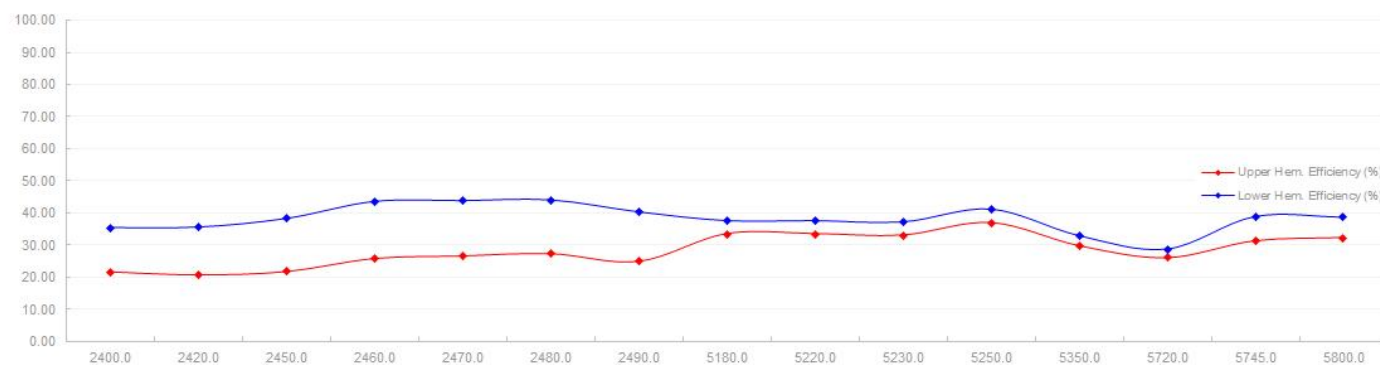



Chart 10 Directional diagram

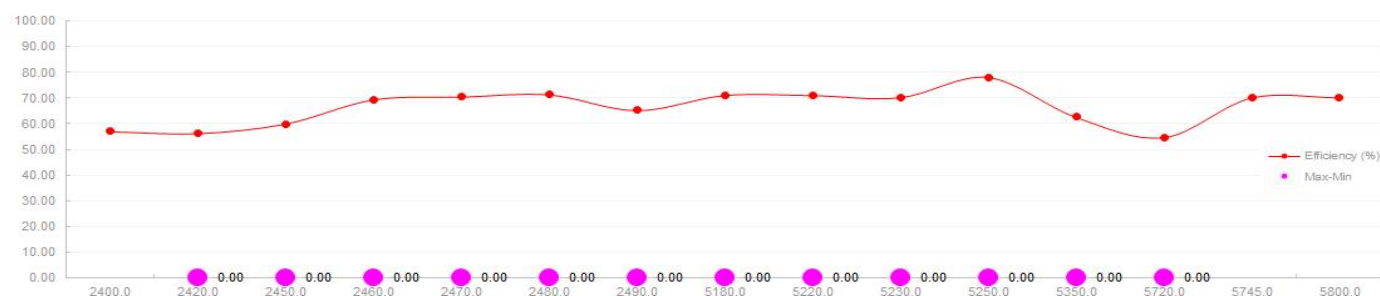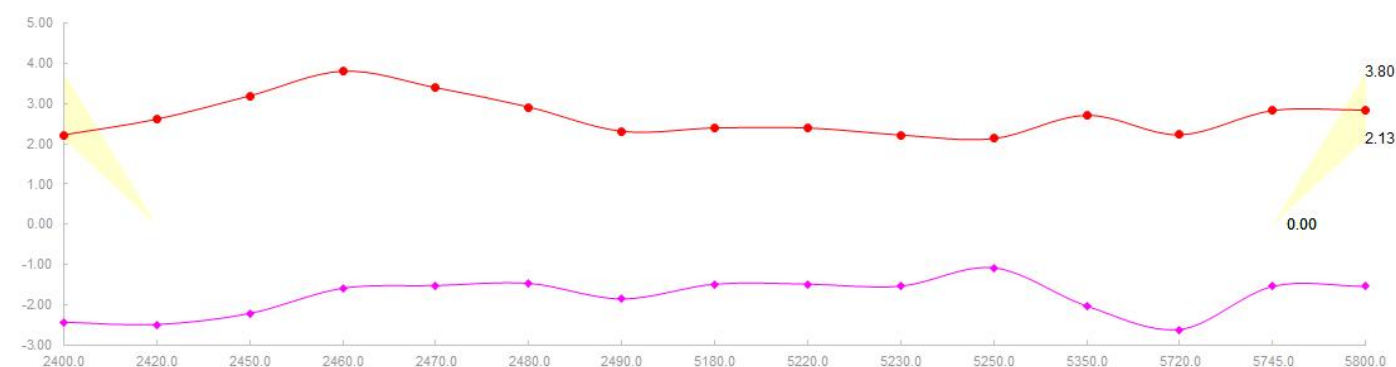


2400.0MHz H+V, Eff: 57.0%




















2400.0MHz Total(E1), Max= 2.22dBi




2400.0MHz Total(E2), Max= 1.02dBi




2400.0MHz Total(H), Max= -1.62dBi




2470.0MHz H+V, Eff: 70.4%








2470.0MHz Total(E1), Max= 3.39dBi




2470.0MHz Total(E2), Max= 2.29dBi




2470.0MHz Total(H), Max= 0.74dBi




5790.0MHz H+V, Eff: 66.3%








5790.0MHz Total(E1), Max= 0.62dBi



5790.0MHz Total(E2), Max= 2.63dBi



5790.0MHz Total(H), Max= 0.89dBi



3, recommendations and conclusions

This report is based on the customer Shenzhen dry sound Technology Co., LTD. Model project, the final version of the measured antenna electrical performance. As can be seen from the above test data, this antenna provides better electrical performance.

Tianyi R & D is looking forward to your confirmation, thank you for your cooperation!