

承认书

SPECIFICATION FOR APPROVAL

客户					
Customer:					
客户料号					
CUSTOMER P/N					
物料名称					
Material name:	Transmitting coil				
规格型号					
Specification model:	43.5*0.8*5.3				
日期					
DATE:	2025/12/12				
料号 remark:					

供方确认			客户确认		
APPROVED SIGNATURES			APPROVED SIGNATURES		
承办	审核	核准	检测	审核	核准
PREPARED BY	CHECKED BY	APPROVED BY	TESTED BY	CHECKED BY	APPROVED BY
张以宣	张高松	张运安			

地址: No. 1, Ximian Yong SAN Lane, Hongxing Village, Qicha, Shiwan Sub-district, Chancheng District, Foshan

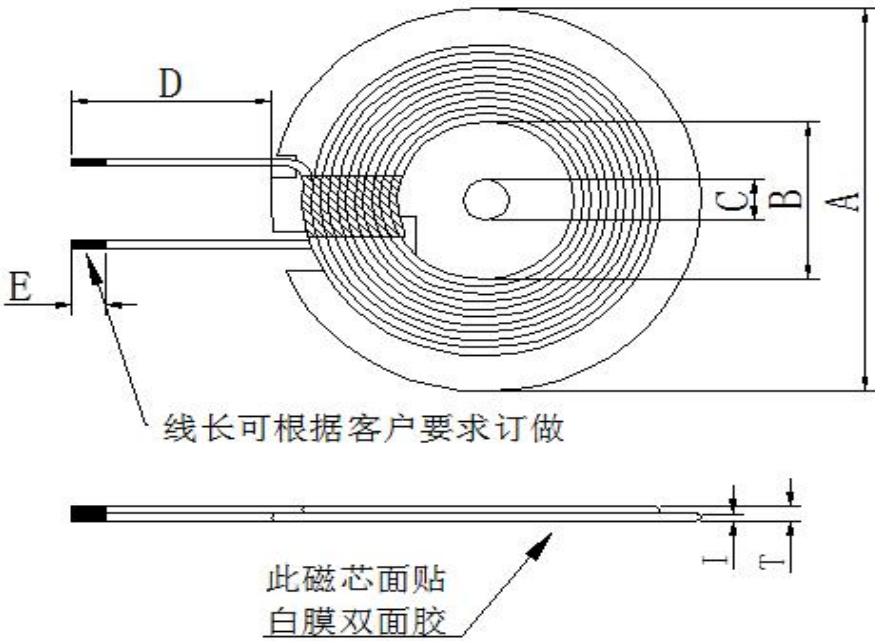
电话: 13679845853 QQ: 792699260

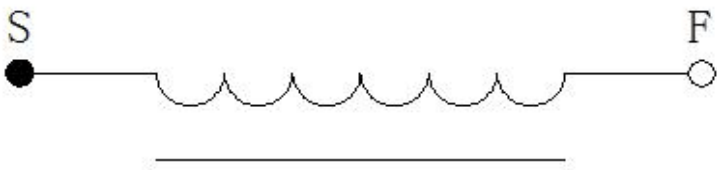
佛山市鑫逸丰电子有限公司

产品规格承认书

SPECIFICATION FOR APPROVAL

产品型号 DESC	43.5双槽背胶磁吸线圈	版本 REV:A	客户	四维联芯
			客户料号	
			料号	

一、尺寸 DIMENSION: (mm)		A	43.50±0.50
		B	20.50±0.50
		C	5.30±0.50
		D	50.00±3.00 线长可根据客户要求订做
		E	4.00±2.00
		I	0.80MAX
		T	2.00MAX
		备注	
		1	线径: 0.08*24*2P漆包线
		2	绕线圈数:10TS
		3	起尾线是否交叉: 都是
		4	线圈包6mm宽左右高温胶
		5	磁片背面贴双面胶

二、原理图 SCHEMATIC DIAGRAM:					
					

三、绕线参数 Winding Specification:					
序号 NO	端子 TERMINAL		线径 WIRE	圈数 Tums	绕线方向 Winding Direction
1	S	F	自粘漆包线0.08*48P	10Ts	CCW

四、电子特性 ELECTRICAL CHARACTERISTICS:					
温度TEMPERATURE: 25±10° C, 湿度RELATIVE HUMIDITY: 65±20%					
序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	L	S-F	6.8±10% μH	100KHz/1.0V	■ TH2817B ■ TH2817B ■ CH-502BC
2	Q Value	S-F	70 (Min)	100KHz/1.0V	
3	DCR	S-F	50m Ω (Max)	@ 25° C	