

POWER BANK FUNCTION



PD 30W OUT



Short press power button check battery

Supports fast charging for the speaker and reverse charging for your USB-C devices. (such as smartphones or tablets)

- Use a compatible USB-C data cable to connect the speaker and the device.
- Ensure the speaker's battery level is at least 20% to maintain reverse charging efficiency.

Type-C port specification:

Forward charging: 5V 3A

Reverse charging: 5V 3A

Note: Please don't supply power to large electronic devices (such as computers).

IP68 PROTECTION RATING



6 — Dustproof

Fully protected against dust ingress.
Keeps internal components safe in dusty outdoor environments.

8 — Waterproof

Protected against water immersion under specified test conditions.
Suitable for outdoor activities including camping, hiking, and beach use.

Rain & splashing water
Dusty environments
Outdoor adventures
Accidental water exposure

Important Notes

- The IP68 rating supports short-time underwater soaking and full dust isolation. Avoid prolonged underwater use.
- Make sure all ports and covers are securely closed before exposure to water. Never charge the speaker when its surface is wet, or the sealing cover is open.
- Avoid collision and scratching the waterproof gasket, otherwise its dustproof & waterproof capability will be weakened.
- Rinse with fresh water after exposure to salt water or chlorinated water.

MAGNETIC MOUNT READY WHEN YOU ARE



Magnetic Mount


- The speaker features a built-in magnetic mounting surface on one side, allowing it to securely attach to suitable metal surfaces or compatible magnetic accessories
- Each magnetic position is marked with a smiley face icon, with a U-shaped mark underneath for easy identification

Magnetic Strength & Function

- Equipped with a high-strength magnetic system
- Enables quick and convenient attachment to flat metal surfaces
- Provides stable positioning during normal use

Usage Notes

- Keep the magnetic surface away from magnetically sensitive items such as credit cards, magnetic cards, or data storage devices
- Ensure the contact surface is clean, dry, and flat to maintain optimal magnetic adhesion
- The magnetic mount is intended for surface attachment only
- Do not use it for hanging or load-bearing purposes
- Magnetic performance may vary depending on surface material, thickness, and environmental conditions

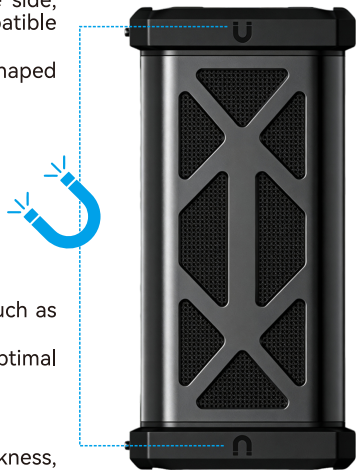

AMBIENT LIGHT



①



Long press
3S ON/OFF

① **Long press 3S:** Turn ambient light on or off.

②



Short press
Switch LED effects

② **Short press:** Switch LED effects.

- Gradient Mode — The light slowly transitions from one color to multiple colors.
- Flowing Light Mode — Multicolor light flows continuously along the light ring.
- Flashing Gradient Mode — The light flashes while slowly transitioning from one color to multiple colors.

Note: The LED brightness is preset and cannot be adjusted.