东莞市一佳电子通讯科技有限公司
DONGGUAN YIJIA ELECTRONICS COMMUNICATION TECHNOLOGY CO., LTD

规 格 承 认 书

SPECIFICATION FOR APPROVAL

日 期 Date	2025/10/30
编 号 File No	25103001
版 本 Revision	1.0

客 户 CUSTOMER: 天有为

客户料号 CUSTOMER NO: SOR-5GY0-F17

品 名 PART NAME: WIFI Antenna L=95mm MHF

供方料号 SUPPLIER NO: YJQ01.097.025.301A

送样日期Date: 送样数量Q'TY:

客户确认CUSTOMER APPROVED BY		
APPROVAL	CHIEF	SUPERVISOR

供方确认 SUPPLIER SIGNATURE		
APPROVAL	CHECK	DESIGN
ChenGuoqiang	XieLi	ChenXingyi

YJ-RD-F04-A

承认书项目表

NO.	内 容（Contents）	页 数（Number of Page）	页 码（Page Code）
1	承认书封面（Spec Cover）	1	1
2	承认书项目表（Spec Item ）	1	2
3	工程成品图 （Drawing）	1	3
4	天线规格（Antenna Specification）	1	4
5	S参数测试 （S Parameter ）	1	5
6	无源测试 （Passive Test ）	3	6 ~ 8
7	方向图（Radiation Pattern ）	3	9 ~ 11
8	天线装配图（Antenna Profile）	3	12 ~ 14
9	材质证明（ Material Certificate ）	42	15 ~ 56
10	RoHS报告（ RoHS Test Report ）	**	**
11	N/A	N/A	N/A
12	-	-	-
13	-	-	-

RoHS Compatible

CUSTOMER	
PART NO	

REV.	DESCRIPTION	DATE
A	首次发行	2025-10-20

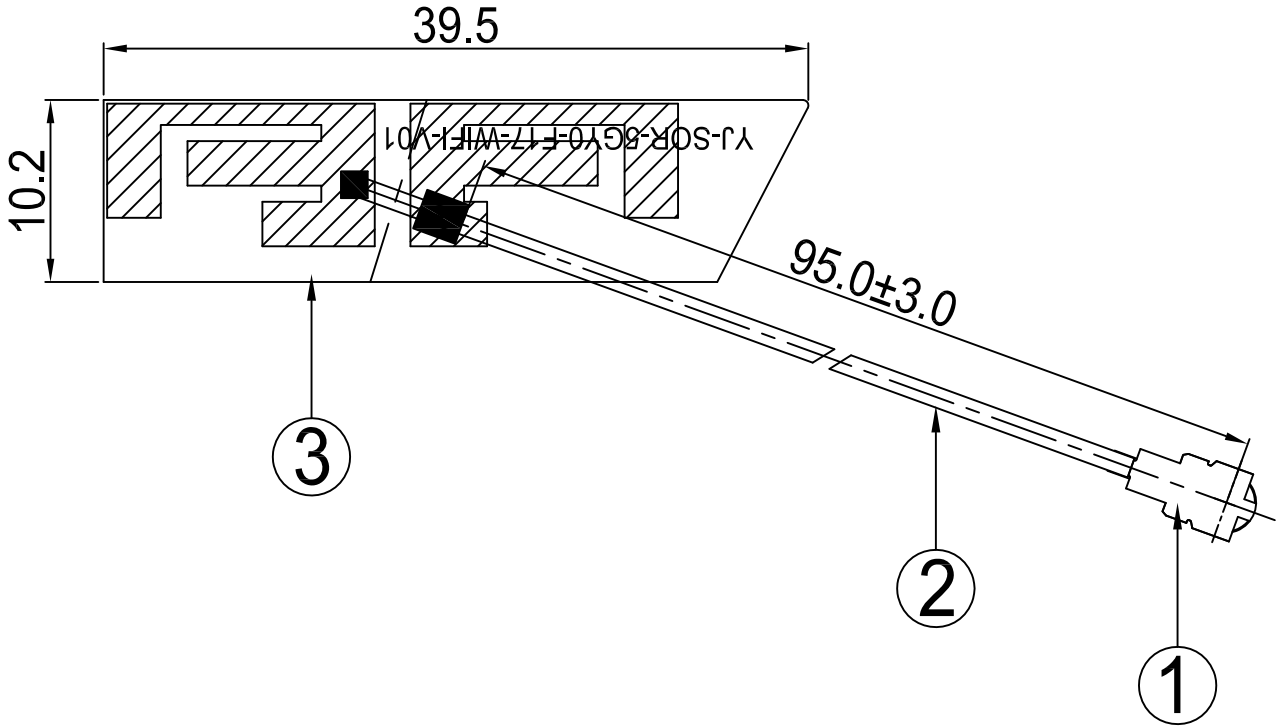

NO	PART NAME	DESCRIPTION	Material	Q.TY
3	FPC	39.5*10.2mm	FPC	1
2	Coaxial Cable	O.D.1.13 Black	O.D.1.13	1
1	Mini Connector	Au Plated 1代	Cu	1

东莞市一佳电子通讯科技有限公司
DONGGUAN YIJIA ELECTRONICS COMMUNICATION TECHOLOGY CO.,LTD

PART NAME: WIFI Antenna L=95mm MHF

PART NO.: YJQ01.097.025.301A

DATE: 2025-10-20

APPROVED BY	CHECKED BY	DESIGNED BY	
覃健宇	邓磊	廖光喜	UNITS: mm SCALE: 1/1 REVISION: A

Tolerance
X.X ±0.50
X.XX±0.15
X° ±3°

天线规格
Antenna Specification

Electrical Properties	
Frequency	2.4-2.5GHz 5.15-5.85GHz
Impedance	50 Ohm Nominal
V.S.W.R	2.0 Max
Gain	6.5 dBi@2.4-2.5GHz 3.6 dBi@5.15-5.85GHz
Radiation	Omni-directional
Polarization	Linear
Physical Properties	
Connector	1代IPEX
Cable Type	O.D.1.13mm
Cable Length	95mm
Cable Color	Black
Operating Temp.	-40 ~ +85 ˚C
Storage Temp / Humidity	25±5˚C / <70%

Agilent E5071C S Parameter Test // WiFi Antenna

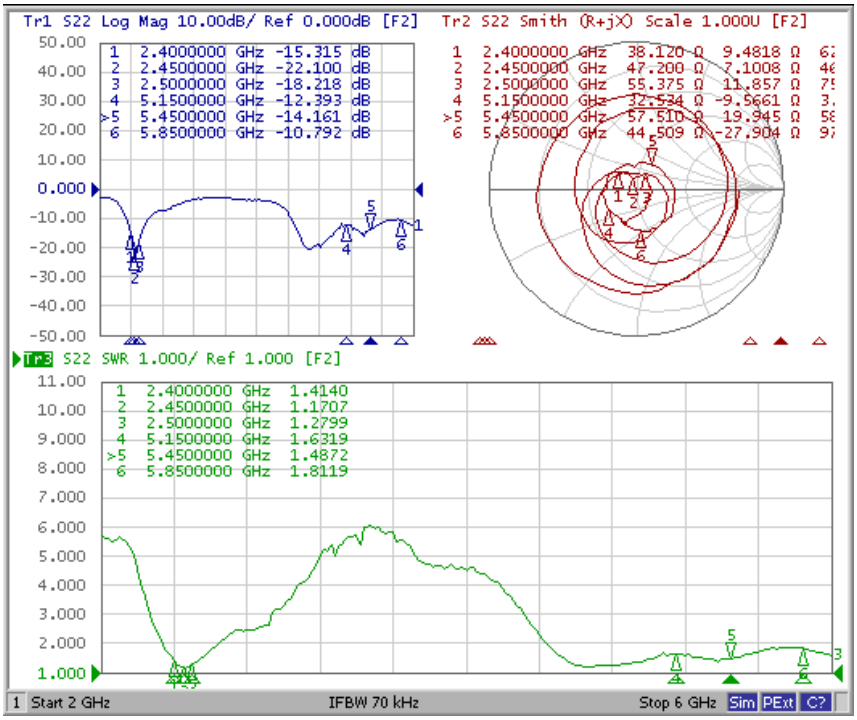

Antenna Passive Test

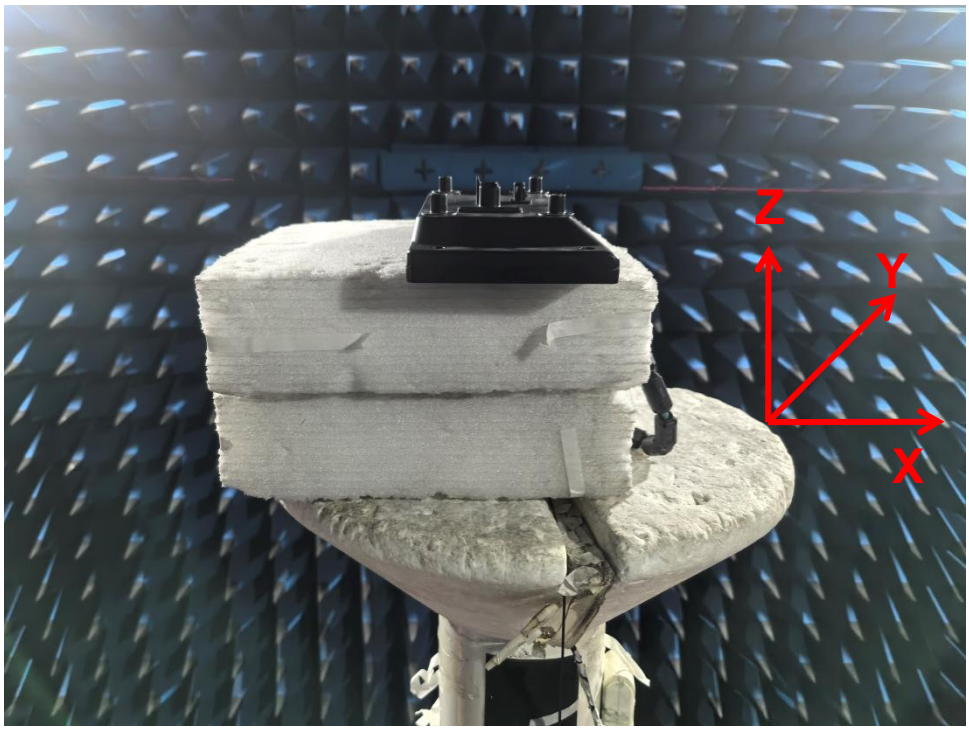

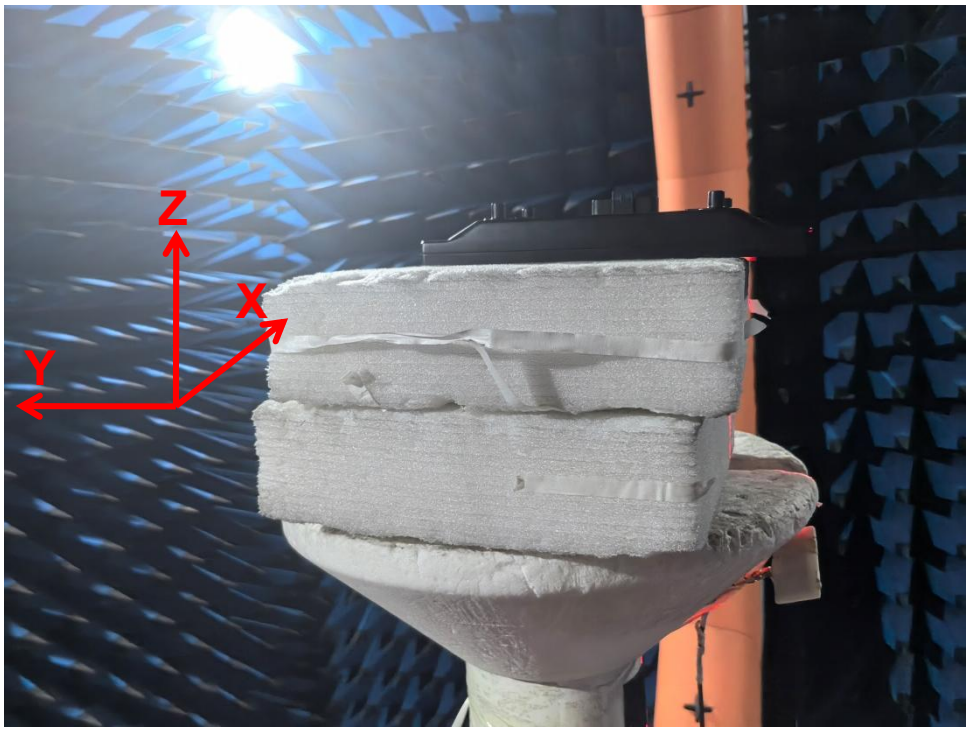

Passive Test For WiFi Antenna(2.4G)			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	59.1	-2.3	5.6
2410	60.7	-2.2	5.7
2420	61.6	-2.1	5.8
2430	61.2	-2.1	6.0
2440	61.1	-2.1	6.1
2450	62.5	-2.0	6.3
2460	61.3	-2.1	6.3
2470	61.6	-2.1	6.5
2480	60.8	-2.2	6.4
2490	60.7	-2.2	6.2
2500	58.2	-2.4	5.8

Passive Test For WiFi Antenna(5.8G)			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
5150	50.2	-3.0	3.1
5200	51.5	-2.9	3.3
5250	52.9	-2.8	3.3
5300	54.9	-2.6	3.2
5350	54.7	-2.6	3.1
5400	59.6	-2.3	3.2
5450	58.3	-2.3	3.0
5500	52.6	-2.8	2.6
5550	57.0	-2.4	3.6
5600	55.9	-2.5	3.2
5650	51.2	-2.9	2.4
5700	56.4	-2.5	2.8
5750	57.3	-2.4	3.4
5800	53.9	-2.7	2.7
5850	52.5	-2.8	2.2

Radiation Pattern For WiFi Antenna

2400MHz

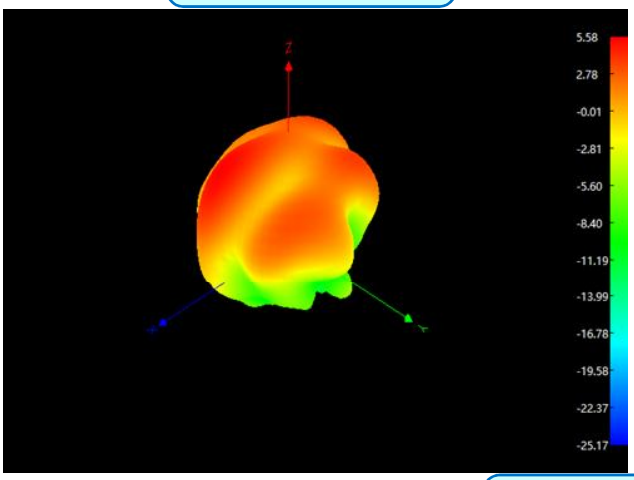

2450MHz

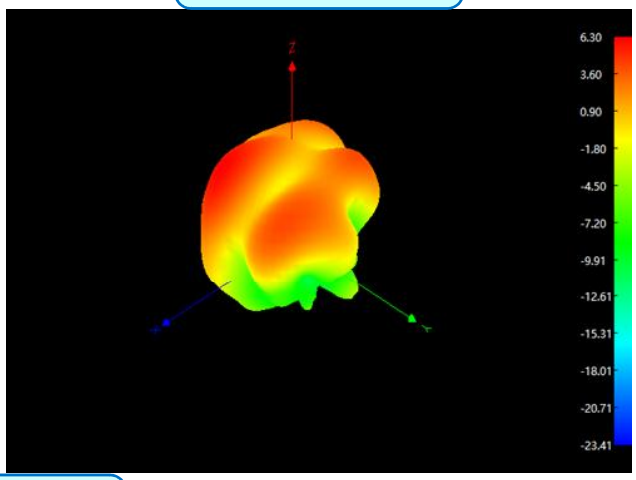

2500MHz

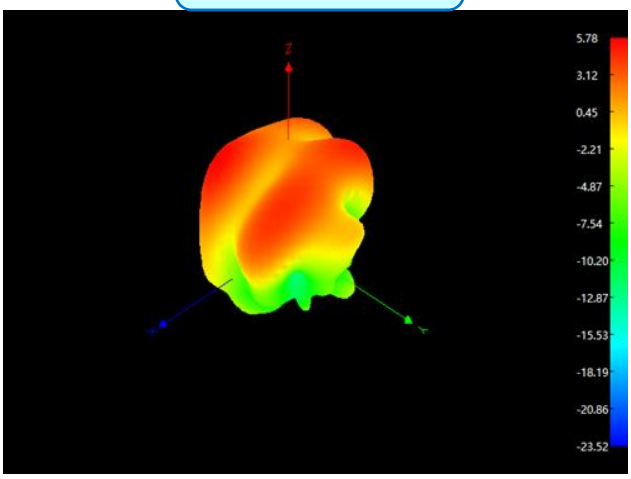

5150MHz

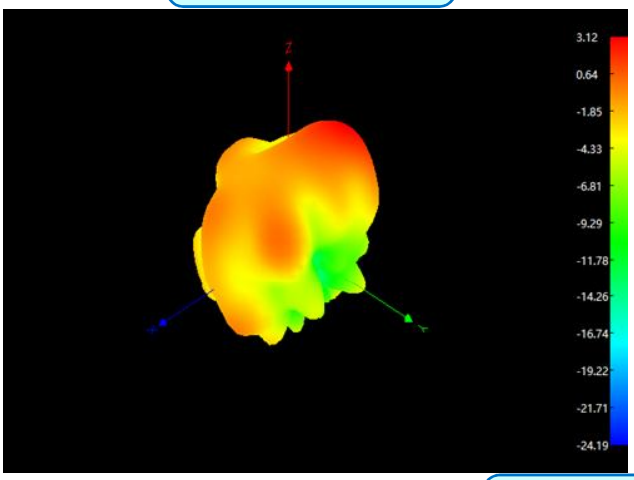

5500MHz

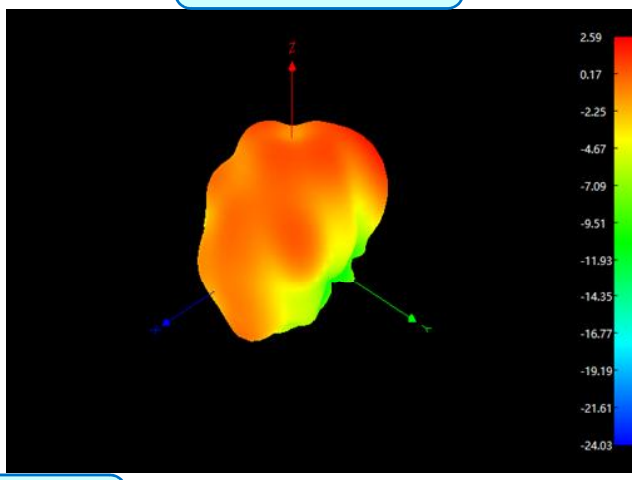

5850MHz

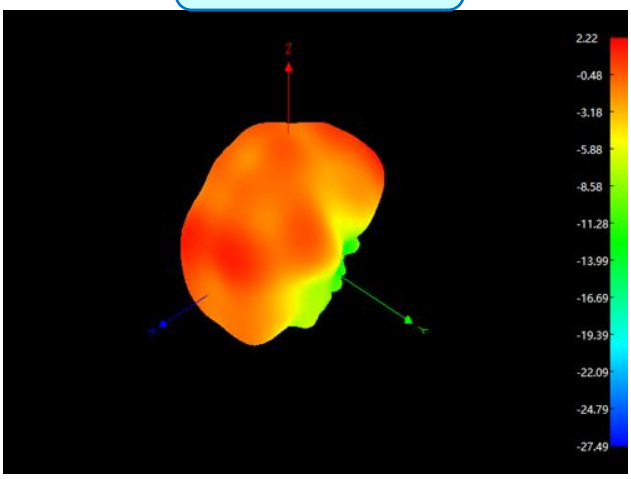

Radiation Pattern For WiFi Antenna

Phi 0°

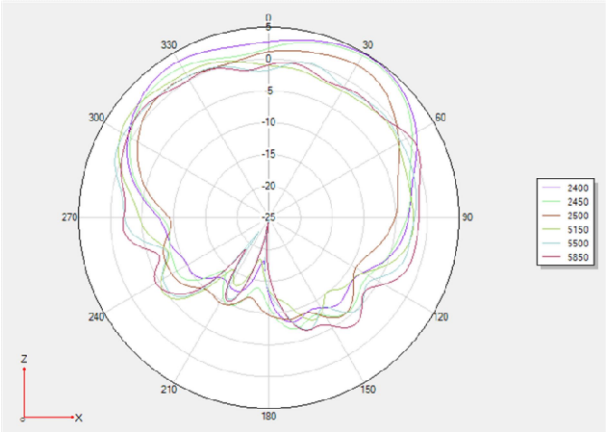

Phi 90°

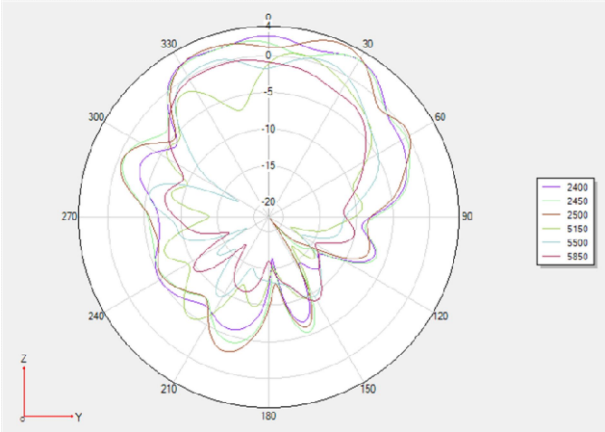

Theta 90°

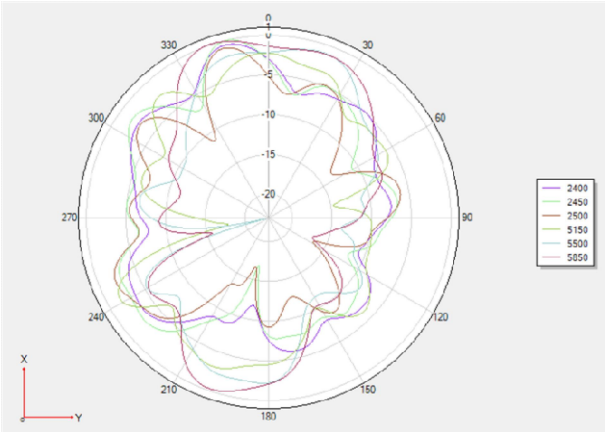

Device	

WiFi Antenna	

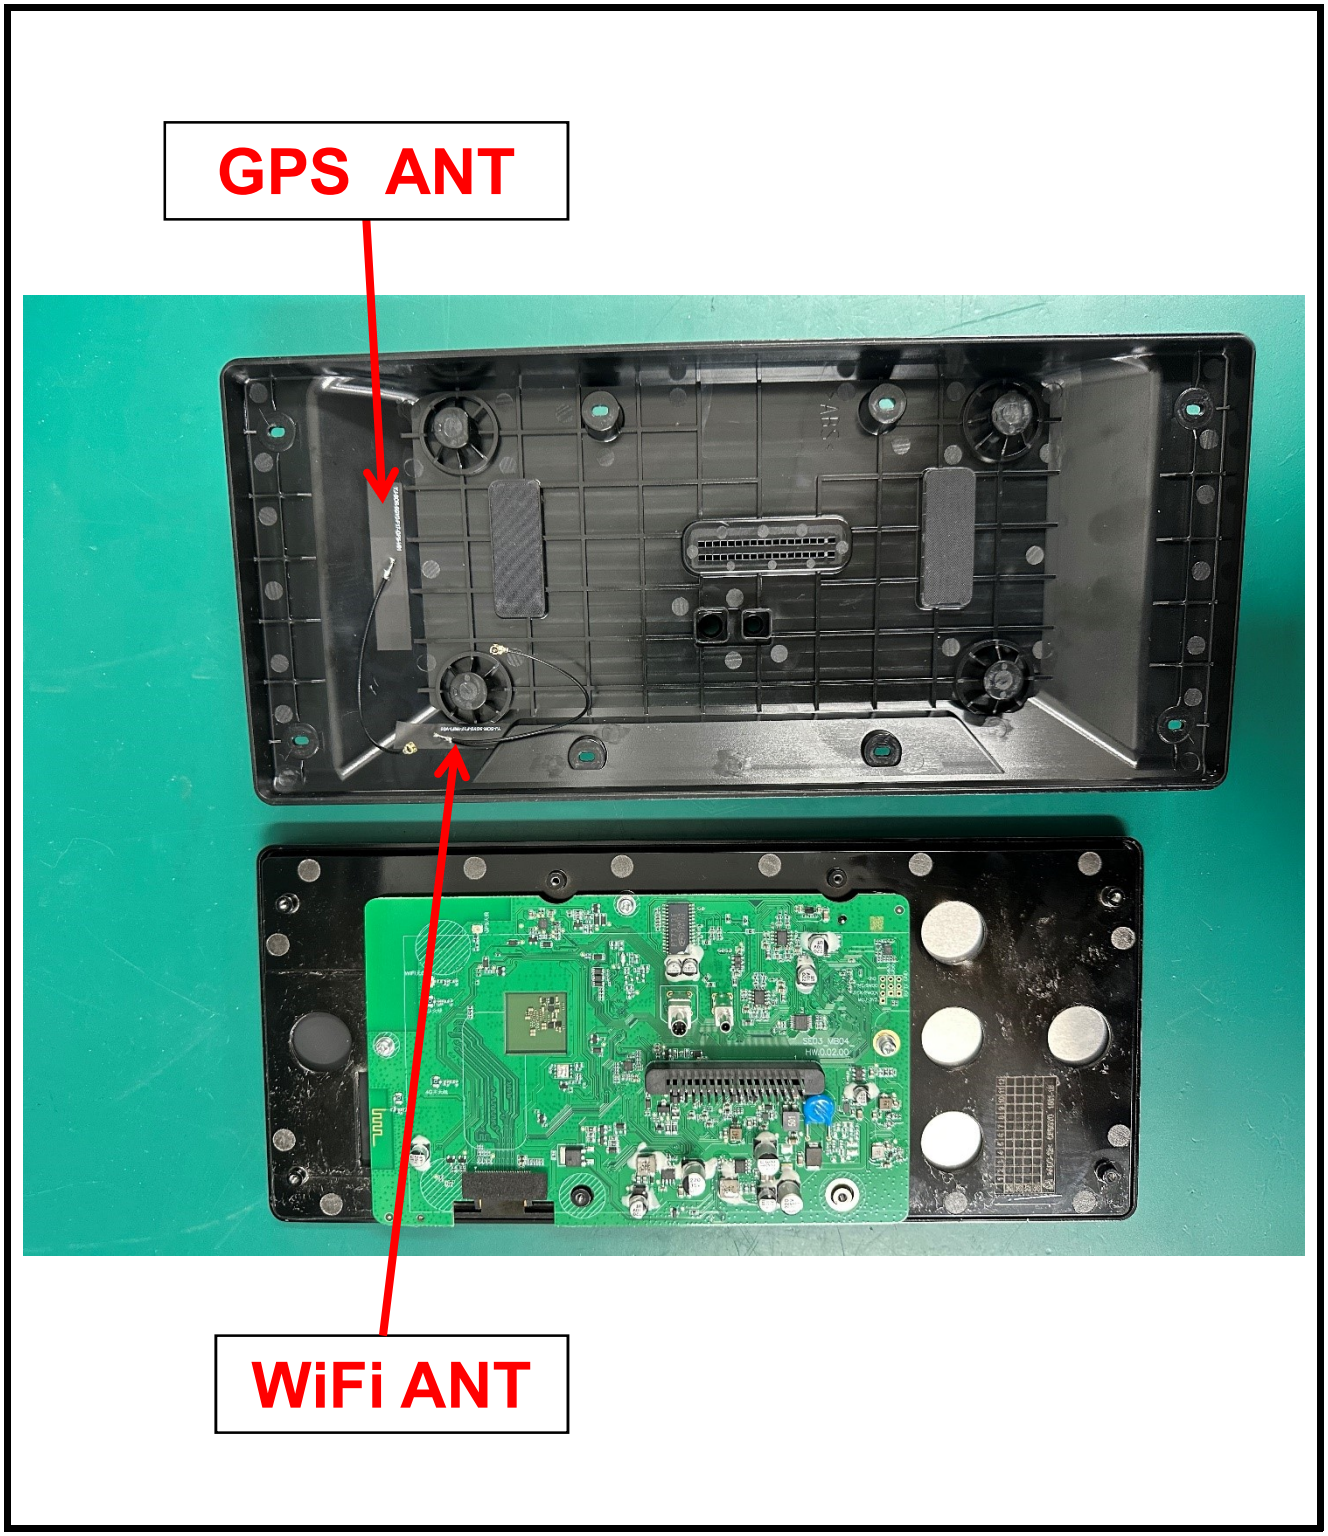
GPS ANT
WiFi ANT

capital mixture:

Liquid solid plate ink PSM-800FSDM-A/SMH-800		
Chemical geology:		
Chinese and English names of hazardous components	Register number of Chemical Digest Service (CAS No.)	Degree or degree (percentage of components)
Oxygen acrylate oligmer Epoxy acrylate oligmer	28064-14-4	50%
Silicon dioxide Fused silica	7631-86-9	13%
Aromatic solution	64742-94-5	4%

Methyl dipropylene glycol	34590-94-8	4%
Carbon black	1333-86-4	3.5%
BaSO4 sulfate	13462-86-7	24%
Photoinitiator and the others	5495-84-1	1.5%

Fourth, first aid measures

First aid methods for the same road:

Inhalation: 1. Take self-protection measures before rescue.

2. Remove pollution sources or move patients to new places.

3. If a patient stops breathing, artificial respiration should be given immediately by the person who has been adalmed. If the heart stops, cardiopulmonary resuscitation should be given. When the patient inhales and swallows toxic substances, mouth-to-mouth artificial respiration should be used directly, and pocket masks and other medical equipment should be used for artificial respiration.

4. Maintain the patient's safety and normal temperature. 6. Treat the cure quickly.

Pi Mo: Wash the contaminated area with harmonious water for at least 20 minutes, and remove contaminated clothes, shoes and leather products before water. Eye touching: Immediately open the eyelids and wash the contaminated eyes with water for at least 20 minutes, and immediately take care of them.

Intake: 1. If the patient will be frustrated, or has been frustrated, he can feed anything.

2. It can induce vomiting and give 240-300ml of water.

3. If you vomit spontaneously, rinse your mouth and supply water repeatedly.

The most important diseases and harmful effects:-

Protection against first aid workers:-

Tips for doctors:-

V. Fire measures

Suitable for fire: chemical dry powder, wine foam, carbon dioxide, water, fire: water, water, foam water.

Special hazards that may be encountered during fire;

1. Its steam gas and decomposition products are burning and toxic.
2. Its steam gas is heavier than its empty gas, and it can spread to distant fire sources and give birth to tempering.
3. The combination of steam and big gas may lead to explosion.
4. When this object is indoors, outdoors or in sewers, it is in danger of steam explosion.

Special Fire Procedure:

1. In a safe distance from the place of fire, keep in the upwind position.
2. You can use water containers to disperse steam gas to wash the leakage and sparse the leakage, so as to protect the rescue staff.
3. Water in the flame of the container around, so that the container is cold, until the fire is cold. Keep the bottom of the container safe.
4. Poker or move all ignition sources.

Special protection of firefighters: Firefighters must wear air respirators, fire clothing and protection gloves.

VI. Leakage and management methods

Things people should pay attention to:

1. Restrict personnel from entering until the spillover area is completely cleaned up.
2. The work of cleaning up by the person who is negated.
3. Wear appropriate civil air defense.

Attention to matters in the environment:

1. Remove the ignition source.
2. Maintain ventilation in the leakage area.
3. Be in the upper wind and avoid going into the lower place.
4. Remove or separate burning and combustible materials under conditions that endanger the safety of people.
5. At least 100 to 200 meters away from the pollution source.

Cleaning method:

1. You can touch the leaked materials.

2. Avoid leakage entering sewers or dense spaces.
3. Where safety permits, prevent or reduce spills.
4. Block the leakage with soil, sand or similar and combustible objects that will respond to the leakage.
5. When there is a small amount of spill, it should be absorbed by the reaction with the leakage. Contaminated absorbed and discharged materials have the same model
6. Harmfulness must be placed in the appropriate container that is covered and indicated. Wash the spill area with water.
7. When there is a large amount of spill: fire fighting, emergency management and business response to seek help.

VII. Safe Location and Storage Methods

Place:
1. It is stored in a place where it is dry and ventilated, and avoids direct light and ignition source.
2. Far away things such as strong oxides, strong acids and water.
3. Use grounding, use the device without spark, and ventilate the wind system.
4. Store a small amount in the refrigerator, and use the explosion-proof refrigerator.
5. Department of police reports leaked outside the city.
6. It is necessary to separate the storage area from the work area, restrict people from entering and leaving the storage area, and show warnings.
7. Avoid collision, and the nearest fire system.
8. You can work alone, and another person needs to be on standby for rescue.
9. In the work area, use the containers that can be used to burn the liquid body, and all the barrels and slots should be grounded, and the containers must be connected to each other.
10. Use the smallest possible amount, and use a suitable ventilation system in the designated area.
11. The target indication container should be covered when in use.

Storage:
1. It is stored in a place where it is dry and ventilated, and avoids direct light and ignition source.
2. Store a small amount in the refrigerator, and use the explosion-proof refrigerator.
3. It is necessary to separate the storage area from the work area, restrict people from entering and leaving the storage area, and show warnings.
4. The target indication container should be covered when in use.

Eight, the preventive measures

Engineering control:
1. The wind system of the single use of the step to generate sparks and grounding.
2. The discharge port leads directly to the outside, and the important measures for protection are taken.
3. When using this object in large quantities, it may be necessary to install local gas and process dense.
4. Supply fully new and fresh air gas to supplement the air gas drawn out by filling and discharging the air gas system.

Control number:-
Average capacitance of eight small hours/average capacitance of short hours/maximum capacitance:-
Biological fingerprint:-

Civil air defense:

:: Breathing protection: 1. Chemical materials containing machine vapor poison cans or self-made breathing protection equipment.

2. Constant quantity type gas supply type breathing protection device, animation type breathing protection device containing machine steamed gas pot, mask containing machine steamed gas pot, comprehensive self-galvanizing breathing protection device, comprehensive gas supply type breathing protection device, and comprehensive chemical school poison breathing protection device containing machine steam poison pot. 3. Positive full-blown breathing protection equipment or positive full-blown gas-supplied breathing protection equipment with auxiliary positive self-blown breathing protection equipment.

4. There is a mask for steaming gas canister, and an escape type self-breathing protection tool.

Hand protection: Butyl rubber is the best, chlorinated polyethylene, polyvinyl acid, fluorinated cortex, butyl rubber/chloroprene rubber, fluorinated rubber, chloroprene rubber/natural rubber galaxy cover, fluorinated cortex/chloroprene rubber are also good anti-scorching gloves.

Eye protection: 1. Anti-chemical safety eye protection.

2. Full cover.

3. Don't wear shaped eyes.

1. Work shoes and body clothes.

2. There should be a bath/wash in the work area.

The measures for living:

1. Remove contaminated clothes quickly after work, and then wear them after washing them.

2. The work place is forbidden to smoke cigarettes or eat. 3. After taking care of this thing, you must wash your hands. 4. Keep the property clean.

IX. Physical and Chemical Geology

Outside (physical state, color, etc.): black cream	Gas flavor: bad smell
Olfactory value:-	Melting level:-25 ℃
PH value:-	Boiling/boiling: 218-219 ℃
Combustibility (solid and gas):-	Fire: > 75 ℃
Decomposition temperature:-	The method of wearing a cup: () carrying a cup (V) wearing a cup
Spontaneous combustion temperature: spontaneous combustion	Explosion boundary:-
Steaming gas:-	Steaming density: 6.07
Density: 1.24 ~ 1.26 (water = 1)	Solubility: Slightly soluble in water
Octanol/water partition number (log Kow):-	Dispersion rate:-

X. Stability and Reaction

Stability: Stability under sealed dry container.
Possible hazard response under special conditions:-
Types to be avoided: leakage, flame and other ignition sources.
Things to avoid: acid, oxidation
Hazardous decomposition: carbon monoxide

XI. Toxic Materials

The road: leather, inhalation, eyes, food
Symptoms: irritation, drowsiness, dizziness, tiredness, pain, nausea, difficulty breathing and
Acute toxicity: Inhalation: 1. Steaming gas will irritate nose, throat and lungs. Pi Fou: 1. Liquid body or solution will cause heavy irritation and burning pain. 2. Steaming gas can cause irritation. 3. After being picked up by the skin, the liquid will be absorbed to the poisoned amount. Eyes: 1. Steaming gas will irritate eyes and stimulate them. 2. Liquid body will cause heavy burning and injury to eyes. Intake: 1. It will cause bright local irritation to the mouth and digestive tract.
Chronic toxicity or long-term toxicity:-

Twelve, raw materials

Raw toxicity:-
Persistence and degradation: Avoid entering the water source inlet and waterway, which is harmful to aquatic organisms.
Bioaccumulability:-
Reactionality in soil:-
Other good effects:-

XIII. Methods of abandoning and abandoning places

Discarding method: 1. Examining the principle of phase method. 2. According to the pieces of the store to be disposed of waste materials. 3. Specific incineration or burial can be used.

Fourteen, Dictate to send materials

Lian He Guo Bian No.:-

版權 2021-01-10

The name of the joint country is:-
Classification of the hazards of Dirk: It is judged as ordinary goods according to Fujian Commercial Report 0128227
Packaging and fitting: It can be arranged according to ordinary goods
Marine pollutants (yes/no): no
Special delivery methods and precautions:-

XV. French Materials

Suitable usage: 1. If you work safely, you will be able to apply it 2. Road traffic safety rules 3. Methods and standards for the storage and removal of waste materials 4. Harmful academic products and general knowledge 5. What you can do in your work, what you can do, and what you can do

XVI. Other materials

Take part in the text	1. RTECS Materials, TOMES PLUS CD-ROM, Vol. 41, 1999 2. HSDB Materials, TOMES PLUS CD-ROM, Vol. 41, 1999	
Superficial site	Mingjia: Youli Lian Lian Co., Ltd.	
	Address/: No.22, Jingjian Fourth Road, Guanyin District, Taoyuan City: 886-3-4836651	
Table person	Calling for: the principle of science and technology	Name (Seal): Huang Zhihui
Table date	2021.01 1.10	
Per	Among the above-mentioned materials, "-" means that there is no related materials at present, while the symbol number "/" means that this person is compatible with the material and is suitable for use	

The above-mentioned materials are provided by our company, which is correct for the above-mentioned materials, but it is still difficult to avoid them. The materials and materials of each project are only for reference, and users should judge their availability according to their corresponding needs.

JIU JIANG
Flex Co., Ltd
1210 Qianjin Road(E), Jiujiang Jiangxi,China 332006
Tel: 86-792-8358899, Fax: 86-792-8355803

MATERIAL SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

1.1 Material Name: Flexible Copper-Clad Polyimide Laminates
1.2 Part Number: LPI-HF
1.3 Use of Material: Printed Circuit Boards
1.4 Date of Prepared: April 22nd, 2021
1.5 Company Identification: Jiu Jiang Flex Co., Ltd.
1210Qianjin Road (E) Jiujiang, Jiangxi, China 332006
1.6 Emergency Telephone Number: 86-792-8358899
1.7 Telephone Number for Information: 86-792-8358899, 8355813

SECTION 2 COMPOSITION/INFORMATION ON INGREDIENTS

Composition / substance		CAS#	%
PI	polyimide	25038-81-7	2.93~28.11
Adhesive	Epoxy resin	25036-25-3	2.42~6.81
	Flame Retardant (additive type)	225789-38-8	0.49~1.36
	Rubber	9003-18-3	1.45~3.99
Copper foil	Copper	7440-50-8	92.66~59.72

SECTION 3 HAZARDOUS IDENTIFICATION

Dust, soot, combustion gases produced when burning, of inhaled, ingested or absorbed through skin it will be harmful or irritating to the eyes, skin, mucous membrane, respiratory system, allergies can be caused to skin, flammable irritating and sensitive.

SECTION 4 FIRST-AID MEASURES (on Dust)

Inhalation:
Remove to fresh air. Obtain medical attention if symptoms persist.

Eye Contact:
Flush immediately with large amounts of water. Do not rub eyes. Obtain medical attention if symptoms persist.

Skin Contact:
Wash area of contact thoroughly with soap and water. Do not rub or scratch. Obtain medical attention if symptoms persist.

Ingestion: Drinking water as much as possible, emetic, and see doctor.

1210 Qianjin Road(E), Jiujiang Jiangxi,China 332006
Tel: 86-792-8358899, Fax: 86-792-8355803

SECTION 5 FIRE FIGHTING MEASURES

Extinguishing Agents

Following extinguishing media can be used:
Carbon dioxide extinguisher
Dry powder fire extinguisher
Water Pump
Foam fire extinguisher

Hazards of Unusual burning and Explosion:

The material produces carbon monoxide, carbon dioxide, nitrogen, oxides of nitrogen, smoke and dust when extremely high temperature or burning.

Personal Protective Equipment

As in any burning, wear self-contained breathing apparatus and full protective gear.

Upper limit of Flammability: not ascertained

SECTION 6 EMERGENCY HANDLING OF LEAKAGE

Emergency handling:

Block the leakage area to avoid dust flying and wear protective equipment, use vacuum cleaner to clean the leakage.

SECTION 7 HANDLING AND STORAGE

Handling: Wear cotton gloves to protect product damage and hand lacerated.

Storage conditions

The material should be stored in dry, ambient temperature wrapped with PE film.

Environment: Keep away from heat, ignition sources, and direct sunlight.

Other conditions: Keep cartons tightly closed when not in use.

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

Respiratory protection:

No general requirements. If the occurrence of dust, gas or smoke processing or processing, is stimulating to employees, to use NIOSH/MSHA approved respiratory protection measures. Engineering control should be excluded from the need for respiratory support.

Ventilation:

Once air exhaust exposure exceeds limits, or visible smoke, dust, exhaust gas, the ventilation at site should be accompanied by all the heat process at the same time.

Mechanical operations:

Optimize and follow good industrial operation as possible as you can.

Eye Contact:

With eye-glasses on during all process

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance	PI film Copper-Clad Laminate with adhesive
Physical State:	solid
PH:	Not Applicable
Melting point:	no data
Relative density (water =1):	more than 1
Boiling point:	no data
The relative vapor density (air =1):	more than 1
Saturated vapor pressure (kPa):	Not Applicable
Heat of combustion (kJ/mol):	no data
The critical temperature (c):	Not Applicable
The critical pressure (MPa):	Not Applicable
The octanol / water partition coefficient of numerical:	Not Applicable
Flash point（℃):	Not Applicable
Upper explosive limit% (V/V):	Not Applicable
Ignition temperature (c):	no data
The lower limit of explosion% (V/V):	Not Applicable
Solubility:	insoluble
Application:	used for making printed circuit board

SECTION 10 STABILITY AND REACTIVITY

Stability:

Storage for one year at 5℃ to 30℃ and RH less than 75%

Conditions to Avoid:

High Humidity, direct sunlight,

The copper side may have violent reaction with followings:

Acetylene, ammonium nitrate, bromide, chlorate, iodic acid, chlorine, ClF_3, $Pb(N_3)_2$, (Cl_2+OF_2), ethylene oxide, fluoride, hydrogen peroxide, nitric acid hydrazide, hydrazoic acid, H_2S, K_2O_2, NaN_3, Na_2O_2.

SECTION 11 TOXICOLOGICAL INFORMATION

Sensitization: Long time skin contact may cause dermatitis

Acute Poisoning: Inhalation of dust may cause thirst, fever, headache, weakness, symptom of respiratory disorders.

1210 Qianjin Road(E), Jiujiang Jiangxi,China 332006
Tel: 86-792-8358899, Fax: 86-792-8355803

SECTION 12 ECOLOGICAL INFORMATION

Normal condition: No big influence may caused to ecology.
Waste Disposal Method
To dispose based on local, state or national laws.
Tank treatment: Not applicable.

SECTION 13 DISPOSAL CONSIDERATION

Hazardous wastage: NO.
Waste Disposal Method
To bury or burn at specified place based on national laws.

SECTION 14 TRANSPORTATION INFORMATION

No special regulation on this product for domestic or international transportation.

SECTION 15 REGULATORY INFORMATION

Must be complied with domestic or local regulation

SECTION 16 REGULATORY INFORMATION

14.1 INTERNATIONAL REGULATIONS:
EU Directive 2011/65/EU (RoHS): Compliant

SECTION 17 OTHER INFORMATION

Issued by: QC Department of Jiu Jiang Flex Co., Ltd
Disclaimer:
The data sheet information is true and accurate, but all statements and recommendations do not contain any guarantee. The consequence of the material shall be from practice. This report does not include all the circumstances that the user may encounter during operation. Each aspect of the operation may be increased or decreased during operation. All health and safety information contained in this report shall be submitted to you employees and customers. Users are responsible to take appropriate measures in practical operations.

CHUNG YU INDUSTRY CORPORATION

Material Safety Data Sheet

Section 1： Chemical Product and Company Identification

Product name	Thermal curable two-component marking ink
Other means of identification	ZSR-150 ZM-400WF
Recommended use of the chemical and restrictions on use	Use in PCB fabrication.
Manufacturer/Supplier identification	CHUNG YU INDUSTRY COPORATION
Manufacturer/Supplier address	618 Yen-Ping Rd., sec. 3, Ping-Jeng, Tao-Yuan, Taiwan
Emergency telephone No.	(886-3)4641205
FAX No.	(886-3)4644839

Section 2： Hazards Identification Information

Hazard classifications of the product	Inflammable liquids(II),Carcinogens, (II), Inhalation of hazardous substances (I)
Label elements	 Hazard symbols: Fire Caution catchwords: Danger Hazard massages: Inflammable liquids and vapor Harmful to swallow Skin irritation Eye irritation
Other hazards	—

Section 3： Composition, Information on Ingredients

Mixture：

Chemical name	Concentration(% of contents)	CAS. NO.
Epoxy resin	50	25085-99-8
Barium sulfate	15	7727-43-7
Titanium dioxide	30	13463-67-7
Naphtha	5	8030-30-6

Section 4 ： First-aid Measures

The first-aid measures for different exposure routes:	
Eyes contact	Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids.
Skin contact	Flush skin with plenty of soap and water for at least 15 minutes while removing contaminated clothing and shoes.
Swallow	Do not induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cupfuls of milk or water.
Inhalation	Remove from exposure to fresh air immediately.
The most important symptoms and hazardous effects	Headache, nausea
Notes to Physicians	Please provide the MSDS for physicians.

Section 5： Fire-fighting Measures

Suitable fire extinguishing media	Chemical dry powders, chemical foam, carbon dioxide
General information	As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.
Specific fire-fighting methods	It’s not suitable to use water extinguish.

Section 6： Accidental Release Measures

Person-related precautionary measures	Do not inhale vapors / aerosols. Ensure supply of fresh air in enclosed rooms.
Environmental-protection measures	Do not allow to enter sewerage system.
Procedures for cleaning / absorption	Take up with liquid-absorbent material. Forward for disposal. Clean up affected area

Section 7： Safe Handling and Storage Measures

Handling	Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Avoid contact with eyes, skin, and clothing. Avoid ingestion and inhalation.
Storage	Store in a cool(15～25℃), dry place. Keep container closed when not in use.

Section 8： Exposure Controls Measures

Engineering controls	Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits. Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels.
Control parameters	

Term	8 hours time weighted averagw exposure limits TWA	Short-term exposure limits STEL	Maximum limits CEILING	Biological standards BEIs
Solvent	100ppm	125ppm	—	—

Personal protective equipment	Eye protection: Wear safety glasses and chemical goggles if splashing is possible. Skin protection: Wear appropriate protective gloves and clothing to prevent skin exposure. Clothing: Wear appropriate protective clothing to minimize contact with skin. Respirators: Wear a NIOSH/MSHA or European Standard EN 149 approved full-facepiece airline respirator in the positive pressure mode with emergency escape provisions.

Section 9： Physical and Chemical Properties

Physical state：paste	Color：white
Odor threshold：—	Odor：slightly pungent
pH value：—	Melting point：—
Decomposition temperature：—	Boiling point：110-190℃ (solvent)
Flammability(solid, gas)：—	Flash point：38-43℃ (solvent) Test methods：—
Autoignition temperature：—	
Vapor pressure：<5 mmHg @ 25℃ (solvent)	Explosion limits：—
Specific gravity/Density：1.45～1.55 g/cm^3 (water=1)	Solubility in water：insoluble

Section 10： Stability and Reactivity

Chemical stability	Stable under normal temperatures and pressures.
Conditions to avoid	Fire.
Incompatibilities with other materials	Strong oxidants.
Hazardous decomposition products	Irritating and toxic fumes and gases.
Hazardous polymerization	Has not been reported.

Section 11： Toxicological Information

Information on the likely routes of exposure	Skins, swallow, inhale, eyes
Symptoms	Nausea, vertigo, irritation
Acute toxicity	Skins: Slight irritation Swallow: Nausea, vomit, and the other symptoms same as inhale Inhale: Cause the respiratory tract irritation, nausea, vomit, headache Eyes: The vapor cause eyes irritation LD50(solvent): >5000mg/kg (mouse, swallow) LC50:－
Further information	Further hazardous properties cannot be excluded. The product should be handled with the usual when dealing with chemicals

Section 12： Ecological Information

Ecotoxic effect	Quantitative data on the ecologic effect of this product are not available.
Further ecologic data	No ecological problems are to be expected when the product is handled and due care and attention.

Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

Section 14 - Transport Information

1. United Nation number (UN No.): 1866
2. UN proper shipping name: －
3. Transport hazard classes: 3
4. Packing group:－
5. Marine pollutant (Yes/No): No
6. Specific transport measures and precautionary conditions: －

Section 15 - Regulatory Information

1. European / International Regulations：European labeling in accordance with EC Directives.
2. Other using condition should follow local regulations.

Section 16 - Additional Information

Organization that prepared the MSDS	Name: R&D	TEL: (886-3)4641205	
	Address: 618 Yen-Ping Rd., sec. 3, Ping-Jeng, Tao-Yuan, Taiwan		
Person who prepared the MSDS	Job: manager	Name: Wan-Hua Lee	
Date the MSDS was prepared	2018/12/20		

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if the company has been advised of the possibility of such damages.

物质安全资料（MSDS）
Material safety data

一.物品与厂商资料（Article and manufacturer information）

物品名称：铜面防氧化剂 OSP （Article name: copper surface antioxidant OSP）
物品编号 serial number：KBX-108H
联系电话 Contact number：0755-27232150
传　　真 Fax：0755-29083002

二.成份辨识资料（Component identification data）

化学性质：有机化合物之有机酸溶液 Chemical properties: organic acid solution of organic compounds			
危害物质名称 Name of hazardous	CAS 号 number	浓度范围 concentration range	备 注
冰醋酸 Glacial acetic	64-19-7	5%--15%	/
甲酸 formic acid	64-18-6	5%--10%	/
苯并咪唑 Imidazoprene	110534-15-1	3-5%	/
表面活性助剂 Surfactant	102-71-6	10%	/
纯净水 Purified water	/	77%--65%	/

三.危害辨识资料（ hazard identification data）

最重要危害效应 Most important hazard effect	健康危害效应：避免接触肌肤及眼睛.穿著适当之防护衣物. Health hazard effect: avoid contact with skin and eyes. Wear appropriate protective clothing
	环境影响：酸性（Environmental impact: Acid）
	物理性及化学性危害：腐蚀性 Physical and chemical hazards: corrosive
	特殊危害：无 Special hazard: None

主要症状：无 Main symptoms: None
物品危害分类:未分类 Hazard classification: unclassified

四.急救措施（first aid measures）

不同暴露途径之急救方法:First aid methods of different exposure routes: *皮肤接触：若不慎与皮肤接触时,立刻以大量清水冲洗,最好是以淋浴冲洗,于冲洗的同时,将衣物脱下,并继续冲洗最少 10 分钟,若起水泡或持续红肿即刻就医,受污染之衣物于再次使用前须水洗或干洗过。 *食入:让伤者立即饮用 240-300ml 之水.若伤者发生自然呕吐的情况时,将伤者嘴部抬出并持续灌以开水.以清水清洗嘴巴.保持患者温暖并给予适当的休息,即刻就医。 *Skin contact: in case of inadvertent contact with skin, wash immediately with plenty of water, preferably with a shower. Take off the clothes while washing, and continue to wash for at least 10 minutes. If there is blister or continuous swelling, see a doctor immediately. The contaminated clothes must be washed or dry cleaned before reuse. *Ingestion: let the injured drink 240-300ml of water immediately. In case of natural vomiting, lift out the mouth of the injured and continuously fill with boiled water. Wash the mouth with clear water. Keep the patient warm and give proper rest, and seek medical treatment immediately.
*食入：以清水冲洗嘴巴.让患者饮用 1-3 杯以冲淡胃中的成份,催吐并立即送医,若患者逐渐丧失意识,不可喂食任何食物. 眼睛接触：立刻以大量清水冲洗眼睛,并保持眼皮撑开,且至少冲洗 15 分钟.若持续红肿或疼痛即刻就医., 吸入：将患者移至空气新鲜处,若呼吸困难则给予氧气帮助呼吸.立即送医. *Ingestion: rinse the mouth with clear water. Let the patient drink 1-3 cups to dilute the ingredients in the stomach, induce vomiting and send to the doctor immediately. If the patient gradually loses consciousness, do not feed any food Eye contact: wash eyes immediately with plenty of water, keep eyelids open, and wash for at least 15 minutes. If there is continuous swelling or pain, see a doctor immediately,

Inhalation: move the patient to fresh air. If breathing is difficult, give oxygen to help breathe. Send to the doctor immediately

最重要症状及危害效应:

暴露途径:吸入,食入,眼睛及肌肤接触吸收.会影响眼睛,皮肤,呼吸系统,肝脏,肾脏,血液,神经系统.

对身体不同部位的危害:

眼睛:水溶液或蒸气会严重刺激结膜及伤害眼角膜.

皮肤:会对皮肤造成刺激.若大面积的接触及长期暴露,液体将经由肌肤吸收明显至毒的数量.重复或长期接触有以下效应:皮肤炎,肝脏损伤,肾脏损伤,头痛,中央神经系统衰竭,血液失序,暂时或永久性失明.

食入:大量吞食会有以下效应:严重刺激嘴巴,喉咙和消化道,肝脏损伤,肾脏损伤,中央神经系统衰竭,血液失序,暂时或永久性失明.

吞食可能会致命.

吸入:暴露在蒸气或烟雾下会有以下效应,严重刺激鼻子,喉咙和呼吸道,咳嗽,呼吸困难,恶心,想睡,肺水肿.

Most important symptoms and harmful effects:

Exposure route: inhalation, ingestion, eye and skin contact absorption. It will affect eyes, skin, respiratory system, liver, kidney, blood, nervous system

Hazards to different parts of the body:

Eyes: aqueous solution or vapor can seriously stimulate the conjunctiva and damage the cornea

Skin: can cause skin irritation. If large area contact and long-term exposure, the liquid will be absorbed through the skin to the amount of poison. Repeated or long-term contact has the following effects: dermatitis, liver damage, kidney damage, headache, central nervous system failure, blood disorder, temporary or permanent blindness

Ingestion: massive ingestion has the following effects: severe mouth, throat and digestive tract irritation, liver damage, kidney damage, central nervous system failure, blood disorder, temporary or permanent blindness

Swallowing can be fatal Inhalation: exposure to vapor or smoke can have the following effects, severely irritating the nose, throat and respiratory tract, coughing, Dyspnea, nausea, sleepiness, pulmonary edema
对急救人员防护：活性炭口罩，胶手套. Protection for first aid personnel: masks, rubber gloves
对就医之提示：请依症状治疗. Tips for medical treatment: please treat according to symptoms

五.灭火措施(Extinguishing measures)

适用灭火剂:可使用喷水，护醇泡沫,干粉或二氧化碳灭火. Suitable for extinguishing agents: spray water, alcohol foam, dry powder or carbon dioxide fire extinguishing.
灭火时可能遭遇之特殊危害：未知 Special hazards that may be encountered during fire fighting: unknown
特殊灭火程序：未知 Special fire fighting procedure: unknown
消防人员之特殊防护设备：请穿著全套衣物和配带自我维生装置 Special protective equipment for firefighters: please wear a full set of clothes and self-sustaining equipment

六.泄漏处理方法: leakage treatment method:

处置:必须于通风之良好之状态下使用 Disposal: must be used in a well ventilated state
储存:必须储存在原来的容器中,并存放于干燥低温,通风良好,远离直接日晒 Storage: must be stored in the original container, dry and low temperature, well ventilated, away from direct sunlight

七.操作处置与储存 Handling and storage

操作注意事项：密闭操作。操作人员要注意个人防护。搬运时要轻拿轻放，防止包装或容器损坏。备配泄漏应急处理设备。倒空的容器可能残留有害物。 Operation precautions: closed operation. Operators should pay attention

to personal protection. Handle with care when handling to prevent damage to the package or container. Prepare leakage emergency treatment equipment. Empty containers may contain harmful substances.
储存注意事项： 储存于阴凉、干燥、通风良好的库房。库内湿度最好小于 85%。包装必须密封。应与易（可）燃物、碱类,氧化剂等分开存放，切忌混存。 储区应备有合适的材料收容泄漏物。 Storage precautions: Store in a cool, dry and well ventilated warehouse. The humidity in the warehouse should be less than 85%. The packaging must be sealed. It shall be stored separately from inflammable (combustible), alkali, oxidant, etc., and shall not be mixed. The storage area shall be equipped with appropriate materials to contain the leakage.

八.暴露预防措施 Exposure precautions

工程控制:建议使用工程化系统来预防或控制暴露的情形发生,其中应包括人力的围堵,机械式的通风设备(排气)及处理时防护设备的控制。 Engineering control: it is recommended to use an engineering system to prevent or control the occurrence of exposure, which shall include the containment of manpower, mechanical ventilation equipment (exhaust) and the control of protective equipment during treatment.
控制参数: *八小时日时量平均容许浓度/短时间时量平均容许浓度/最高容许浓度:1 毫克/立方 *生物指针:无 Control parameters: *Eight hour daily average allowable concentration / short time average allowable concentration / maximum allowable concentration: 1 mg / m3 *Biological pointer: None
个人防护设备: *呼吸防护:当有可能暴露于高蒸气浓度下,需配带呼吸保护装置.必须依据工作场地之空气中物质的浓度,配戴适当之防毒面具且不可以超出防毒

面罩之工作时限. *手部防护:配带nitrile或Buty1橡胶制手套.亦可使用你的专业安全人员建议的耐酸碱手套. *眼睛防护:必须随时配戴护目镜. *皮肤及身体防护:穿著一般工作服 Personal protective equipment: *Respiratory protection: when it is possible to be exposed to high vapor concentration, it is necessary to wear respiratory protection device. It is necessary to wear appropriate gas mask according to the concentration of substances in the air of the workplace and the working time limit of the gas mask shall not be exceeded *Hand protection: wear nitrile or buty1 rubber gloves. You can also use the acid and alkali resistant gloves recommended by your professional safety personnel *Eye protection: goggles must be worn at all times *Skin and body protection: wear general work clothes
卫生措施:必须于通风良好之状态下使用. Hygienic measures: it must be used in a well ventilated state

九.物理及化学性质 Physical and chemical properties

物质状态:液体 Material state: liquid	形状：液态 Shape: liquid
颜色：蓝色至沉清液体	气味：刺激性
PH 值：》3.0	沸点:100℃
分解温度:	闪火点：90 摄氏度
自燃温度:	爆炸界限:无界定
蒸气压:同水	蒸气密度:重于空气
比重：1.0-1.03	(对水)溶解度:完全可溶解
Color: blue to clear liquid smell: irritant PH value: 3.0 boiling point: 100 ℃ Decomposition temperature: flash point: 90 ℃ Spontaneous combustion temperature: explosion limit: no limit	

Vapor pressure: same as water vapor density: heavier than air Specific gravity: 1.0-1.03 (for water) solubility: completely soluble

十.安全性及应性 Safety and response

安定性:在正常状况下是安定的.
特殊情况下可能之危害反应:
应避免之状况:接触不兼容的物质,暴露于直接日晒.
应避免之物质:强还原剂,强碱.
危害分解物:无
Stability: stable under normal conditions Possible hazardous reactions under special circumstances: Conditions to avoid: exposure to incompatible substances, direct sun exposure Substances to be avoided: strong reducing agent, strong base Hazardous decomposition products: None

十一.毒性资料 Toxicity data

急毒性:1900mg/kg
局部效应:刺激
致敏感性:有
慢毒性或长期毒性:中等
特殊效应:无
Acute toxicity: 1900mg / kg Local effect: stimulation Sensitivity: Yes Slow or long term toxicity: medium Special effect: None

十二.生态资料 Ecological data

可能之环境影响/环境流布:本产品为非挥发性但为水溶性物质并会被分隔为不同含水区间.此产品难吸收在土壤或沉淀物之上.但会被溶解到土壤中.本产品会迅速溶于水中.但会对水中生物产生危害。 Possible environmental impact / environmental distribution: This product is non-volatile but water-soluble and will be divided into

different water containing areas. This product is difficult to absorb on the soil or sediment, but it will be dissolved in the soil. This product will quickly dissolve in the water, but it will cause harm to aquatic organisms.

十三.废弃处置方法 Waste disposal method

废弃得置方法: 废弃物处置:依据当地国家法规处置弃物及残留物.此产品被评估具 RCRA 的物质，但并不符合有害废弃物的标准，若本品以购买时的形式补充丢弃，依据 RCRA，产品使用者有责任在丢弃时决定其是否符合 RCRA 有害废弃物的标准，这是因为产品的使用，转换，混合，处置等，将可能使用成为有害物质。 废弃容器处置:在容器未被清洗干净前,不可将标签去除.空瓶可能仍含有有害之残留物需小心处理. Disposal method: Waste disposal: dispose of wastes and residues in accordance with local national regulations. This product is evaluated to have substances with RCRA, but it does not meet the standards of hazardous wastes. If this product is added and discarded in the form of purchase, according to RCRA, the user of the product is responsible for determining whether it meets the standards of RCRA hazardous wastes when it is discarded, because of the use, conversion, mixing, disposal, etc. of the product , will likely be used as a hazardous substance. Disposal of waste container: do not remove the label before the container is cleaned. The empty bottle may still contain harmful residues which need to be handled carefully

十四.运送资料 Shipping information

国际运送规定:
联合国编号:未分类
国内运送规定:
特殊运送方法及注意事项:
International Shipping Regulations:

UN No.: unclassified Domestic delivery regulations: Special delivery methods and precautions:

十五.法规资料 Regulatory data

适用法规:国标 Applicable regulations: National Standard

十六:其它资料 Other information

公司名称	深圳市宝鑫化工技术有限公司	
制表人	职称:经理	姓名(签章)：吕平
制表日期:	2010/01/06	
Company name: shenzheng baoxinchemical technology co.ltd Preparer Title: manager name (seal): LV Ping Date of preparation: 2010 / 01 / 06		

Safety Data Sheet

Copyright,2018,3M Company.
All rights reserved. Copying and/or downloading of this information for the purpose of properly utilizing 3M products is allowed provided that: (1) the information is copied in full with no changes unless prior written agreement is obtained from 3M, and (2) neither the copy nor the original is resold or otherwise distributed with the intention of earning a profit thereon.

This safety data sheet (SDS) is provided as a courtesy in response to a customer request. This product is not regulated under, and a SDS is not required for this product by the Regulation of Labelling and Hazard Communication of Hazardous Chemicals promulgated by Ministry of Labor on June 27, 2014 by the order of Lao-Zhi-Tzu-No.10302007861 because, when used as recommended or under ordinary conditions, it should not present a health and safety hazard. However, use or processing of the product not in accordance with the product's recommendations or not under ordinary conditions may affect the performance of the product and may present potential health and safety hazards.

Document Group:	27-4234-4	**Version Number:**	2.00
Issue Date:	2018/03/28	**Supercedes Date:**	2018/02/22

This Safety Data Sheet has been prepared in accordance with the 'Regulation of Labelling and Hazard Communication of Hazardous Chemicals' (by Ministry of Labor on June 27, 2014)

SECTION 1: Identification

1.1. Chemicals Name
3M™ 200MP Adhesive Transfer Tapes 467MC, 467MCF, 467MP, 467MPF, 468MC, 468MCF, 468MP, 468MPF, 7952MP, 7955MP, 7962MP, 7965MP, 9172MP, 9185MP, 9667MP, 9668MP, 9668MPL

Product Identification Numbers

XT-0004-0738-4	XT-0007-0190-1	YP-2080-0000-7	YP-2080-0001-5	YP-2080-0002-3
YP-2080-0004-9	YP-2080-0005-6	YP-2080-0008-0	YP-2080-0017-1	YP-2080-0018-9
YP-2080-0020-5	YP-2080-0021-3	YP-2080-0032-0	YP-2080-0034-6	YP-2080-0041-1
YP-2080-0043-7	YP-2080-0054-4	YP-2080-0068-4	YP-2080-0252-4	

1.2. Recommended use and restrictions on use

Recommended use
Bonding & Attachment, Industrial use

1.3. Details of the supplier of the safety data sheet
Name: 3M Taiwan LTD
ADDRESS: 6F, No.95, Tun Hwa South Road, Section 2, Taipei 10682, Taiwan, R.O.C.
Telephone: (02) 2704-9011
Website: www.3m.com.tw

1.4. Emergency telephone number
Emergency Telephone:886-3-4783600, 8:00AM - 4:30PM
Fax number:(03) 475-0924, 475-0904

SECTION 2: Hazard identification

2.1. Classification of the substance or mixture

This product is exempt from GHS classification according to article 4 of Regulation of Labelling and Hazard Communication of Dangerous and Harmful Materials.

2.2. Label elements
SIGNAL WORD
Not applicable.

Symbols
Not applicable.

Pictograms
Not applicable

2.3. Other hazards
None known

SECTION 3: Composition/information on ingredients

This material is a mixture.

Ingredient	C.A.S. No.	% by Wt
Disposable Paper or Film Liner	Mixture	Not Applicable
Acrylate Polymer	Trade Secret	100

SECTION 4: First aid measures

4.1. Description of first aid measures

Inhalation:
No need for first aid is anticipated.

Skin Contact:
No need for first aid is anticipated.

Eye Contact:
No need for first aid is anticipated.

If Swallowed:
No need for first aid is anticipated.

4.2. Most important symptoms and effects, both acute and delayed
See Section 11.1. Information on toxicological effects.

4.3. Advice to protect the rescuer and special warning to doctors
Refer to other sections of this SDS for information regarding physical and health hazards, respiratory protection, ventilation and personal protective equipment.

4.4. Indication of any immediate medical attention and special treatment required
Not applicable

SECTION 5: Fire-fighting measures

5.1. Suitable extinguishing media

In case of fire: Use a fire fighting agent suitable for ordinary combustible material such as water or foam to extinguish.

5.2. Special hazards arising from the substance or mixture
None inherent in this product.

Hazardous Decomposition or By-Products

Substance	Condition
Hydrocarbons	During Combustion
Carbon monoxide	During Combustion
Carbon dioxide	During Combustion

5.3. Special protective actions for fire-fighters
No special protective actions for fire-fighters are anticipated.

5.4. Special equipment for the protection of fire-fighters
No information is available.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures
Not applicable. Observe precautions from other sections.

6.2. Environmental precautions
Not applicable. Avoid release to the environment.

6.3. Methods and material for containment and cleaning up
Not applicable. Collect as much of the spilled material as possible. Seal the container.

SECTION 7: Handling and storage

7.1. Precautions for safe handling
This product is considered to be an article which does not release or otherwise result in exposure to a hazardous chemical under normal use conditions.

7.2. Conditions for safe storage including any incompatibilities
Not applicable.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Occupational exposure limits
No occupational exposure limit values exist for any of the components listed in Section 3 of this SDS.

Biological limit values
No biological limit values exist for any of the components listed in Section 3 of this safety data sheet.

8.2. Exposure controls

8.2.1. Engineering controls
Not applicable.

8.2.2. Personal protective equipment (PPE)

Eye/face protection

Eye protection not required.

Skin/hand protection
No chemical protective gloves are required.

Respiratory protection

Respiratory protection is not required.

8.3. Hygiene Measures
See Section 7.1 Precautions for safe handling

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state	Solid
Specific Physical Form:	Roll of Tape
Appearance/Odor	Translucent adhesive, slight acrylate odor, paper or fim quick release liner
Odor threshold	*Not Applicable*
pH	*Not Applicable*
Melting point/Freezing point	*No Data Available*
Boiling point/Initial boiling point/Boiling range	*Not Applicable*
Flash Point	*Not Applicable*
Evaporation rate	*Not Applicable*
Flammability (solid, gas)	Not Classified
Flammable Limits(LEL)	*Not Applicable*
Flammable Limits(UEL)	*Not Applicable*
Vapor Pressure	*Not Applicable*
Vapor Density	*Not Applicable*
Density	*Not Applicable*
Relative Density	*Not Applicable*
Water solubility	Nil
Solubility- non-water	*Not Applicable*
Partition coefficient: n-octanol/ water	*No Data Available*
Autoignition temperature	*Not Applicable*
Decomposition temperature	*Not Applicable*
Viscosity	*Not Applicable*
Molecular weight	*No Data Available*
Volatile Organic Compounds	*Not Applicable*
Percent volatile	*Not Applicable*
VOC Less H2O & Exempt Solvents	*Not Applicable*

SECTION 10: Stability and reactivity

10.1. Reactivity
This material is considered to be non reactive under normal use conditions.

10.2. Chemical stability
Stable.

10.3. Possibility of hazardous reactions
Hazardous polymerization will not occur.

10.4. Conditions to avoid
None known.

10.5. Incompatible materials
None known.

10.6. Hazardous decomposition products

Substance	Condition
None known.	

Refer to section 5.2 for hazardous decomposition products during combustion.

Under recommended usage conditions, hazardous decomposition products are not expected. Hazardous decomposition products may occur as a result of oxidation, heating, or reaction with another material.

SECTION 11: Toxicological information

The information below may not be consistent with the material classification in Section 2 if specific ingredient classifications are mandated by a competent authority. In addition, toxicological data on ingredients may not be reflected in the material classification and/or the signs and symptoms of exposure, because an ingredient may be present below the threshold for labeling, an ingredient may not be available for exposure, or the data may not be relevant to the material as a whole.

11.1. Information on Toxicological effects

Signs and Symptoms of Exposure

Based on test data and/or information on the components, this material may produce the following health effects:

Inhalation:
No health effects are expected. No known health effects.

Skin Contact:
Contact with the skin during product use is not expected to result in significant irritation.

Eye Contact:
Contact with the eyes during product use is not expected to result in significant irritation.

Ingestion:
No health effects are expected.
No known health effects.

Chronic toxicity or long term toxicity

Additional Information:
This product, when used under reasonable conditions and in accordance with the directions for use, should not present a health hazard. However, use or processing of the product in a manner not in accordance with the product's directions for use may affect the performance of the product and may present potential health and safety hazards.

Toxicological Data
If a component is disclosed in section 3 but does not appear in a table below, either no data are available for that endpoint or the data are not sufficient for classification.

Acute Toxicity

Name	Route	Species	Value
Overall product	Ingestion		No data available; calculated ATE >5,000 mg/kg

ATE = acute toxicity estimate

Skin Corrosion/Irritation
For the component/components, either no data are currently available or the data are not sufficient for classification.

Serious Eye Damage/Irritation
For the component/components, either no data are currently available or the data are not sufficient for classification.

Skin Sensitization
For the component/components, either no data are currently available or the data are not sufficient for classification.

Respiratory Sensitization
For the component/components, either no data are currently available or the data are not sufficient for classification.

Germ Cell Mutagenicity
For the component/components, either no data are currently available or the data are not sufficient for classification.

Carcinogenicity
For the component/components, either no data are currently available or the data are not sufficient for classification.

Reproductive Toxicity

Reproductive and/or Developmental Effects
For the component/components, either no data are currently available or the data are not sufficient for classification.

Target Organ(s)

Specific Target Organ Toxicity - single exposure
For the component/components, either no data are currently available or the data are not sufficient for classification.

Specific Target Organ Toxicity - repeated exposure
For the component/components, either no data are currently available or the data are not sufficient for classification.

Aspiration Hazard
For the component/components, either no data are currently available or the data are not sufficient for classification.

Please contact the address or phone number listed on the first page of the SDS for additional toxicological information on this material and/or its components.

SECTION 12: Ecological information

The information below may not be consistent with the material classification in Section 2 if specific ingredient classifications are mandated by a competent authority. Additional information leading to material classification in Section 2 is available upon request. In addition, environmental fate and effects data on ingredients may not be reflected in this section because an ingredient is present below the threshold for labeling, an ingredient is not expected to be available for exposure, or the data is considered not relevant to the material as a whole.

12.1. Toxicity

Acute aquatic hazard:
Not acutely toxic to aquatic life by GHS criteria.

Chronic aquatic hazard:
Not chronically toxic to aquatic life by GHS criteria.

No product test data available

12.2. Persistence and degradability
No test data available

12.3. Bioaccumulative potential
No test data available

12.4. Mobility in soil
Please contact manufacturer for more details

12.5 Other adverse effects
No information available

SECTION 13: Disposal considerations

13.1. Disposal methods
Dispose of contents/ container in accordance with the local/regional/national/international regulations.

Prior to disposal, consult all applicable authorities and regulations to insure proper classification. Dispose of waste product in a permitted industrial waste facility. As a disposal alternative, incinerate in a permitted waste incineration facility. If no other disposal options are available, waste product may be placed in a landfill properly designed for industrial waste.

SECTION 14: Transport Information

14.1. International Regulations
Not hazardous for transportation.

UN No.: Not applicable
UN Proper shipping name: Not applicable
Transportation Class (IMO): Not applicable
Transportation Class (IATA): Not applicable
Packing Group: Not applicable
Marine pollutant: Not applicable
Specific transport measures and precautionary conditions: Not applicable

SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

Applicable regulations:
Taiwan. Methods and Facilities Standards for the Storage, Clearance and Disposal of Industrial Waste (EPA Order No. 0950098458C, Table 1 Process Hazardous Industrial Waste, December 14, 2006)

Occupational Safety and Health Act

Waste Disposal Act
Regulation of Labelling and Hazard Communication of Hazardous Chemicals

SECTION 16: Other information

16.1. Literature references

Organization that prepared the SDS

Name:	3M Taiwan LTD
Address:	6F, No.95, Tun Hwa South Road, Section 2, Taipei 10682, Taiwan, R.O.C.
Telephone Number:	886 3 478 3600 #388

Person who prepared the SDS

Title:	Senior Product Responsibility Liaison
Name:	Sunny Chang

Date that the SDS was prepared:
2018/03/28

Revision information:
Section 02: TW Symbol Text information was deleted.
Section 2: TW Symbol Text - Not applicable information was modified.

DISCLAIMER: The information on this Safety Data Sheet is based on our experience and is correct to the best of our knowledge at the date of publication, but we do not accept any liability for any loss, damage or injury resulting from its use (except as required by law). The information may not be valid for any use not referred to in this Data Sheet or use of the product in combination with other materials. For these reasons, it is important that customers carry out their own test to satisfy themselves as to the suitability of the product for their own intended applications.

3M Taiwan SDSs are available at www.3m.com.tw

江阴凯博通信科技有限公司
JIANGYIN KAIBO COMMUNICATION TECHNOLOGY CO.,LTD.
Material Safety Data Sheet（物質安全資料表）

一、　物品与厂商资料
物品名称：同轴高频线
物品编号：KB113/50 系列
制造商或供货商名称、地址：江阴市凯博通信科技有限公司/江苏省江阴市澄江镇梅园大街 391 号
紧急联络电话/传真电话：0510-86070001/86070020
二、　成分辨识资料
纯物质：
中英文名称：聚全氟乙丙烯 FLUORINATED PROPYLENE ETHYLENE/镀锡线 TINNED COPPER/镀银铜线/Silver plated Copper
同义名称：FEP/TX/SC
危害物质成分(成分百分比）：无

危害物质：

危害物质	浓度或浓度范围（单位：ppm）	
铅及其化合物 Pb	≤90	
镉及其化合物 Cd	≤75	
汞及其化合物 Hg	≤1000	
六价铬及化合物	≤1000	
卤素	氯 Cl≤900	氯 Cl+溴 Br≤1500
	溴 Br≤900	
SVHC15 种物质	禁止使用	

三、危害辨识数据

最重要危害效应	健康危害效应：在 260℃ 以上，可能会有吸入分解气体的危险.一定要安装排气装置.
	环境影响：要按废弃物处理及清扫法律法规处理,绝对不可燃烧.
	物理性及化学性危害：物理化学性能及其稳定,不易降解,不得擅自填埋 .
	特殊危害：　无
主要症状：　对人的神经系统产生损害	
物品危害分类：大气和水源	

四、急救措施

不同暴露途径之急救方法：
・吸入：到空气流通处换气.
・皮肤接触：无
・眼睛接触：无
・食入：　不消化,排出.

最重要症状及危害效应：无
对急救人员之防护：对流换气
对医师之提示： 吸氧

五、灭火措施

适用灭火剂： 通用
灭火时可能遭遇之特殊危害： 避免分解气体吸入
特殊灭火程序：无
消防人员之特殊防护设备：防毒面罩

六、泄漏处理方法

个人应注意事项：粉状树脂
环境注意事项： 不可填埋
清理方法：要按废弃物处理及清扫法律法规处理,绝对不可燃烧.

七、安全处置与储存方法

处置：避免与高温和火源接触.
储存：通风干燥处.

八、暴露预防措施

工程控制：无
控制参数： · 八小时日时量平均容许浓度/短时间时量平均容许浓度/最高容许浓度： · 生物指标：
个人防护设备： · 呼吸防护：安装排气装置 · 手部防护：无 · 眼睛防护：无 · 皮肤及身体防护：无
卫生措施：应将衣服上附着的灰尘抖落,手脸洗净,不要让其附着于香烟上.

九、物理及化学性质

物质状态：固体	形状：透明颗粒
颜色：透明	气味： 无
pH 值： 7	沸点/沸点范围： /
分解温度： 360℃	闪火点： /
自燃温度： /	爆炸界限： /
蒸气压： /	蒸气密度： /
密度： 2.2	溶解度： /

十、安定性及反应性

安定性：很稳定
特殊状况下可能之危害反应：高温或燃烧分解气体对人体神经系统的损害.
应避免之状况：绝对不可燃烧.

应避免之物质：金属钠及其强酸的混合物 .
危害分解物： 气体及粉尘.

十一、毒性资料

急毒性：/
局部效应：/
致敏感性： /
慢毒性或长期毒性： /
特殊效应： /

十二、生态资料

可能之环境影响/环境流布：不降解,禁填埋

十三、废弃处置方法

废弃处置方法：按废弃物处理及清扫法律法规要求送专业资质处理公司处置.

十四、运送资料

国际运送规定：/
联合国编号： /
国内运送规定： 无
特殊运送方法及注意事项：无

十五、法规资料

适用法规：遵循欧盟 REACH 法规相关要求。

十六、其它数据

参考文献	杜邦产品说明/SONY 限用物资标准
制窗体位	名称：江阴凯博通信科技有限公司
	地址/电话：江阴市**城东街道东定路83号/0510-86070012**
制 表 人	姓名(签章)：**董英畅**
制表日期	2023/11/12

物质安全资料表

MSDS C5100,C5191,C5210,C5240

物质安全资料表编号： MCL001	改版日期：02-15-2015
版次：4	前次改版：02-20-2008

1. 物质供应商资料

物品中（英）文名称：	磷青銅(PHOSPHOR BRONZE ALLOYS)		
物品代码：	JIS C5100,C5191,C5210,C5240		
化学名称：	铜(Cu)－锡(Sn)金属合金		
类别：	铜金属合金		
制造商或供应商名称：	福建紫金铜业有限公司		
制造商或供应商地址：	福建省龙岩市上杭县南岗开发区		
制造商或供应商电话：	0597-3960633	传真：	0597-3833128
制造商或供应商网址：	www.fjzjty.com		
紧急联络电话：	0597-3960600		

2.成品成分

	CAS编号	化学名称	重量比例%
C5100	**7440-50-8**	铜(Cu)	>93.65
	7440-31-5	锡(Sn)	4.5~5.5
	7723-14-0	磷(P)	0.03~0.35

	CAS编号	化学名称	重量比例%
C5191	**7440-50-8**	铜(Cu)	>92.15
	7440-31-5	锡(Sn)	5.5~7.0
	7723-14-0	磷(P)	0.03~0.35

	CAS编号	化学名称	重量比例%
C5210	**7440-50-8**	铜(Cu)	>90.0
	7440-31-5	锡(Sn)	7.0~9.0
	7723-14-0	磷(P)	0.03~0.35
	7440-66-6	锌(Zn)	<0.20
	7439-92-1	铅(Pb)	<0.05
	7439-89-6	铁(Fe)	<0.10

	CAS编号	化学名称	重量比例%
C5240	**7440-50-8**	铜(Cu)	>90.15
	7440-31-5	锡(Sn)	9 ~11
	7723-14-0	磷(P)	0.03~0.35

OSHA 管理状态 ：在固体时不具危害性。其粉尘及燻烟对肺脏、血液、肾脏具有致癌、刺激性。反复产生之毒性及神经性毒素

OHSA：本合金产品在固体时不具危害性。其粉尘及燻烟具有危害性。

（美国）职业安全卫生署OSHA

3. 危害辨识资料

警告！ 暴露于粉尘及燻烟的工作环境下，对于眼睛、呼吸系统、皮肤会造成刺激伤害。其含有金属可能对血液、肾脏产生反复性及神经性之影响，也可能致癌。必须保持足够且良好之通风。避免直接接触眼睛、皮肤及衣物。佩戴保护器具，包括护目镜、适当衣物，必须要保证全部身体。身体及衣物被接触之部位，必须彻底清洗干净。	
种类的名称：	铜、锡之金属混合物。
危险标识类别：	金属粉尘或燻烟将对皮肤、眼睛造成刺激性且对肺具有毒性，但金属合金本身不具危害性。
HMIS 危害级数（粉尘及燻烟）：	健康 ：2 ；可燃性：0 （0=低 、4=极高）； 物性危害：无
IDLH 对生命或健康有立即性危害浓度值	IDLH(3/1/95)无本金属立即性危险浓度数值 。 铜(Cu)粉尘或燻烟、铅 (Pb)、锡(Sn)：100 mg / m^3 磷(P)：5 mg/m^3 氧化铁（Fe）粉尘或燻烟 ：2500 mg / m^3 氧化锌 ：500 mg / m^3

Hazardous Materials Identification System (HMIS)

严重症状：

眼睛：其粉尘或燻烟皆具刺激性，会引起红肿及疼痛。经常暴露于此环境时，可能导致结膜炎。

皮肤：此物质不会经由皮肤渗入体内被吸收。但接触其粉尘时，皮肤有可能会引起轻微刺激而出现红肿现象。

吸入：吸入人体是有害的。吸入高浓度粉尘或燻烟可能会导致剧烈呼吸、鼻刺激、咳嗽、呼吸困难。吸入高浓度铜金属粉尘或燻烟也可能出现呕心、呕吐及胃痛现象。金属燻烟可能引起类似流行性感冒（flu-like)症状之金属燻烟热；其症状包括喉咙不适、呼吸困难、咳嗽、哮喘、呕吐、头痛、发冷、发热、肌痛、虚弱、昏睡、流汗、关节痛。这些症状通常会在24小时后消失，但也有可能更长时间。

食入 ：大量食入粉尘时，可能引起呕心、腹泻及胃痛现象。

慢性影响：皮肤长期或者重复性接触其粉尘时可能引起剧烈刺激或皮肤炎。长期或者重复性吸入其粉尘或燻烟会导致更剧烈刺激。慢性暴露于铅中会引起人体肾脏损害、贫血症、复发性及成长性影响、永久性神经系统损害。

4.急救措施

对于粉尘及燻烟危害：

眼睛接触：	以大量清净水冲洗上下眼睛内部（至少15分钟），若眼睛被刺激不适者，立即送医院检查
皮肤接触：	以清水清洗干净。衣物被接触之部位，必须彻底清洗干净后才能再穿戴。若仍有皮肤发生刺激、出疹现象或情况持续、复发时送至医院诊疗。
吸入时：	送至通风良好较阴凉处休息，以毛巾保暖，严重者迅速送医院检查诊断。
食入时：	大量喝水并催吐，迅速送医院检查

医疗提示：对于本产品组成之元素物质并无特殊解毒剂可供使用。必须视不同症状给予适当治疗 。

5.火炎及爆炸危害资料

燃烧性资料 ：

爆炸性：	无
可燃性：	无
燃烧性：	无
闪火点：	不适用
自燃性：	不适用

灭火剂 ：

小区域之材料粉末起火时，可适用干沙、干石灰粉、食盐或苏打粉给予关熄。其他周边处起火时需以适当灭火器灭火。

意外及爆炸危害：

注意粉尘可能导致爆炸或产生可燃性气体。

6.泄露的处置

本产品在加工中产生粉尘时，有可能产生爆炸危害，必须将火源移除。也惟有粉尘型态时才可能产生泄露，所以必须装设通风设备及集尘装置过滤空气中之粉尘，以降低其粉尘浓度。

7.取用及储运方式

取用注意事项：

板带产品之端面易割伤皮肤应小心取用。
切削加工时会产生粉尘应小心眼睛、皮肤及呼吸应佩戴保护器具。
小心粉尘不可泄露至空气中。
需注意产品有翻到之危险性易造成压伤，吊运时要十分注意。
打包带切除时，小心其末端会弹起，对人员之身体、皮肤及眼睛造成割伤。
衣物或器具上之粉尘以水洗或HEPA吸入器清洗，不可用拍打或其他方式处理。

储存条件 ：

食储最高容许温度：无 避免放置于潮湿或酸/碱性物质或酸/碱性气体之场所

8. 人员暴露防设措施

CAS 编号	暴露标准：	OSHA(PEL)	ACGIH(TLV)
铜(Cu) 7440-50-8	燻烟	0.1 mg/m^3	0.2 mg/m^3
	粉尘及雾状	1 mg/m^3	1 mg/m^3
锡(Sn) 7440-31-5	粉状	2 mg/m^3	2 mg/m^3
磷(P) 7723-14-0	-	0.1 mg/m^3	0.1 mg/m^3
锌(Zn) 7440-66-6	-	无资料	无资料
铅(Pb) 7439-92-1	粉尘及燻烟	0.05 mg/m^3	0.05 mg/m^3
铁(Fe) 7439-89-6	-	无资料	无资料
本产品材料若经加热会产生燻烟，氧化锌燻烟可能形成。 OSHA(PEL)以及 ACGIH(TLV)对氧化锌燻烟之限制值为 5 mg/m^3			

呼吸防设：	一般情况下不需佩戴口罩。但当超过上述PEL/TLV标准值时必须佩戴NIOSH认证之全罩或半罩式HEPA滤心防口罩。
通风防设：	工作场所中，若是会产生燻烟及粉尘时，必须要有通风设备装置及集尘装置，且工作中不可饮食及抽烟
眼睛及脸部防设：	需要佩戴护目镜。
皮肤防设：	作业时应穿着适当之工作服，安全鞋及防护手套，以避免皮肤与材料直接接触并防止割伤。

（美国）职业安全卫生署OSHA(Occupational Safety and Health Administration)

（美国）国家职业安全卫生研究所NIOSH(National Institute for Occupational Safety and Health)

立即对生命或健康有危险 IDLH(Immediately Dangerous to Life or Health)

时量平均浓度 TWA(Time Weighted Average)；

容许暴露浓度值PEL(Permissible Exposure Limit)

9. 物理及化学性质

外观：	浅红色光泽的固态金属
熔点：	C5100(950~1060℃),C5191(900~1045℃), C5210(870~1030℃),C5240(840~1020℃)
沸点：	无资料
比重：	C5100(8.86),C5191(8.83), C5210(8.80),C5240(8.7)
蒸气压：	不适用
溶解度：	不适用
PH 值25℃：	不适用

10. 稳定性及活性资料

稳定性	在正常一般室温及大气下为稳定性物质，非活性物质。
应避免之状况	遭受机械撞击或通电时并不会产生化性反应。
应避免之材料	氯 ：与金属黄铜、铜细分应形成剧烈或爆炸性反应。 乙炔 ：与黄铜形成爆炸性化合物。
危害之分解物	当加热至分解温度时，会产生金属氧化物和金属燻烟。有可能引起类似流行性感冒（flu-like）症状之金属燻烟热。
危害之聚合反应	无。

11. 毒性资料

潜在之暴露途径：

粉尘：食入、皮肤接触、吸入、眼睛接触。
烟燻：吸入、眼睛接触。
本合金产品不具毒性。

动物急毒性资料：动物半致死剂量 (LD_{50})及浓度(LC_{50})

针对本合金产品之粉尘或燻烟	铜（Cu）	锡（Sn）	磷（P）	锌（Zn）	铅（Pb）	铁（Fe）
口服 (LD_{50})	3.5mg/Kg(鼠，腹腔内)	无资料	无资料	无资料	无资料	30mg/Kg(鼠)
皮肤 (LD_{50})	375mg/Kg(兔，皮下注射)	无资料	无资料	无资料	无资料	无资料
吸入 (LC_{50})	无资料	无资料	无资料	无资料	无资料	无资料

亚慢性及慢性毒性：本合金产品不具毒性。铅对实验室中动物之血液、肾脏及神经系统会造成损害。

致癌性：本合金产品尚未被报告具致癌性。铅被 IARC(International Agency for Research on Cancer) 列入对人头可能致癌，属2B类

致基因突变型:本合金产品尚未被报告具致基因突变性。铅则在数项细胞体外试验中显示有致基因突变性。

复发性及成长性影响：本合金产品不具复发性及成长性影响。铅会导致实验室中动物之脱臼发育，包括天生畸形缺陷及影响雄性生殖能力。

神经性影响：本合金产品尚未被报告具有神经性影响。铅会导致实验室中动物之中枢、末稍神经系统损伤及行为影响。

12.生态资料

本合金产品对生态之毒性：无资料
其单一成分之毒性说明如下： 生态毒性 ecotoxicity：水中的溶解度，在 0.1～1.0mg/l 范围内已被许多研究者证实对大多数鱼类不具有毒性。但浓度在 0.015-3.0mg/l 时，尤其在软水中，会有报告会对许多种类的鱼、甲头类的动物及软体动物、浮游生物具有毒性。 铅对大翻车鱼(Bluegill)/蓝思鱼(Lepomis macrochirus)LC_{50}(48Hrs)资料为 2~5mg/l。铅对水鸟类皆具毒性。 流动性：分解的铅会对转移入土壤内。 持续性/可分解性：铅在环境中会持续且赘存。 生态累赘性（Bioaccumulation）:无资料。

13.废弃处理

本合金产品不属于危害性废弃物：须丢弃时可以委托当地回收商予以回收再生利用。

14.运输资料

USA DOT：未被列入。 运输时本产品不要直接与水接触，并且要注意会滑落、翻落得危险发生

15.法规资料

通常无特定法令规定，但是在会产生粉尘的场所必须遵守劳工安全卫生法劳工工作业环境空气中有害物质容许浓度标准
USA／OHSA：Occupational Safety & Health Administration
USA／ACGIH Guide to protective Clothing. Cincinnati, OH:American Conference of Government Industrial Hygienists,1987
USA／SARA313

16.其他资料

初版：04-28-2008

制表单位：福建紫金铜业有限公司

注意：本MSDS内容资料应被所有使用、运送、储存或暴露于本合金产品之公司/人员充分了解与接受并将其应用于使用、加工、制造或管理与本合金产品有关之相关作业规定上；使用者请依应用需求，自行判断其可用性。本MSDS资料内容在编订时已经可能将最新 之资料纳入，但对所有内容并不予以任何保证。