



TX_b 2412MHz_H Average

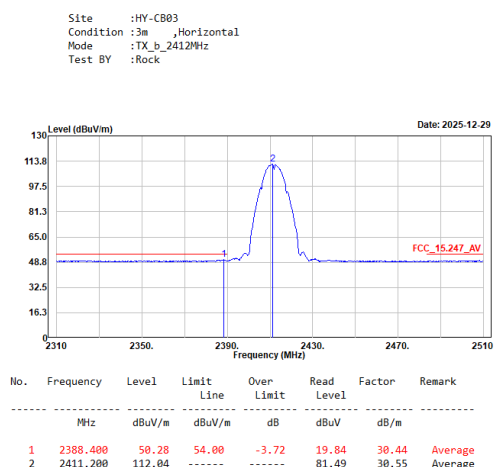


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2412MHz_H Peak

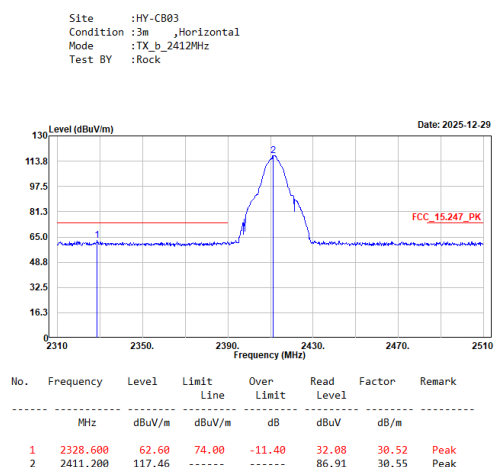


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2412MHz_V Average

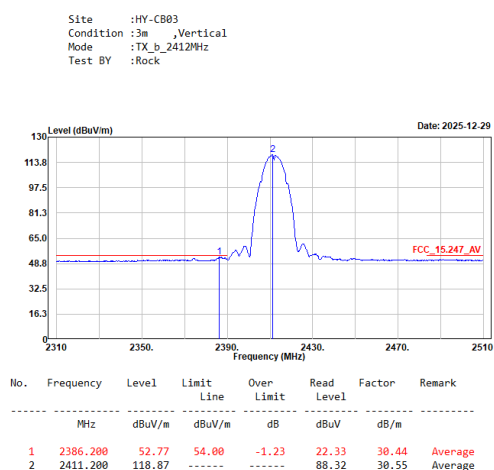

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b 2412MHz_V Peak

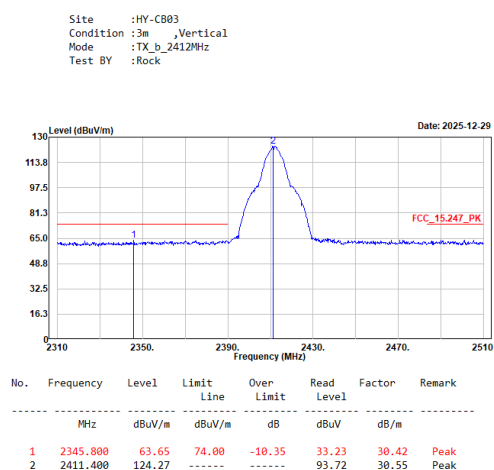

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2437MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
Test BY :Rock

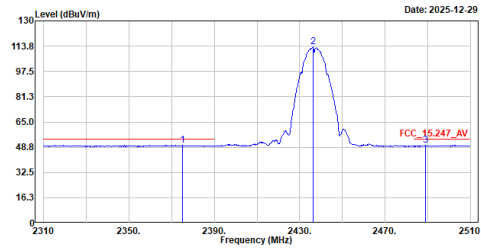


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2375.200	50.02	54.00	-3.98	19.59	30.43	Average
2	2436.200	113.14	-----	-----	82.74	30.40	Average
3	2489.000	49.83	54.00	-4.17	19.34	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2437MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
Test BY :Rock

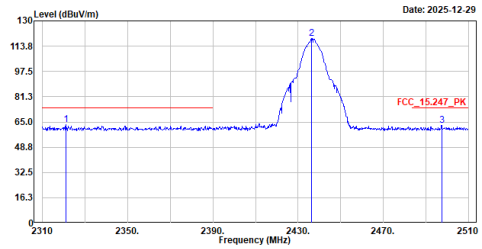


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.000	63.46	74.00	-10.54	32.86	30.60	Peak
2	2436.400	118.67	-----	-----	88.27	30.40	Peak
3	2497.400	62.68	74.00	-11.32	32.17	30.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2437MHz_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz
Test BY :Rock

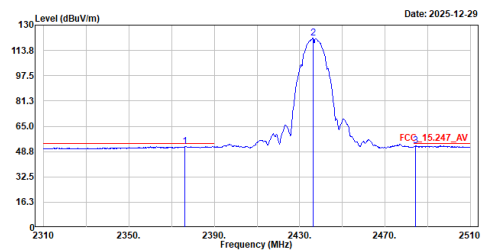


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2376.200	52.02	54.00	-1.98	21.59	30.43	Average
2	2436.200	121.64	-----	-----	91.24	30.40	Average
3	2484.200	52.62	54.00	-1.38	22.18	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2437MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz
Test BY :Rock

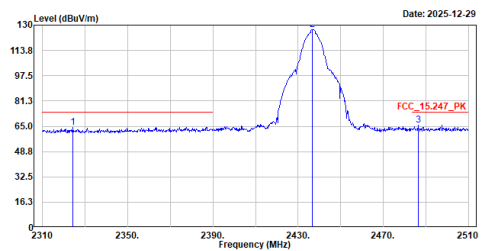


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2324.400	64.41	74.00	-9.59	33.84	30.57	Peak
2	2436.600	127.21	-----	-----	96.81	30.40	Peak
3	2486.400	65.57	74.00	-8.43	35.11	30.46	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_H Average

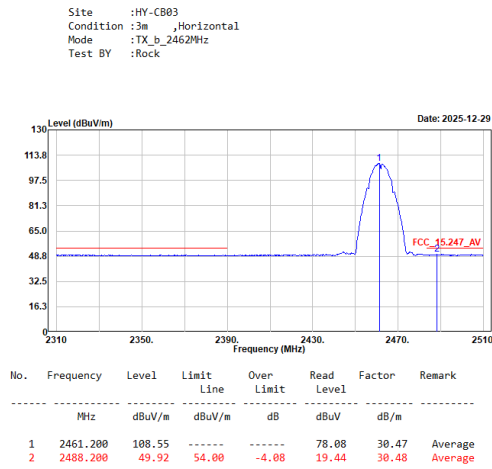


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_H Peak

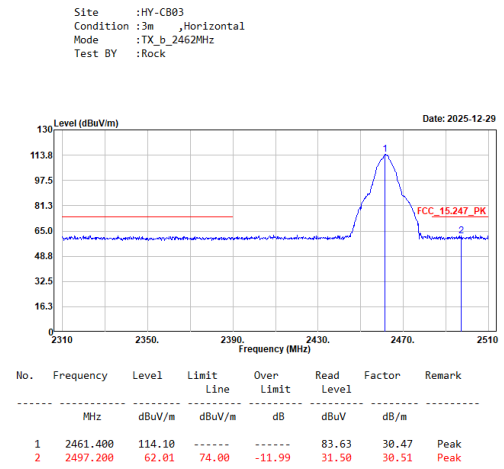


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_V Average

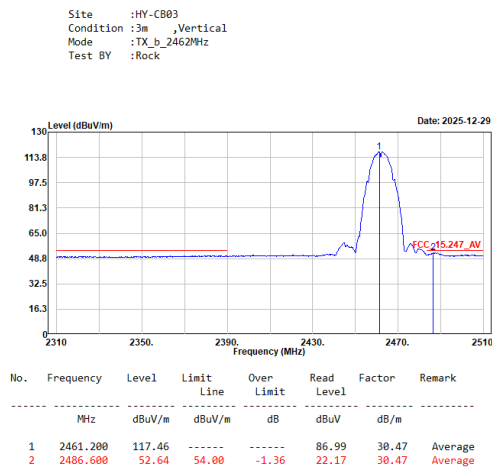


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_V Peak

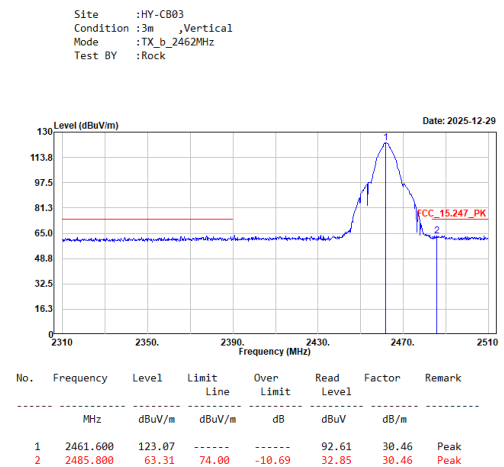


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

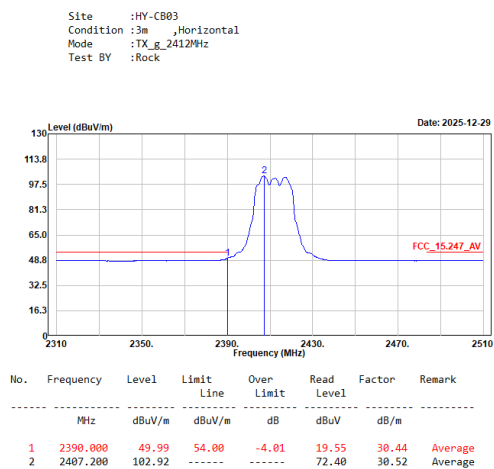


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

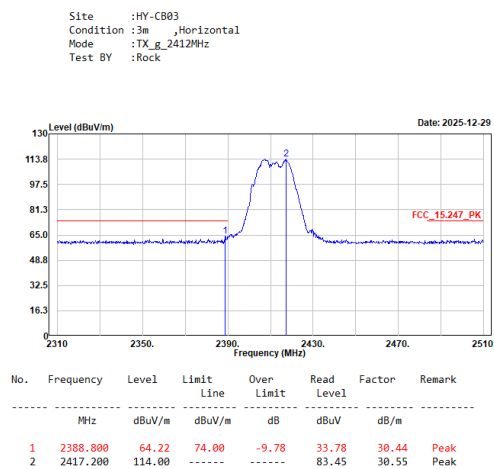


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

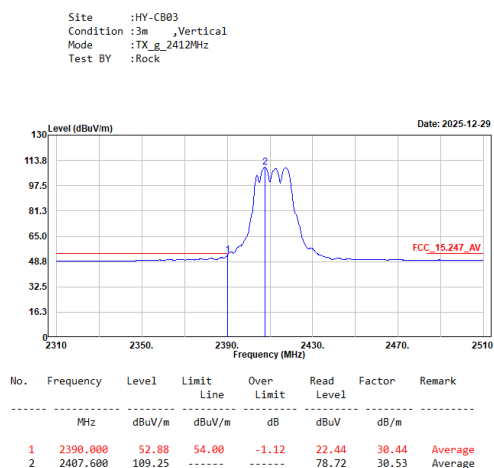

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2412MHz_V_Peak

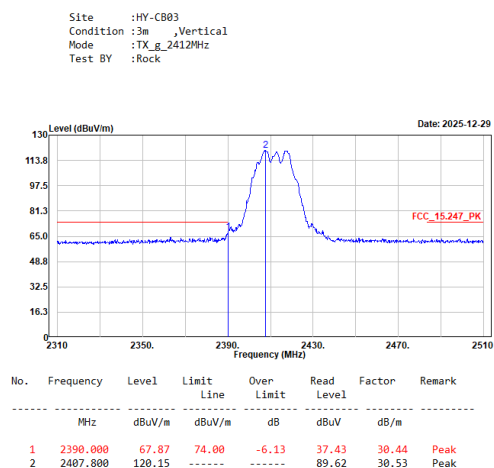

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2437MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Rock

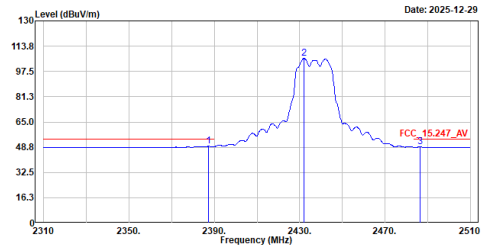


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.400	49.35	54.00	-4.65	18.91	30.44	Average
2	2432.000	105.84	-----	-----	75.40	30.44	Average
3	2486.600	48.92	54.00	-5.08	18.45	30.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2437MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Rock

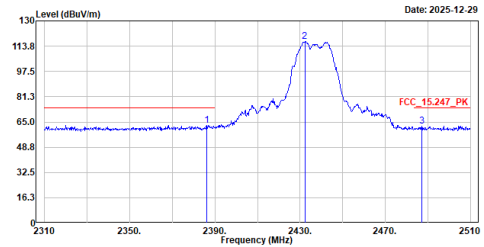


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.200	62.77	74.00	-11.23	32.33	30.44	Peak
2	2432.200	116.52	-----	-----	86.08	30.44	Peak
3	2487.000	62.40	74.00	-11.60	31.93	30.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2437MHz_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Rock

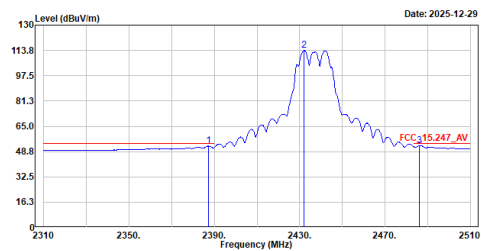


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.200	52.32	54.00	-1.68	21.88	30.44	Average
2	2432.000	113.58	-----	-----	83.14	30.44	Average
3	2486.200	52.63	54.00	-1.37	22.17	30.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2437MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Rock

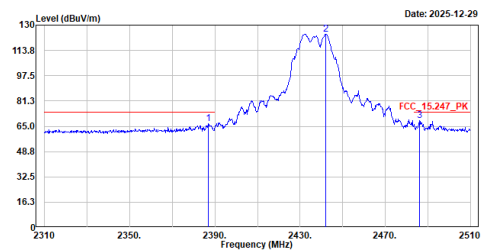


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.000	66.82	74.00	-7.18	36.38	30.44	Peak
2	2442.000	124.23	-----	-----	93.86	30.37	Peak
3	2486.000	68.90	74.00	-5.10	38.44	30.46	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

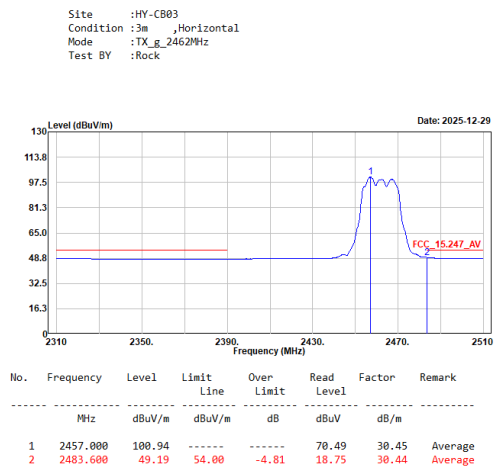


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

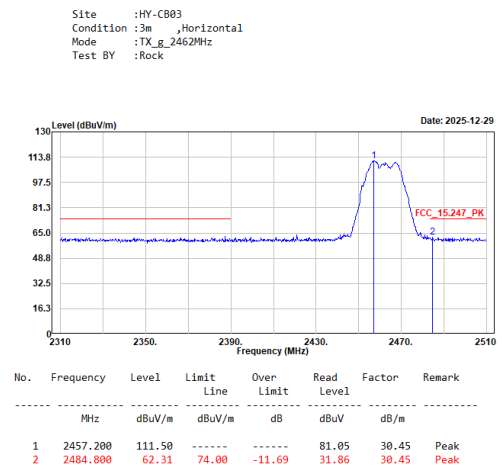


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

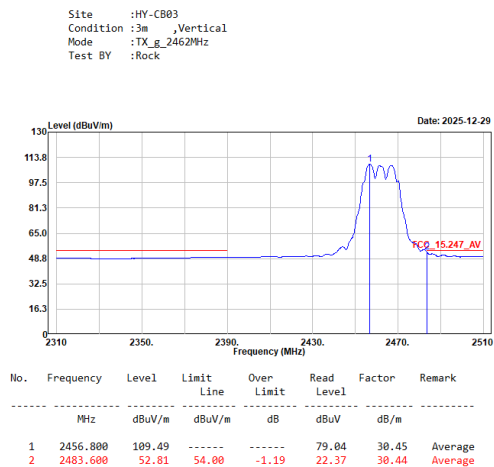


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

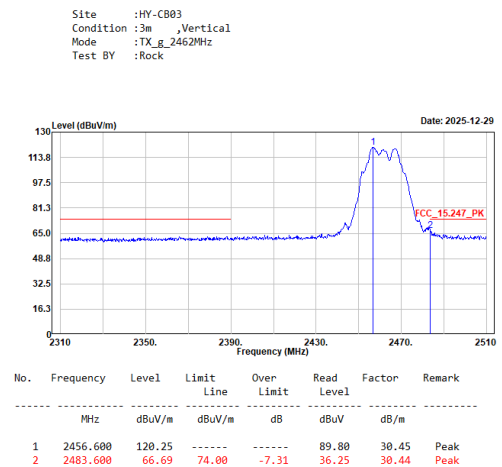


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H_Average

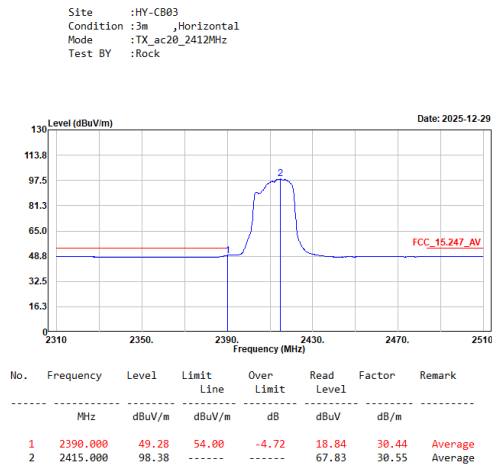


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H_Peak

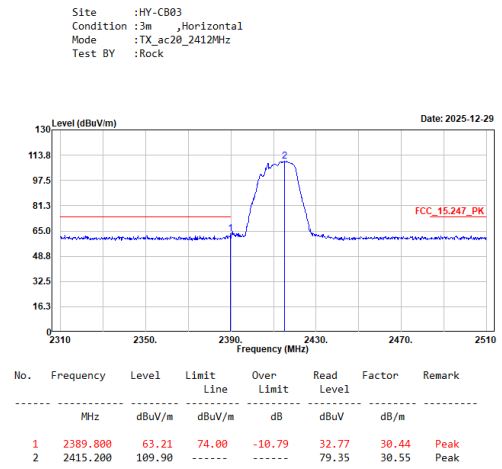


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V_Average

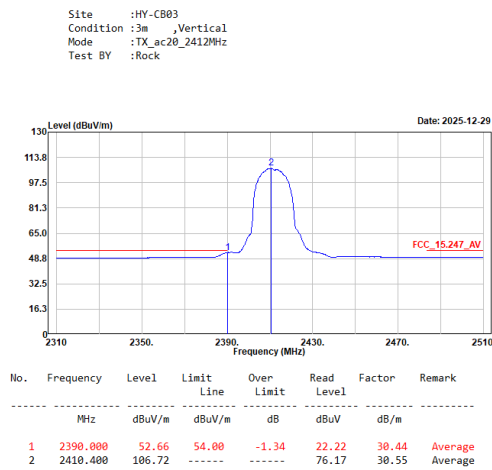

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ac20_2412MHz_V_Peak

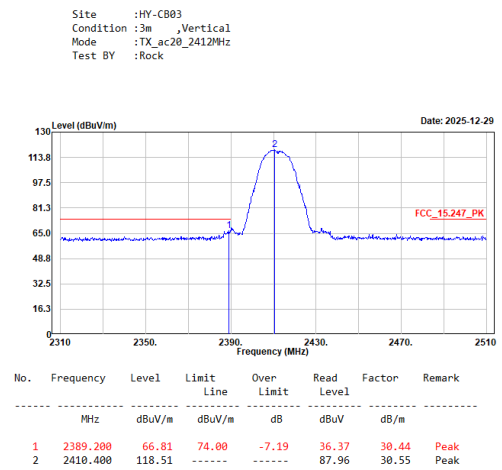

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2437MHz
Test BY :Rock

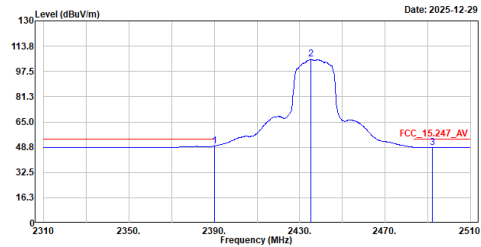


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	49.46	54.00	-4.54	19.02	30.44	Average
2	2435.400	105.26	-----	-----	74.85	30.41	Average
3	2492.000	48.80	54.00	-5.20	18.30	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2437MHz
Test BY :Rock

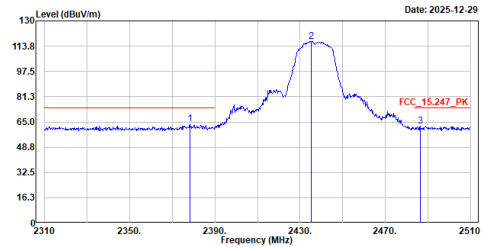


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2378.200	63.60	74.00	-10.40	33.17	30.43	Peak
2	2435.200	116.72	-----	-----	86.31	30.41	Peak
3	2486.400	62.18	74.00	-11.82	31.72	30.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2437MHz
Test BY :Rock

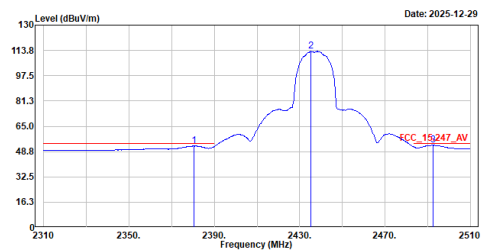


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2380.400	52.29	54.00	-1.71	21.86	30.43	Average
2	2435.400	113.24	-----	-----	82.83	30.41	Average
3	2492.400	52.80	54.00	-1.20	22.30	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2437MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2379.200	68.98	74.00	-5.02	38.55	30.43	Peak
2	2438.600	124.97	-----	-----	94.59	30.38	Peak
3	2495.400	69.27	74.00	-4.73	38.76	30.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.200	97.14	-----	-----	66.67	30.47	Average
2	2483.600	48.77	54.00	-5.23	18.33	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Rock

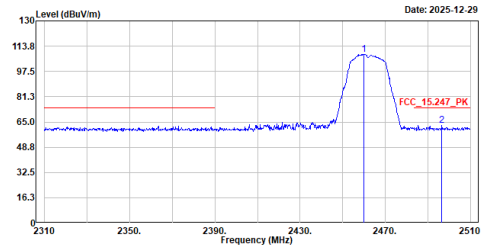


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.000	108.61	-----	-----	78.13	30.48	Peak
2	2483.600	62.64	74.00	-11.36	32.13	30.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Rock

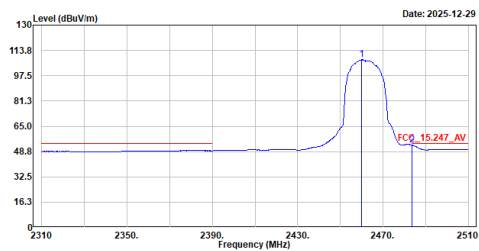


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.000	107.74	-----	-----	77.26	30.48	Average
2	2483.600	52.86	54.00	-1.14	22.42	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Rock

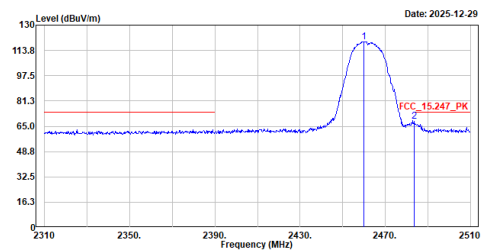


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.000	119.34	-----	-----	88.86	30.48	Peak
2	2483.600	68.19	74.00	-5.81	37.75	30.44	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Average

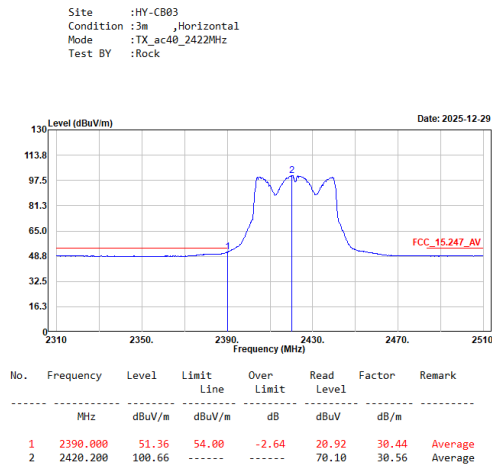


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Peak

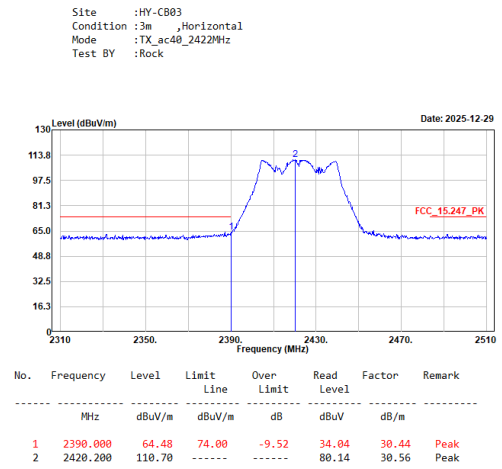


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Average

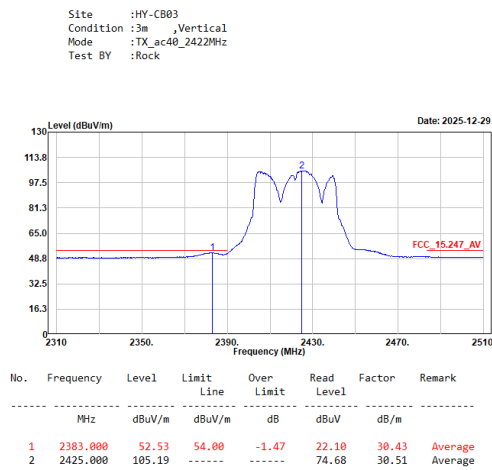

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ac40_2422MHz_V_Peak

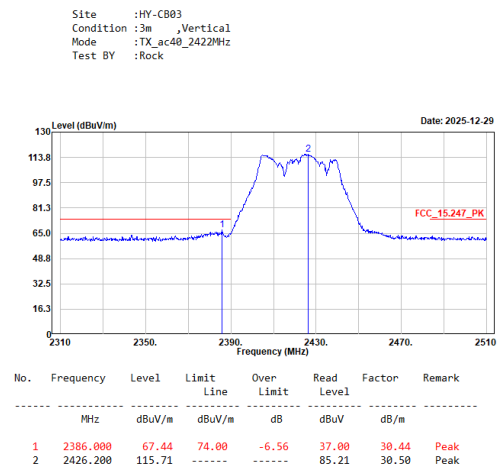

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Rock

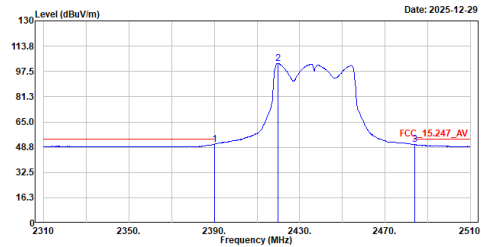


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	50.66	54.00	-3.34	20.22	30.44	Average
2	2419.800	102.51	-----	-----	71.95	30.56	Average
3	2483.800	50.52	54.00	-3.48	20.08	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Rock

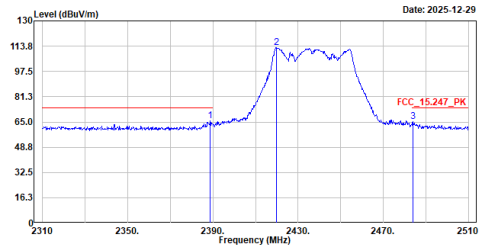


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.800	65.65	74.00	-8.35	35.21	30.44	Peak
2	2419.800	112.94	-----	-----	82.38	30.56	Peak
3	2483.800	65.16	74.00	-8.84	34.72	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Rock

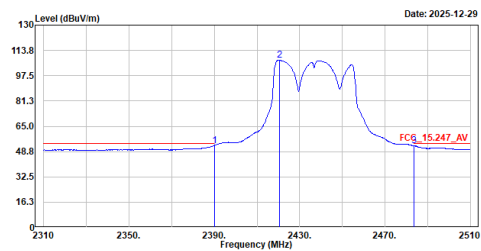


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.63	54.00	-1.37	22.19	30.44	Average
2	2420.600	107.48	-----	-----	76.93	30.55	Average
3	2483.600	52.57	54.00	-1.43	22.13	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.200	67.15	74.00	-6.85	36.71	30.44	Peak
2	2420.600	117.92	-----	-----	87.37	30.55	Peak
3	2483.600	66.94	74.00	-7.06	36.50	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Rock

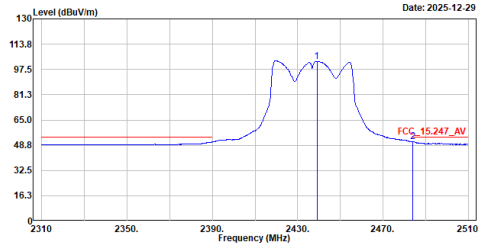


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2439.000	102.75	-----	-----	72.37	30.38	Average
2	2484.000	51.05	54.00	-2.95	20.61	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Rock

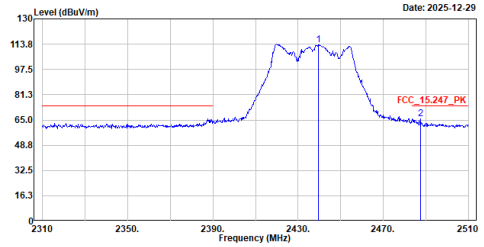


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2439.600	113.13	-----	-----	82.76	30.37	Peak
2	2487.400	65.57	74.00	-8.43	35.10	30.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Rock

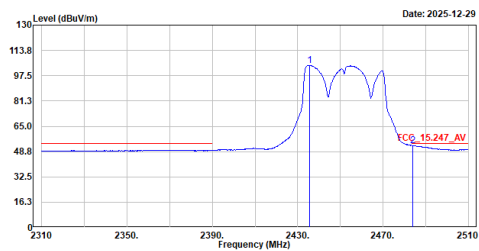


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2435.600	104.24	-----	-----	73.84	30.40	Average
2	2483.800	52.72	54.00	-1.28	22.28	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Rock



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2435.600	114.83	-----	-----	84.43	30.40	Peak
2	2484.200	65.89	74.00	-8.11	35.45	30.44	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Average

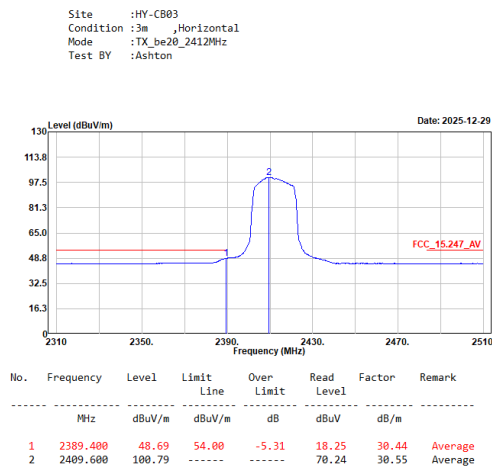


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Peak

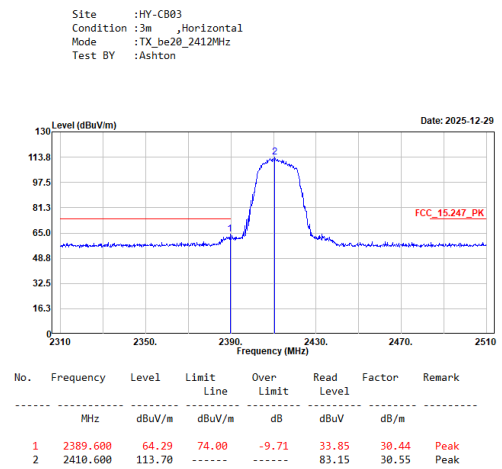


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Average

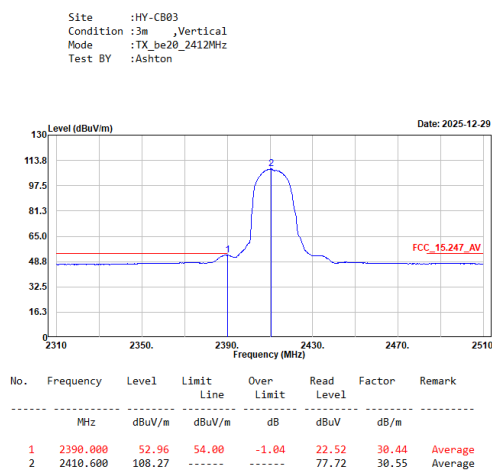

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_2412MHz_V_Peak

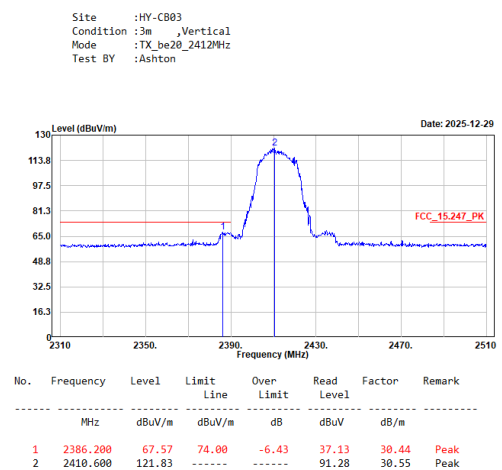

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_2437MHz
Test BY :Rock

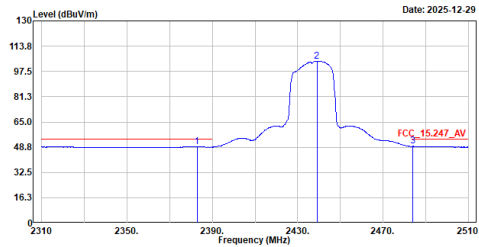


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2382.800	49.23	54.00	-4.77	18.80	30.43	Average
2	2439.000	104.15	-----	-----	73.77	30.38	Average
3	2483.800	49.34	54.00	-4.66	18.90	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_2437MHz
Test BY :Rock

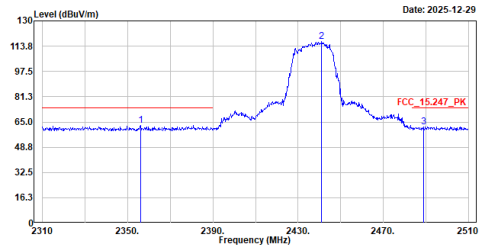


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2356.000	62.58	74.00	-11.42	32.16	30.42	Peak
2	2441.000	116.53	-----	-----	86.16	30.37	Peak
3	2488.800	62.06	74.00	-11.94	31.57	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_2437MHz
Test BY :Rock

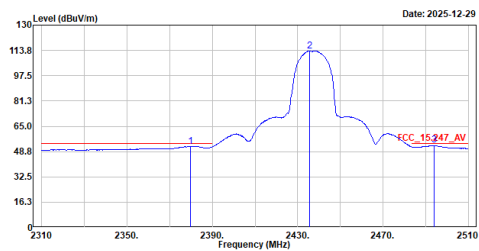


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2379.600	52.15	54.00	-1.85	21.72	30.43	Average
2	2435.600	113.52	-----	-----	83.12	30.40	Average
3	2494.000	52.78	54.00	-1.22	22.28	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_2437MHz
Test BY :Rock

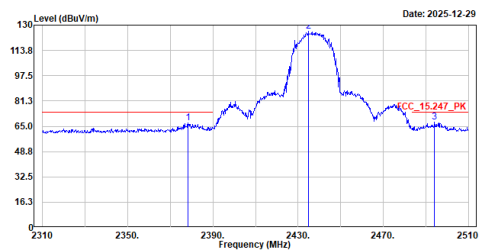


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2378.200	67.41	74.00	-6.59	36.98	30.43	Peak
2	2434.800	125.91	-----	-----	95.50	30.41	Peak
3	2494.000	67.89	74.00	-6.11	37.39	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_2462MHz
Test BY :Ashton

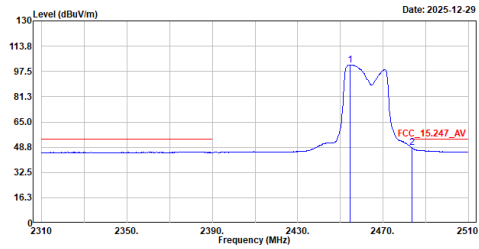


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.600	101.70	-----	-----	71.27	30.43	Average
2	2483.600	48.45	54.00	-5.55	18.01	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_2462MHz
Test BY :Ashton

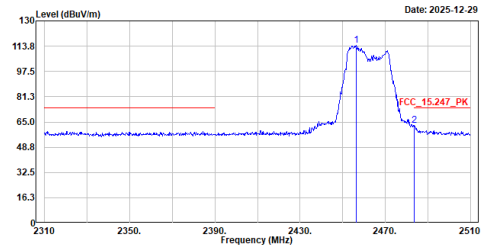


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2456.200	114.18	-----	-----	83.74	30.44	Peak
2	2483.600	62.85	74.00	-11.15	32.41	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_2462MHz
Test BY :Ashton

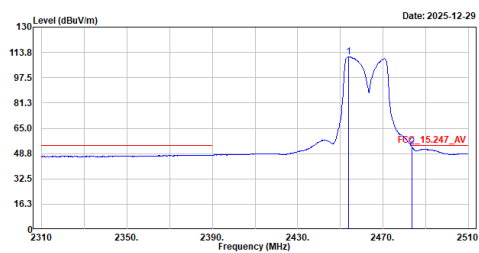


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.000	110.88	-----	-----	80.46	30.42	Average
2	2483.600	52.95	54.00	-1.05	22.51	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_2462MHz
Test BY :Ashton

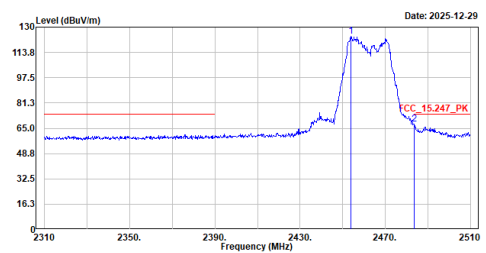


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	123.99	-----	-----	93.57	30.42	Peak
2	2483.600	67.53	74.00	-6.47	37.09	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be40_2422MHz_H_Average

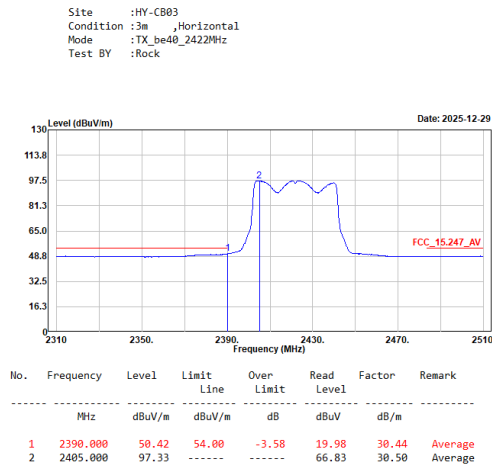


TX_be40_2422MHz_H_Peak

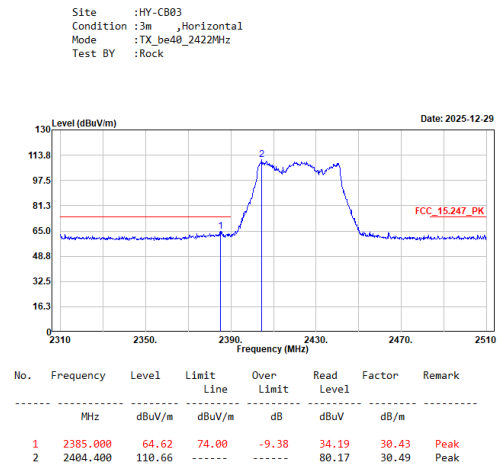

TX_be40_2422MHz_V_Average

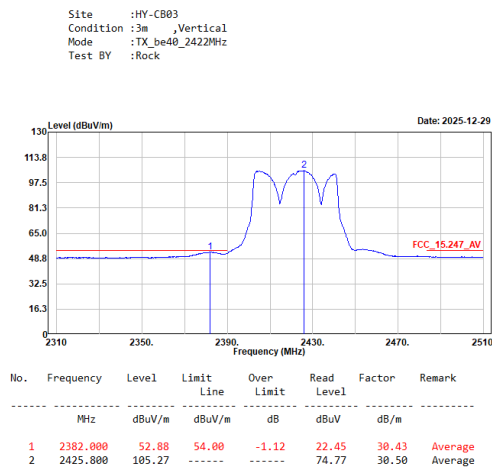


TX_be40_2422MHz_V_Peak

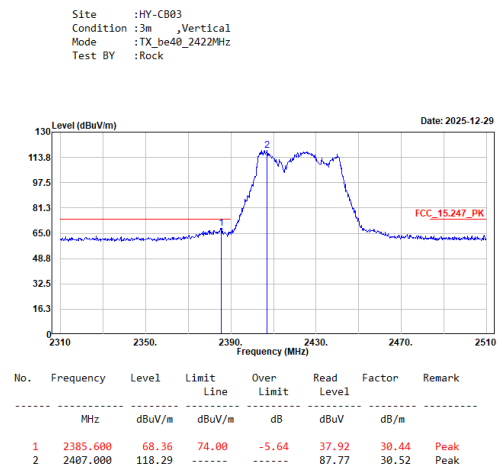

TX_be40_2437MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_2437MHz
Test BY :Rock

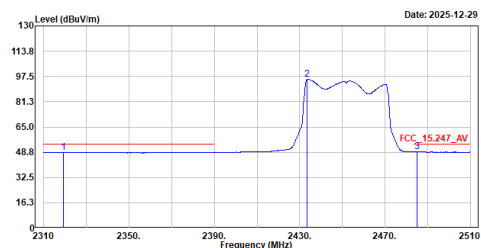


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2319.200	48.69	54.00	-5.31	18.08	30.61	Average
2	2433.600	95.66	-----	-----	65.24	30.42	Average
3	2485.000	49.17	54.00	-4.83	18.72	30.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_2437MHz
Test BY :Rock

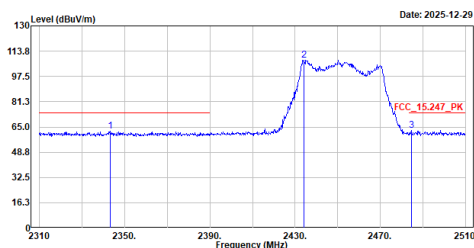


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2343.200	62.21	74.00	-11.79	31.79	30.42	Peak
2	2434.200	108.00	-----	-----	77.58	30.42	Peak
3	2484.600	62.90	74.00	-11.10	32.45	30.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_2437MHz
Test BY :Rock

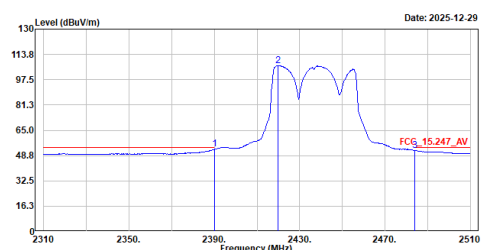


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.75	54.00	-1.25	22.31	30.44	Average
2	2420.000	106.46	-----	-----	75.90	30.56	Average
3	2483.000	52.06	54.00	-1.94	21.62	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_2437MHz
Test BY :Rock

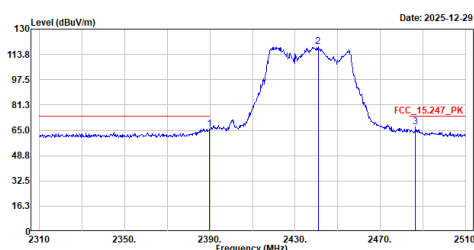


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	65.82	74.00	-8.18	35.38	30.44	Peak
2	2440.800	118.60	-----	-----	88.23	30.37	Peak
3	2486.600	67.40	74.00	-6.60	36.93	30.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_2452MHz
Test BY :Ashton

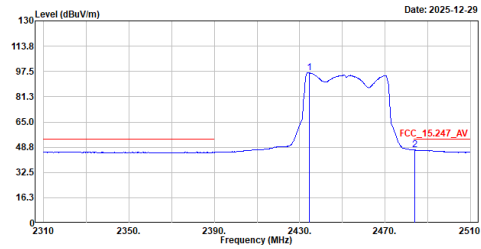


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2434.400	96.81	-----	-----	66.39	30.42	Average
2	2483.800	47.00	54.00	-7.00	16.56	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_2452MHz
Test BY :Ashton

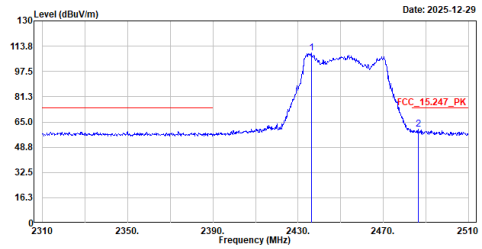


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2436.200	109.17	-----	-----	78.77	30.40	Peak
2	2486.400	60.42	74.00	-13.58	29.96	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_2452MHz
Test BY :Ashton

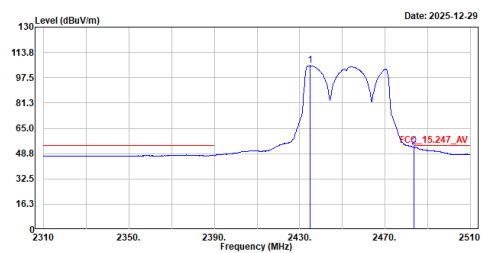


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2435.000	105.25	-----	-----	74.84	30.41	Average
2	2483.600	52.82	54.00	-1.18	22.38	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_2452MHz
Test BY :Ashton

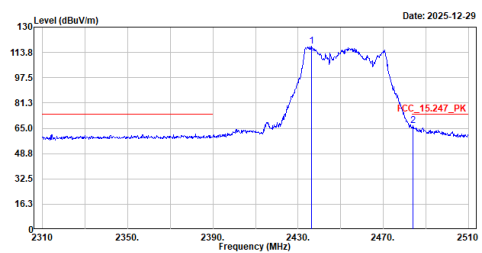


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2436.400	117.60	-----	-----	87.20	30.40	Peak
2	2484.000	66.56	74.00	-7.44	36.12	30.44	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 18GHz worst case


TX_ac40_2437MHz_H

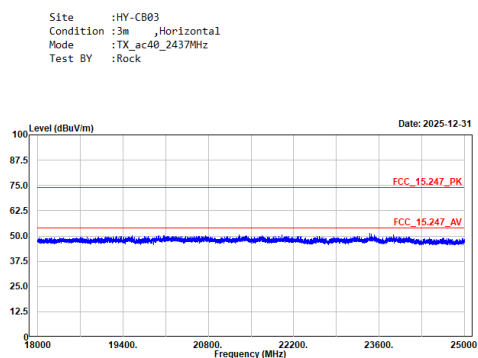


TX_ac40_2437MHz_V

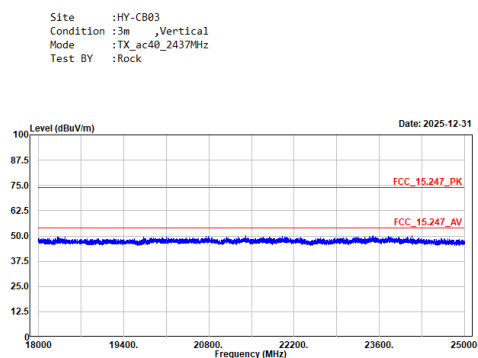

TX_be40_2437MHz_H




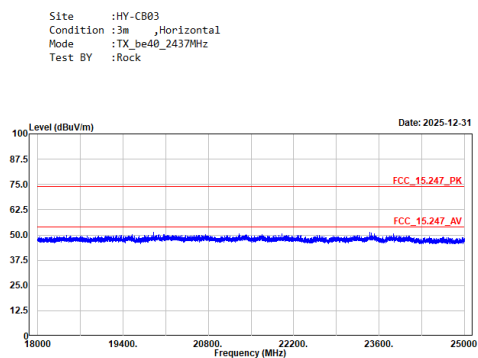


TX_be40_2437MHz_V

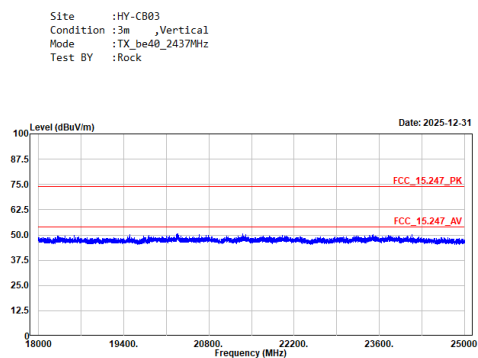


Appendix G. Test Result of Radiated Emissions Co-location

Cellular module: FN990A40-HP

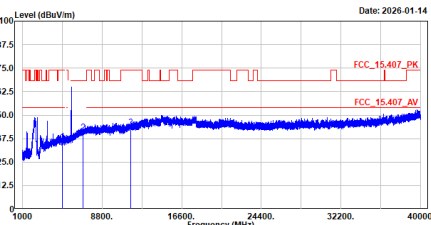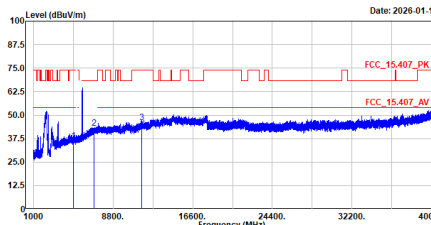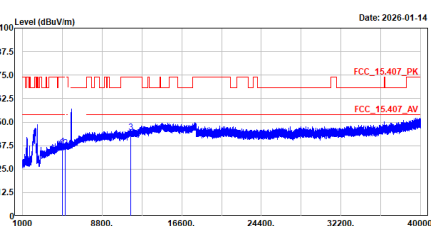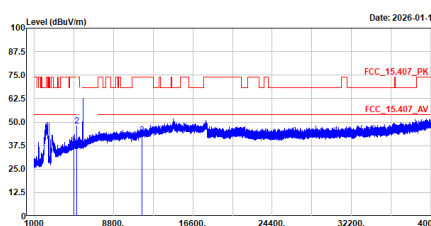TX_b_2437MHz+TX_be20_5785MHz+5GNR n78_15M_QPSK_1RB36_CH630500_H		TX_b_2437MHz+TX_be20_5785MHz+5GNR n78_15M_QPSK_1RB36_CH630500_V																																																																																	
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR n78_15M_QPSK_1RB36_CH630500 Test BY :Ashton  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>35.79</td><td>74.00</td><td>-38.21</td><td>50.41</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>6915.000</td><td>40.64</td><td>68.22</td><td>-27.58</td><td>48.38</td><td>-7.74</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>43.54</td><td>74.00</td><td>-30.46</td><td>45.37</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	35.79	74.00	-38.21	50.41	-14.62	Peak	2	6915.000	40.64	68.22	-27.58	48.38	-7.74	Peak	3	11570.000	43.54	74.00	-30.46	45.37	-1.83	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR n78_15M_QPSK_1RB36_CH630500 Test BY :Ashton  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>36.38</td><td>74.00</td><td>-37.62</td><td>51.00</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>6915.000</td><td>43.08</td><td>68.22</td><td>-25.14</td><td>50.82</td><td>-7.74</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>48.04</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	36.38	74.00	-37.62	51.00	-14.62	Peak	2	6915.000	43.08	68.22	-25.14	50.82	-7.74	Peak	3	11570.000	46.21	74.00	-27.79	48.04	-1.83	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																													
1	4874.000	35.79	74.00	-38.21	50.41	-14.62	Peak																																																																												
2	6915.000	40.64	68.22	-27.58	48.38	-7.74	Peak																																																																												
3	11570.000	43.54	74.00	-30.46	45.37	-1.83	Peak																																																																												
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																													
1	4874.000	36.38	74.00	-37.62	51.00	-14.62	Peak																																																																												
2	6915.000	43.08	68.22	-25.14	50.82	-7.74	Peak																																																																												
3	11570.000	46.21	74.00	-27.79	48.04	-1.83	Peak																																																																												
TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK 1RB0_CH40620_H		TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK 1RB0_CH40620_V																																																																																	
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK_1RB0_CH40620 Test BY :Ashton  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>36.80</td><td>74.00</td><td>-37.20</td><td>51.42</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>5186.000</td><td>36.13</td><td>74.00</td><td>-37.87</td><td>50.11</td><td>-13.98</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>44.55</td><td>74.00</td><td>-29.45</td><td>46.38</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	36.80	74.00	-37.20	51.42	-14.62	Peak	2	5186.000	36.13	74.00	-37.87	50.11	-13.98	Peak	3	11570.000	44.55	74.00	-29.45	46.38	-1.83	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK_1RB0_CH40620 Test BY :Ashton  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>37.05</td><td>74.00</td><td>-36.95</td><td>51.67</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>5186.000</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>61.97</td><td>-13.98</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>44.91</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	37.05	74.00	-36.95	51.67	-14.62	Peak	2	5186.000	47.99	74.00	-26.01	61.97	-13.98	Peak	3	11570.000	43.08	74.00	-30.92	44.91	-1.83	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																													
1	4874.000	36.80	74.00	-37.20	51.42	-14.62	Peak																																																																												
2	5186.000	36.13	74.00	-37.87	50.11	-13.98	Peak																																																																												
3	11570.000	44.55	74.00	-29.45	46.38	-1.83	Peak																																																																												
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																													
1	4874.000	37.05	74.00	-36.95	51.67	-14.62	Peak																																																																												
2	5186.000	47.99	74.00	-26.01	61.97	-13.98	Peak																																																																												
3	11570.000	43.08	74.00	-30.92	44.91	-1.83	Peak																																																																												

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182


H

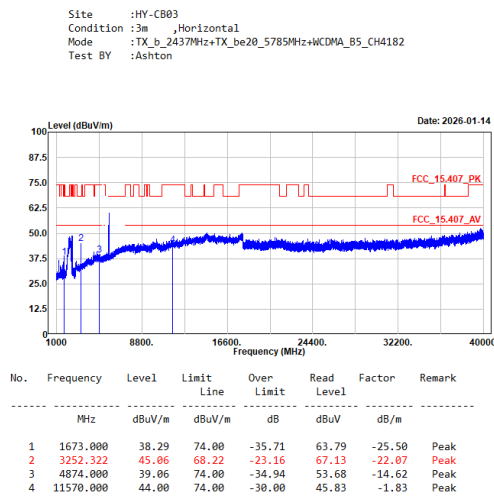


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182


V

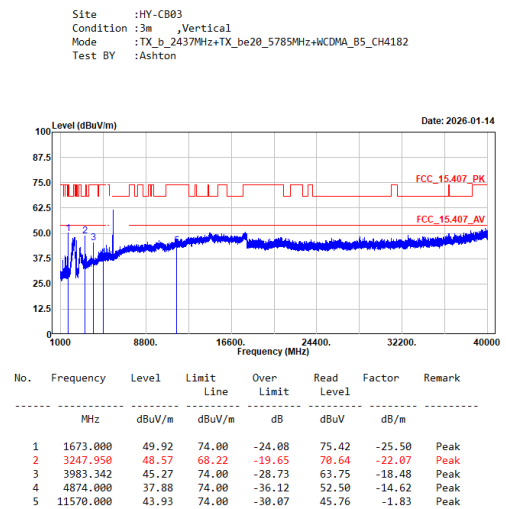

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

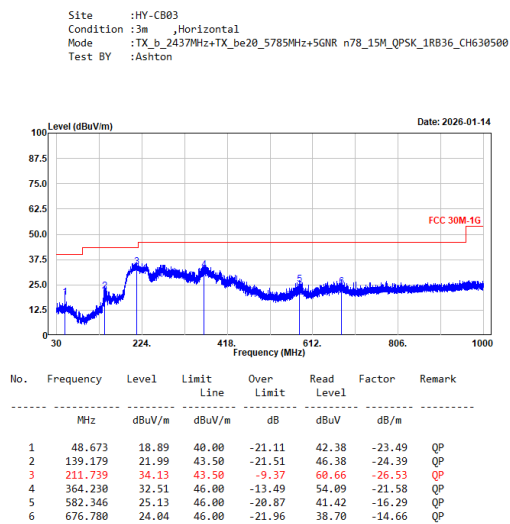TX_b_2437MHz+TX_be20_5785MHz+5GNR
n78_15M_QPSK_1RB36_CH630500_H_QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

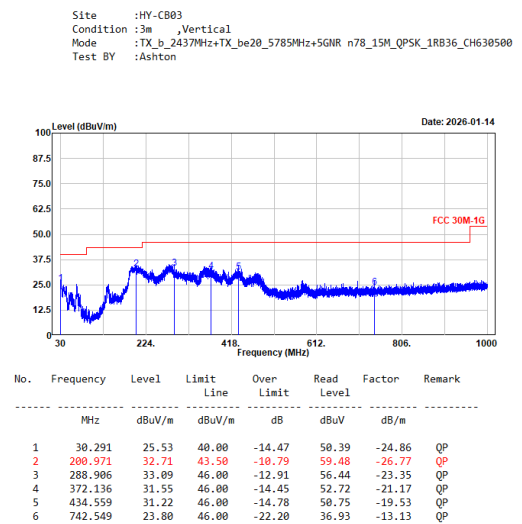TX_b_2437MHz+TX_be20_5785MHz+5GNR
n78_15M_QPSK_1RB36_CH630500_V_QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK
1RB0_CH40620_H_QP**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK_1RB0_CH40620
Test BY :Ashton

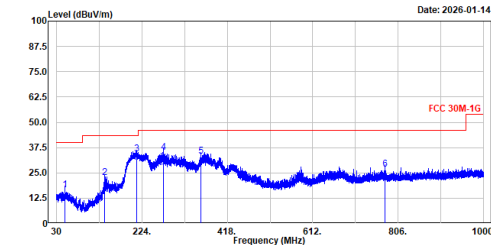


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.673	16.50	40.00	-23.50	39.99	-23.49	QP
2	139.033	22.78	43.50	-20.72	47.17	-24.39	QP
3	211.302	34.36	43.50	-9.14	60.90	-26.54	QP
4	272.561	35.22	46.00	-10.78	59.19	-23.97	QP
5	358.507	33.15	46.00	-12.85	55.04	-21.89	QP
6	777.131	26.95	46.00	-19.05	39.73	-12.78	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK
1RB0_CH40620_V_QP**

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK_1RB0_CH40620
Test BY :Ashton

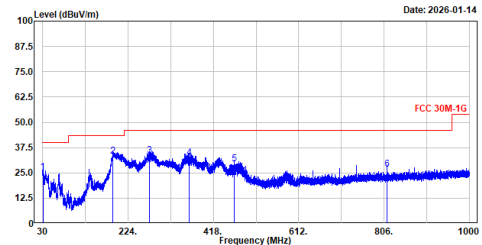


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.631	25.14	40.00	-14.86	50.04	-24.90	QP
2	189.913	33.29	43.50	-10.21	59.81	-26.52	QP
3	272.221	33.67	46.00	-12.33	57.65	-23.98	QP
4	362.290	32.61	46.00	-13.39	54.31	-21.70	QP
5	465.843	29.36	46.00	-16.64	48.04	-18.68	QP
6	812.587	26.90	46.00	-19.10	39.39	-12.49	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
H_QP**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
Test BY :Ashton

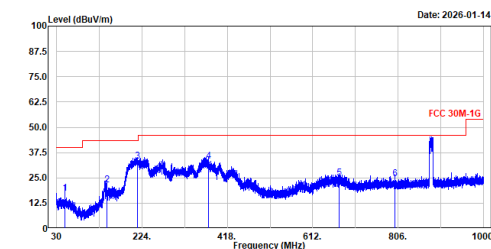


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.673	17.19	40.00	-22.81	40.68	-23.49	QP
2	143.641	21.67	43.50	-21.83	45.74	-24.07	QP
3	214.261	33.03	43.50	-10.47	59.54	-26.51	QP
4	374.707	33.18	46.00	-12.82	54.19	-21.01	QP
5	671.687	25.04	46.00	-20.96	39.76	-14.72	QP
6	799.200	24.62	46.00	-21.38	37.13	-12.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
V_QP**





Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
Test BY :Ashton

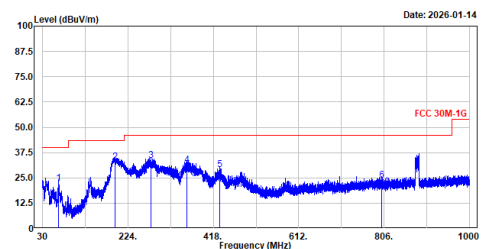

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	66.959	22.32	40.00	-17.68	48.11	-25.79	QP
2	193.930	32.97	43.50	-10.53	59.67	-26.70	QP
3	276.295	33.66	46.00	-12.34	57.48	-23.82	QP
4	357.343	31.28	46.00	-14.72	53.19	-21.91	QP
5	432.182	29.12	46.00	-16.88	48.75	-19.63	QP
6	800.849	23.64	46.00	-22.36	36.15	-12.51	QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Cellular module: RM520N-GL

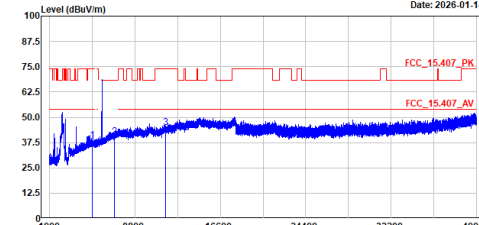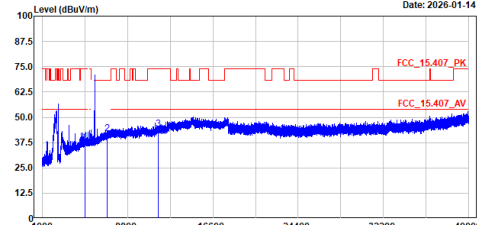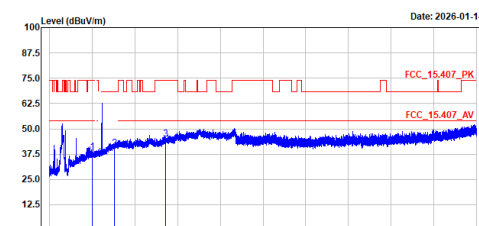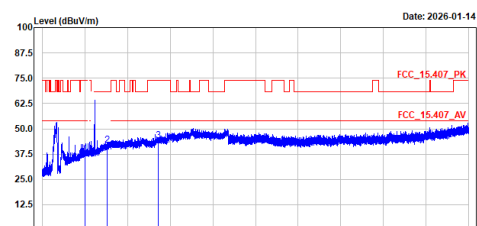TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK_1RB0_CH631334_H	TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK_1RB0_CH631334_V																																																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB0_CH631334 Test BY :Ashton Level (dBuV/m) Date: 2026-01-14  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>38.61</td><td>74.00</td><td>-35.39</td><td>53.23</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>6940.020</td><td>40.33</td><td>68.22</td><td>-27.89</td><td>48.03</td><td>-7.70</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>44.81</td><td>74.00</td><td>-29.19</td><td>46.64</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak	2	6940.020	40.33	68.22	-27.89	48.03	-7.70	Peak	3	11570.000	44.81	74.00	-29.19	46.64	-1.83	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB0_CH631334 Test BY :Ashton Level (dBuV/m) Date: 2026-01-14  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>37.74</td><td>74.00</td><td>-36.26</td><td>52.36</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>6940.020</td><td>42.02</td><td>68.22</td><td>-26.20</td><td>49.72</td><td>-7.70</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>45.88</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	37.74	74.00	-36.26	52.36	-14.62	Peak	2	6940.020	42.02	68.22	-26.20	49.72	-7.70	Peak	3	11570.000	44.05	74.00	-29.95	45.88	-1.83	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak																																																																										
2	6940.020	40.33	68.22	-27.89	48.03	-7.70	Peak																																																																										
3	11570.000	44.81	74.00	-29.19	46.64	-1.83	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	37.74	74.00	-36.26	52.36	-14.62	Peak																																																																										
2	6940.020	42.02	68.22	-26.20	49.72	-7.70	Peak																																																																										
3	11570.000	44.05	74.00	-29.95	45.88	-1.83	Peak																																																																										
TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK_1RB36_CH40620_H_001--.png	TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK_1RB36_CH40620_V_001--.png																																																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620 Test BY :Ashton Level (dBuV/m) Date: 2026-01-14  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>38.61</td><td>74.00</td><td>-35.39</td><td>53.23</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>6940.020</td><td>40.33</td><td>68.22</td><td>-27.89</td><td>48.03</td><td>-7.70</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>44.81</td><td>74.00</td><td>-29.19</td><td>46.64</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak	2	6940.020	40.33	68.22	-27.89	48.03	-7.70	Peak	3	11570.000	44.81	74.00	-29.19	46.64	-1.83	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620 Test BY :Ashton Level (dBuV/m) Date: 2026-01-14  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>37.74</td><td>74.00</td><td>-36.26</td><td>52.36</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>6940.020</td><td>42.02</td><td>68.22</td><td>-26.20</td><td>49.72</td><td>-7.70</td><td>Peak</td></tr><tr><td>3</td><td>11570.000</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>45.88</td><td>-1.83</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	37.74	74.00	-36.26	52.36	-14.62	Peak	2	6940.020	42.02	68.22	-26.20	49.72	-7.70	Peak	3	11570.000	44.05	74.00	-29.95	45.88	-1.83	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak																																																																										
2	6940.020	40.33	68.22	-27.89	48.03	-7.70	Peak																																																																										
3	11570.000	44.81	74.00	-29.19	46.64	-1.83	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	37.74	74.00	-36.26	52.36	-14.62	Peak																																																																										
2	6940.020	42.02	68.22	-26.20	49.72	-7.70	Peak																																																																										
3	11570.000	44.05	74.00	-29.95	45.88	-1.83	Peak																																																																										

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

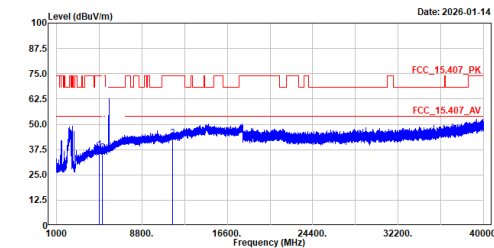


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.41	74.00	-36.59	52.03	-14.62	Peak
2	5186.000	35.78	74.00	-38.22	49.76	-13.98	Peak
3	11570.000	42.85	74.00	-31.15	44.68	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620_H_001--.png

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

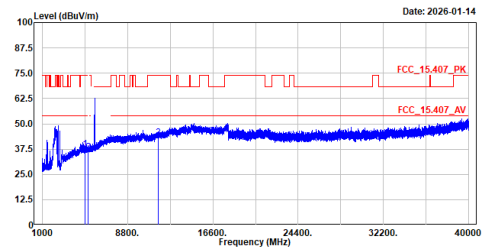


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.41	74.00	-36.59	52.03	-14.62	Peak
2	5186.000	35.78	74.00	-38.22	49.76	-13.98	Peak
3	11570.000	42.85	74.00	-31.15	44.68	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

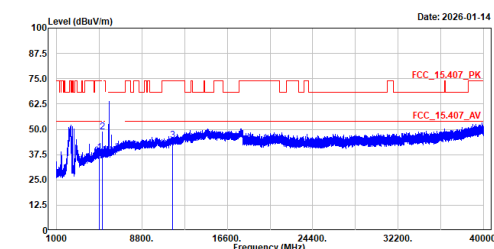


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak
2	5186.000	48.51	74.00	-25.49	62.49	-13.98	Peak
3	11570.000	44.46	74.00	-29.54	46.29	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620_V_001--.png



Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

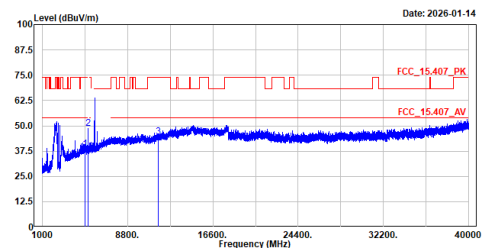



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak
2	5186.000	48.51	74.00	-25.49	62.49	-13.98	Peak
3	11570.000	44.46	74.00	-29.54	46.29	-1.83	Peak





Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400 H	TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400 V
---	---

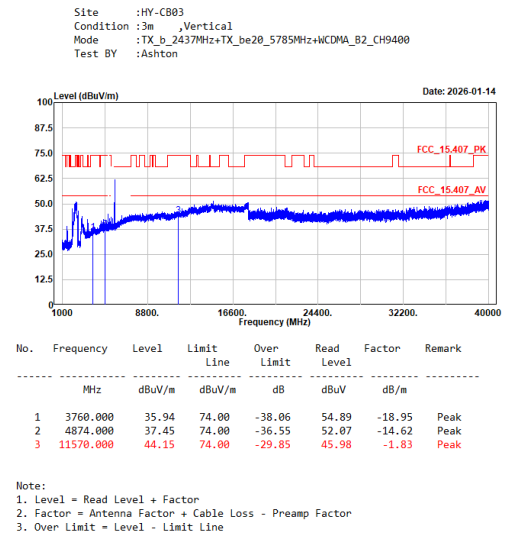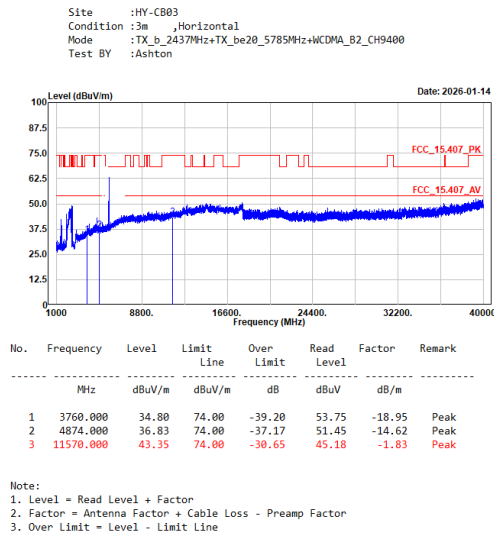


TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK 1RB0 CH631334 H	TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK 1RB0 CH631334 V
--	--

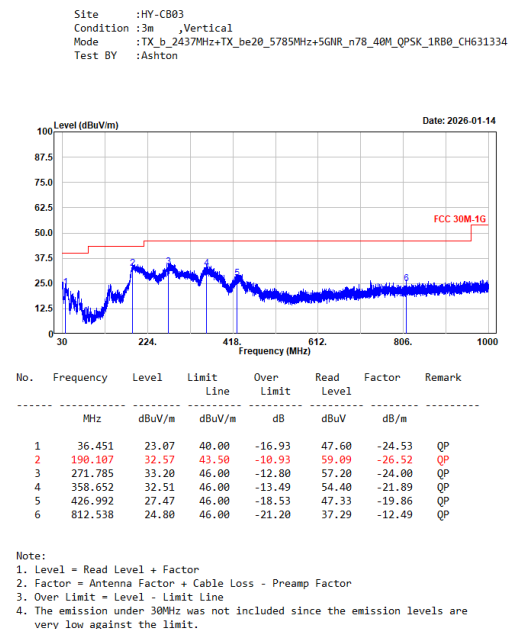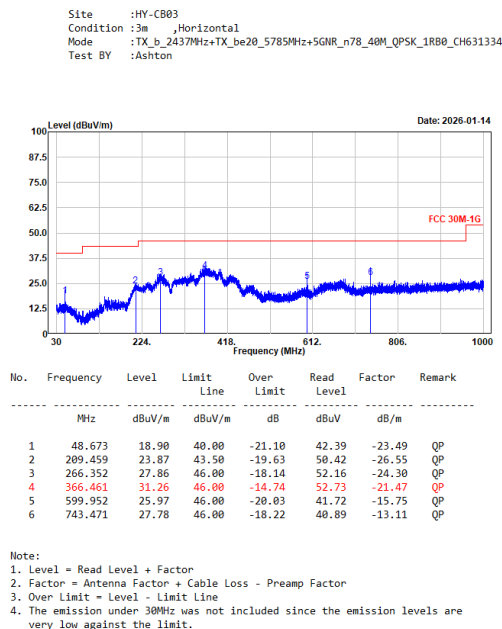

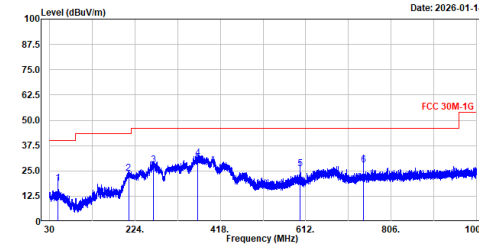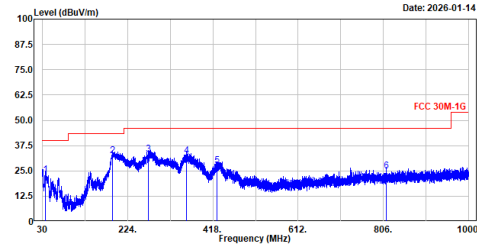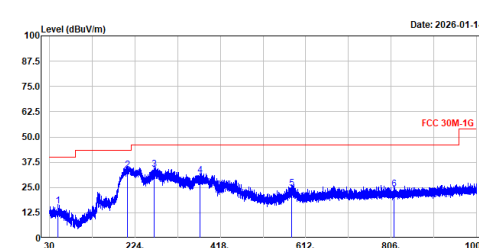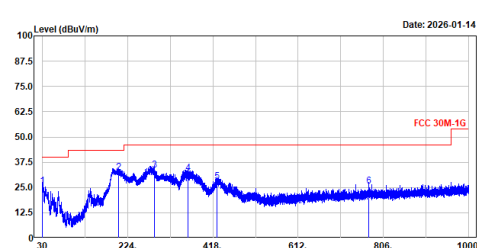TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK_1RB36_CH40620_H_QP_001--.png	TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP SK_1RB36_CH40620_V_QP_001--.png																																																																																																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620 Test BY :Ashton  <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>48.673</td><td>18.90</td><td>40.00</td><td>-21.10</td><td>42.39</td><td>-23.49</td><td>QP</td></tr><tr><td>2</td><td>209.459</td><td>23.87</td><td>43.50</td><td>-19.63</td><td>50.42</td><td>-26.55</td><td>QP</td></tr><tr><td>3</td><td>266.352</td><td>27.86</td><td>46.00</td><td>-18.14</td><td>52.16</td><td>-24.30</td><td>QP</td></tr><tr><td>4</td><td>366.461</td><td>31.26</td><td>46.00</td><td>-14.74</td><td>52.73</td><td>-21.47</td><td>QP</td></tr><tr><td>5</td><td>599.952</td><td>25.97</td><td>46.00</td><td>-20.03</td><td>41.72</td><td>-15.75</td><td>QP</td></tr><tr><td>6</td><td>743.471</td><td>27.78</td><td>46.00</td><td>-18.22</td><td>40.89</td><td>-13.11</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	48.673	18.90	40.00	-21.10	42.39	-23.49	QP	2	209.459	23.87	43.50	-19.63	50.42	-26.55	QP	3	266.352	27.86	46.00	-18.14	52.16	-24.30	QP	4	366.461	31.26	46.00	-14.74	52.73	-21.47	QP	5	599.952	25.97	46.00	-20.03	41.72	-15.75	QP	6	743.471	27.78	46.00	-18.22	40.89	-13.11	QP	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620 Test BY :Ashton  <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>36.451</td><td>23.07</td><td>40.00</td><td>-16.93</td><td>47.60</td><td>-24.53</td><td>QP</td></tr><tr><td>2</td><td>190.107</td><td>32.57</td><td>43.50</td><td>-10.93</td><td>59.09</td><td>-26.52</td><td>QP</td></tr><tr><td>3</td><td>271.785</td><td>33.20</td><td>46.00</td><td>-12.80</td><td>57.20</td><td>-24.00</td><td>QP</td></tr><tr><td>4</td><td>358.652</td><td>32.51</td><td>46.00</td><td>-13.49</td><td>54.40</td><td>-21.89</td><td>QP</td></tr><tr><td>5</td><td>426.992</td><td>27.47</td><td>46.00</td><td>-18.53</td><td>47.33</td><td>-19.86</td><td>QP</td></tr><tr><td>6</td><td>812.538</td><td>24.80</td><td>46.00</td><td>-21.20</td><td>37.29</td><td>-12.49</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	36.451	23.07	40.00	-16.93	47.60	-24.53	QP	2	190.107	32.57	43.50	-10.93	59.09	-26.52	QP	3	271.785	33.20	46.00	-12.80	57.20	-24.00	QP	4	358.652	32.51	46.00	-13.49	54.40	-21.89	QP	5	426.992	27.47	46.00	-18.53	47.33	-19.86	QP	6	812.538	24.80	46.00	-21.20	37.29	-12.49	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	48.673	18.90	40.00	-21.10	42.39	-23.49	QP																																																																																																																										
2	209.459	23.87	43.50	-19.63	50.42	-26.55	QP																																																																																																																										
3	266.352	27.86	46.00	-18.14	52.16	-24.30	QP																																																																																																																										
4	366.461	31.26	46.00	-14.74	52.73	-21.47	QP																																																																																																																										
5	599.952	25.97	46.00	-20.03	41.72	-15.75	QP																																																																																																																										
6	743.471	27.78	46.00	-18.22	40.89	-13.11	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	36.451	23.07	40.00	-16.93	47.60	-24.53	QP																																																																																																																										
2	190.107	32.57	43.50	-10.93	59.09	-26.52	QP																																																																																																																										
3	271.785	33.20	46.00	-12.80	57.20	-24.00	QP																																																																																																																										
4	358.652	32.51	46.00	-13.49	54.40	-21.89	QP																																																																																																																										
5	426.992	27.47	46.00	-18.53	47.33	-19.86	QP																																																																																																																										
6	812.538	24.80	46.00	-21.20	37.29	-12.49	QP																																																																																																																										
TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK 1RB24_CH40620_H_QP	TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK 1RB24_CH40620_V_QP																																																																																																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620 Test BY :Ashton  <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>48.625</td><td>15.73</td><td>40.00</td><td>-24.27</td><td>39.22</td><td>-23.49</td><td>QP</td></tr><tr><td>2</td><td>207.664</td><td>33.55</td><td>43.50</td><td>-9.95</td><td>60.11</td><td>-26.56</td><td>QP</td></tr><tr><td>3</td><td>267.565</td><td>34.07</td><td>46.00</td><td>-11.93</td><td>58.29</td><td>-24.22</td><td>QP</td></tr><tr><td>4</td><td>371.457</td><td>31.04</td><td>46.00</td><td>-14.96</td><td>52.25</td><td>-21.21</td><td>QP</td></tr><tr><td>5</td><td>580.891</td><td>24.50</td><td>46.00</td><td>-21.50</td><td>40.84</td><td>-16.34</td><td>QP</td></tr><tr><td>6</td><td>812.587</td><td>23.97</td><td>46.00</td><td>-22.03</td><td>36.46</td><td>-12.49</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	48.625	15.73	40.00	-24.27	39.22	-23.49	QP	2	207.664	33.55	43.50	-9.95	60.11	-26.56	QP	3	267.565	34.07	46.00	-11.93	58.29	-24.22	QP	4	371.457	31.04	46.00	-14.96	52.25	-21.21	QP	5	580.891	24.50	46.00	-21.50	40.84	-16.34	QP	6	812.587	23.97	46.00	-22.03	36.46	-12.49	QP	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620 Test BY :Ashton  <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.485</td><td>25.60</td><td>40.00</td><td>-14.40</td><td>50.49</td><td>-24.89</td><td>QP</td></tr><tr><td>2</td><td>203.105</td><td>32.33</td><td>43.50</td><td>-11.17</td><td>59.00</td><td>-26.67</td><td>QP</td></tr><tr><td>3</td><td>284.298</td><td>33.69</td><td>46.00</td><td>-12.31</td><td>57.17</td><td>-23.48</td><td>QP</td></tr><tr><td>4</td><td>361.708</td><td>32.22</td><td>46.00</td><td>-13.78</td><td>53.96</td><td>-21.74</td><td>QP</td></tr><tr><td>5</td><td>427.041</td><td>28.02</td><td>46.00</td><td>-17.98</td><td>47.88</td><td>-19.86</td><td>QP</td></tr><tr><td>6</td><td>772.281</td><td>25.55</td><td>46.00</td><td>-20.45</td><td>38.37</td><td>-12.82</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	30.485	25.60	40.00	-14.40	50.49	-24.89	QP	2	203.105	32.33	43.50	-11.17	59.00	-26.67	QP	3	284.298	33.69	46.00	-12.31	57.17	-23.48	QP	4	361.708	32.22	46.00	-13.78	53.96	-21.74	QP	5	427.041	28.02	46.00	-17.98	47.88	-19.86	QP	6	772.281	25.55	46.00	-20.45	38.37	-12.82	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	48.625	15.73	40.00	-24.27	39.22	-23.49	QP																																																																																																																										
2	207.664	33.55	43.50	-9.95	60.11	-26.56	QP																																																																																																																										
3	267.565	34.07	46.00	-11.93	58.29	-24.22	QP																																																																																																																										
4	371.457	31.04	46.00	-14.96	52.25	-21.21	QP																																																																																																																										
5	580.891	24.50	46.00	-21.50	40.84	-16.34	QP																																																																																																																										
6	812.587	23.97	46.00	-22.03	36.46	-12.49	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	30.485	25.60	40.00	-14.40	50.49	-24.89	QP																																																																																																																										
2	203.105	32.33	43.50	-11.17	59.00	-26.67	QP																																																																																																																										
3	284.298	33.69	46.00	-12.31	57.17	-23.48	QP																																																																																																																										
4	361.708	32.22	46.00	-13.78	53.96	-21.74	QP																																																																																																																										
5	427.041	28.02	46.00	-17.98	47.88	-19.86	QP																																																																																																																										
6	772.281	25.55	46.00	-20.45	38.37	-12.82	QP																																																																																																																										

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
Test BY :Ashton

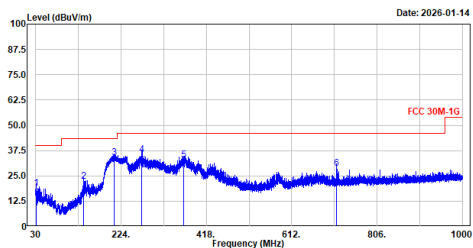


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.922	18.98	40.00	-21.02	43.90	-24.92	QP
2	139.033	22.18	43.50	-21.32	46.57	-24.39	QP
3	208.101	33.91	43.50	-9.59	60.47	-26.56	QP
4	271.882	35.29	46.00	-10.71	59.28	-23.99	QP
5	366.946	32.83	46.00	-13.17	54.28	-21.45	QP
6	714.418	28.81	46.00	-17.19	42.66	-13.85	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
Test BY :Ashton

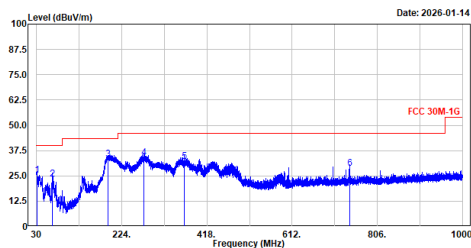

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.776	25.24	40.00	-14.76	50.16	-24.92	QP
2	66.668	23.51	40.00	-16.49	49.27	-25.76	QP
3	193.647	33.03	43.50	-10.47	59.74	-26.71	QP
4	274.889	33.92	46.00	-12.08	57.79	-23.87	QP
5	366.655	32.22	46.00	-13.78	53.68	-21.46	QP
6	742.549	28.69	46.00	-17.31	41.82	-13.13	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.