
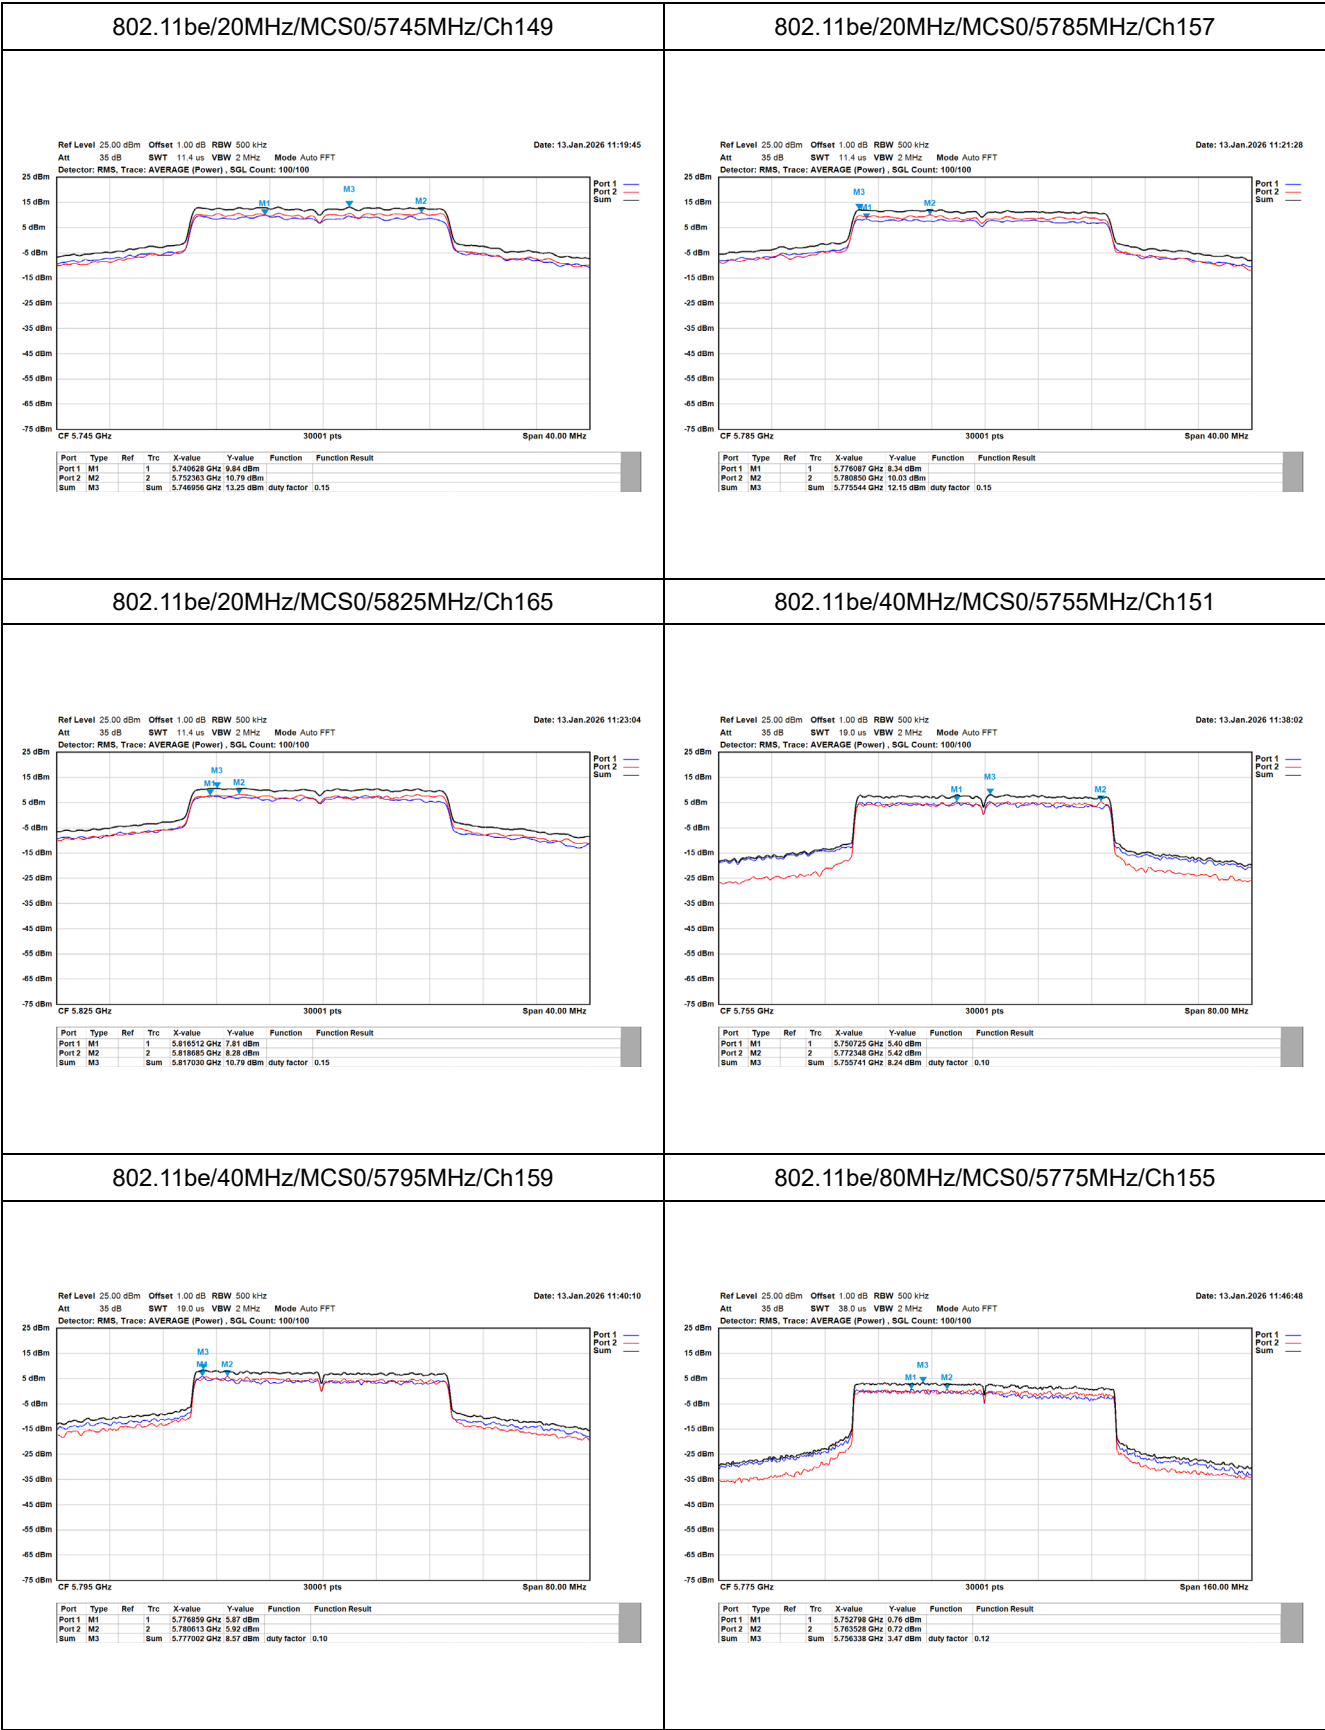
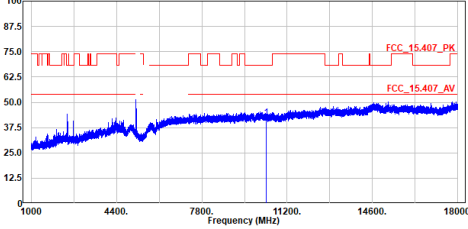
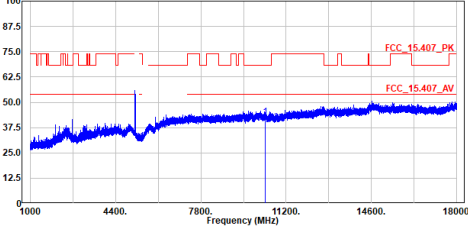
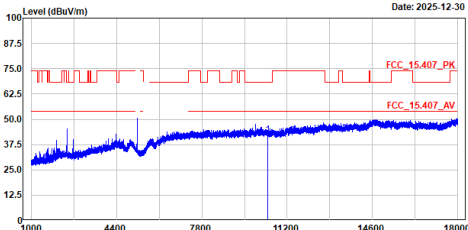
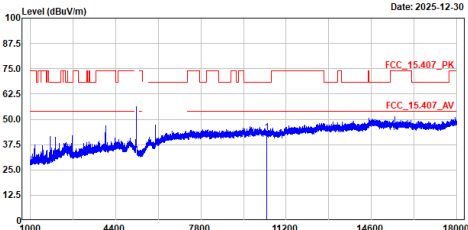
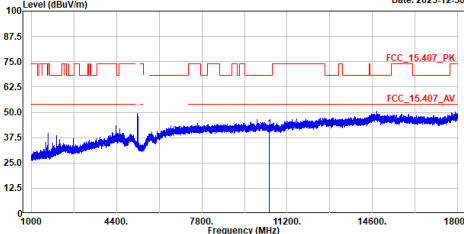
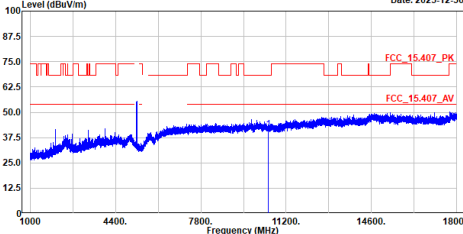
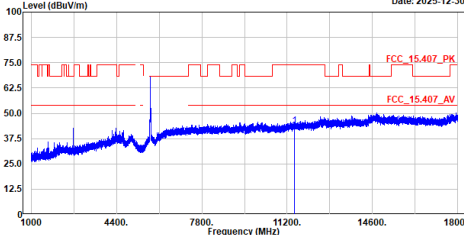


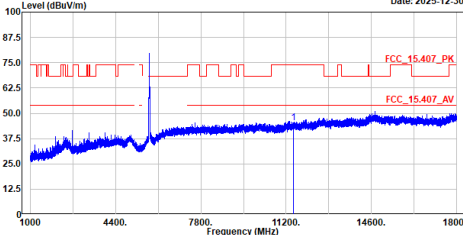

Appendix E. Test Result of Transmitter Radiated Spurious Emission

TX a 5180MHz H	TX a 5180MHz V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5180MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10360.000</td><td>42.11</td><td>68.22</td><td>-26.11</td><td>46.87</td><td>-4.76</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10360.000	42.11	68.22	-26.11	46.87	-4.76	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5180MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10360.000</td><td>42.57</td><td>68.22</td><td>-25.65</td><td>47.33</td><td>-4.76</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10360.000	42.57	68.22	-25.65	47.33	-4.76	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10360.000	42.11	68.22	-26.11	46.87	-4.76	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10360.000	42.57	68.22	-25.65	47.33	-4.76	Peak																																										
TX a 5220MHz H	TX a 5220MHz V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5220MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10440.000</td><td>42.25</td><td>68.22</td><td>-25.97</td><td>47.15</td><td>-4.90</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10440.000	42.25	68.22	-25.97	47.15	-4.90	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5220MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10440.000</td><td>43.55</td><td>68.22</td><td>-24.67</td><td>48.45</td><td>-4.90</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10440.000	43.55	68.22	-24.67	48.45	-4.90	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10440.000	42.25	68.22	-25.97	47.15	-4.90	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10440.000	43.55	68.22	-24.67	48.45	-4.90	Peak																																										


TX_a 5240MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5240MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10480.000</td><td>41.76</td><td>68.22</td><td>-26.46</td><td>46.67</td><td>-4.91</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10480.000	41.76	68.22	-26.46	46.67	-4.91	Peak	TX_a 5240MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5240MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10480.000</td><td>41.50</td><td>68.22</td><td>-26.72</td><td>46.41</td><td>-4.91</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10480.000	41.50	68.22	-26.72	46.41	-4.91	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10480.000	41.76	68.22	-26.46	46.67	-4.91	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10480.000	41.50	68.22	-26.72	46.41	-4.91	Peak																																										
TX_a 5745MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5745MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11490.000</td><td>43.60</td><td>74.00</td><td>-30.40</td><td>45.59</td><td>-1.99</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11490.000	43.60	74.00	-30.40	45.59	-1.99	Peak	TX_a 5745MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5745MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11490.000</td><td>45.30</td><td>74.00</td><td>-28.70</td><td>47.29</td><td>-1.99</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11490.000	45.30	74.00	-28.70	47.29	-1.99	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	11490.000	43.60	74.00	-30.40	45.59	-1.99	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	11490.000	45.30	74.00	-28.70	47.29	-1.99	Peak																																										

TX_a_5785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5785MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

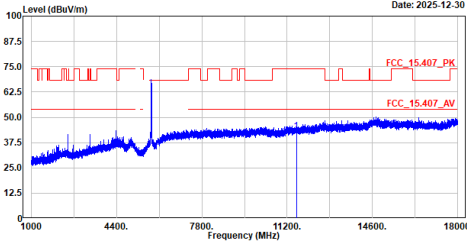

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11570.000	42.87	74.00	-31.13	44.70	-1.83	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5785MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

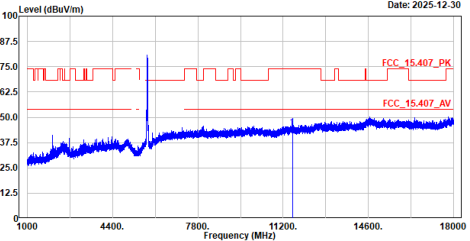

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11570.000	44.93	74.00	-29.07	46.76	-1.83	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5825MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

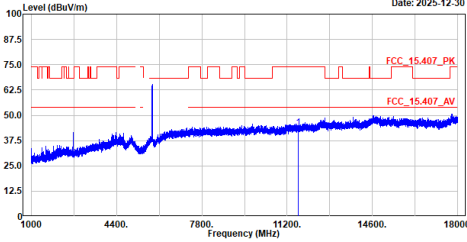

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11650.000	43.83	74.00	-30.17	45.71	-1.88	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5825MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

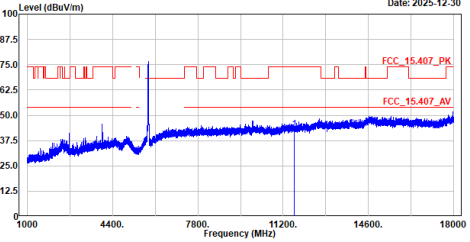


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11650.000	43.13	74.00	-30.87	45.01	-1.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Rock

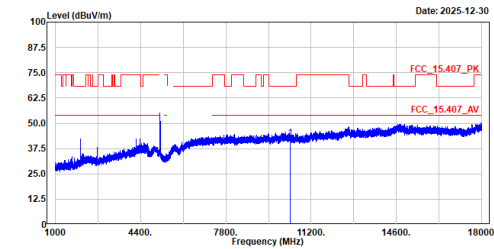


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	42.66	68.22	-25.56	47.42	-4.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	42.82	68.22	-25.40	47.58	-4.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz
Test BY :Rock

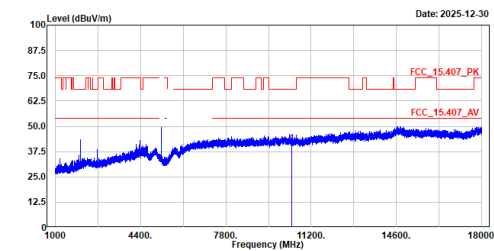


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	41.46	68.22	-26.76	46.36	-4.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz
Test BY :Rock

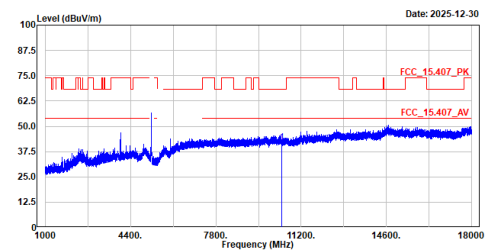


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	41.80	68.22	-26.42	46.70	-4.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test BY :Rock

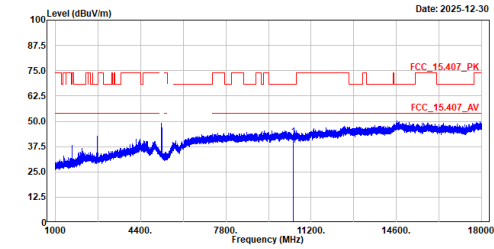


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	42.19	68.22	-26.03	47.10	-4.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test BY :Rock

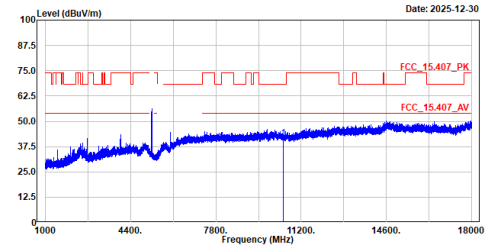


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	41.63	68.22	-26.59	46.54	-4.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test BY :Rock

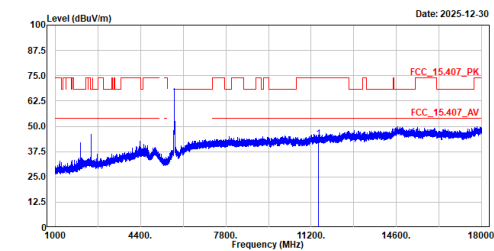


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	43.95	74.00	-30.05	45.94	-1.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test BY :Rock

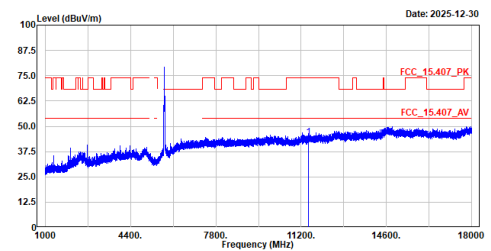

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	44.53	74.00	-29.47	46.52	-1.99	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5785MHz_H

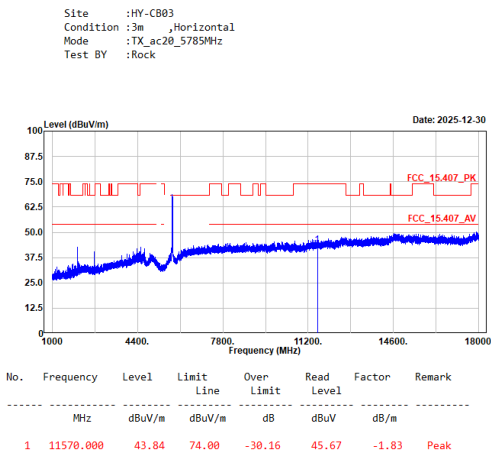


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5785MHz_V

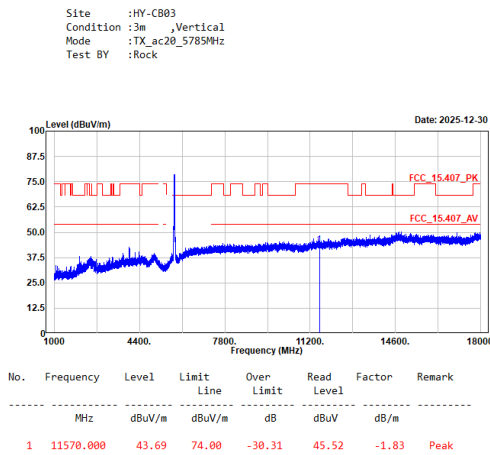


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_H

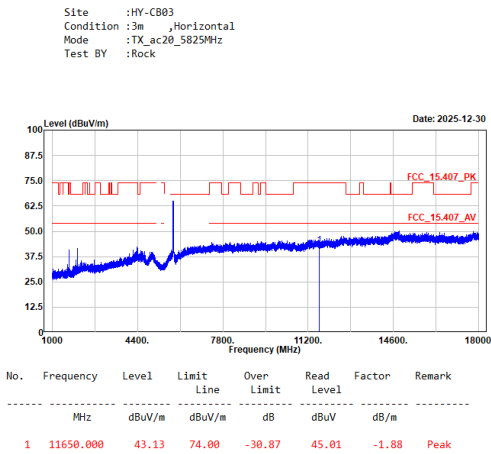

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_V

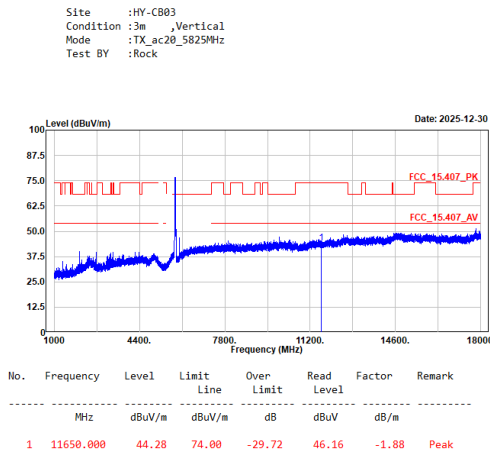

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	43.20	68.22	-25.02	47.99	-4.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	43.19	68.22	-25.03	47.98	-4.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	41.59	68.22	-26.63	46.51	-4.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz
Test BY :Rock


Level (dBuV/m)
Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	42.12	68.22	-26.10	47.04	-4.92	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_H

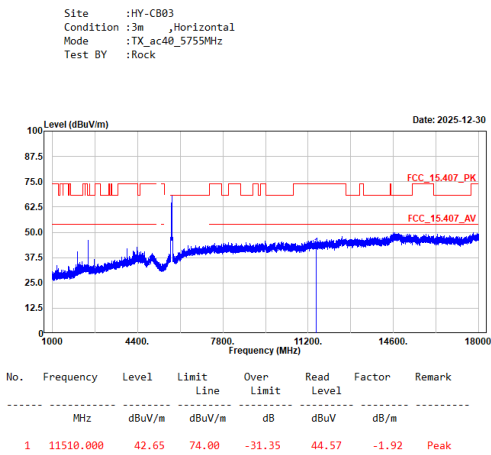


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_V

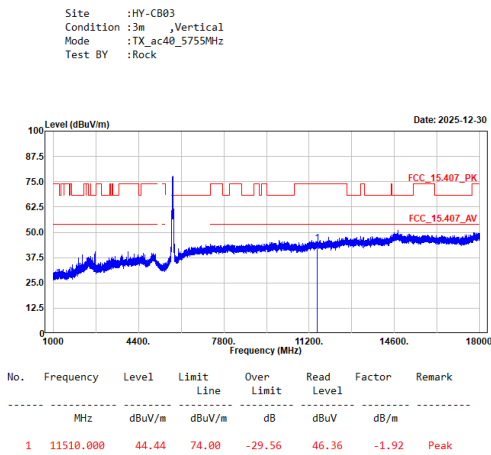


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_H

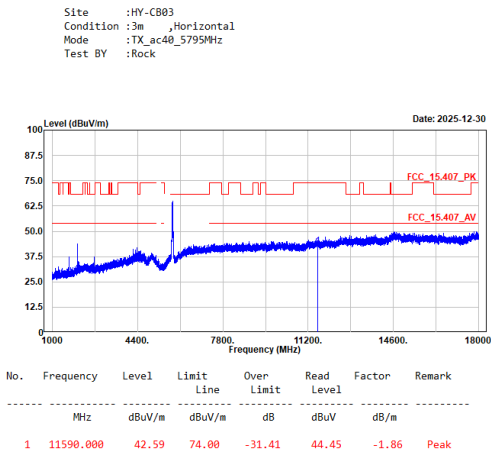

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_V

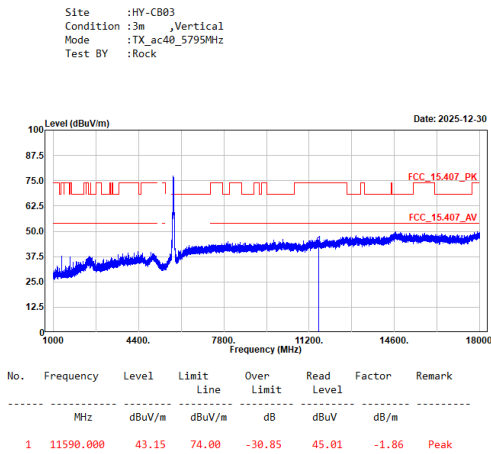

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	41.43	68.22	-26.79	46.29	-4.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	42.64	68.22	-25.58	47.50	-4.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	44.05	74.00	-29.95	45.85	-1.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	44.50	74.00	-29.50	46.30	-1.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5180MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5180MHz
Test BY :Rock

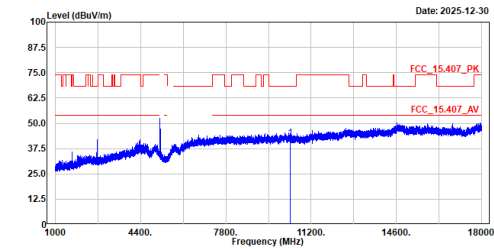


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	42.79	68.22	-25.43	47.55	-4.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5180MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5180MHz
Test BY :Rock

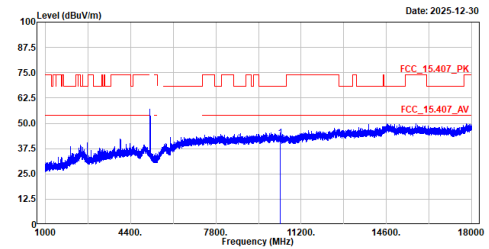


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	42.52	68.22	-25.70	47.28	-4.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5220MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5220MHz
Test BY :Rock

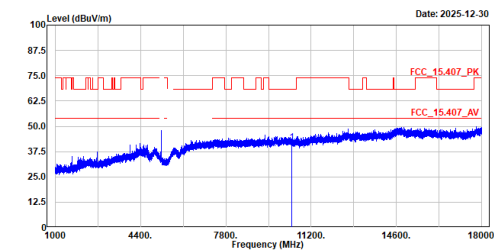


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	41.90	68.22	-26.32	46.80	-4.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5220MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5220MHz
Test BY :Rock

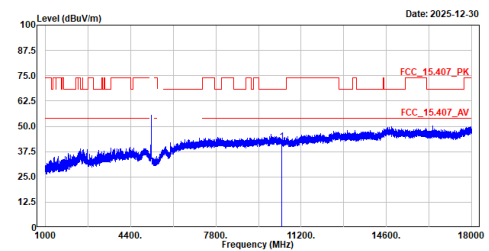

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	42.41	68.22	-25.81	47.31	-4.90	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5240MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5240MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-16

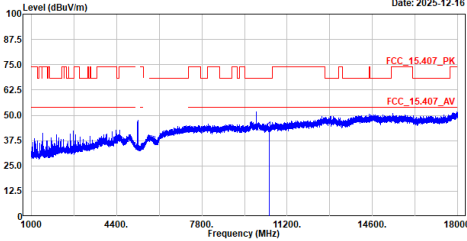

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	42.33	68.22	-25.89	47.24	-4.91	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5240MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5240MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-16

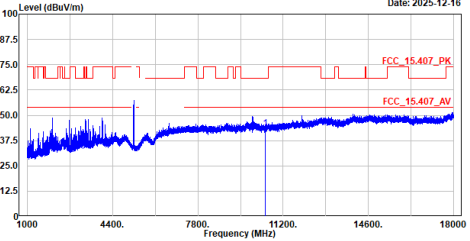

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	43.52	68.22	-24.70	48.43	-4.91	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5745MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5745MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

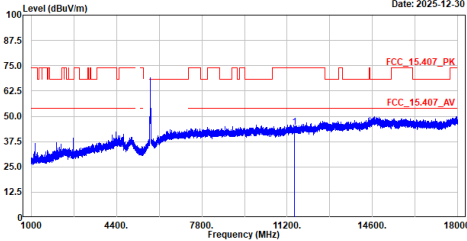

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	44.40	74.00	-29.60	46.39	-1.99	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5745MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5745MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

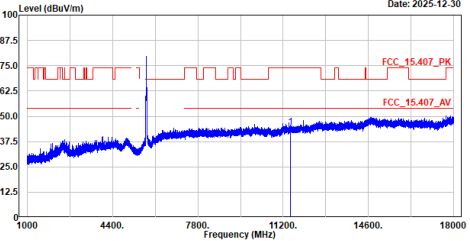


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	44.35	74.00	-29.65	46.34	-1.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 5785MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5785MHz
Test BY :Rock

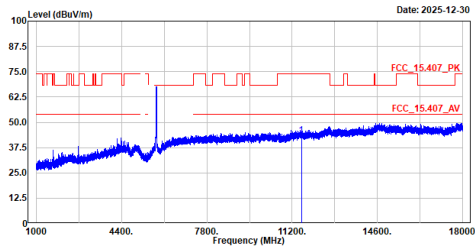


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	43.56	74.00	-30.44	45.39	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 5785MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5785MHz
Test BY :Rock

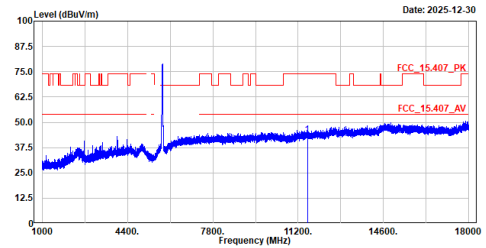


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	43.93	74.00	-30.07	45.76	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 5825MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5825MHz
Test BY :Rock

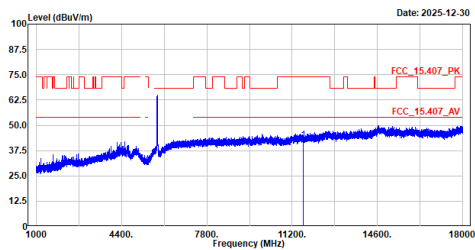


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	42.79	74.00	-31.21	44.67	-1.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 5825MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5825MHz
Test BY :Rock

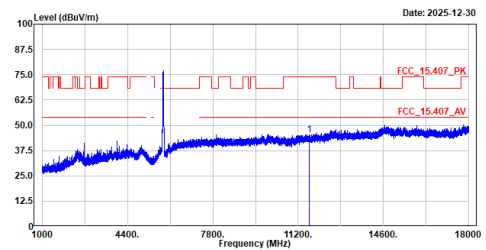

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	45.39	74.00	-28.61	47.27	-1.88	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5190MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

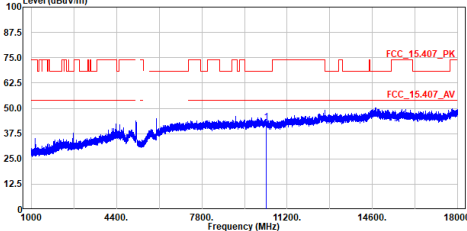

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	43.20	68.22	-25.02	47.99	-4.79	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5190MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

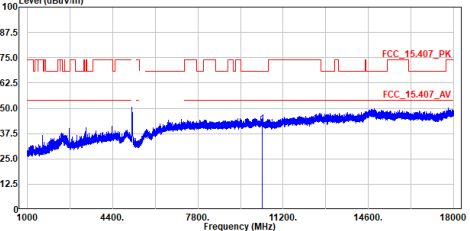

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	42.27	68.22	-25.95	47.06	-4.79	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5230MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

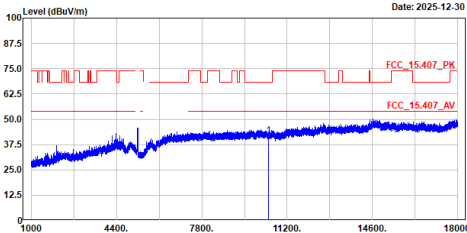

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	41.71	68.22	-26.51	46.63	-4.92	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5230MHz
Test BY :Rock

Level (dBuV/m)

Date: 2025-12-30

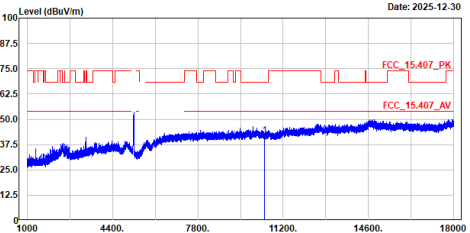

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	41.71	68.22	-26.51	46.63	-4.92	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5755MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_be40_5755MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11510.000</td><td>44.18</td><td>74.00</td><td>-29.82</td><td>46.10</td><td>-1.92</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report. TX_be40_5755MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_be40_5755MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11510.000</td><td>43.96</td><td>74.00</td><td>-30.04</td><td>45.88</td><td>-1.92</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11510.000	44.18	74.00	-29.82	46.10	-1.92	Peak	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11510.000	43.96	74.00	-30.04	45.88	-1.92	Peak	TX_be40_5795MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_be40_5795MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11590.000</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>45.71</td><td>-1.86</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report. TX_be40_5795MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_be40_5795MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-30 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11590.000</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>44.83</td><td>-1.86</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11590.000	43.85	74.00	-30.15	45.71	-1.86	Peak	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11590.000	42.97	74.00	-31.03	44.83	-1.86	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																											
1	11510.000	44.18	74.00	-29.82	46.10	-1.92	Peak																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																											
1	11510.000	43.96	74.00	-30.04	45.88	-1.92	Peak																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																											
1	11590.000	43.85	74.00	-30.15	45.71	-1.86	Peak																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																											
1	11590.000	42.97	74.00	-31.03	44.83	-1.86	Peak																																																																																										

TX be80 5210MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5210MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

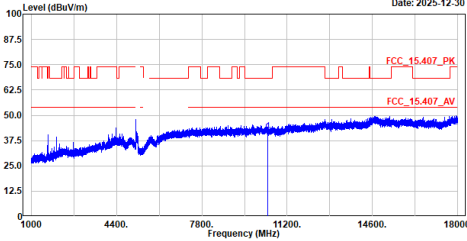

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	41.74	68.22	-26.48	46.60	-4.86	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be80 5210MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5210MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

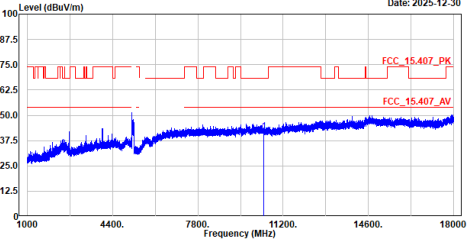

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	41.80	68.22	-26.42	46.66	-4.86	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be80 5775MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5775MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

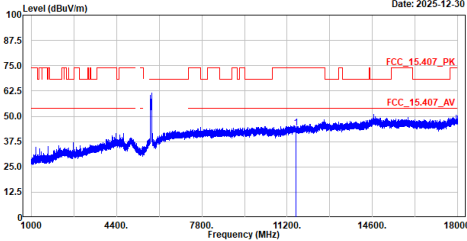

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	44.11	74.00	-29.89	45.91	-1.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be80 5775MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5775MHz
Test BY :Rock

Level (dBuV/m)
Date: 2025-12-30

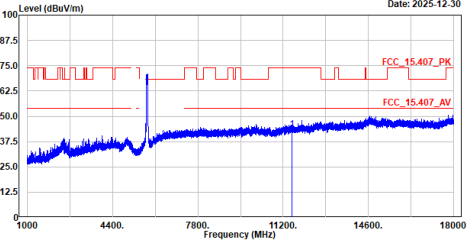


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	43.43	74.00	-30.57	45.23	-1.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX ac80 5775MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Ashton

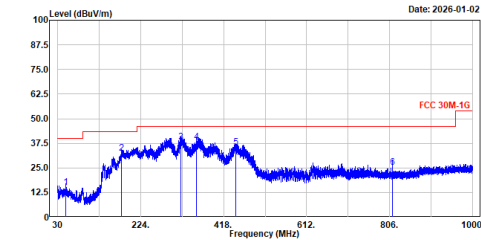


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.673	14.95	40.00	-25.05	38.49	-23.54	QP
2	178.708	32.41	43.50	-11.09	57.83	-25.42	QP
3	317.813	37.93	46.00	-8.07	60.60	-22.67	QP
4	355.289	37.94	46.00	-8.06	60.05	-22.11	QP
5	446.345	35.40	46.00	-10.60	54.62	-19.22	QP
6	812.538	25.20	46.00	-20.80	37.88	-12.68	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX ac80 5775MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Ashton

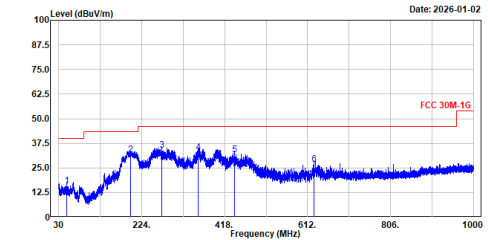


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.722	15.77	40.00	-24.23	39.31	-23.54	QP
2	198.691	31.55	43.50	-11.95	58.41	-26.86	QP
3	271.251	33.80	46.00	-12.20	57.98	-24.18	QP
4	355.645	32.95	46.00	-13.05	55.85	-22.10	QP
5	440.913	31.63	46.00	-14.37	50.98	-19.35	QP
6	626.725	26.65	46.00	-19.35	41.97	-15.32	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX be80 5775MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5775MHz
Test BY :Ashton

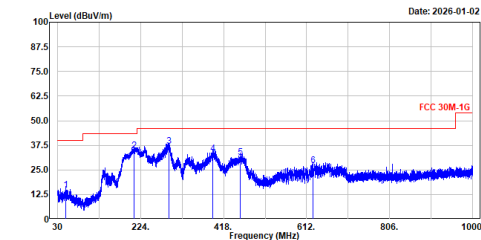


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.673	14.74	40.00	-25.26	38.28	-23.54	QP
2	208.804	34.80	43.50	-8.70	61.48	-26.68	QP
3	290.895	36.82	46.00	-9.18	60.26	-23.44	QP
4	392.313	33.32	46.00	-12.68	54.04	-20.72	QP
5	457.597	31.45	46.00	-14.55	50.42	-18.97	QP
6	626.822	27.24	46.00	-18.76	42.55	-15.31	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX be80 5775MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5775MHz
Test BY :Ashton

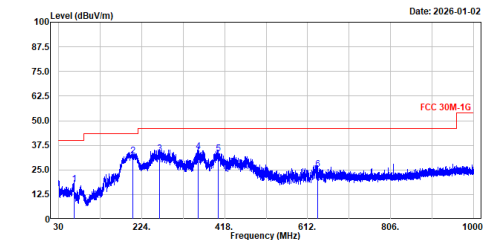


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	65.892	17.60	40.00	-22.40	43.43	-25.83	QP
2	203.195	32.16	43.50	-11.34	58.94	-26.78	QP
3	266.061	33.30	46.00	-12.70	57.78	-24.48	QP
4	356.082	34.26	46.00	-11.74	56.35	-22.09	QP
5	402.256	33.03	46.00	-12.97	53.62	-20.59	QP
6	635.262	25.27	46.00	-20.73	40.50	-15.23	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX a 5180MHz V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Rock

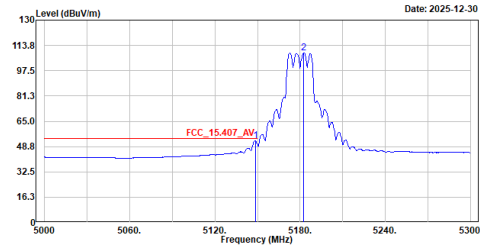


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.500	52.51	54.00	-1.49	37.00	15.51	Average
2	5182.700	108.84	-----	-----	93.22	15.62	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5180MHz V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Rock

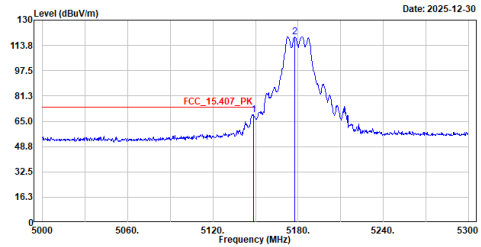


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	69.21	74.00	-4.79	53.70	15.51	Peak
2	5177.600	119.29	-----	-----	103.69	15.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B1 H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5220MHz_B1
Test BY :Rock

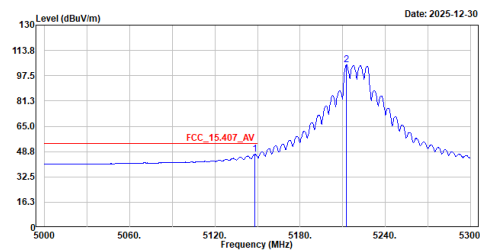


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.200	46.92	54.00	-7.08	31.41	15.51	Average
2	5212.700	104.32	-----	-----	88.59	15.73	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B1 H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5220MHz_B1
Test BY :Rock

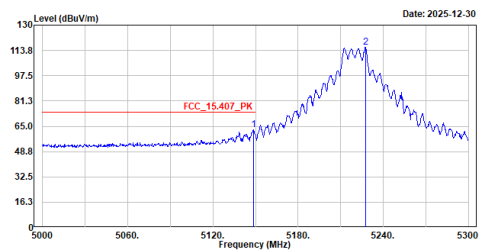


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.500	62.64	74.00	-11.36	47.13	15.51	Peak
2	5227.400	115.92	-----	-----	100.15	15.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B1_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5220MHz_B1
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.900	52.62	54.00	-1.38	37.11	15.51	Average
2	5222.900	113.75	-----	-----	98.00	15.75	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B1_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5220MHz_B1
Test BY :Rock

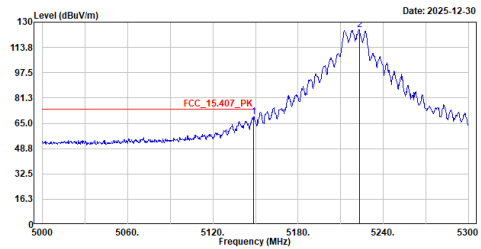


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.500	69.38	74.00	-4.62	53.87	15.51	Peak
2	5223.200	124.96	-----	-----	109.21	15.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B2_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5220MHz_B2
Test BY :Rock

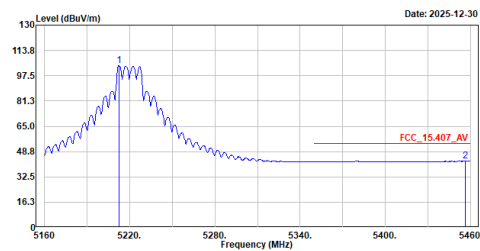


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5212.500	104.08	-----	-----	88.35	15.73	Average
2	5456.100	42.61	54.00	-11.39	26.29	16.32	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B2_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5220MHz_B2
Test BY :Rock

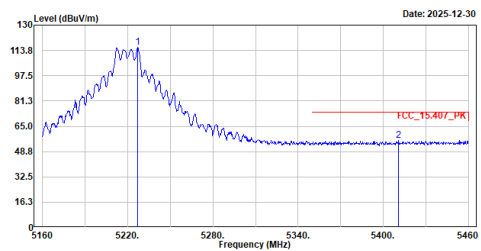


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5227.200	115.64	-----	-----	99.87	15.77	Peak
2	5410.800	56.00	74.00	-18.00	39.81	16.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B2 V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5220MHz_B2
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5222.700	113.39	-----	-----	97.64	15.75	Average
2	5380.200	46.53	54.00	-7.47	30.50	16.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5220MHz B2 V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5220MHz_B2
Test BY :Rock

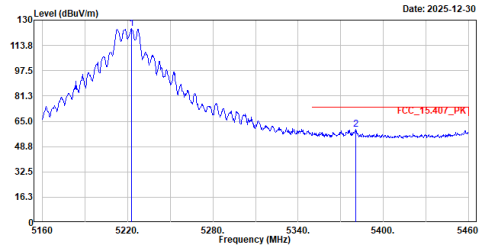


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5222.700	124.73	-----	-----	108.98	15.75	Peak
2	5380.500	59.78	74.00	-14.22	43.75	16.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5240MHz H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5232.600	103.96	-----	-----	88.18	15.78	Average
2	5394.900	42.55	54.00	-11.45	26.47	16.08	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5240MHz H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
Test BY :Rock

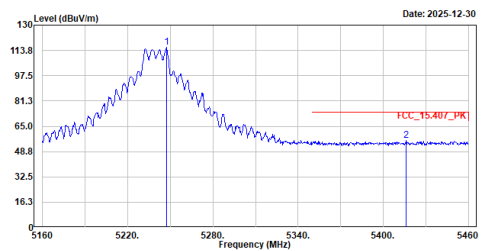


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.300	115.68	-----	-----	99.86	15.82	Peak
2	5416.200	55.86	74.00	-18.14	39.62	16.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5240MHz V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5240MHz
Test BY :Rock

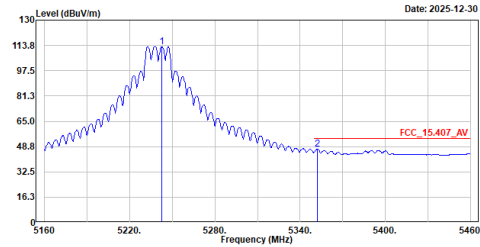


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5242.800	113.04	-----	-----	97.24	15.80	Average
2	5352.300	47.22	54.00	-6.78	31.28	15.94	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5240MHz V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5240MHz
Test BY :Rock

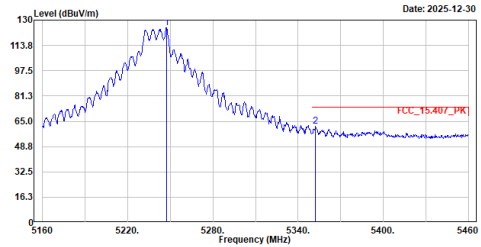


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.300	125.24	-----	-----	109.42	15.82	Peak
2	5352.300	62.03	74.00	-11.97	46.09	15.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5745MHz H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Rock

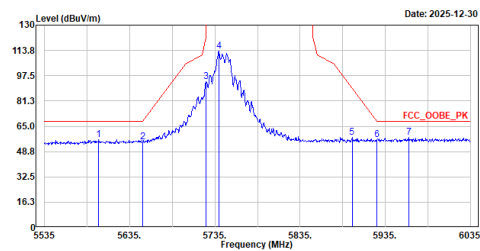


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5598.500	56.56	68.20	-11.64	39.45	17.11	Peak
2	5650.000	54.78	68.21	-13.43	37.48	17.30	Peak
3	5725.000	93.69	122.20	-28.51	75.94	17.75	Peak
4	5739.500	113.09	-----	-----	95.24	17.85	Peak
5	5896.000	58.06	89.66	-31.60	39.94	18.12	Peak
6	5925.000	56.47	68.21	-11.74	38.30	18.17	Peak
7	5962.500	57.83	68.20	-10.37	39.59	18.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5745MHz V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Rock

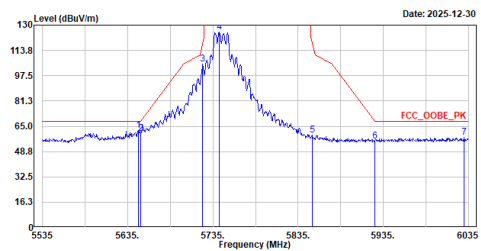


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5647.500	62.45	68.20	-5.75	45.17	17.28	Peak
2	5650.000	60.44	68.21	-7.77	43.14	17.30	Peak
3	5723.000	104.74	117.64	-12.90	87.00	17.74	Peak
4	5742.500	125.47	-----	-----	107.61	17.86	Peak
5	5851.500	59.20	118.78	-59.58	41.07	18.13	Peak
6	5925.000	55.34	68.21	-12.87	37.17	18.17	Peak
7	6029.500	57.67	68.20	-10.53	39.29	18.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5785MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5785MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5636.500	56.37	68.20	-11.83	39.12	17.25	Peak
2	5650.000	54.98	68.21	-13.23	37.68	17.30	Peak
3	5722.500	65.18	116.50	-51.32	47.44	17.74	Peak
4	5779.500	112.92	-----	-----	94.96	17.96	Peak
5	5855.000	60.04	110.80	-50.76	41.92	18.12	Peak
6	5925.000	55.21	68.21	-13.00	37.04	18.17	Peak
7	6023.500	57.65	68.20	-10.55	39.28	18.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5785MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5785MHz
Test BY :Rock

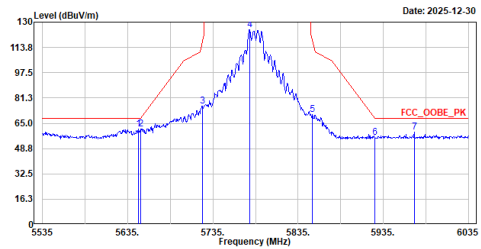


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5648.000	61.30	68.20	-6.90	44.02	17.28	Peak
2	5650.000	61.17	68.21	-7.04	43.87	17.30	Peak
3	5723.000	76.25	117.64	-41.39	58.51	17.74	Peak
4	5778.000	125.24	-----	-----	107.28	17.96	Peak
5	5852.000	70.83	117.64	-46.81	52.70	18.13	Peak
6	5925.000	55.83	68.21	-12.38	37.66	18.17	Peak
7	5971.500	59.52	68.20	-8.68	41.26	18.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5825MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5560.000	56.82	68.20	-11.38	40.01	16.81	Peak
2	5650.000	55.04	68.21	-13.17	37.74	17.30	Peak
3	5716.000	61.60	109.68	-48.08	43.90	17.70	Peak
4	5818.000	112.76	-----	-----	94.71	18.05	Peak
5	5852.500	85.10	116.50	-31.40	66.97	18.13	Peak
6	5925.000	55.20	68.21	-13.01	37.03	18.17	Peak
7	6026.500	58.11	68.20	-10.09	39.74	18.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5825MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Rock

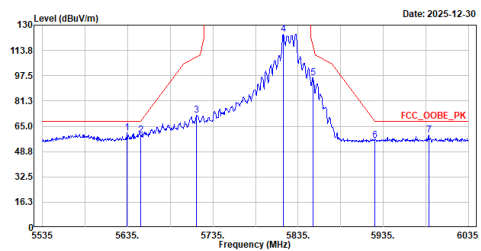


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5634.500	60.64	68.20	-7.56	43.40	17.24	Peak
2	5650.000	59.12	68.21	-9.09	41.82	17.30	Peak
3	5716.000	71.97	109.68	-37.71	54.27	17.70	Peak
4	5818.000	124.13	-----	-----	106.08	18.05	Peak
5	5852.500	96.21	116.50	-20.29	78.08	18.13	Peak
6	5925.000	56.02	68.21	-12.19	37.85	18.17	Peak
7	5988.500	59.43	68.20	-8.77	41.13	18.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Rock

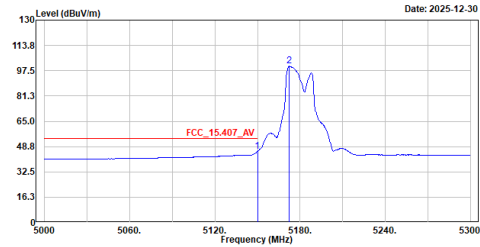


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	45.63	54.00	-8.37	30.12	15.51	Average
2	5172.200	100.36	-----	-----	84.78	15.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Rock

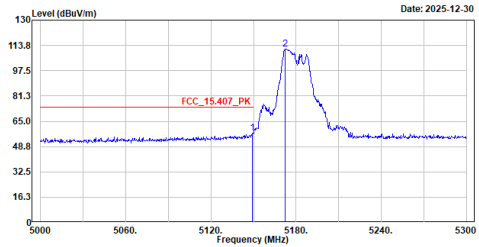


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	57.22	74.00	-16.78	41.71	15.51	Peak
2	5172.200	111.49	-----	-----	95.91	15.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Rock

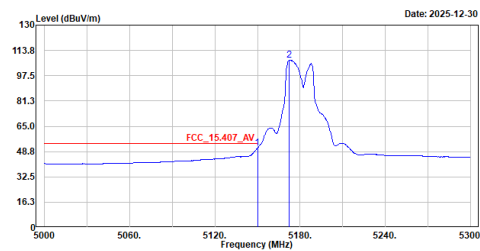


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	51.09	54.00	-2.91	35.58	15.51	Average
2	5172.500	107.27	-----	-----	91.69	15.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Rock

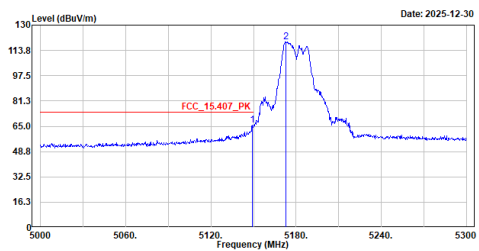


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	65.86	74.00	-8.14	50.35	15.51	Peak
2	5172.800	119.18	-----	-----	103.60	15.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B1_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz_B1
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	47.07	54.00	-6.93	31.56	15.51	Average
2	5212.100	103.37	-----	-----	87.63	15.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B1_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz_B1
Test BY :Rock

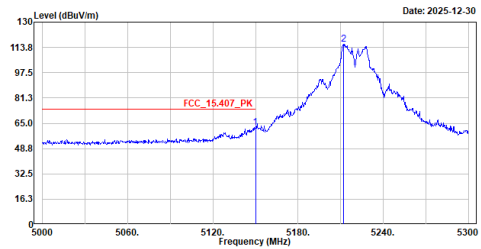


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	62.19	74.00	-11.81	46.68	15.51	Peak
2	5211.800	115.78	-----	-----	100.04	15.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B1_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz_B1
Test BY :Rock

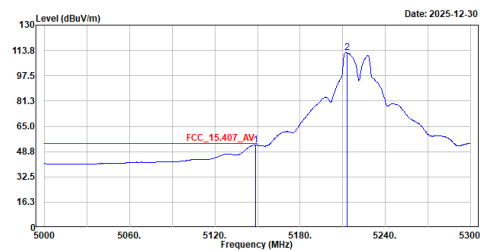


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.800	52.95	54.00	-1.05	37.44	15.51	Average
2	5213.000	112.46	-----	-----	96.73	15.73	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B1_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz_B1
Test BY :Rock

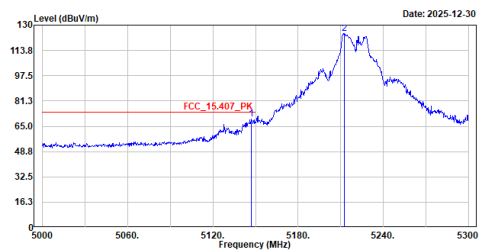


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.300	69.44	74.00	-4.56	53.92	15.52	Peak
2	5212.400	124.70	-----	-----	108.96	15.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B2_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz_B2
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5211.900	102.95	-----	-----	87.21	15.74	Average
2	5379.300	42.64	54.00	-11.36	26.62	16.02	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B2_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz_B2
Test BY :Rock

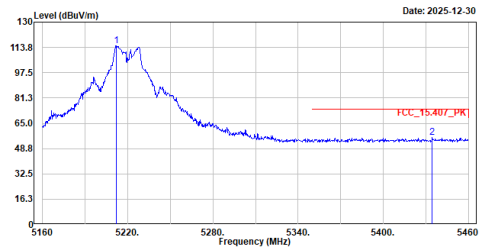


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5211.900	114.79	-----	-----	99.05	15.74	Peak
2	5434.500	55.79	74.00	-18.21	39.48	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B2_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz_B2
Test BY :Rock

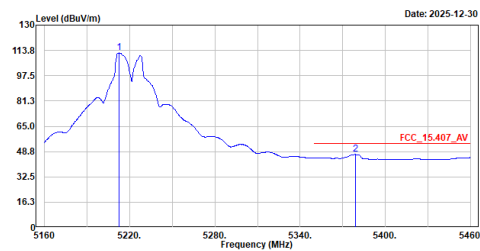


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5212.500	112.14	-----	-----	96.41	15.73	Average
2	5379.000	46.91	54.00	-7.09	30.89	16.02	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_B2_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz_B2
Test BY :Rock

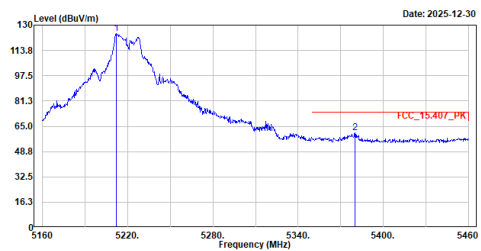


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5211.900	124.67	-----	-----	108.93	15.74	Peak
2	5379.900	60.82	74.00	-13.18	44.79	16.03	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test BY :Ashton

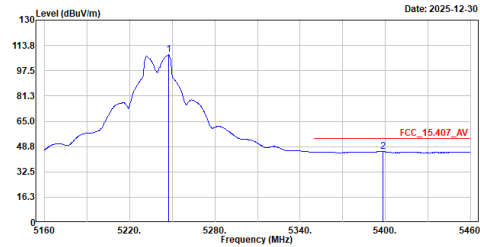


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	107.79	-----	-----	91.98	15.81	Average
2	5350.000	45.51	54.00	-8.49	29.43	16.08	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test BY :Ashton

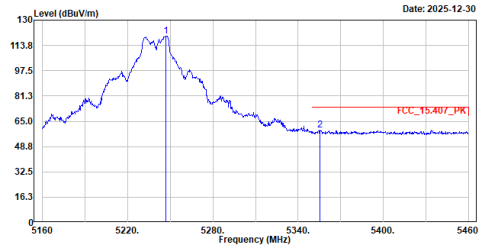


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	119.83	-----	-----	104.01	15.82	Peak
2	5350.000	59.15	74.00	-14.85	43.20	15.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	115.92	-----	-----	100.11	15.81	Average
2	5350.000	48.62	54.00	-5.38	32.69	15.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	128.53	-----	-----	112.72	15.81	Peak
2	5350.000	67.06	74.00	-6.94	51.11	15.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5599.000	56.65	68.20	-11.55	39.53	17.12	Peak
2	5650.000	54.38	68.21	-13.83	37.08	17.30	Peak
3	5724.000	93.94	119.92	-25.98	76.20	17.74	Peak
4	5737.000	114.25	-----	-----	96.42	17.83	Peak
5	5893.000	56.43	91.88	-35.45	38.31	18.12	Peak
6	5925.000	55.48	68.21	-12.73	37.31	18.17	Peak
7	5991.000	56.94	68.20	-11.26	38.64	18.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test BY :Ashton

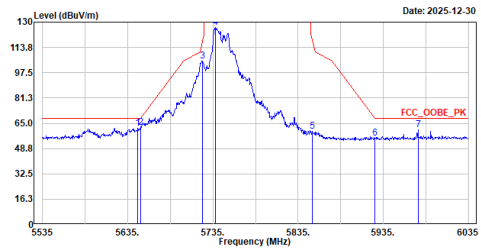


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5647.000	61.90	68.20	-6.30	44.62	17.28	Peak
2	5650.000	62.18	68.21	-6.03	44.88	17.30	Peak
3	5722.500	105.10	116.50	-11.40	87.36	17.74	Peak
4	5738.000	126.36	-----	-----	108.52	17.84	Peak
5	5851.500	59.60	118.78	-59.18	41.47	18.13	Peak
6	5925.000	55.21	68.21	-13.00	37.04	18.17	Peak
7	5976.000	61.03	68.20	-7.17	42.76	18.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5785MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5785MHz
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5591.500	56.84	68.20	-11.36	39.74	17.10	Peak
2	5650.000	53.76	68.21	-14.45	36.46	17.30	Peak
3	5722.500	64.08	116.50	-52.42	46.34	17.74	Peak
4	5790.000	114.11	-----	-----	96.12	17.99	Peak
5	5851.500	60.45	118.78	-58.33	42.32	18.13	Peak
6	5925.000	54.15	68.21	-14.06	35.98	18.17	Peak
7	6012.500	57.16	68.20	-11.04	38.80	18.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5785MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5785MHz
Test BY :Ashton

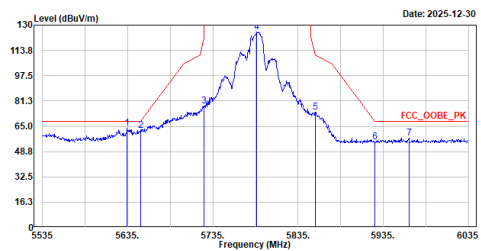


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5634.500	63.80	68.20	-4.40	46.56	17.24	Peak
2	5650.000	62.08	68.21	-6.13	44.78	17.30	Peak
3	5725.000	77.90	122.20	-44.30	60.15	17.75	Peak
4	5786.500	125.74	-----	-----	107.76	17.98	Peak
5	5855.500	74.31	110.66	-36.35	56.19	18.12	Peak
6	5925.000	55.15	68.21	-13.06	36.98	18.17	Peak
7	5965.000	57.46	68.20	-10.74	39.22	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5825MHz
Test BY :Ashton

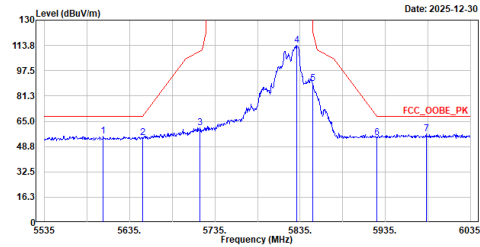


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5604.000	55.35	68.20	-12.85	38.21	17.14	Peak
2	5650.000	54.67	68.21	-13.54	37.37	17.30	Peak
3	5717.500	60.91	110.10	-49.19	43.21	17.70	Peak
4	5831.000	113.79	-----	-----	95.72	18.07	Peak
5	5850.000	89.27	122.20	-32.93	71.16	18.11	Peak
6	5925.000	54.68	68.21	-13.53	36.51	18.17	Peak
7	5983.000	56.80	68.20	-11.40	38.52	18.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5825MHz
Test BY :Ashton

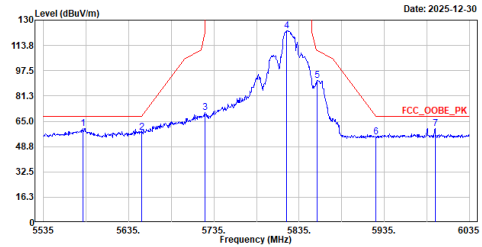


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5581.000	60.16	68.20	-8.04	43.16	17.00	Peak
2	5650.000	58.03	68.21	-10.18	40.73	17.30	Peak
3	5724.500	70.58	121.06	-50.48	52.83	17.75	Peak
4	5820.000	122.96	-----	-----	104.91	18.05	Peak
5	5856.000	91.37	110.52	-19.15	73.25	18.12	Peak
6	5925.000	55.09	68.21	-13.12	36.92	18.17	Peak
7	5994.500	60.39	68.20	-7.81	42.09	18.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Rock

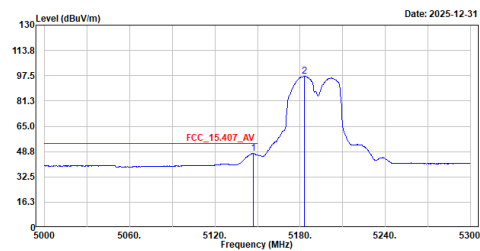


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.300	47.43	54.00	-6.57	31.91	15.52	Average
2	5183.000	97.07	-----	-----	81.45	15.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Rock

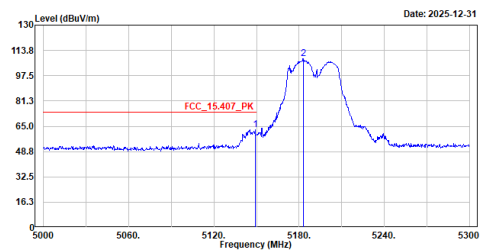


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	63.03	74.00	-10.97	47.52	15.51	Peak
2	5183.000	108.27	-----	-----	92.65	15.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Rock

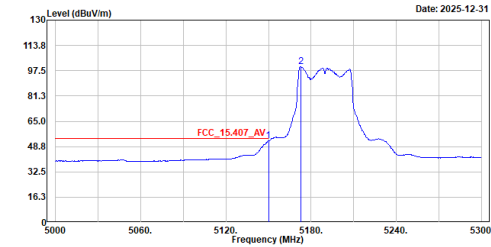


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	52.67	54.00	-1.33	37.16	15.51	Average
2	5172.800	100.31	-----	-----	84.73	15.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Rock

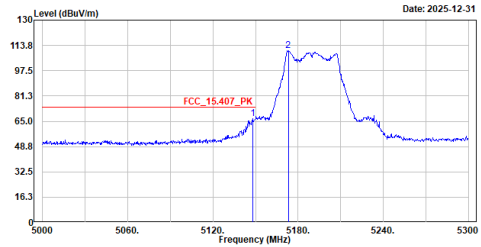


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.900	66.89	74.00	-7.11	51.38	15.51	Peak
2	5173.100	110.53	-----	-----	94.95	15.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B1_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz_B1
Test BY :Ashton

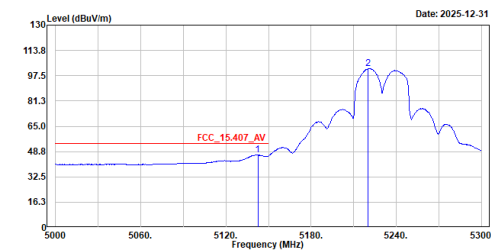


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5142.500	46.53	54.00	-7.47	31.02	15.51	Average
2	5220.200	102.12	-----	-----	86.37	15.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B1_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz_B1
Test BY :Ashton

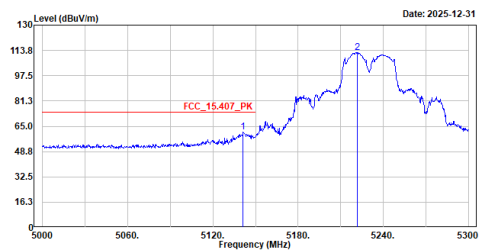


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5141.300	61.33	74.00	-12.67	45.81	15.52	Peak
2	5221.700	112.53	-----	-----	96.77	15.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B1_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz_B1
Test BY :Ashton

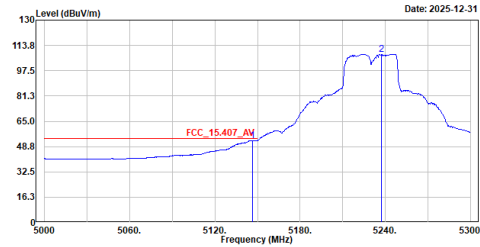


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.700	52.72	54.00	-1.28	37.20	15.52	Average
2	5237.300	108.12	-----	-----	92.32	15.80	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B1_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz_B1
Test BY :Ashton

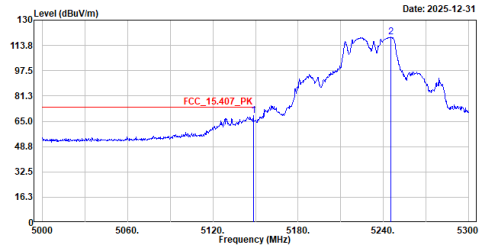


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.500	68.58	74.00	-5.42	53.07	15.51	Peak
2	5245.400	119.01	-----	-----	103.19	15.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B2_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz_B2
Test BY :Ashton

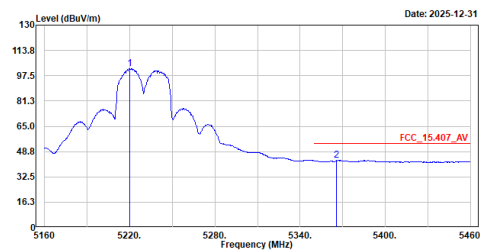


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5220.300	102.03	-----	-----	86.28	15.75	Average
2	5365.800	43.02	54.00	-10.98	27.04	15.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B2_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz_B2
Test BY :Ashton

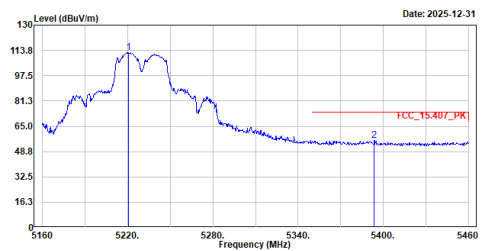


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5220.600	112.40	-----	-----	96.65	15.75	Peak
2	5393.700	55.77	74.00	-18.23	39.70	16.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B2_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz_B2
Test BY :Ashton

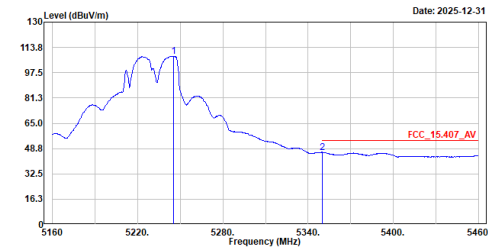


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5245.200	108.12	-----	-----	92.30	15.82	Average
2	5350.200	46.23	54.00	-7.77	30.30	15.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_B2_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz_B2
Test BY :Ashton

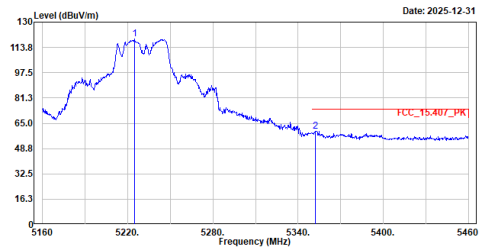


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5225.100	119.25	-----	-----	103.48	15.77	Peak
2	5352.000	60.07	74.00	-13.93	44.14	15.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5755MHz
Test BY :Ashton

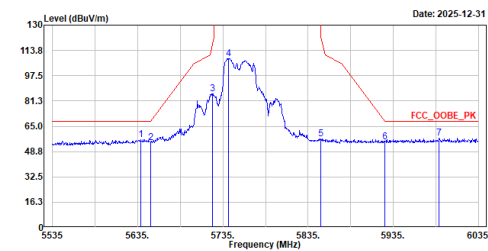


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5639.000	56.37	68.20	-11.83	39.11	17.26	Peak
2	5650.000	54.65	68.21	-13.56	37.35	17.30	Peak
3	5723.000	85.73	117.64	-31.91	67.99	17.74	Peak
4	5742.000	108.43	-----	-----	90.57	17.86	Peak
5	5850.000	57.02	122.20	-65.18	38.91	18.11	Peak
6	5925.000	55.16	68.21	-13.05	36.99	18.17	Peak
7	5989.000	57.38	68.20	-10.82	39.08	18.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5755MHz
Test BY :Ashton

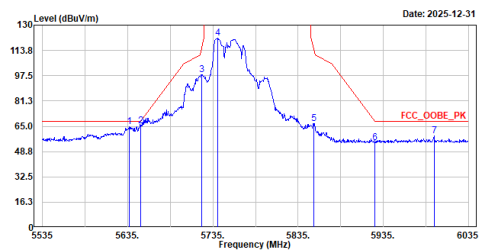


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5636.500	64.80	68.20	-3.40	47.55	17.25	Peak
2	5650.000	65.44	68.21	-2.77	48.14	17.30	Peak
3	5721.500	98.36	114.22	-15.86	80.63	17.73	Peak
4	5741.000	121.42	-----	-----	103.56	17.86	Peak
5	5853.500	66.92	114.22	-47.30	48.60	18.12	Peak
6	5925.000	54.28	68.21	-13.93	36.11	18.17	Peak
7	5994.500	58.62	68.20	-9.58	40.32	18.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5795MHz
Test BY :Ashton

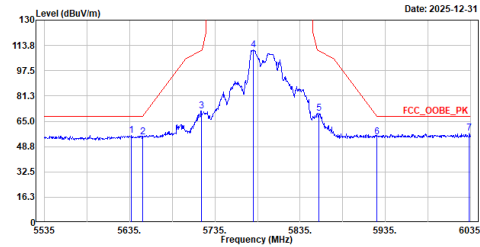


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5637.000	55.87	68.20	-12.33	38.62	17.25	Peak
2	5650.000	54.82	68.21	-13.39	37.52	17.30	Peak
3	5719.000	71.54	110.52	-38.98	53.83	17.71	Peak
4	5780.500	111.05	-----	-----	93.09	17.96	Peak
5	5857.000	70.39	110.24	-39.85	52.27	18.12	Peak
6	5925.000	54.81	68.21	-13.40	36.64	18.17	Peak
7	6033.500	57.42	68.20	-10.78	39.03	18.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5795MHz
Test BY :Ashton

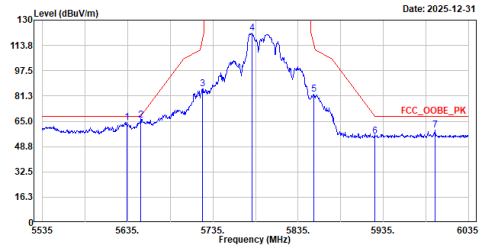


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5634.000	64.41	68.20	-3.79	47.17	17.24	Peak
2	5650.000	65.78	68.21	-2.43	48.48	17.30	Peak
3	5722.500	85.73	116.50	-30.77	67.99	17.74	Peak
4	5781.000	121.77	-----	-----	103.81	17.96	Peak
5	5853.500	82.65	114.22	-31.57	64.53	18.12	Peak
6	5925.000	55.46	68.21	-12.75	37.29	18.17	Peak
7	5996.000	59.31	68.20	-8.89	41.00	18.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Rock

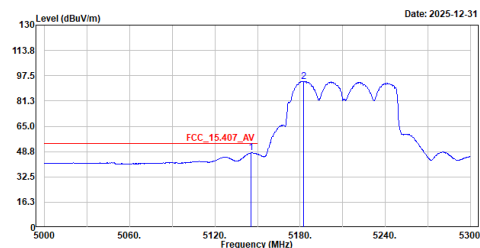


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5145.500	47.97	54.00	-6.03	32.46	15.51	Average
2	5182.700	93.93	-----	-----	78.31	15.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Rock

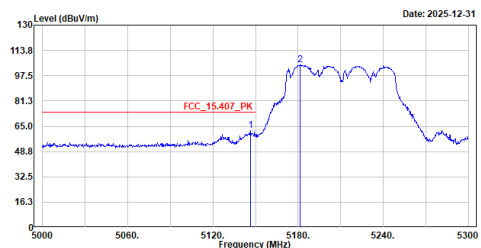


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.400	62.26	74.00	-11.74	46.74	15.52	Peak
2	5181.500	104.62	-----	-----	89.00	15.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Rock

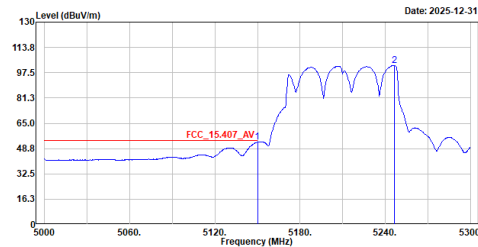


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	52.80	54.00	-1.20	37.29	15.51	Average
2	5246.300	102.12	-----	-----	86.30	15.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Rock

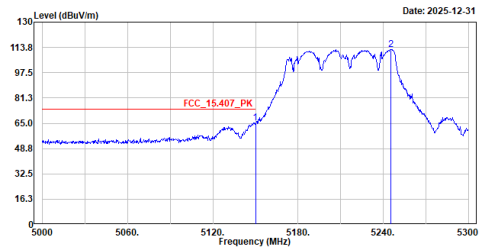


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	65.24	74.00	-8.76	49.73	15.51	Peak
2	5245.400	112.32	-----	-----	96.50	15.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Rock

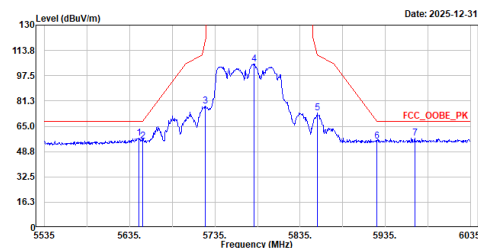


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5645.500	57.17	68.20	-11.03	39.89	17.28	Peak
2	5650.000	55.47	68.21	-12.74	38.17	17.30	Peak
3	5723.500	77.76	118.78	-41.02	60.02	17.74	Peak
4	5781.000	104.99	-----	-----	87.03	17.96	Peak
5	5855.000	73.35	110.80	-37.45	55.23	18.12	Peak
6	5925.000	55.51	68.21	-12.70	37.34	18.17	Peak
7	5969.500	57.39	68.20	-10.81	39.13	18.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Rock

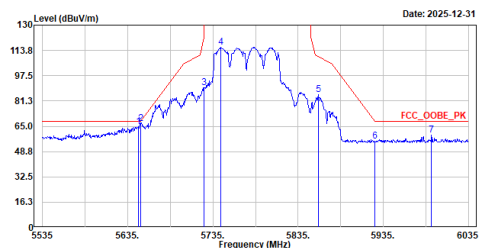


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5648.000	64.90	68.20	-3.30	47.62	17.28	Peak
2	5650.000	66.69	68.21	-1.52	49.39	17.30	Peak
3	5724.500	89.98	121.06	-31.08	72.23	17.75	Peak
4	5744.500	115.79	-----	-----	97.91	17.88	Peak
5	5858.500	85.41	109.82	-24.41	67.30	18.11	Peak
6	5925.000	55.27	68.21	-12.94	37.10	18.17	Peak
7	5991.500	59.31	68.20	-8.89	41.01	18.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5180MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5180MHz
Test BY :Ashton

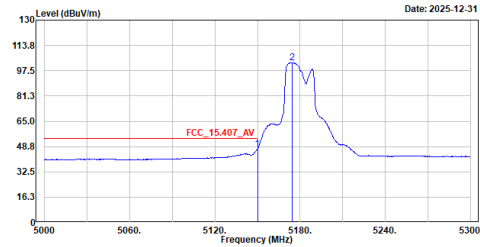


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	47.32	54.00	-6.68	31.81	15.51	Average
2	5174.300	102.74	-----	-----	87.15	15.59	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5180MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5180MHz
Test BY :Ashton

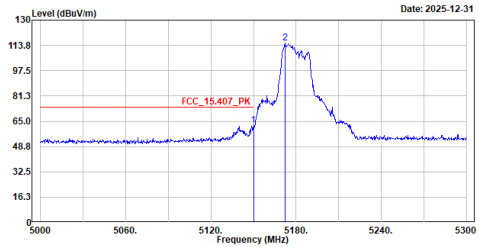


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	62.47	74.00	-11.53	46.96	15.51	Peak
2	5172.200	115.44	-----	-----	99.86	15.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5180MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5180MHz
Test BY :Ashton

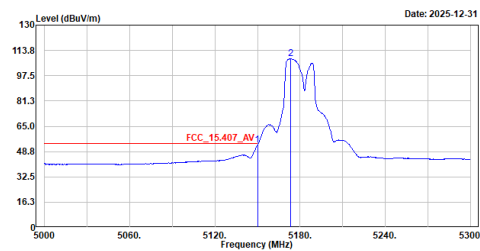


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	52.74	54.00	-1.26	37.23	15.51	Average
2	5173.400	108.32	-----	-----	92.74	15.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5180MHz
Test BY :Ashton

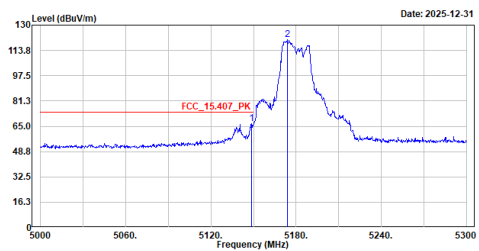


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.500	66.94	74.00	-7.06	51.43	15.51	Peak
2	5173.700	120.45	-----	-----	104.86	15.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5220MHz_B1_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5220MHz_B1
Test BY :Ashton

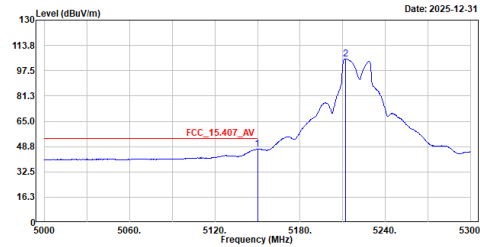


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	47.04	54.00	-6.96	31.53	15.51	Average
2	5211.800	105.21	-----	-----	89.47	15.74	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5220MHz_B1_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5220MHz_B1
Test BY :Ashton

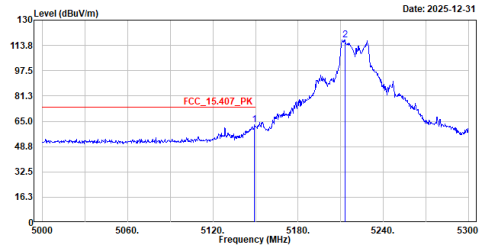


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.400	62.57	74.00	-11.43	47.06	15.51	Peak
2	5213.000	117.43	-----	-----	101.70	15.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5220MHz_B1_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5220MHz_B1
Test BY :Ashton

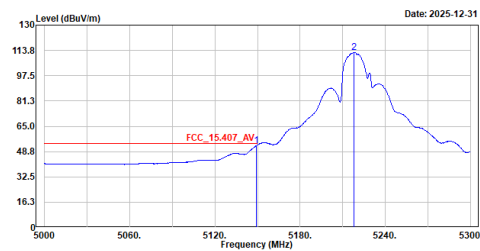


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.400	52.64	54.00	-1.36	37.13	15.51	Average
2	5218.100	112.37	-----	-----	96.62	15.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5220MHz_B1_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5220MHz_B1
Test BY :Ashton

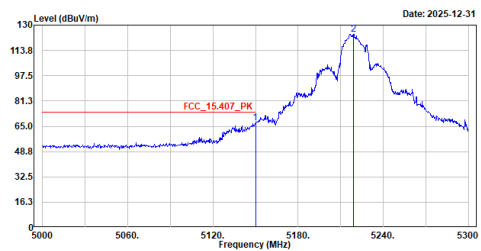


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	67.19	74.00	-6.81	51.68	15.51	Peak
2	5219.000	124.17	-----	-----	108.42	15.75	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_5220MHz_B2_H_Average

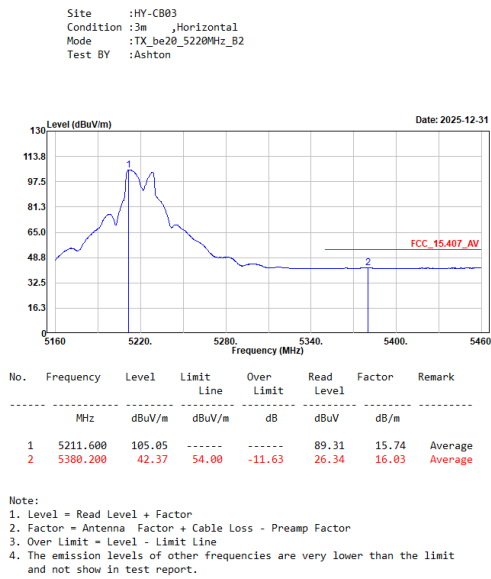


TX_be20_5220MHz_B2_H_Peak

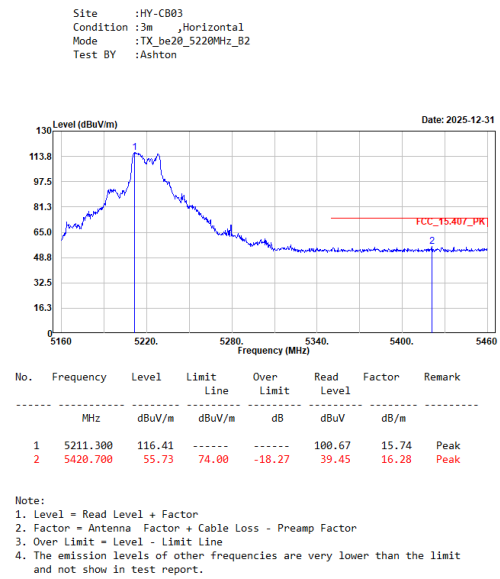

TX_be20_5220MHz_B2_V_Average

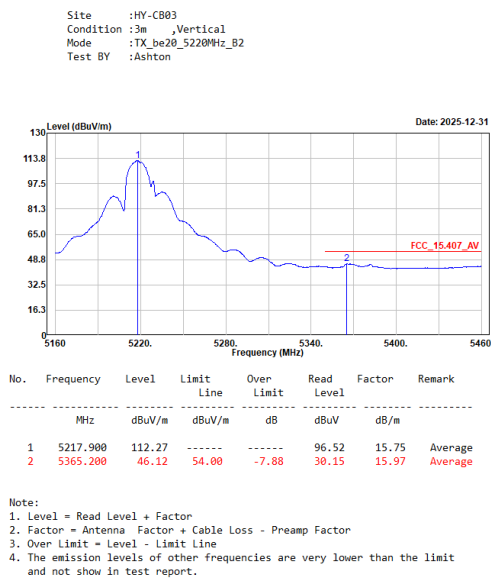


TX_be20_5220MHz_B2_V_Peak

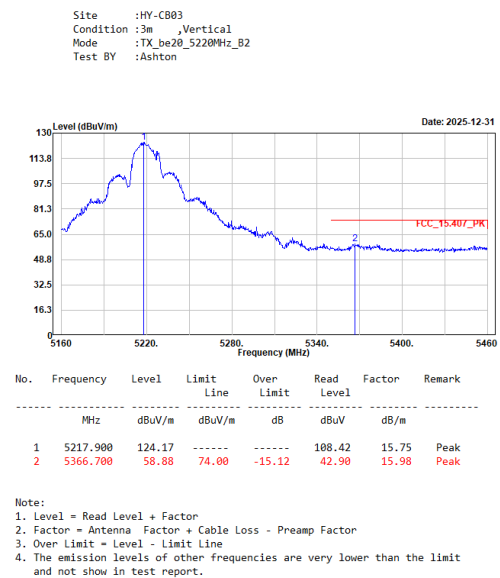

TX_be20_5240MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5240MHz
Test BY :Ashton

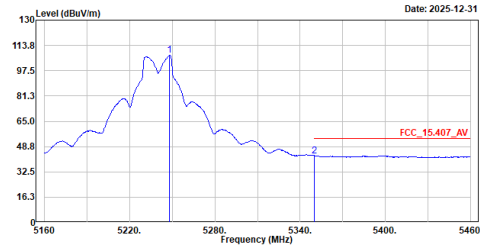


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	107.40	-----	-----	91.59	15.81	Average
2	5350.200	42.89	54.00	-11.11	26.96	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5240MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5240MHz
Test BY :Ashton

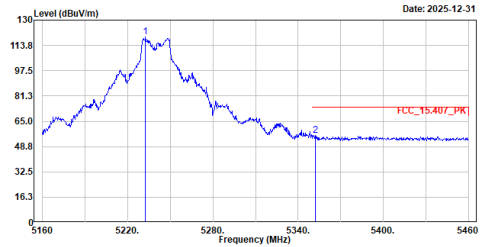


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	119.10	-----	-----	103.32	15.78	Peak
2	5352.000	56.01	74.00	-17.99	40.88	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5240MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5240MHz
Test BY :Ashton

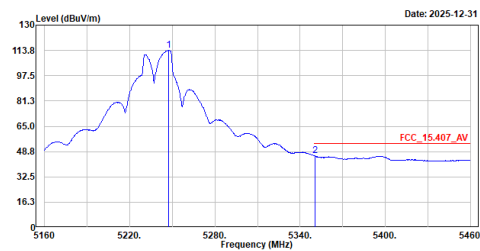


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.600	113.84	-----	-----	98.03	15.81	Average
2	5350.500	46.03	54.00	-7.97	30.10	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5240MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5240MHz
Test BY :Ashton

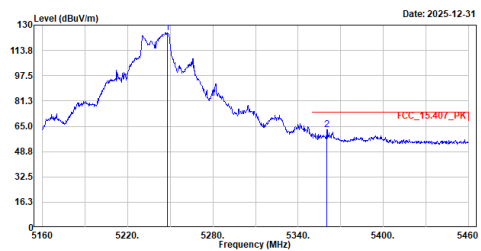


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.900	125.28	-----	-----	109.47	15.81	Peak
2	5360.400	62.60	74.00	-11.40	46.63	15.97	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5745MHz
Test BY :Ashton

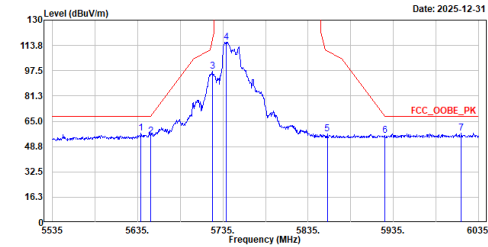


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5639.000	57.27	68.20	-10.93	40.01	17.26	Peak
2	5650.000	55.30	68.21	-12.91	38.00	17.30	Peak
3	5722.500	97.07	116.50	-19.43	79.33	17.74	Peak
4	5739.000	115.90	-----	-----	98.06	17.84	Peak
5	5857.500	56.77	110.10	-53.33	38.65	18.12	Peak
6	5925.000	55.79	68.21	-12.42	37.62	18.17	Peak
7	6015.000	57.34	68.20	-10.86	38.99	18.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5745MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5745MHz
Test BY :Ashton

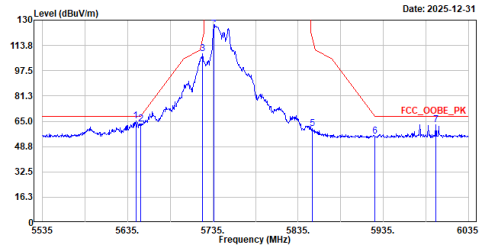


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5644.500	65.41	68.20	-2.79	48.13	17.28	Peak
2	5650.000	63.43	68.21	-4.78	46.13	17.30	Peak
3	5723.000	108.49	117.64	-9.15	90.75	17.74	Peak
4	5736.500	127.20	-----	-----	109.37	17.83	Peak
5	5852.000	60.19	117.64	-57.45	42.06	18.13	Peak
6	5925.000	55.43	68.21	-12.78	37.26	18.17	Peak
7	5996.500	62.76	68.20	-5.44	44.45	18.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5785MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5785MHz
Test BY :Ashton

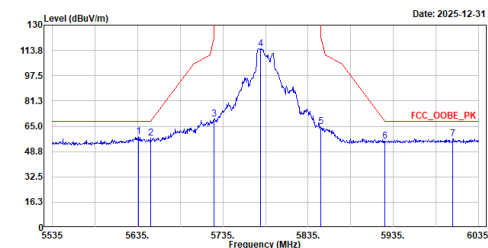


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5636.000	58.18	68.20	-10.02	40.94	17.24	Peak
2	5650.000	57.33	68.21	-10.88	40.03	17.30	Peak
3	5725.000	69.42	122.20	-52.78	51.67	17.75	Peak
4	5779.000	115.01	-----	-----	97.05	17.96	Peak
5	5850.000	64.86	122.20	-57.34	46.75	18.11	Peak
6	5925.000	55.35	68.21	-12.86	37.18	18.17	Peak
7	6005.000	57.12	68.20	-11.08	38.79	18.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5785MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5785MHz
Test BY :Ashton

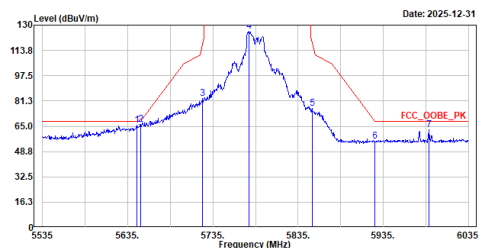


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5645.500	65.98	68.20	-2.22	48.70	17.28	Peak
2	5650.000	66.07	68.21	-2.14	48.77	17.30	Peak
3	5722.500	82.91	116.50	-33.59	65.17	17.74	Peak
4	5777.000	125.99	-----	-----	100.03	17.96	Peak
5	5851.500	76.61	118.78	-42.17	58.48	18.13	Peak
6	5925.000	55.20	68.21	-13.01	37.03	18.17	Peak
7	5989.000	62.77	68.20	-5.43	44.47	18.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5825MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be20_5825MHz
Test BY :Ashton

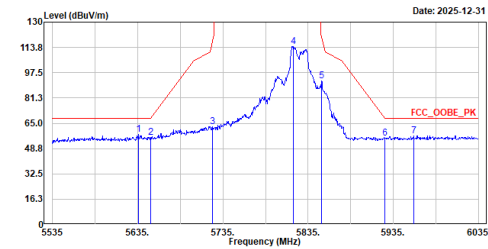


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5636.000	57.70	68.20	-10.50	40.46	17.24	Peak
2	5658.000	55.70	68.21	-12.51	38.40	17.30	Peak
3	5722.500	62.69	116.50	-53.81	44.95	17.74	Peak
4	5818.000	114.32	-----	-----	96.27	18.05	Peak
5	5851.000	91.99	119.92	-27.93	73.86	18.13	Peak
6	5925.000	55.65	68.21	-12.56	37.48	18.17	Peak
7	5959.000	57.00	68.20	-11.20	38.76	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5825MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be20_5825MHz
Test BY :Ashton

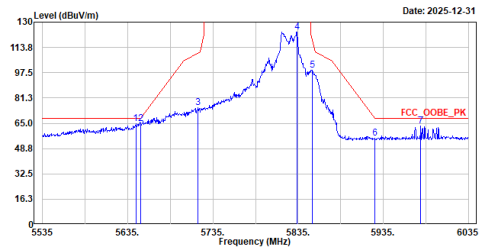


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5644.500	64.90	68.20	-3.30	47.62	17.28	Peak
2	5658.000	64.87	68.21	-3.34	47.57	17.30	Peak
3	5717.500	75.04	110.10	-35.06	57.34	17.70	Peak
4	5833.500	123.61	-----	-----	105.52	18.09	Peak
5	5852.000	99.29	117.64	-18.35	81.16	18.13	Peak
6	5925.000	55.28	68.21	-12.93	37.11	18.17	Peak
7	5979.000	63.28	68.20	-4.92	45.00	18.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5190MHz
Test BY :Rock

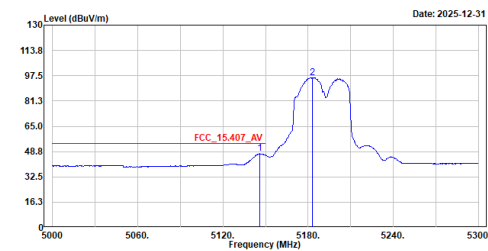


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.100	47.43	54.00	-6.57	31.92	15.51	Average
2	5183.000	96.39	-----	-----	80.77	15.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5190MHz
Test BY :Rock

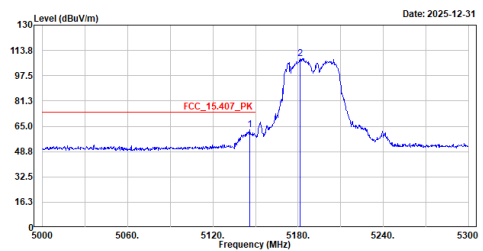


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5145.800	62.76	74.00	-11.24	47.25	15.51	Peak
2	5181.200	108.64	-----	-----	93.02	15.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5190MHz
Test BY :Rock

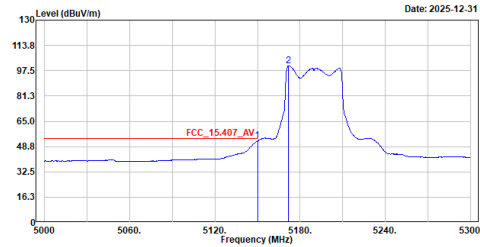


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	52.73	54.00	-1.27	37.22	15.51	Average
2	5171.600	100.66	-----	-----	85.09	15.57	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5190MHz
Test BY :Rock

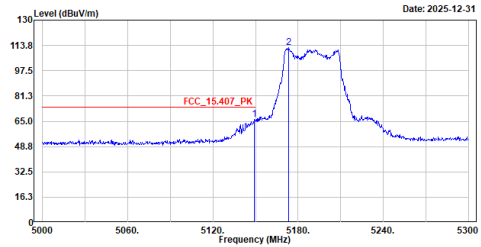


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.100	66.40	74.00	-7.60	50.89	15.51	Peak
2	5173.400	112.50	-----	-----	96.92	15.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_B1_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5230MHz_B1
Test BY :Ashton

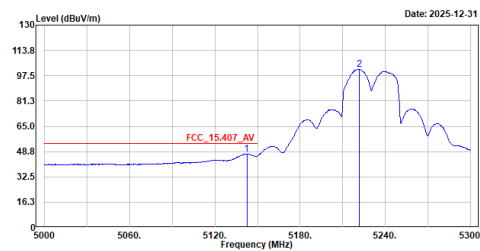


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5142.500	47.20	54.00	-6.80	31.69	15.51	Average
2	5221.700	101.55	-----	-----	85.79	15.76	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_B1_H_Peak


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5230MHz_B1
Test BY :Ashton

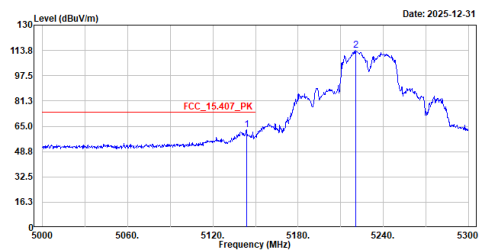

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5143.700	62.83	74.00	-11.17	47.32	15.51	Peak
2	5220.800	113.59	-----	-----	97.84	15.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be40_5230MHz_B1_V_Average

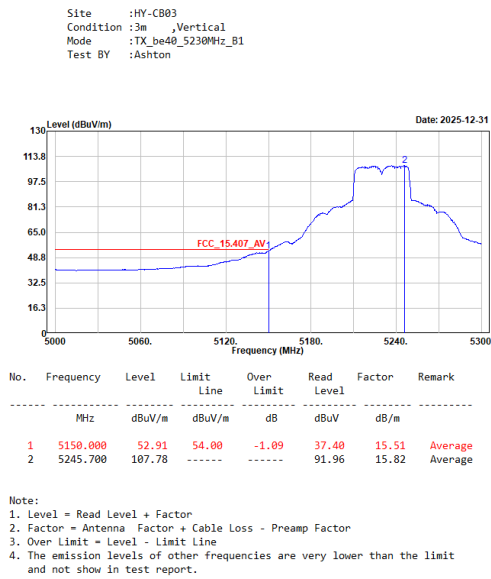

TX_be40_5230MHz_B1_V_Peak



TX_be40_5230MHz_B2_H_Average

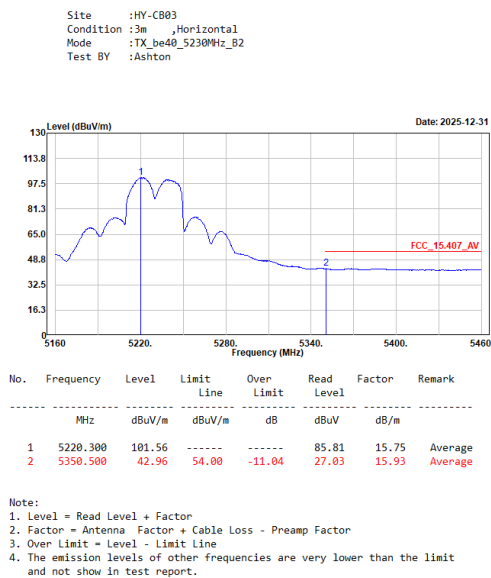


TX_be40_5230MHz_B2_H_Peak



TX_be40_5230MHz_B2_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5230MHz_B2
Test BY :Ashton

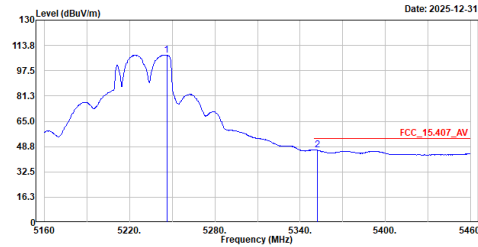


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5246.100	107.62	-----	-----	91.80	15.82	Average
2	5352.000	46.50	54.00	-7.50	30.57	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_B2_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5230MHz_B2
Test BY :Ashton

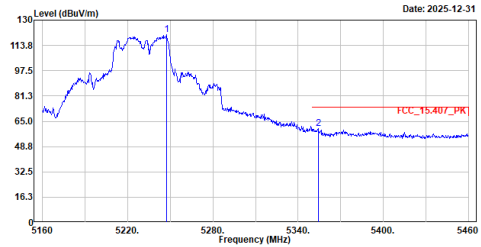


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5247.300	120.46	-----	-----	104.64	15.82	Peak
2	5354.100	60.20	74.00	-13.80	44.26	15.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5755MHz
Test BY :Ashton

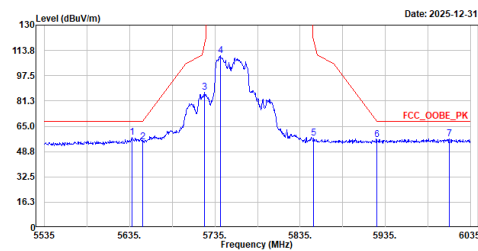


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5637.500	57.64	68.20	-10.56	40.39	17.25	Peak
2	5650.000	55.06	68.21	-13.15	37.76	17.30	Peak
3	5723.000	86.65	117.64	-30.99	68.91	17.74	Peak
4	5741.500	110.15	-----	-----	92.29	17.86	Peak
5	5851.000	57.30	119.92	-62.62	39.17	18.13	Peak
6	5925.000	56.18	68.21	-12.03	38.01	18.17	Peak
7	6010.000	56.94	68.20	-11.26	38.59	18.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5755MHz
Test BY :Ashton

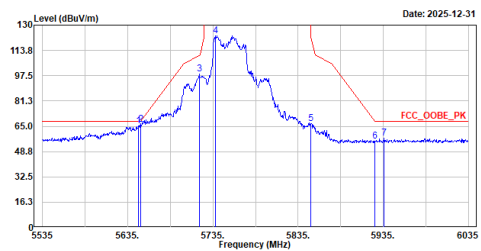


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5648.000	65.05	68.20	-3.15	47.77	17.28	Peak
2	5650.000	66.31	68.21	-1.90	49.01	17.30	Peak
3	5719.000	98.56	110.52	-11.96	80.85	17.71	Peak
4	5738.000	123.19	-----	-----	105.35	17.84	Peak
5	5850.000	66.91	122.20	-55.29	48.80	18.11	Peak
6	5925.000	55.43	68.21	-12.78	37.26	18.17	Peak
7	5936.000	57.25	68.20	-10.95	39.06	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be40_5795MHz
Test BY :Ashton

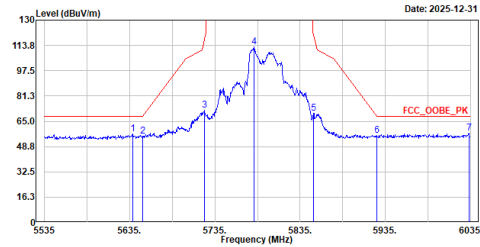


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5638.500	56.72	68.20	-11.48	39.47	17.25	Peak
2	5658.000	55.40	68.21	-12.81	38.10	17.30	Peak
3	5722.500	72.15	116.50	-44.35	54.41	17.74	Peak
4	5781.000	112.70	-----	-----	94.74	17.96	Peak
5	5851.000	70.34	119.92	-49.58	52.21	18.13	Peak
6	5925.000	55.99	68.21	-12.22	37.82	18.17	Peak
7	6033.000	57.23	68.20	-10.97	38.84	18.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be40_5795MHz
Test BY :Ashton

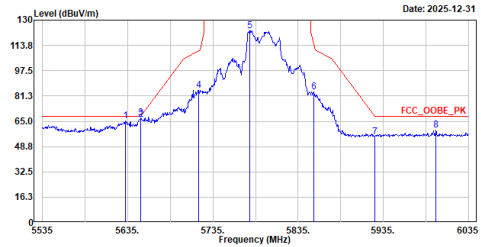


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5632.000	65.40	68.20	-2.80	48.16	17.24	Peak
2	5658.000	66.13	68.21	-2.08	48.83	17.30	Peak
3	5658.500	67.29	68.58	-1.29	49.99	17.30	Peak
4	5718.000	84.77	110.24	-25.47	67.06	17.71	Peak
5	5778.500	123.28	-----	-----	105.32	17.96	Peak
6	5853.500	83.68	114.22	-30.54	65.56	18.12	Peak
7	5925.000	55.00	68.21	-13.21	36.83	18.17	Peak
8	5997.000	59.13	68.20	-9.07	40.82	18.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5210MHz
Test BY :Rock

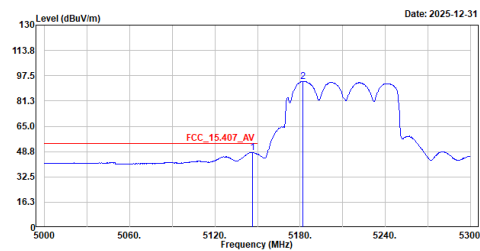


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.700	48.18	54.00	-5.82	32.66	15.52	Average
2	5182.100	93.84	-----	-----	78.22	15.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5210MHz
Test BY :Rock

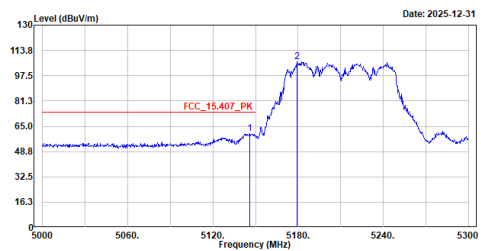


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5145.800	60.12	74.00	-13.88	44.61	15.51	Peak
2	5179.400	106.48	-----	-----	90.87	15.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5210MHz
Test BY :Rock

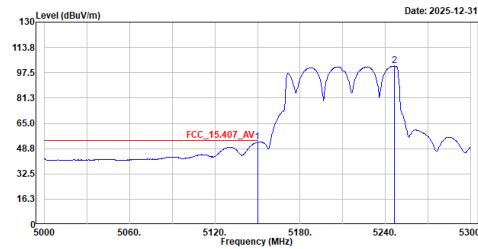


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	52.91	54.00	-1.09	37.40	15.51	Average
2	5246.600	101.82	-----	-----	86.00	15.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5210MHz
Test BY :Rock

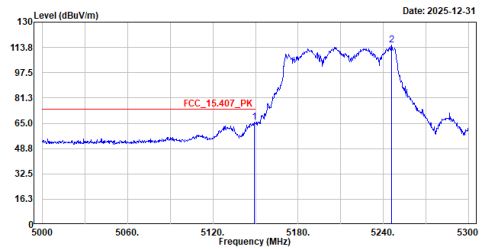


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	65.65	74.00	-8.35	50.14	15.51	Peak
2	5246.000	115.27	-----	-----	99.45	15.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5775MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5775MHz
Test BY :Rock

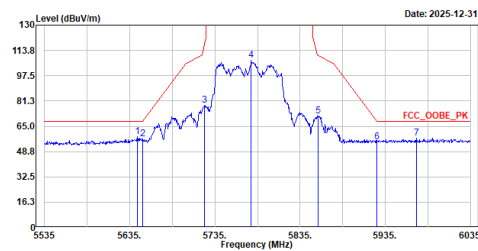


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5644.000	58.24	68.20	-9.96	40.96	17.28	Peak
2	5650.000	57.07	68.21	-11.14	39.77	17.30	Peak
3	5723.000	78.43	117.64	-39.21	60.69	17.74	Peak
4	5777.500	107.33	-----	-----	89.37	17.96	Peak
5	5856.500	71.79	110.38	-38.59	53.67	18.12	Peak
6	5925.000	54.71	68.21	-13.50	36.54	18.17	Peak
7	5972.000	57.27	68.20	-10.93	39.01	18.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5775MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5775MHz
Test BY :Rock

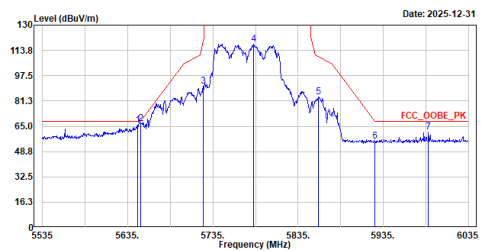


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5647.000	65.58	68.20	-2.62	48.30	17.28	Peak
2	5650.000	66.83	68.21	-1.38	49.53	17.30	Peak
3	5723.500	90.51	118.78	-28.27	72.77	17.74	Peak
4	5783.000	117.64	-----	-----	99.67	17.97	Peak
5	5858.500	84.11	109.82	-25.71	66.00	18.11	Peak
6	5925.000	55.39	68.21	-12.82	37.22	18.17	Peak
7	5988.000	61.37	68.20	-6.83	43.08	18.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 18GHz worst case

TX_ac80_5775MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Ashton

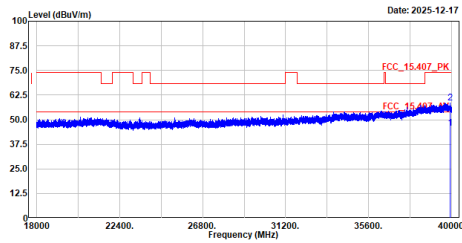


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	39918.000	45.51	54.00	-8.49	26.24	19.27	Average
2	39918.000	58.43	74.00	-15.57	39.16	19.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Ashton

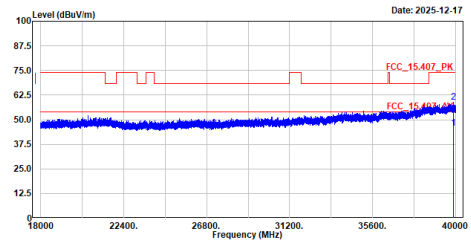


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	39883.500	45.55	54.00	-8.45	26.35	19.20	Average
2	39883.500	58.79	74.00	-15.21	39.59	19.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5775MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_be80_5775MHz
Test BY :Ashton

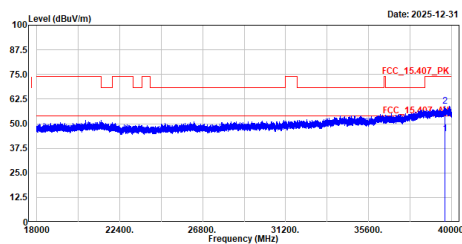


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	39659.990	44.91	54.00	-9.09	26.13	18.78	Average
2	39659.990	58.91	74.00	-15.09	40.13	18.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5775MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_be80_5775MHz
Test BY :Ashton

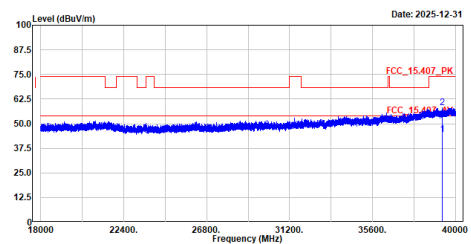

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	39301.480	44.64	54.00	-9.36	26.21	18.43	Average
2	39301.480	58.06	74.00	-15.94	39.63	18.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Appendix F. Test Result of Transmitter Radiated Emission Co-location

Cellular module: FN990A40-HP

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182

H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
Test BY :Ashton

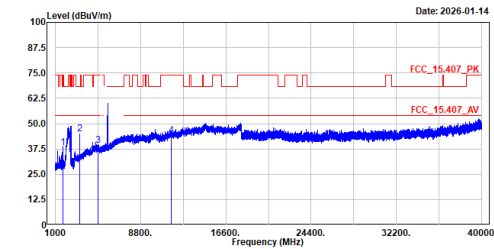


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1673.000	38.29	74.00	-35.71	63.79	-25.50	Peak
2	3252.322	45.06	68.22	-23.16	67.13	-22.07	Peak
3	4874.000	39.06	74.00	-34.94	53.68	-14.62	Peak
4	11570.000	44.00	74.00	-30.00	45.83	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182

V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
Test BY :Ashton

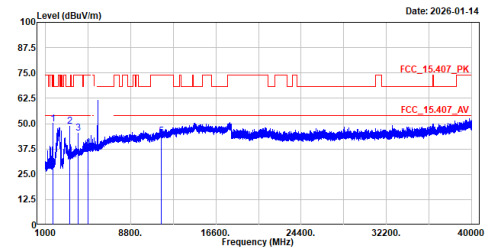


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1673.000	49.92	74.00	-24.08	75.42	-25.50	Peak
2	3247.950	48.57	68.22	-19.65	70.64	-22.07	Peak
3	3983.342	45.27	74.00	-28.73	63.75	-18.48	Peak
4	4874.000	37.88	74.00	-36.12	52.50	-14.62	Peak
5	11570.000	43.93	74.00	-30.07	45.76	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+5GNR
n78_15M_QPSK_1RB36_CH630500_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR n78_15M_QPSK_1RB36_CH630500
Test BY :Ashton

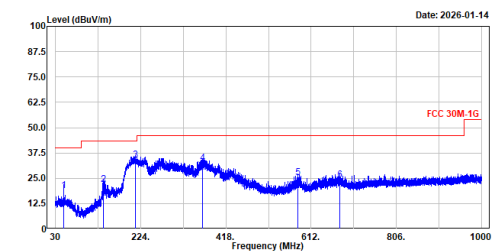


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.673	18.89	40.00	-21.11	42.38	-23.49	QP
2	139.179	21.99	43.50	-21.51	46.38	-24.39	QP
3	211.739	34.13	43.50	-9.37	60.66	-26.53	QP
4	364.230	32.51	46.00	-13.49	54.09	-21.58	QP
5	582.346	25.13	46.00	-20.87	41.42	-16.29	QP
6	676.780	24.04	46.00	-21.96	38.70	-14.66	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2437MHz+TX_be20_5785MHz+5GNR
n78_15M_QPSK_1RB36_CH630500_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR n78_15M_QPSK_1RB36_CH630500
Test BY :Ashton

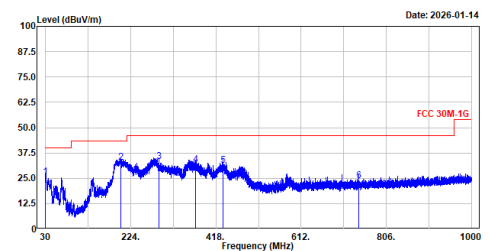


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.291	25.53	40.00	-14.47	50.39	-24.86	QP
2	200.971	32.71	43.50	-10.79	59.48	-26.77	QP
3	288.906	33.09	46.00	-12.91	56.44	-23.35	QP
4	372.136	31.55	46.00	-14.45	52.72	-21.17	QP
5	434.559	31.22	46.00	-14.78	50.75	-19.53	QP
6	742.549	23.80	46.00	-22.20	36.93	-13.13	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK
1RB0_CH40620_H_QP**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK_1RB0_CH40620
Test BY :Ashton

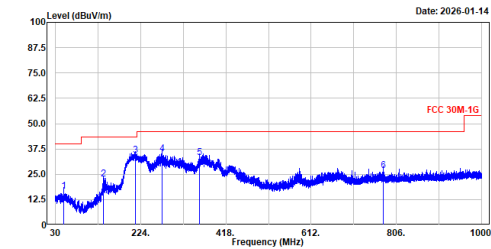


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.673	16.50	40.00	-23.50	39.99	-23.49	QP
2	139.033	22.78	43.50	-20.72	47.17	-24.39	QP
3	211.302	34.36	43.50	-9.14	60.90	-26.54	QP
4	272.561	35.22	46.00	-10.78	59.19	-23.97	QP
5	358.507	33.15	46.00	-12.85	55.04	-21.89	QP
6	777.131	26.95	46.00	-19.05	39.73	-12.78	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK
1RB0_CH40620_V_QP**

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_20M_QPSK_1RB0_CH40620
Test BY :Ashton

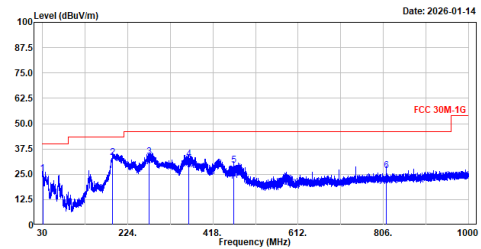


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.631	25.14	40.00	-14.86	50.04	-24.90	QP
2	189.913	33.29	43.50	-10.21	59.81	-26.52	QP
3	272.221	33.67	46.00	-12.33	57.65	-23.98	QP
4	362.290	32.61	46.00	-13.39	54.31	-21.70	QP
5	465.843	29.36	46.00	-16.64	48.04	-18.68	QP
6	812.587	26.90	46.00	-19.10	39.39	-12.49	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
H_QP**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
Test BY :Ashton

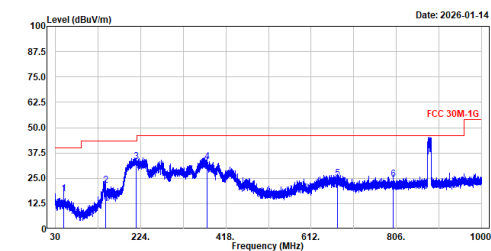


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.673	17.19	40.00	-22.81	40.68	-23.49	QP
2	143.641	21.67	43.50	-21.83	45.74	-24.07	QP
3	214.261	33.03	43.50	-10.47	59.54	-26.51	QP
4	374.707	33.18	46.00	-12.82	54.19	-21.01	QP
5	671.687	25.04	46.00	-20.96	39.76	-14.72	QP
6	799.200	24.62	46.00	-21.38	37.13	-12.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
V_QP**

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B5_CH4182
Test BY :Ashton

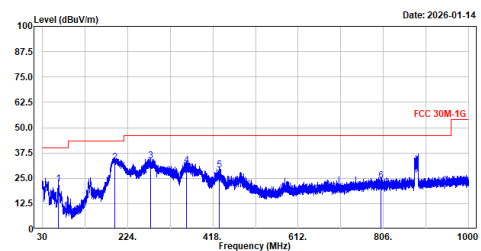


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	66.959	22.32	40.00	-17.68	48.11	-25.79	QP
2	193.938	32.97	43.50	-10.53	59.67	-26.70	QP
3	276.295	33.66	46.00	-12.34	57.48	-23.82	QP
4	357.343	31.28	46.00	-14.72	53.19	-21.91	QP
5	432.182	29.12	46.00	-16.88	48.75	-19.63	QP
6	800.849	23.64	46.00	-22.36	36.15	-12.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Cellular module: RM520N-GL

TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP
SK_1RB0_CH631334_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB0_CH631334
Test BY :Ashton

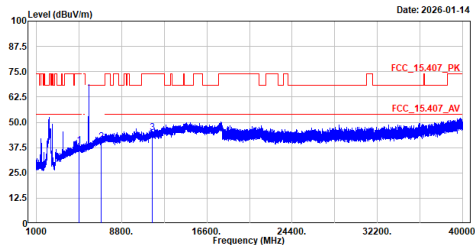


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak
2	6940.020	40.33	68.22	-27.89	48.03	-7.70	Peak
3	11570.000	44.81	74.00	-29.19	46.64	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP
SK_1RB0_CH631334_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB0_CH631334
Test BY :Ashton

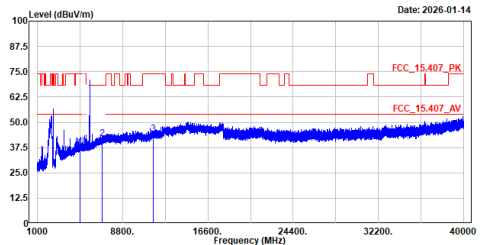


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	37.74	74.00	-36.26	52.36	-14.62	Peak
2	6940.020	42.02	68.22	-26.20	49.72	-7.70	Peak
3	11570.000	44.05	74.00	-29.95	45.88	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP
SK_1RB36_CH40620_H_001--.png

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620
Test BY :Ashton

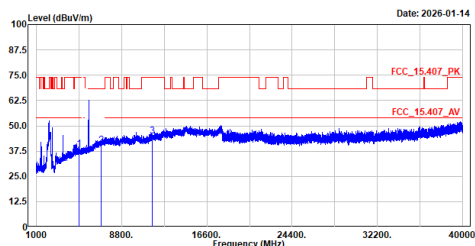


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak
2	6940.020	40.33	68.22	-27.89	48.03	-7.70	Peak
3	11570.000	44.81	74.00	-29.19	46.64	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP
SK_1RB36_CH40620_V_001--.png

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620
Test BY :Ashton

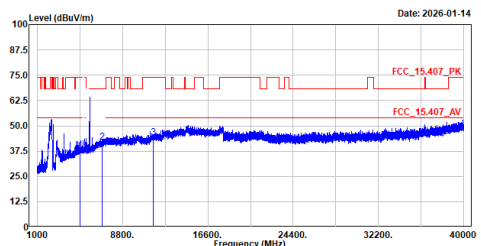


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	37.74	74.00	-36.26	52.36	-14.62	Peak
2	6940.020	42.02	68.22	-26.20	49.72	-7.70	Peak
3	11570.000	44.05	74.00	-29.95	45.88	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK
1RB24_CH40620_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

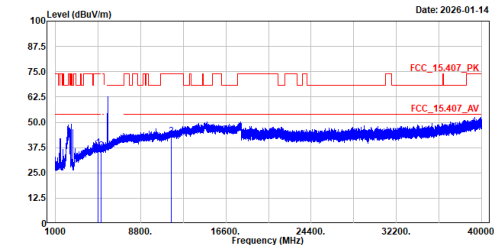


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.41	74.00	-36.59	52.03	-14.62	Peak
2	5186.000	35.78	74.00	-38.22	49.76	-13.98	Peak
3	11570.000	42.85	74.00	-31.15	44.68	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK
1RB24_CH40620_H_001--.png

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

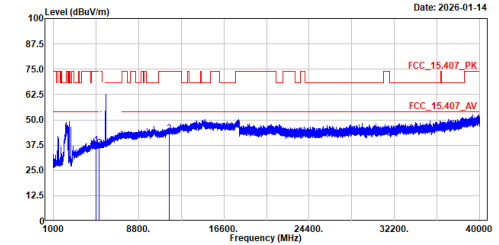


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.41	74.00	-36.59	52.03	-14.62	Peak
2	5186.000	35.78	74.00	-38.22	49.76	-13.98	Peak
3	11570.000	42.85	74.00	-31.15	44.68	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK
1RB24_CH40620_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

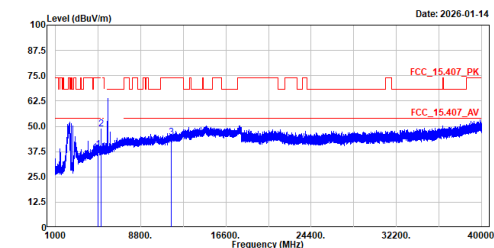


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak
2	5186.000	48.51	74.00	-25.49	62.49	-13.98	Peak
3	11570.000	44.46	74.00	-29.54	46.29	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK
1RB24_CH40620_V_001--.png

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

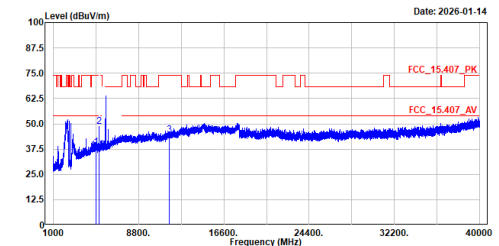


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.61	74.00	-35.39	53.23	-14.62	Peak
2	5186.000	48.51	74.00	-25.49	62.49	-13.98	Peak
3	11570.000	44.46	74.00	-29.54	46.29	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
 Test BY :Ashton

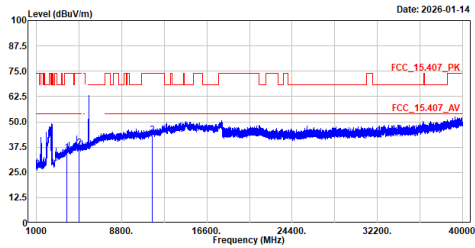


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3760.000	34.80	74.00	-39.20	53.75	-18.95	Peak
2	4874.000	36.83	74.00	-37.17	51.45	-14.62	Peak
3	11570.000	43.35	74.00	-30.65	45.18	-1.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
 Test BY :Ashton

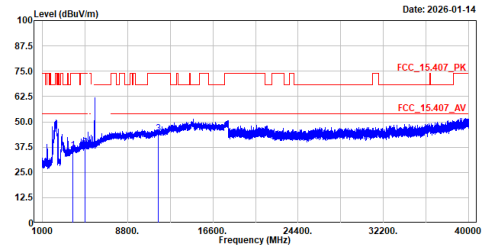


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3760.000	35.94	74.00	-38.06	54.89	-18.95	Peak
2	4874.000	37.45	74.00	-36.55	52.07	-14.62	Peak
3	11570.000	44.15	74.00	-29.85	45.98	-1.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_b_2437MHz+TX_be20_5785MHz+5G NR_n78_40M_QP
SK_1RB0_CH631334 H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2437MHz+TX_be20_5785MHz+5G NR_n78_40M_QP SK_1RB0_CH631334
 Test BY :Ashton

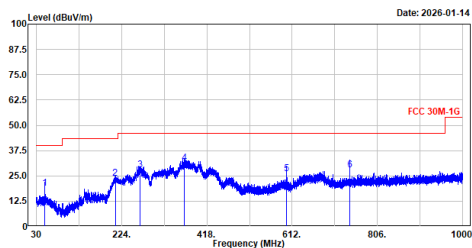


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.673	18.90	40.00	-21.10	42.39	-23.49	QP
2	209.459	23.87	43.50	-19.63	50.42	-26.55	QP
3	266.352	27.86	46.00	-18.14	52.16	-24.30	QP
4	366.461	31.26	46.00	-14.74	52.73	-21.47	QP
5	599.952	25.97	46.00	-20.03	41.72	-15.75	QP
6	743.471	27.78	46.00	-18.22	40.89	-13.11	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2437MHz+TX_be20_5785MHz+5G NR_n78_40M_QP
SK_1RB0_CH631334 V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2437MHz+TX_be20_5785MHz+5G NR_n78_40M_QP SK_1RB0_CH631334
 Test BY :Ashton

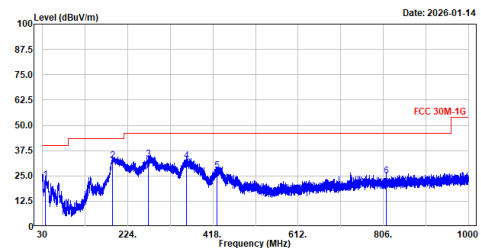


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	36.451	23.07	40.00	-16.93	47.60	-24.53	QP
2	190.107	32.57	43.50	-10.93	59.09	-26.52	QP
3	271.785	33.20	46.00	-12.80	57.20	-24.00	QP
4	358.652	32.51	46.00	-13.49	54.40	-21.89	QP
5	426.992	27.47	46.00	-18.53	47.33	-19.86	QP
6	812.538	24.80	46.00	-21.20	37.29	-12.49	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP
SK_1RB36_CH40620_H_QP_001--.png**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620
Test BY :Ashton

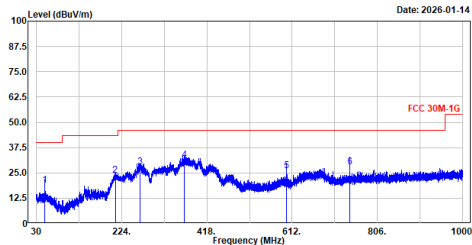


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.673	18.90	40.00	-21.10	42.39	-23.49	QP
2	209.459	23.87	43.50	-19.63	50.42	-26.55	QP
3	266.352	27.86	46.00	-18.14	52.16	-24.30	QP
4	366.461	31.26	46.00	-14.74	52.73	-21.47	QP
5	599.952	25.97	46.00	-20.03	41.72	-15.75	QP
6	743.471	27.78	46.00	-18.22	40.89	-13.11	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QP
SK_1RB36_CH40620_V_QP_001--.png**

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+5GNR_n78_40M_QPSK_1RB36_CH40620
Test BY :Ashton

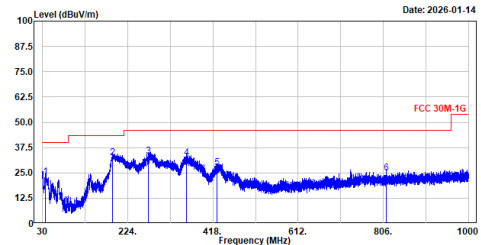


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	36.451	23.07	40.00	-16.93	47.00	-24.53	QP
2	190.107	32.57	43.50	-10.93	59.09	-26.52	QP
3	271.785	33.20	46.00	-12.80	57.20	-24.00	QP
4	358.652	32.51	46.00	-13.49	54.40	-21.89	QP
5	426.992	27.47	46.00	-18.53	47.33	-19.86	QP
6	812.538	24.80	46.00	-21.20	37.29	-12.49	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK
1RB24_CH40620_H_QP**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

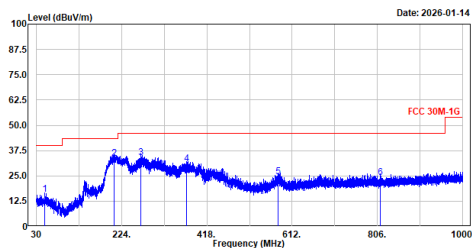


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.625	15.73	40.00	-24.27	39.22	-23.49	QP
2	207.664	33.55	43.50	-9.95	60.11	-26.56	QP
3	267.565	34.07	46.00	-11.93	58.29	-24.22	QP
4	371.457	31.04	46.00	-14.96	52.25	-21.21	QP
5	580.891	24.50	46.00	-21.50	40.84	-16.34	QP
6	812.587	23.97	46.00	-22.03	36.46	-12.49	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

**TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK
1RB24_CH40620_V_QP**

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz+TX_be20_5785MHz+LTE_B41_10M_QPSK_1RB24_CH40620
Test BY :Ashton

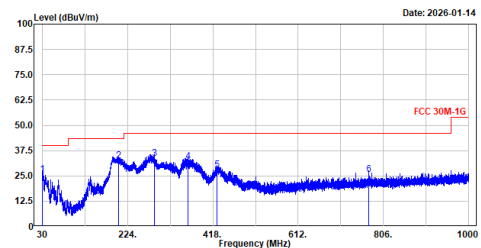


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.485	25.60	40.00	-14.40	50.49	-24.89	QP
2	203.105	32.33	43.50	-11.17	59.00	-26.67	QP
3	284.298	33.69	46.00	-12.31	57.17	-23.48	QP
4	361.708	32.22	46.00	-13.78	53.96	-21.74	QP
5	427.041	28.02	46.00	-17.98	47.88	-19.86	QP
6	772.281	25.55	46.00	-20.45	38.37	-12.82	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
H_QP

Site :HY-C803
 Condition :3m ,Horizontal
 Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
 Test BY :Ashton

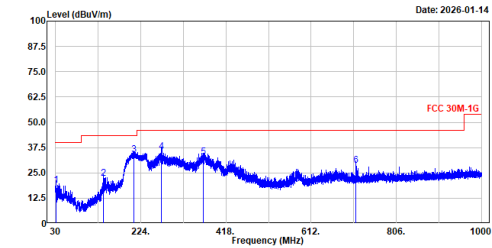


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.922	18.98	40.00	-21.02	43.90	-24.92	QP
2	139.033	22.18	43.50	-21.32	46.57	-24.39	QP
3	208.101	33.91	43.50	-9.59	60.47	-26.56	QP
4	271.882	35.29	46.00	-10.71	59.28	-23.99	QP
5	366.946	32.83	46.00	-13.17	54.28	-21.45	QP
6	714.418	28.81	46.00	-17.19	42.66	-13.85	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
V_QP

Site :HY-C803
 Condition :3m ,Vertical
 Mode :TX_b_2437MHz+TX_be20_5785MHz+WCDMA_B2_CH9400
 Test BY :Ashton

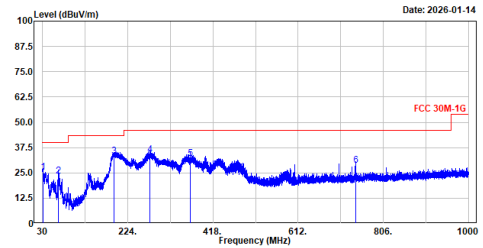

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.776	25.24	40.00	-14.76	50.16	-24.92	QP
2	66.668	23.51	40.00	-16.49	49.27	-25.76	QP
3	193.647	33.03	43.50	-10.47	59.74	-26.71	QP
4	274.889	33.92	46.00	-12.08	57.79	-23.87	QP
5	366.655	32.22	46.00	-13.78	53.68	-21.46	QP
6	742.549	28.69	46.00	-17.31	41.82	-13.13	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.