

Appendix B

RF Test Data for 2.4GWIFI (Conducted Measurement)

Product Name: Portable printer

Test Model: R01A

Environmental Conditions


Temperature:	23.9°C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Suichao Lai
Supervised by:	Yan Chen

B.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.028	≥ 0.5	Pass
NVNT	b	2437	Ant1	8.556	≥ 0.5	Pass
NVNT	b	2462	Ant1	8.582	≥ 0.5	Pass
NVNT	g	2412	Ant1	15.664	≥ 0.5	Pass
NVNT	g	2437	Ant1	16.311	≥ 0.5	Pass
NVNT	g	2462	Ant1	16.343	≥ 0.5	Pass
NVNT	n20	2412	Ant1	16.995	≥ 0.5	Pass
NVNT	n20	2437	Ant1	17.415	≥ 0.5	Pass
NVNT	n20	2462	Ant1	17.117	≥ 0.5	Pass
NVNT	n40	2422	Ant1	35.767	≥ 0.5	Pass
NVNT	n40	2437	Ant1	35.442	≥ 0.5	Pass
NVNT	n40	2452	Ant1	34.742	≥ 0.5	Pass

Test Graphs


-6dB Bandwidth NVNT b 2412MHz Ant1

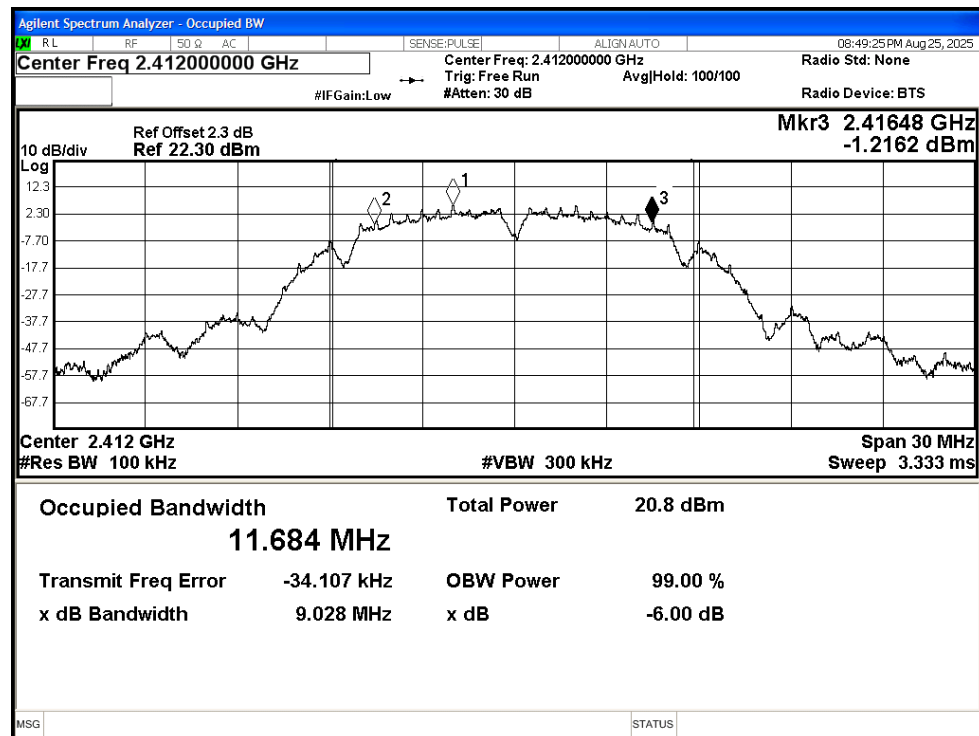


-6dB Bandwidth NVNT b 2437MHz Ant1




-6dB Bandwidth NVNT b 2462MHz Ant1

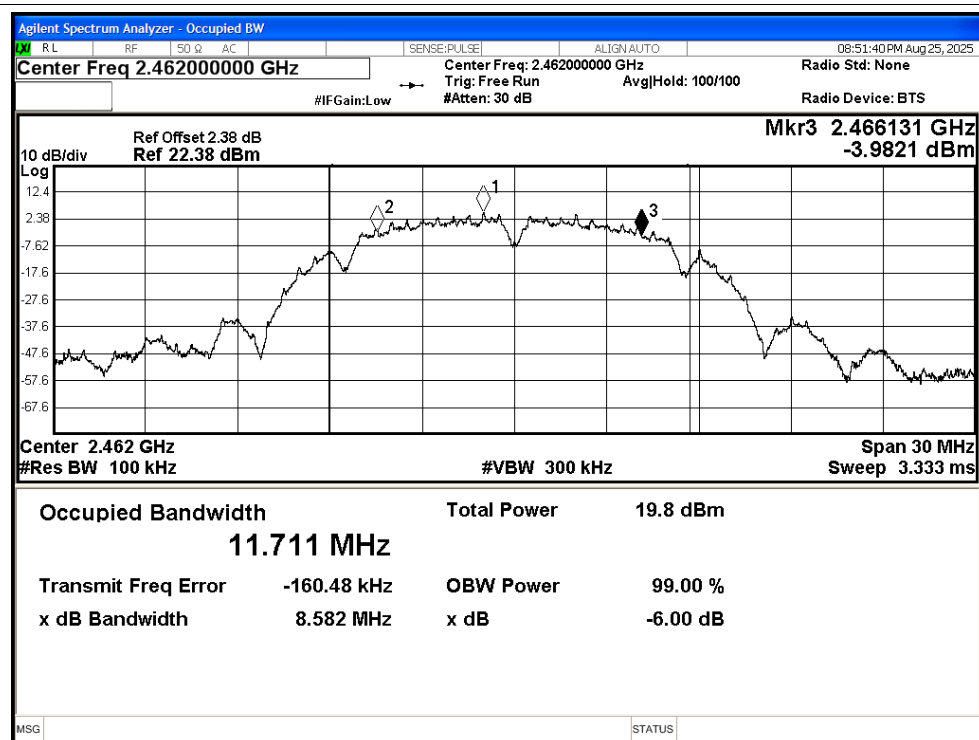


-6dB Bandwidth NVNT g 2412MHz Ant1

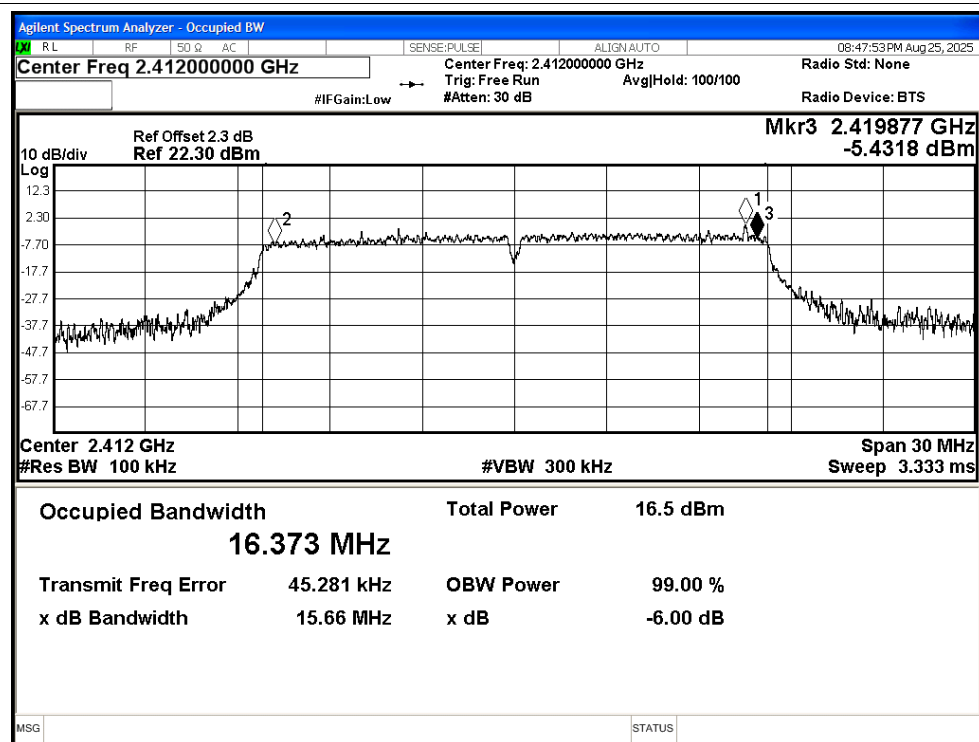


-6dB Bandwidth NVNT g 2437MHz Ant1

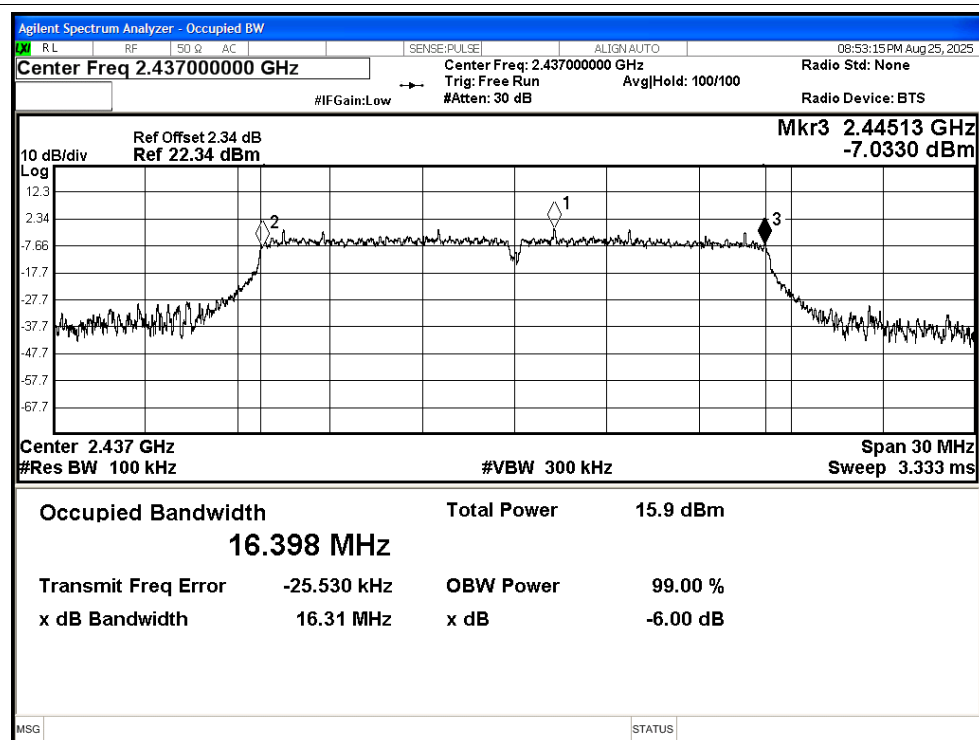


-6dB Bandwidth NVNT g 2462MHz Ant1

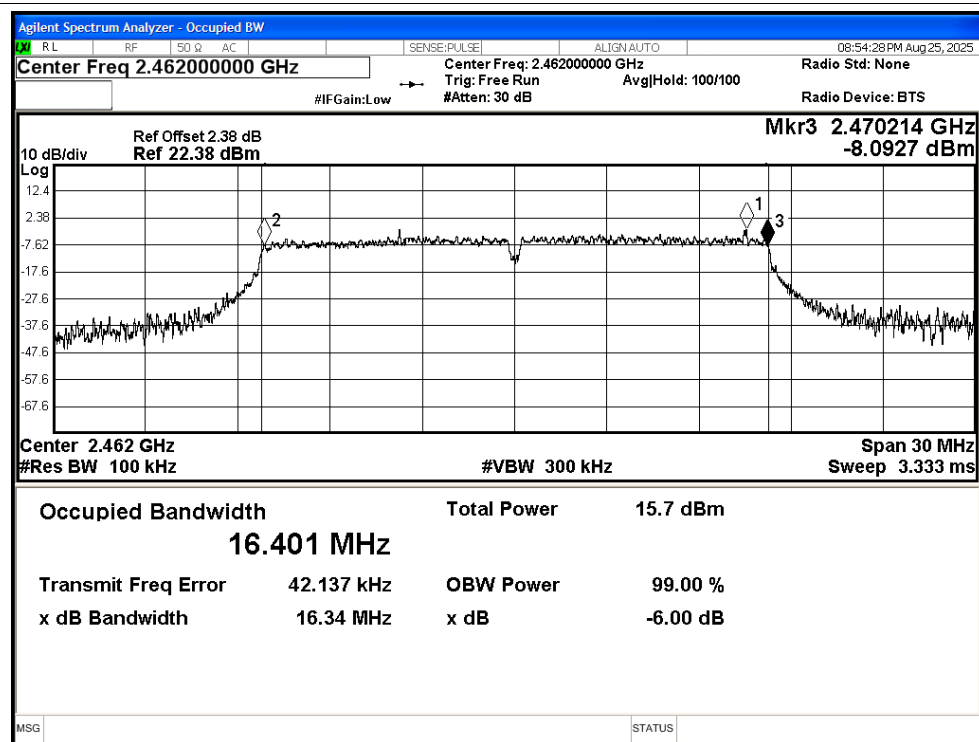


-6dB Bandwidth NVNT n20 2412MHz Ant1

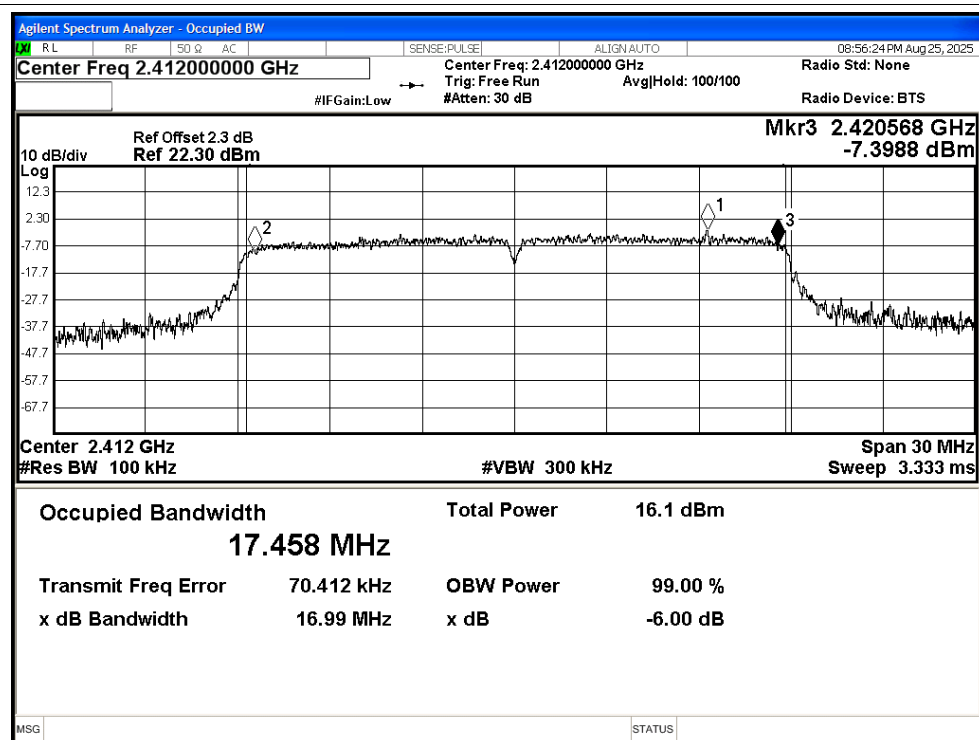


-6dB Bandwidth NVNT n20 2437MHz Ant1

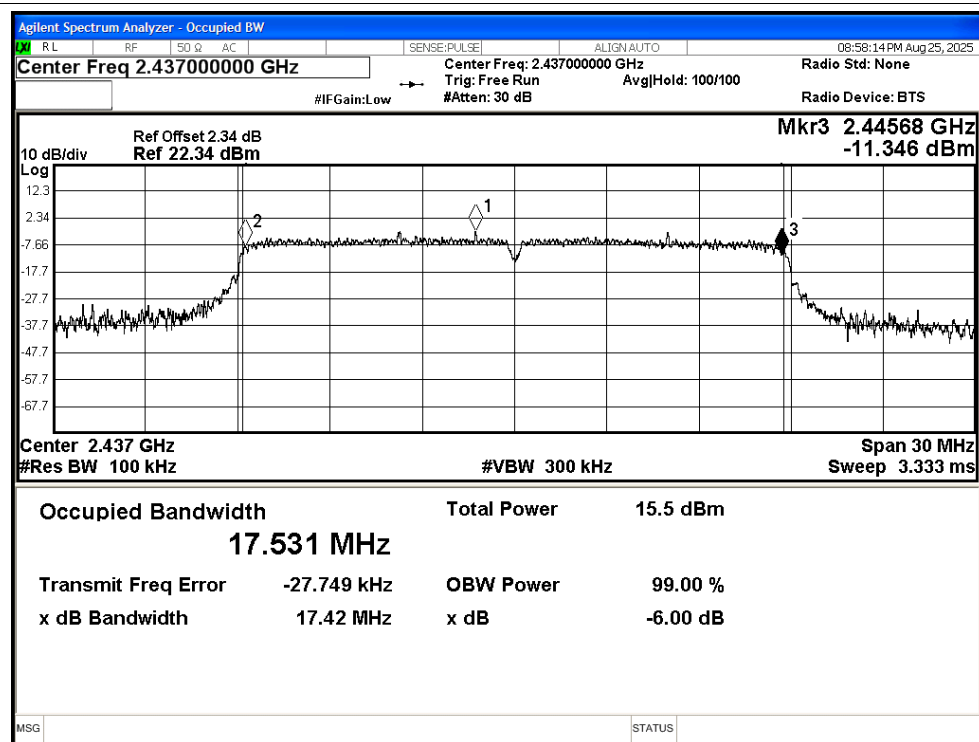


-6dB Bandwidth NVNT n20 2462MHz Ant1

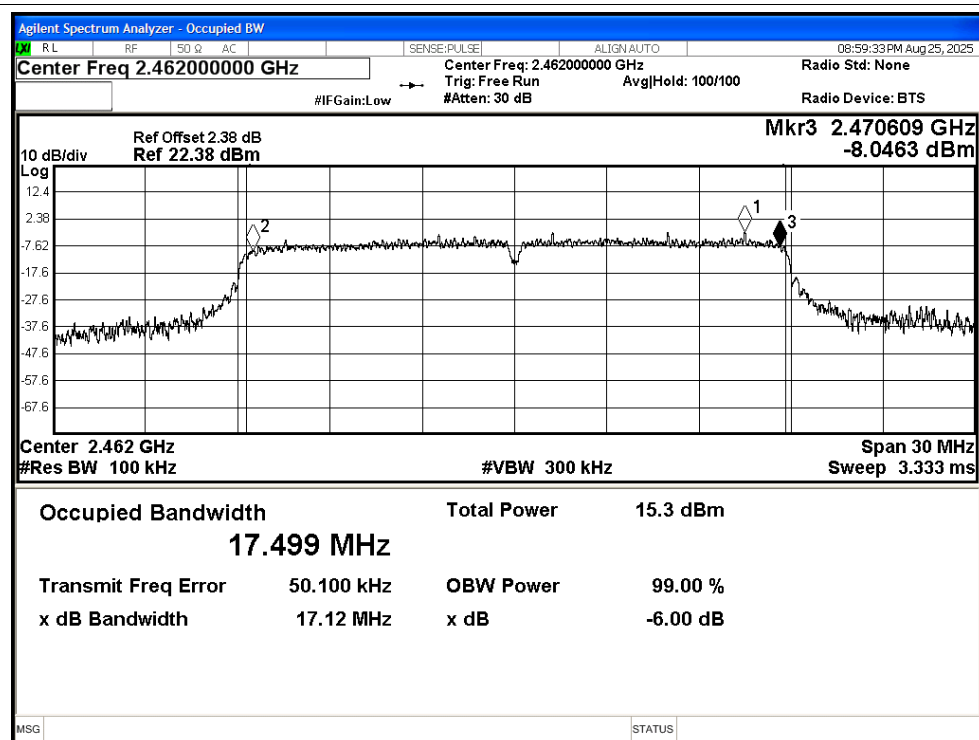


-6dB Bandwidth NVNT n40 2422MHz Ant1

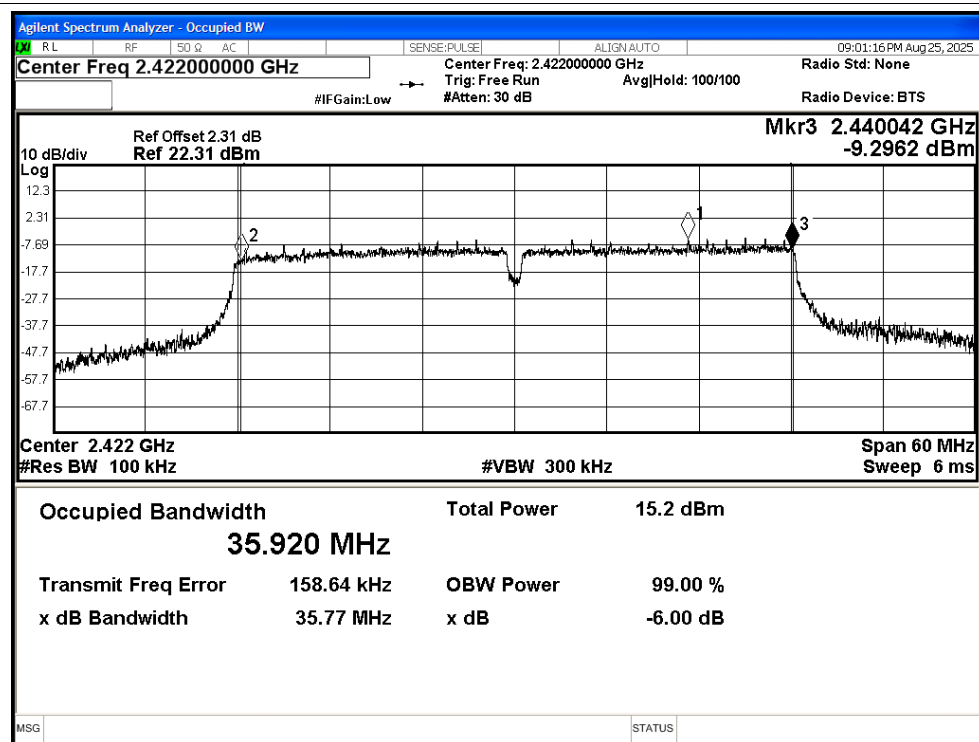

-6dB Bandwidth NVNT n40 2437MHz Ant1

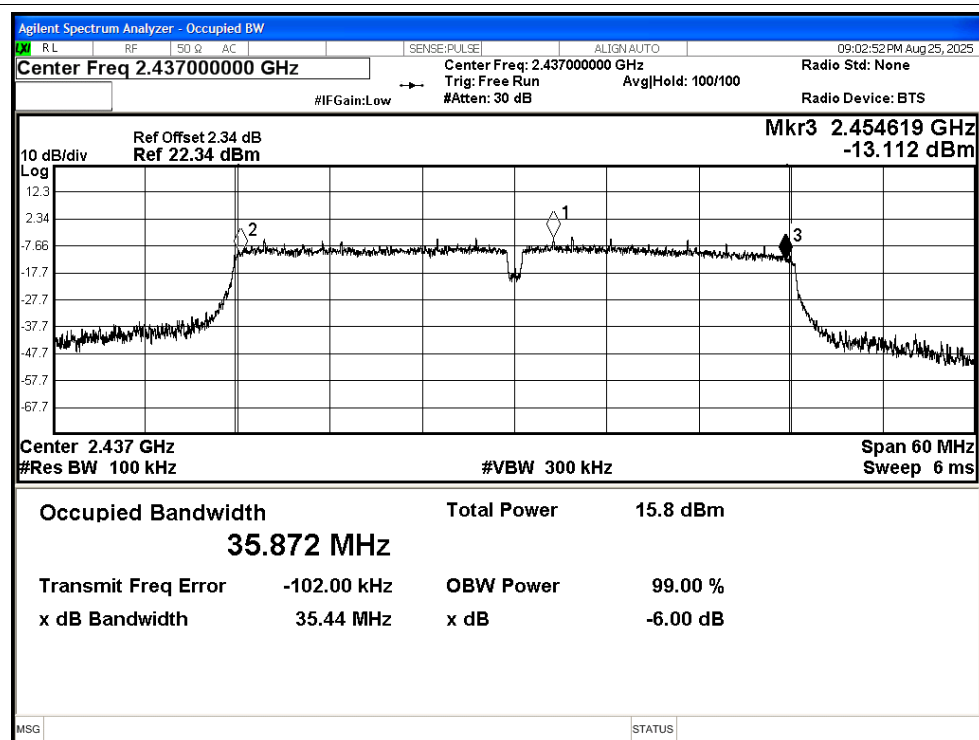

-6dB Bandwidth NVNT n40 2452MHz Ant1

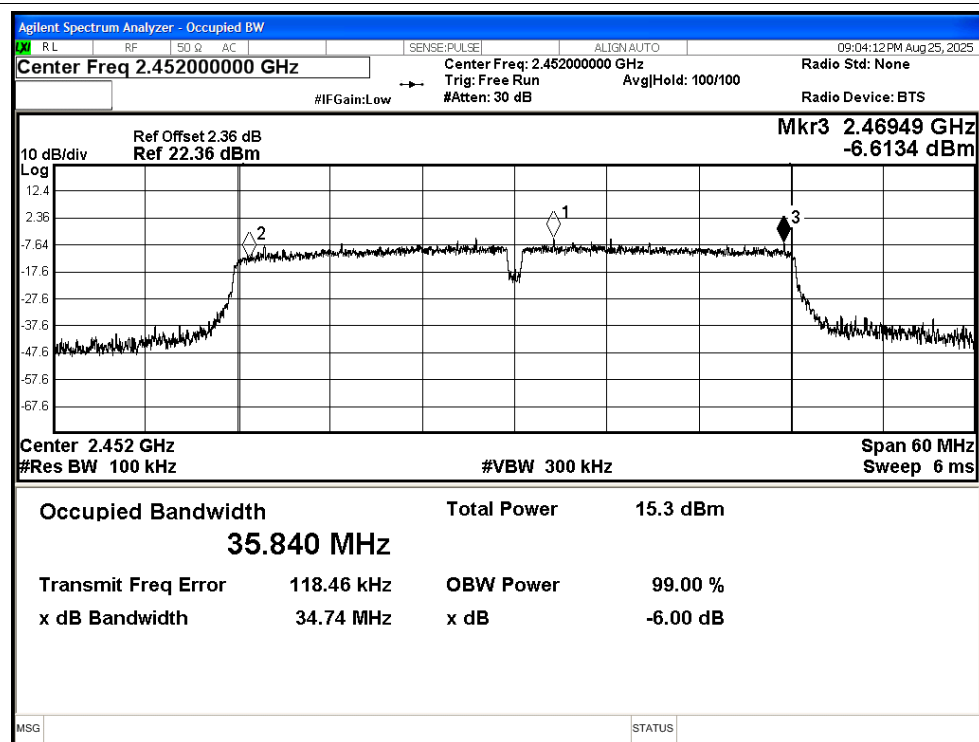




B.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	15.78	30	Pass
NVNT	b	2437	Ant1	15.36	30	Pass
NVNT	b	2462	Ant1	14.81	30	Pass
NVNT	g	2412	Ant1	15.34	30	Pass
NVNT	g	2437	Ant1	14.67	30	Pass
NVNT	g	2462	Ant1	14.5	30	Pass
NVNT	n20	2412	Ant1	14.85	30	Pass
NVNT	n20	2437	Ant1	14.18	30	Pass
NVNT	n20	2462	Ant1	13.96	30	Pass
NVNT	n40	2422	Ant1	13.58	30	Pass
NVNT	n40	2437	Ant1	14.38	30	Pass
NVNT	n40	2452	Ant1	13.86	30	Pass


B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-7.62	8	Pass
NVNT	b	2437	Ant1	-7.88	8	Pass
NVNT	b	2462	Ant1	-8.98	8	Pass
NVNT	g	2412	Ant1	-15.12	8	Pass
NVNT	g	2437	Ant1	-15.91	8	Pass
NVNT	g	2462	Ant1	-16.55	8	Pass
NVNT	n20	2412	Ant1	-15.81	8	Pass
NVNT	n20	2437	Ant1	-16.95	8	Pass
NVNT	n20	2462	Ant1	-17.17	8	Pass
NVNT	n40	2422	Ant1	-19.53	8	Pass
NVNT	n40	2437	Ant1	-19.29	8	Pass
NVNT	n40	2452	Ant1	-18.85	8	Pass

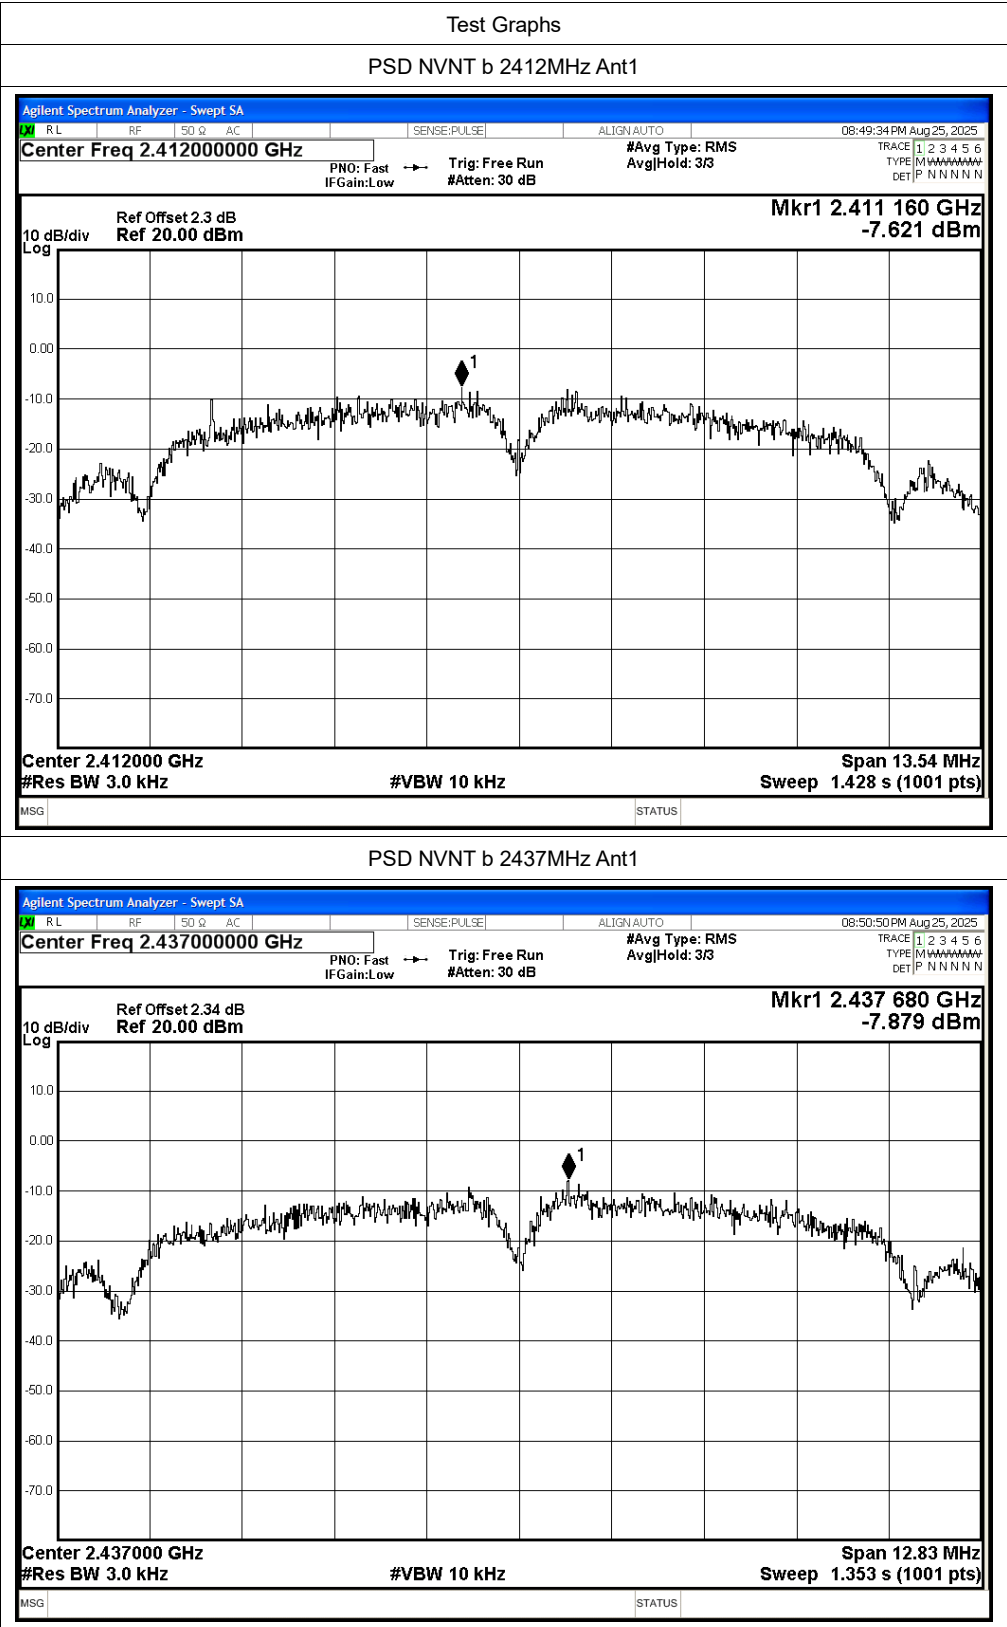


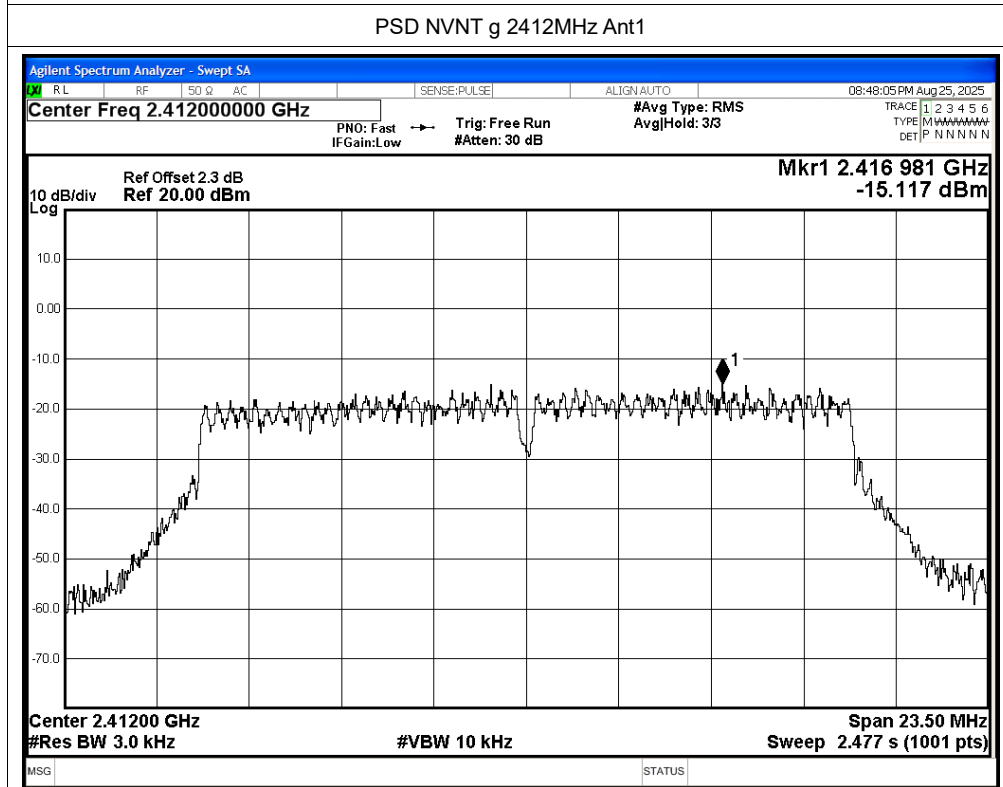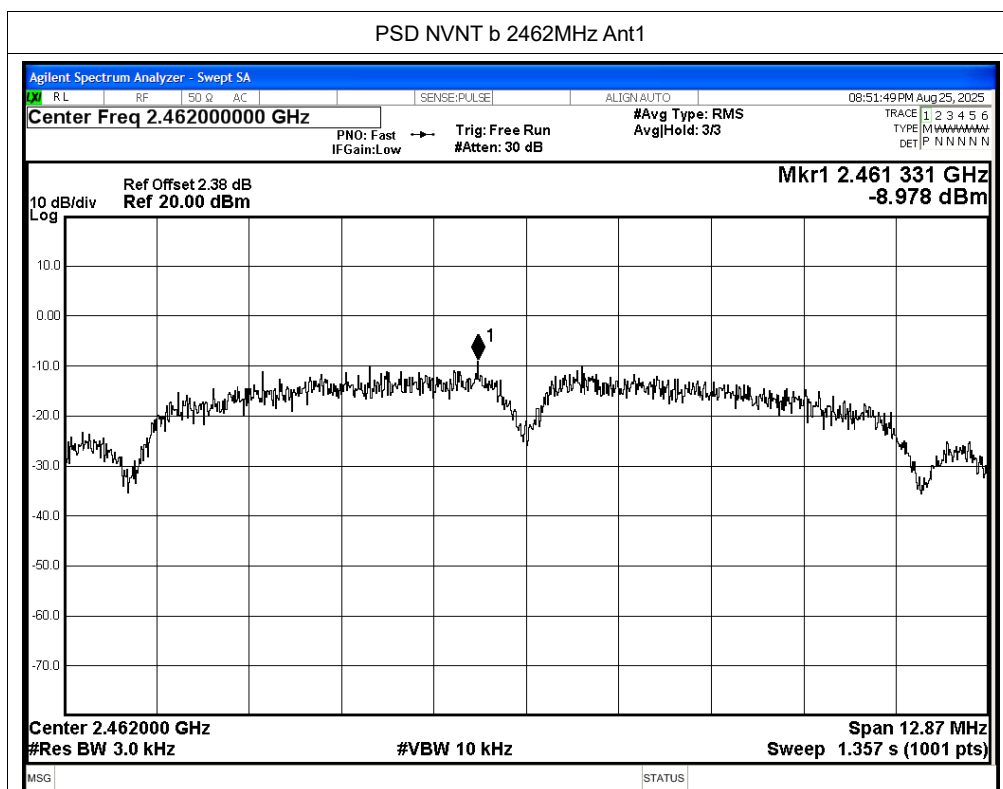



PSD NVNT g 2437MHz Ant1

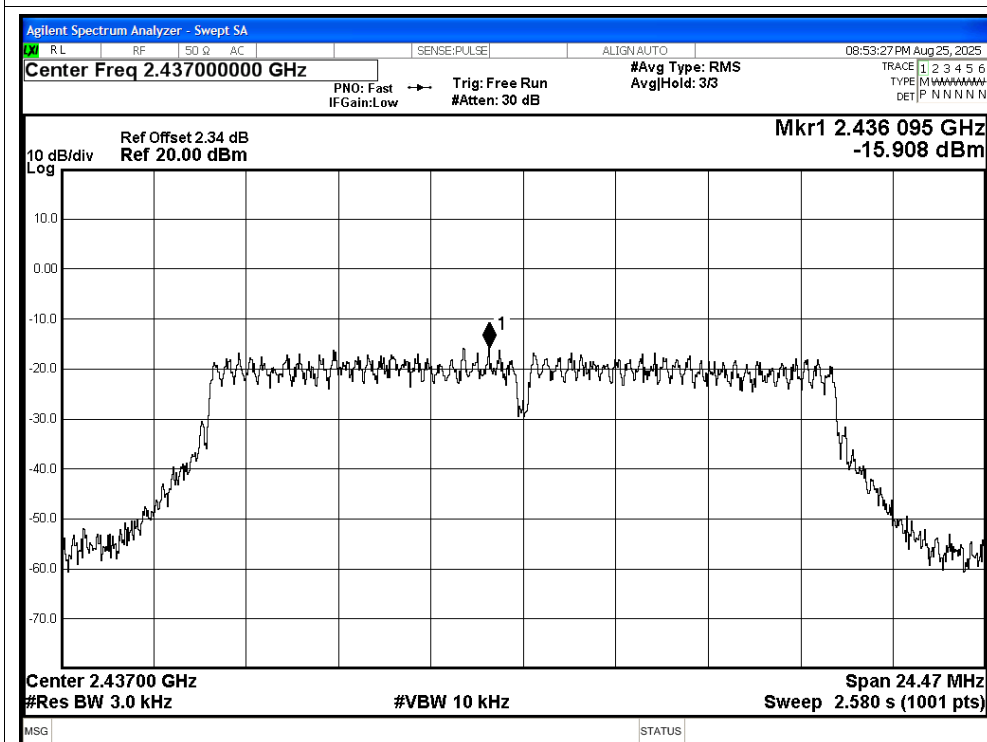


PSD NVNT g 2462MHz Ant1

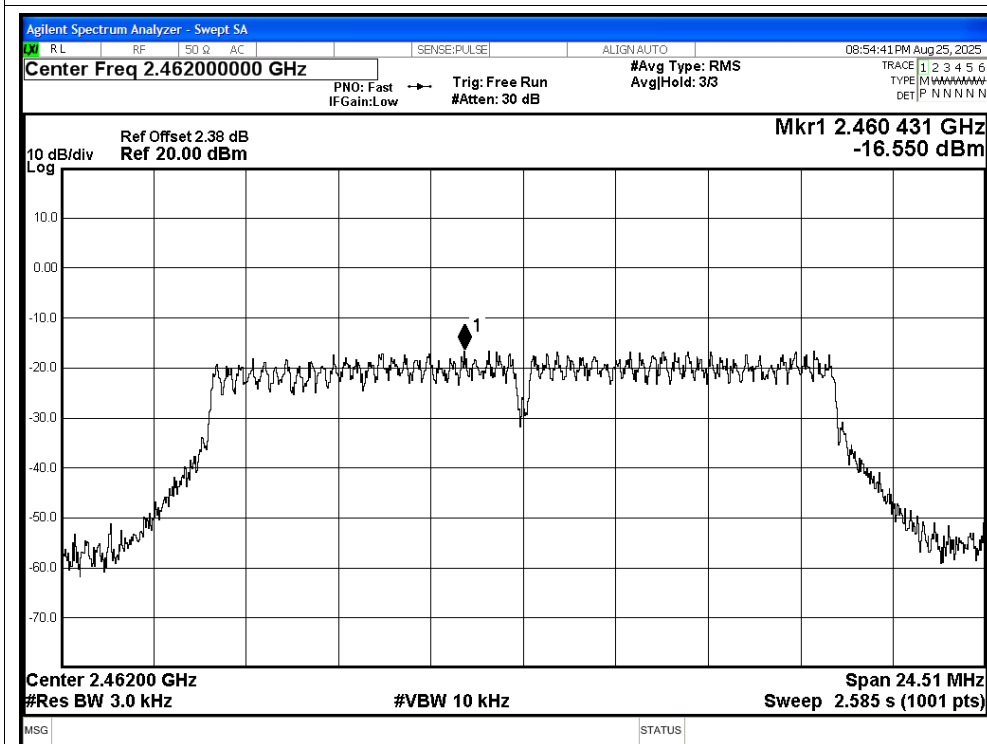

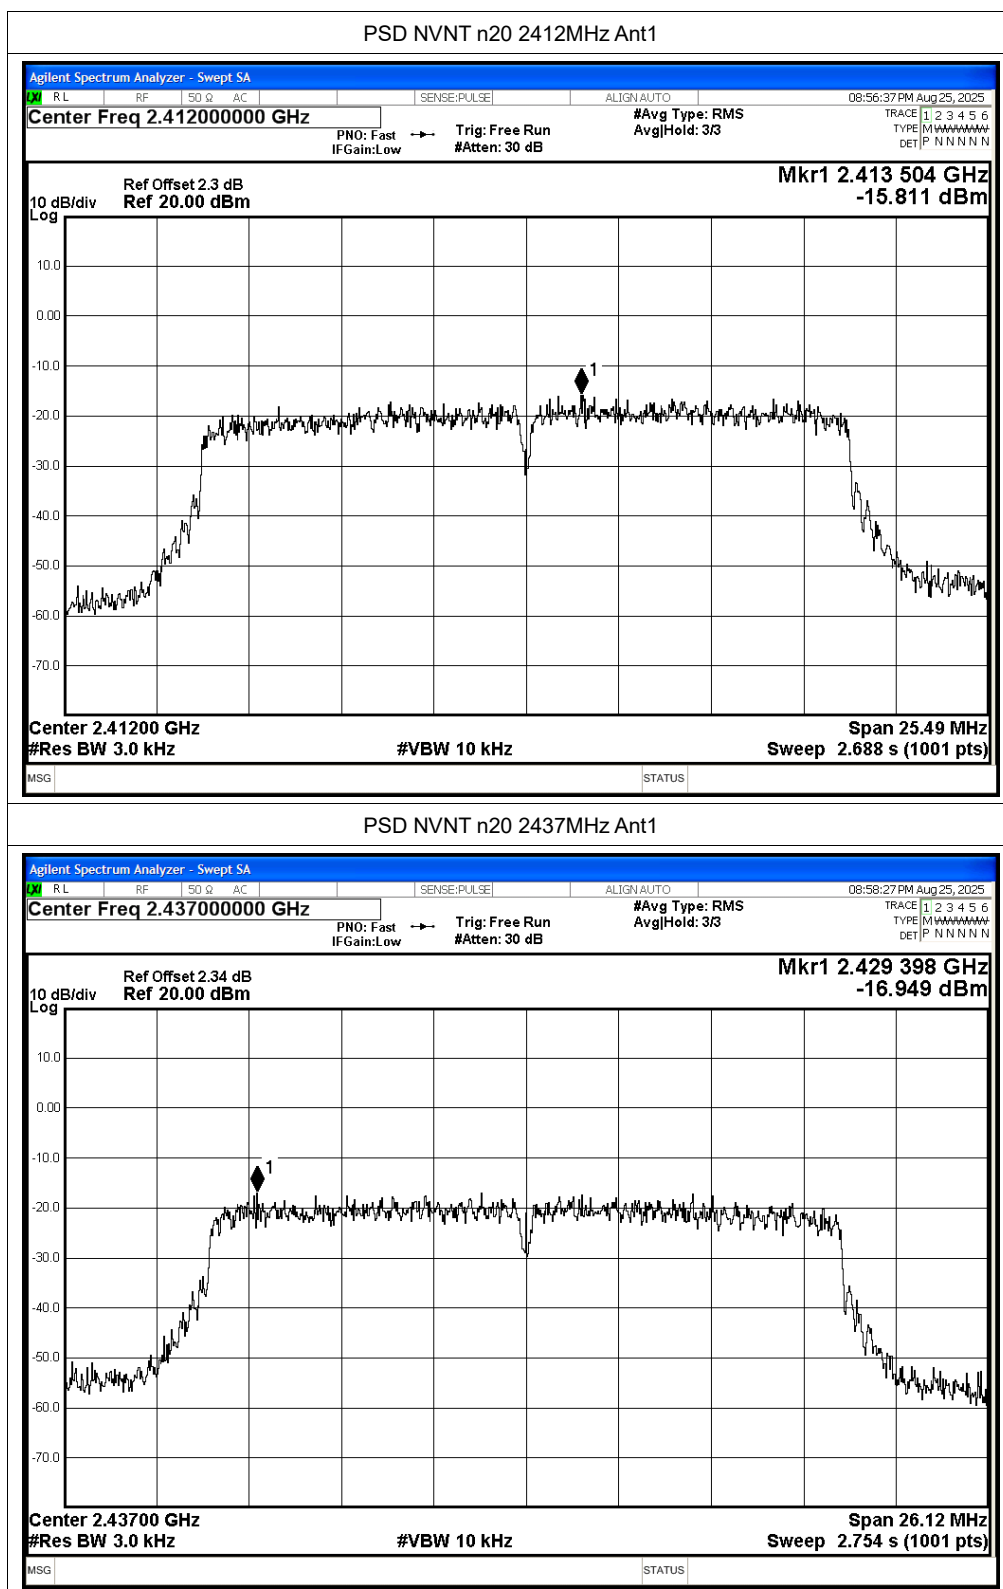


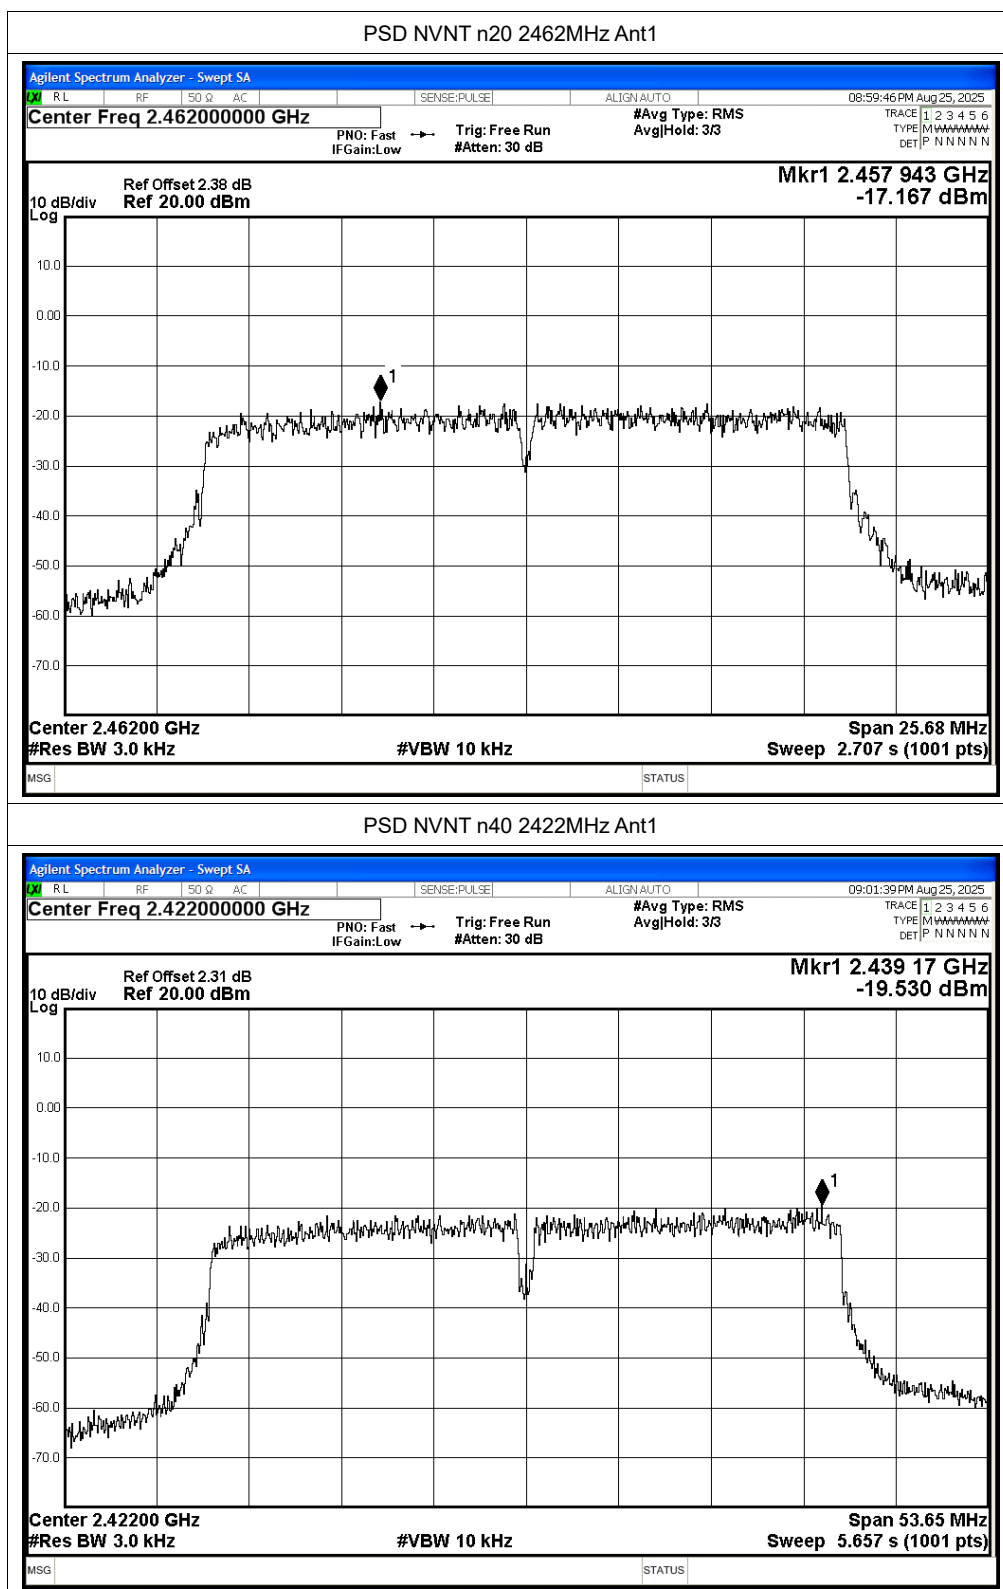


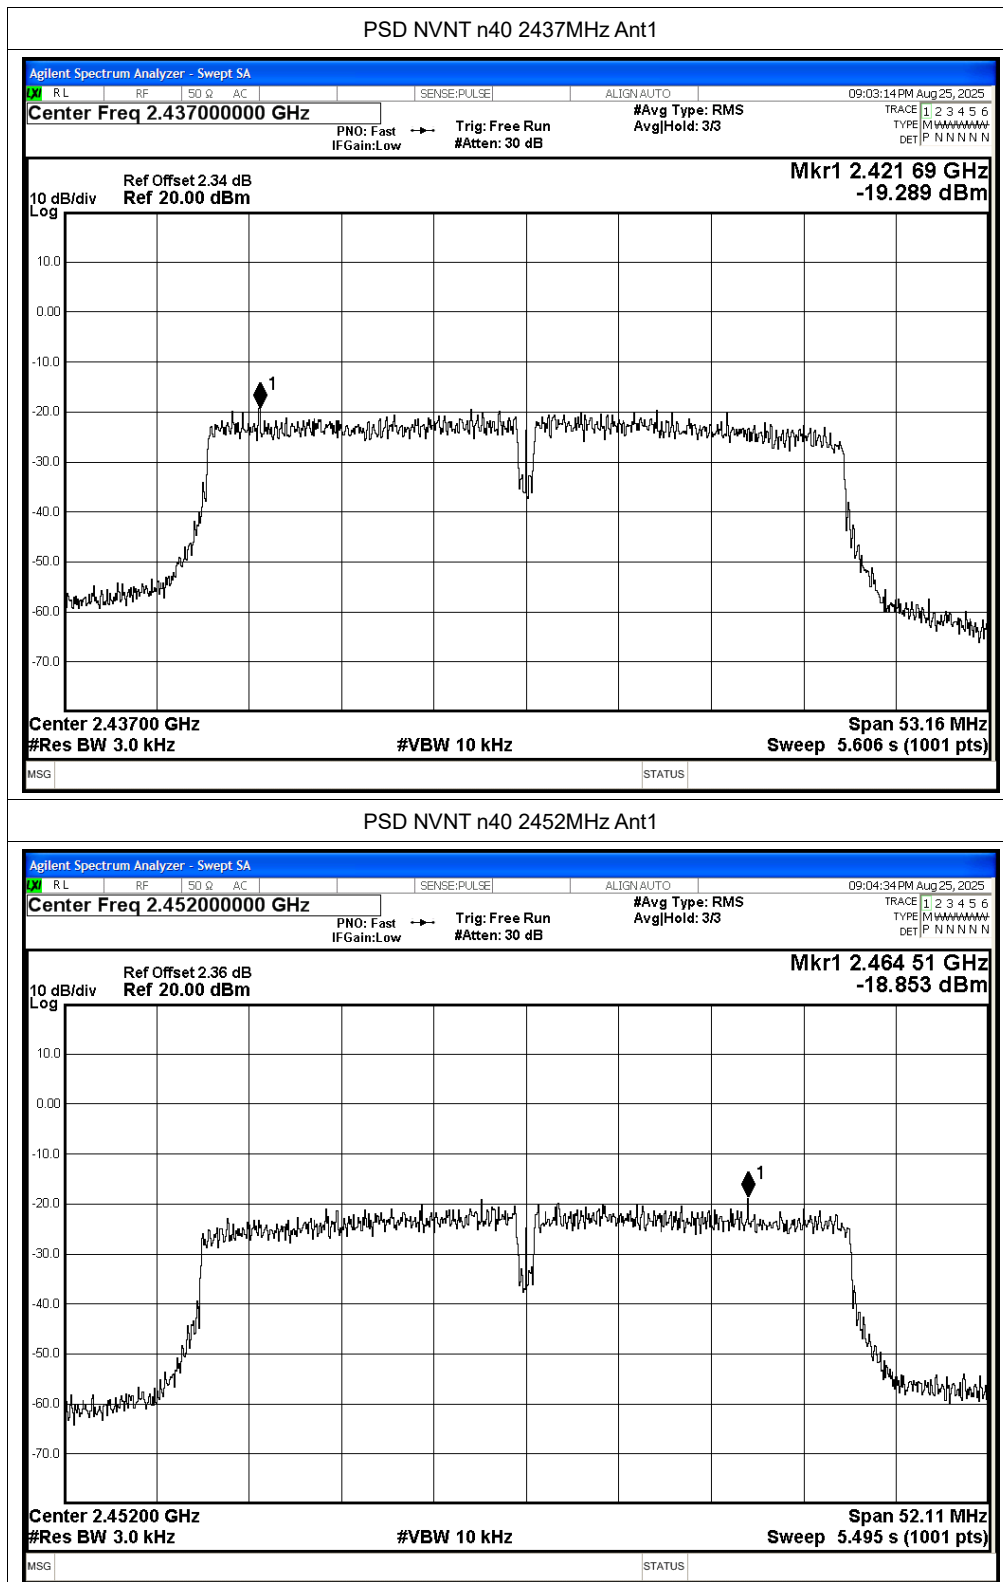



B.4 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-48.83	-20	Pass
NVNT	b	2462	Ant1	-59.38	-20	Pass
NVNT	g	2412	Ant1	-31.07	-20	Pass
NVNT	g	2462	Ant1	-40.02	-20	Pass
NVNT	n20	2412	Ant1	-33.53	-20	Pass
NVNT	n20	2462	Ant1	-37.23	-20	Pass
NVNT	n40	2422	Ant1	-34.86	-20	Pass
NVNT	n40	2452	Ant1	-36.7	-20	Pass


Band Edge NVNT b 2412MHz Ant1 Ref

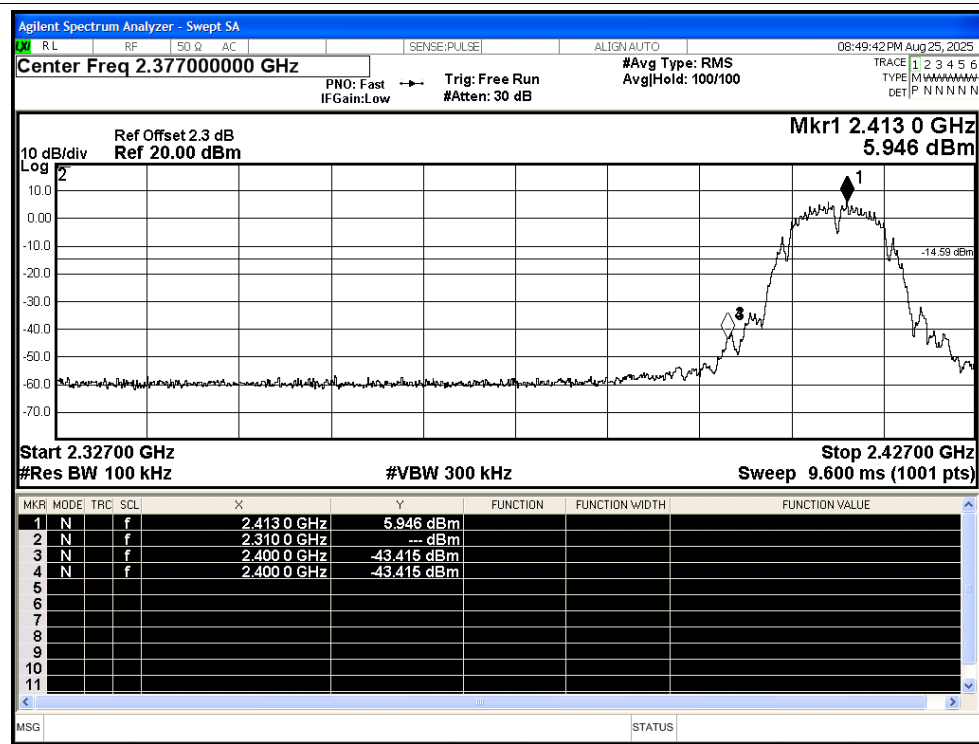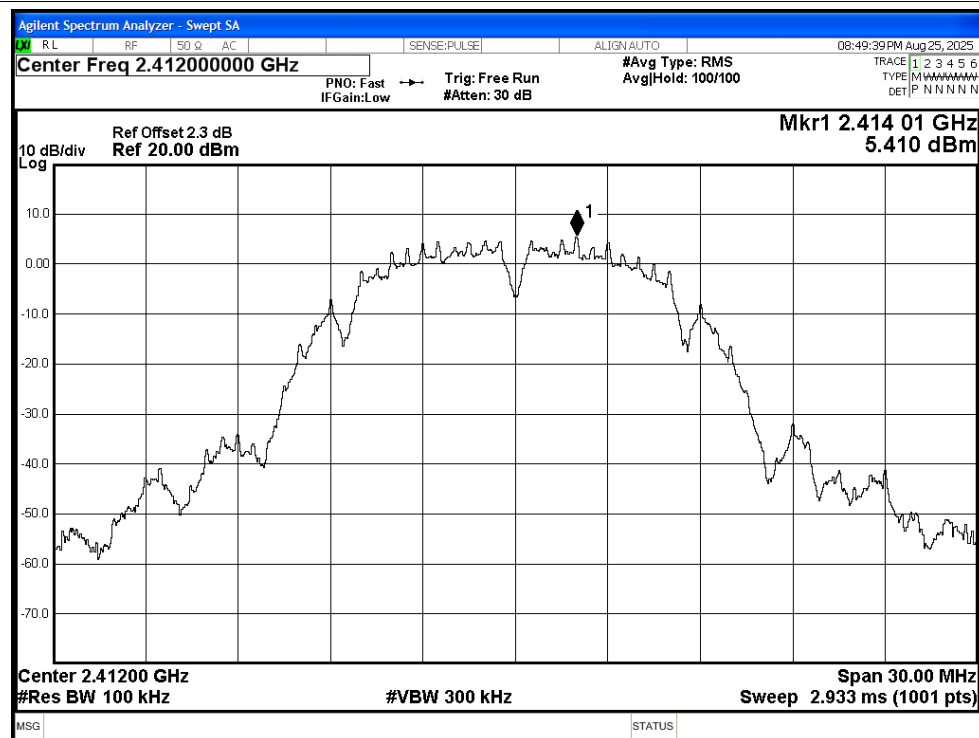


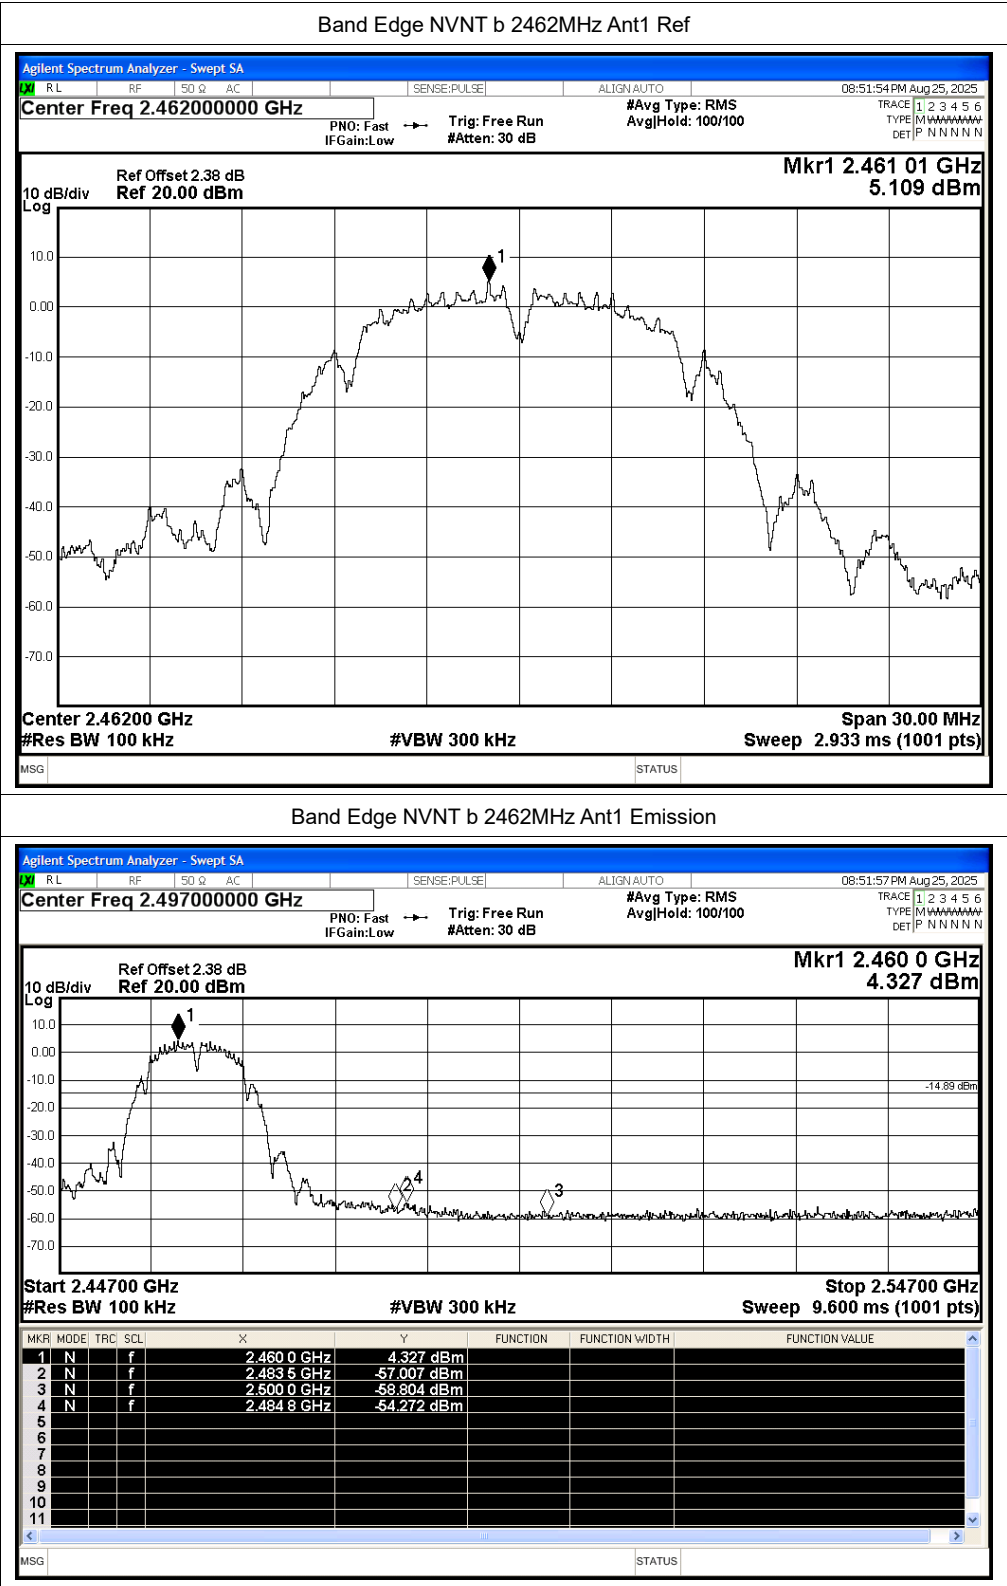


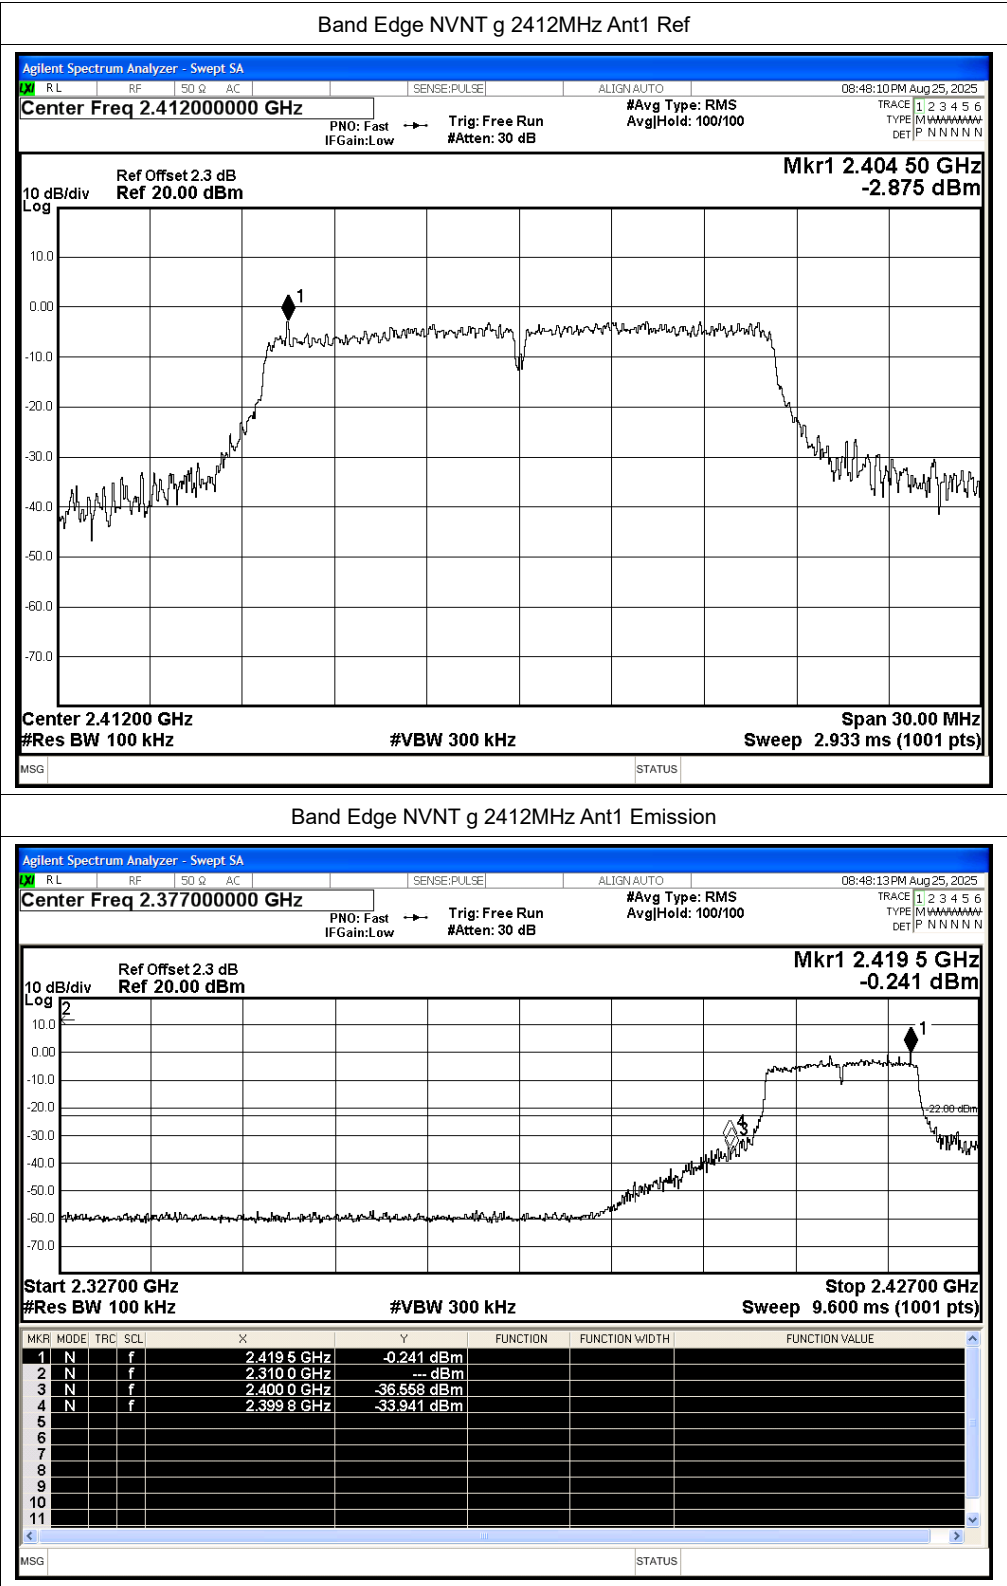


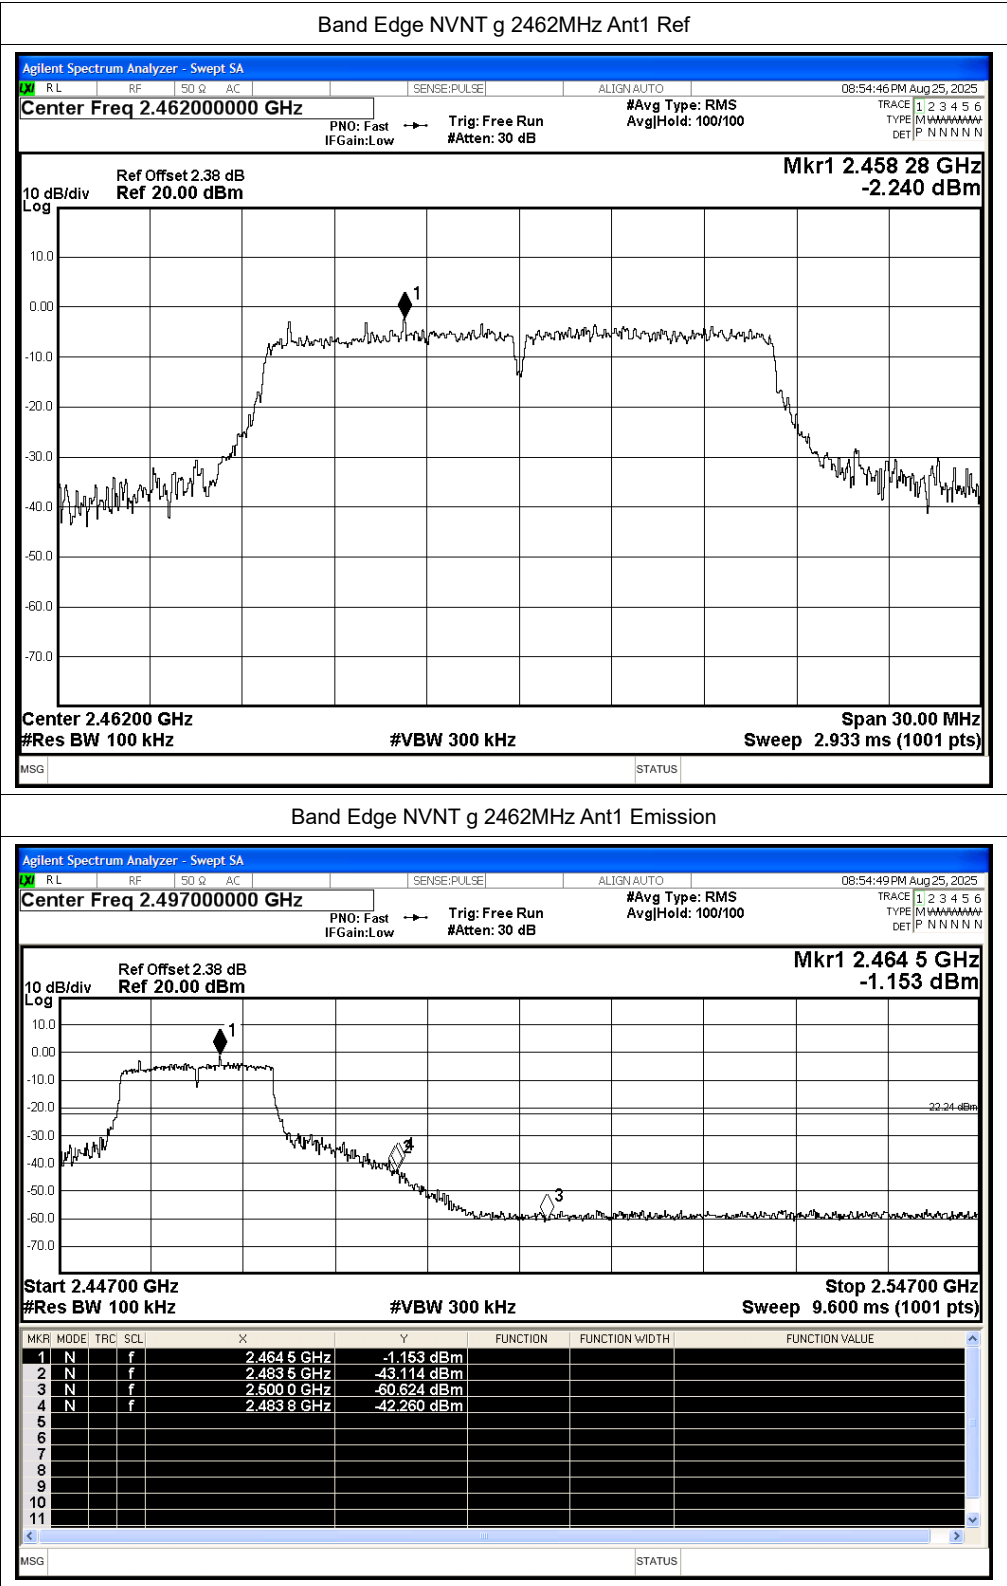

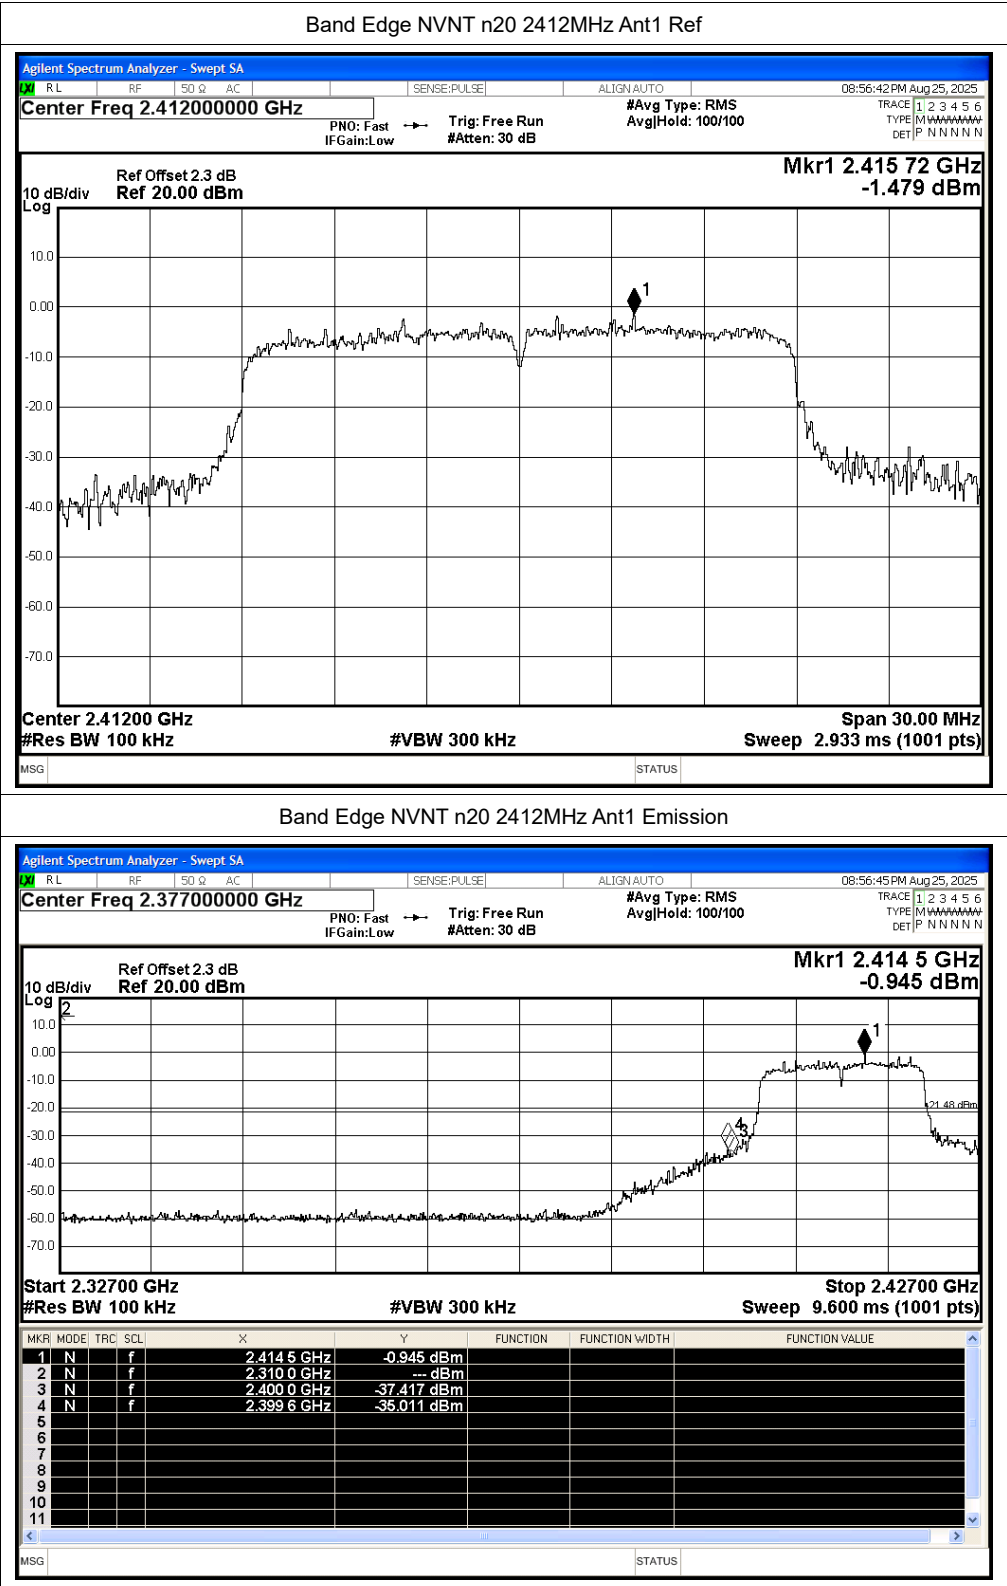

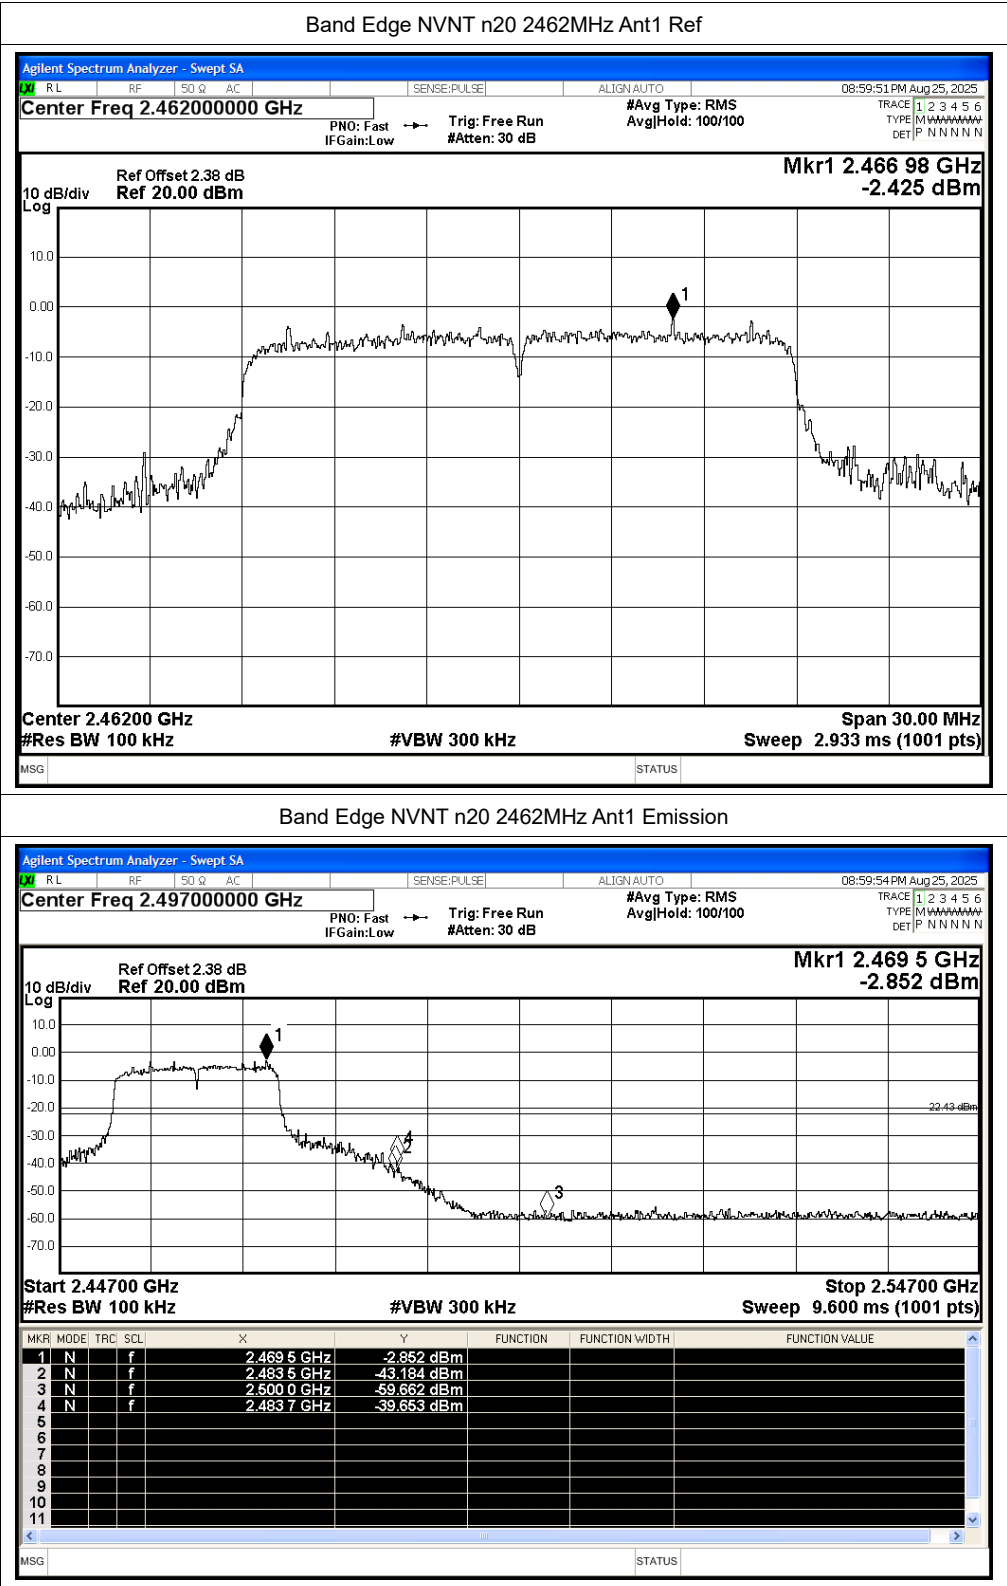

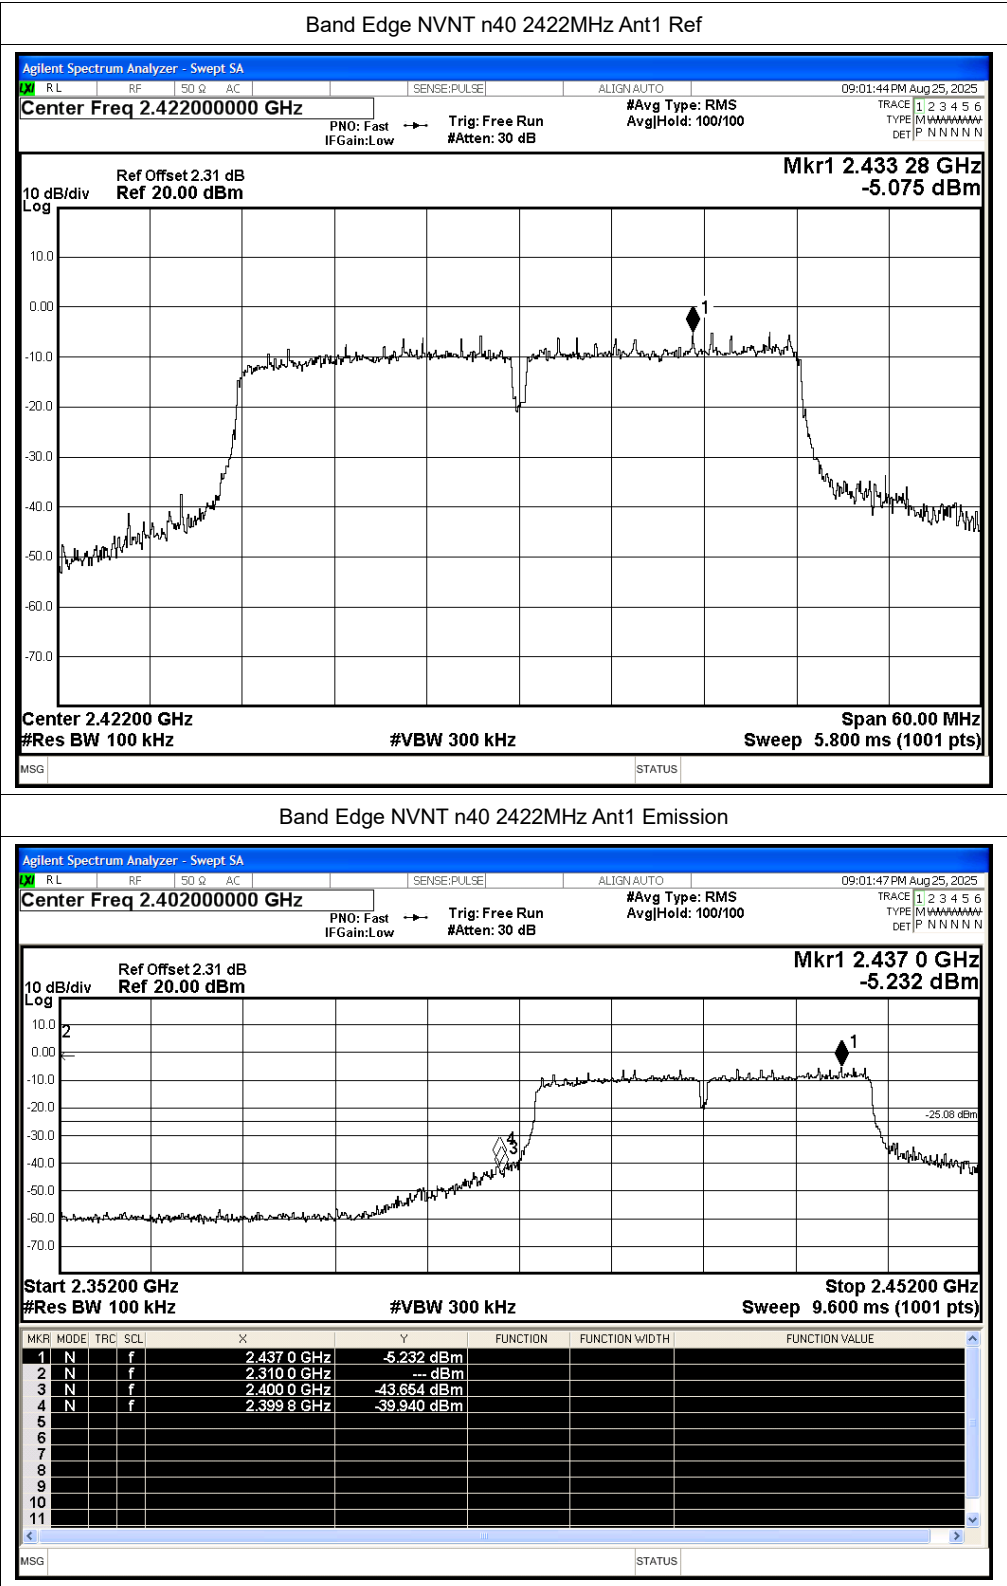


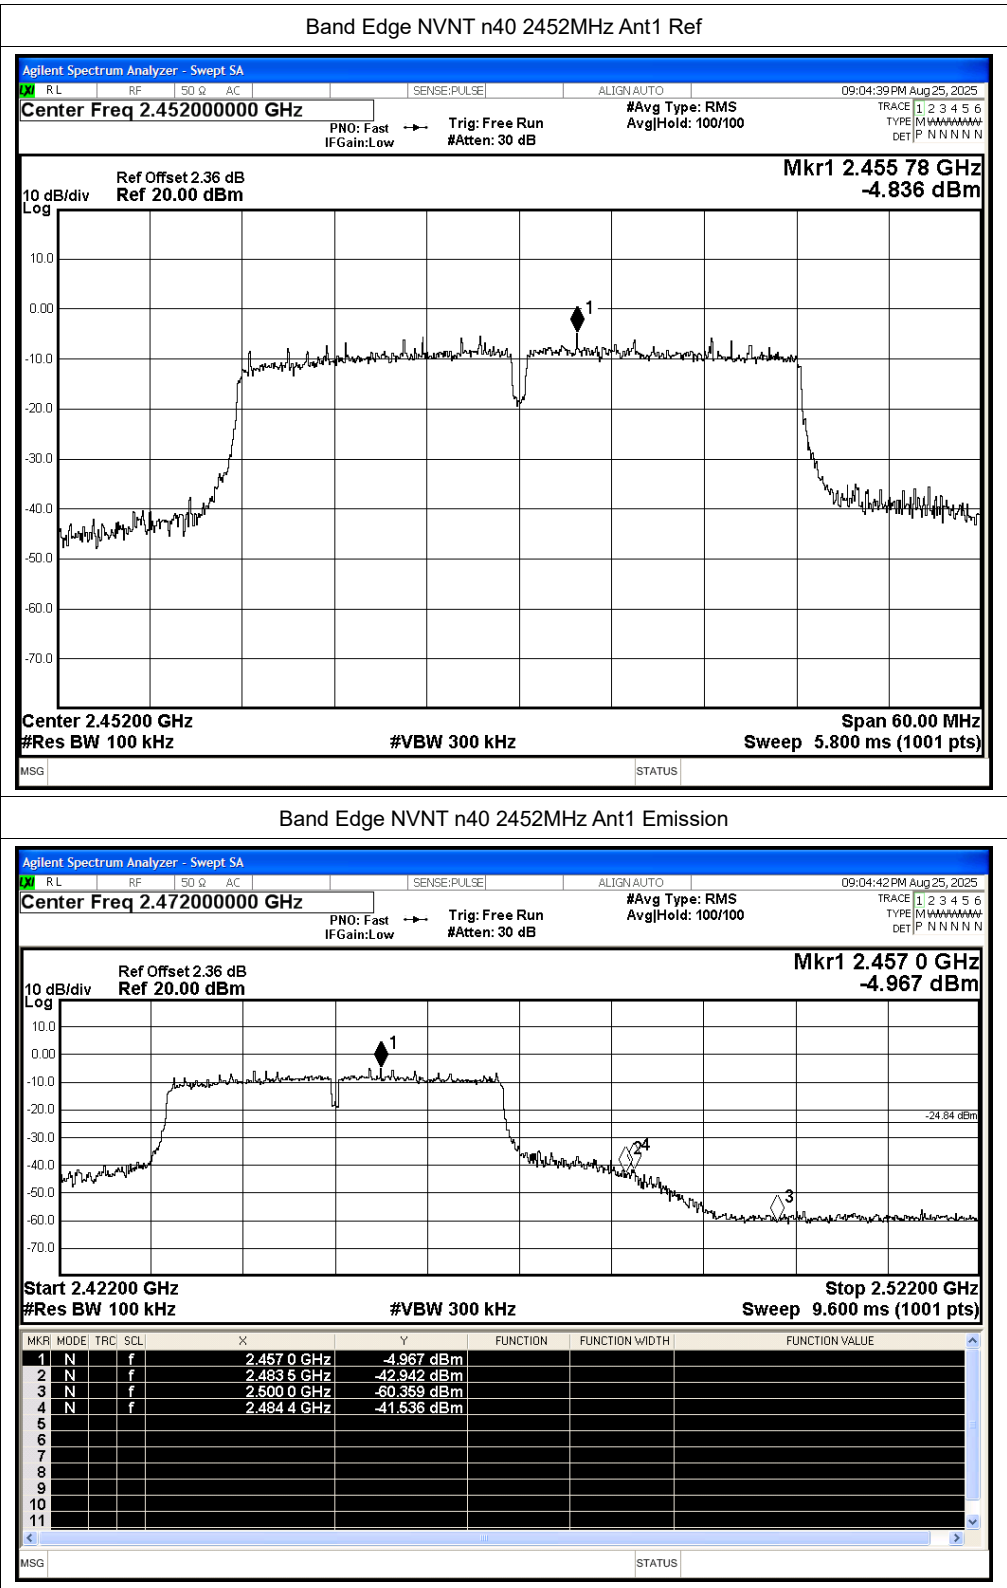



B.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-50.26	-20	Pass
NVNT	b	2437	Ant1	-51.52	-20	Pass
NVNT	b	2462	Ant1	-50.38	-20	Pass
NVNT	g	2412	Ant1	-44.57	-20	Pass
NVNT	g	2437	Ant1	-45.06	-20	Pass
NVNT	g	2462	Ant1	-44.72	-20	Pass
NVNT	n20	2412	Ant1	-44.75	-20	Pass
NVNT	n20	2437	Ant1	-44.23	-20	Pass
NVNT	n20	2462	Ant1	-43	-20	Pass
NVNT	n40	2422	Ant1	-40.29	-20	Pass
NVNT	n40	2437	Ant1	-41.39	-20	Pass
NVNT	n40	2452	Ant1	-40.4	-20	Pass


Tx. Spurious NVNT b 2412MHz Ant1 Ref

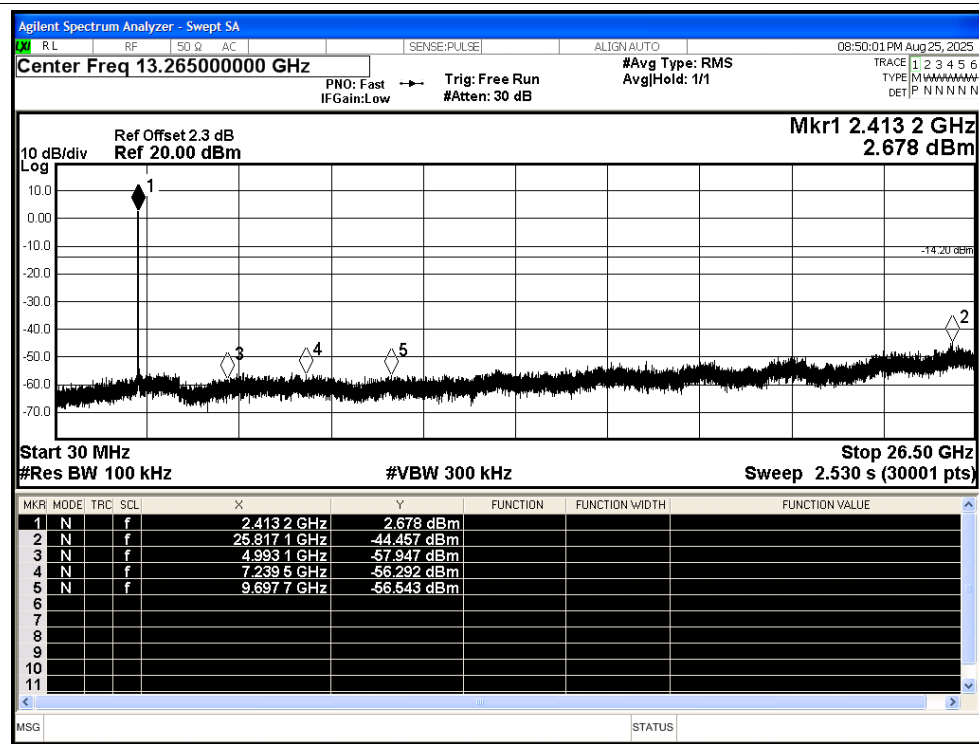


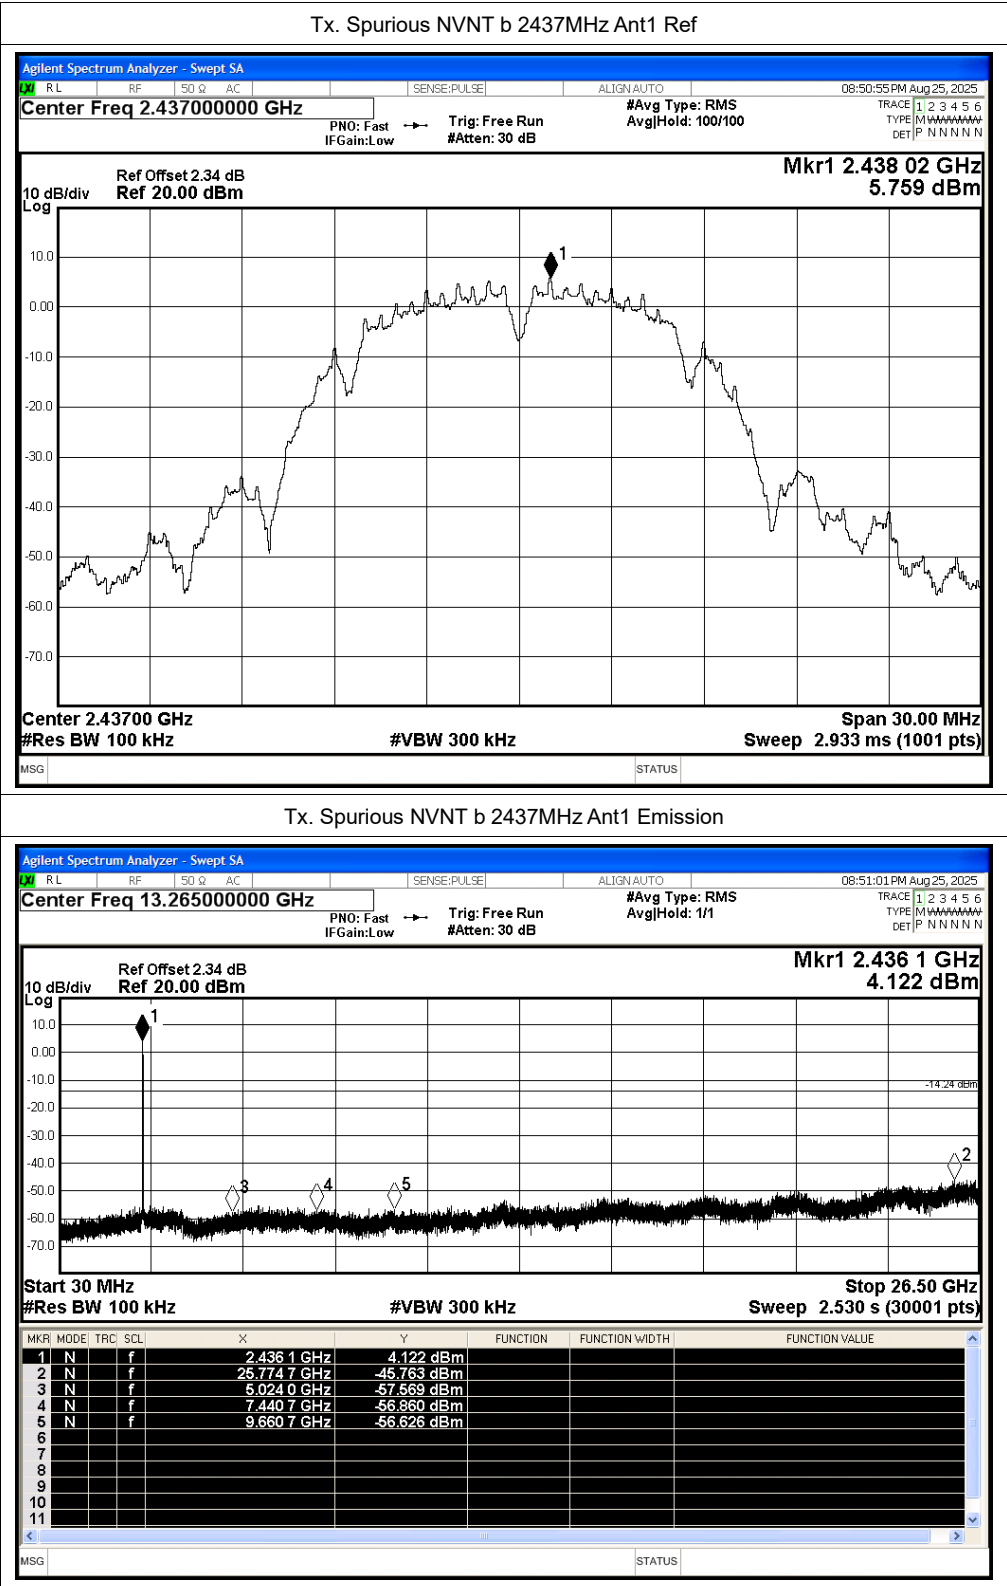


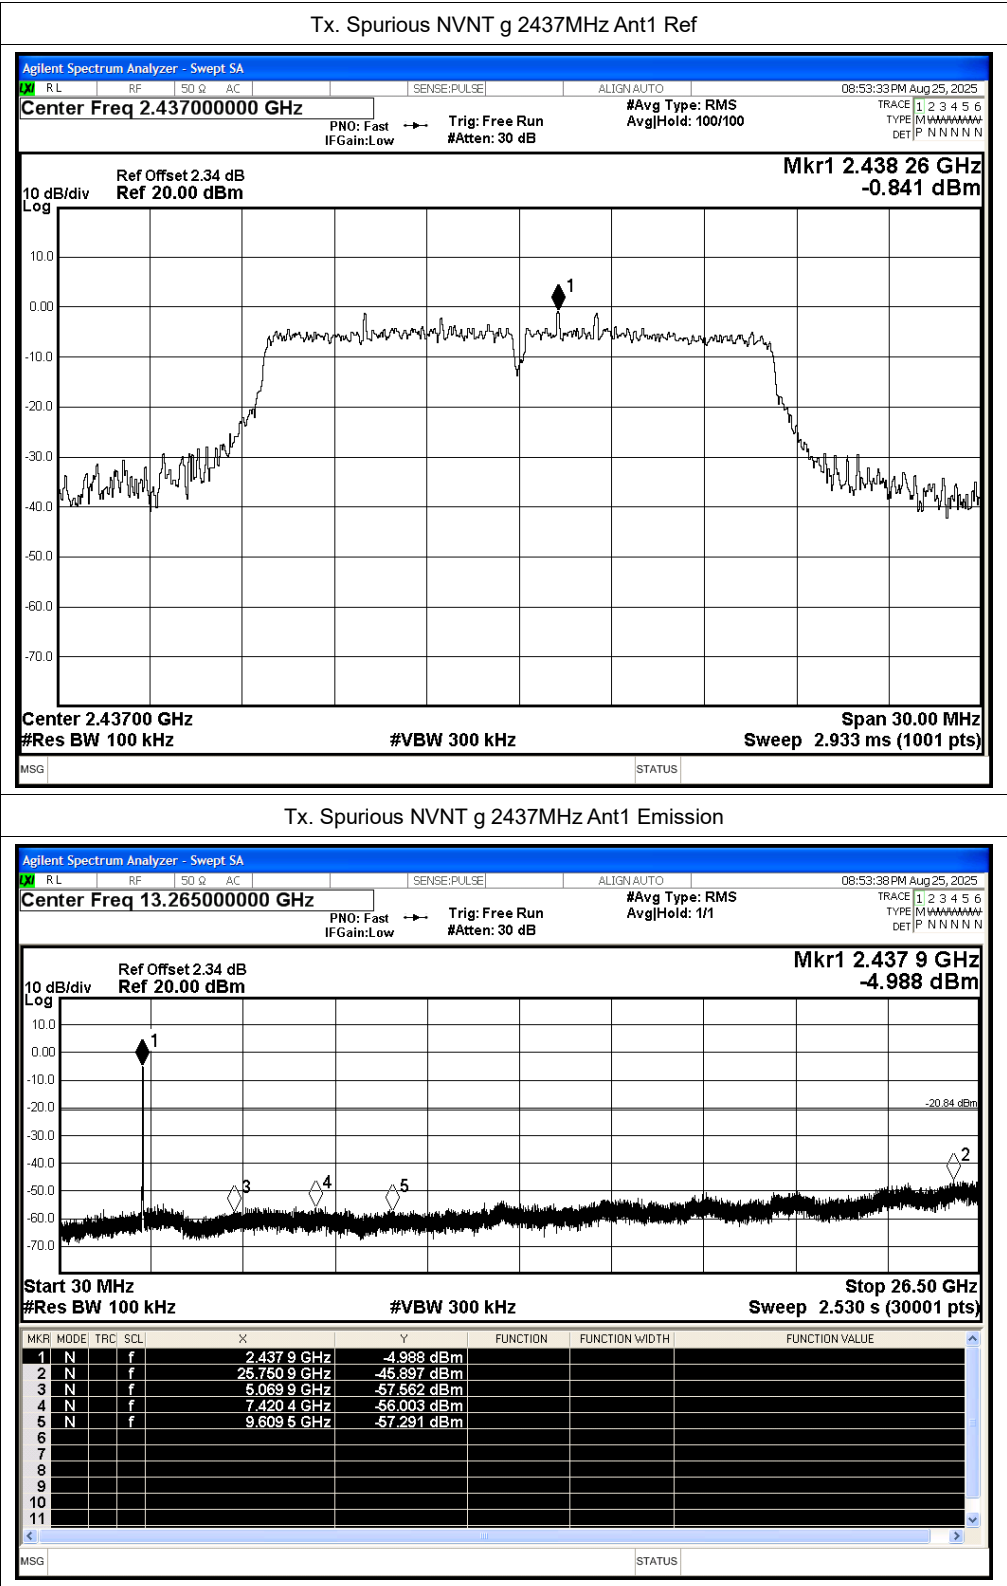

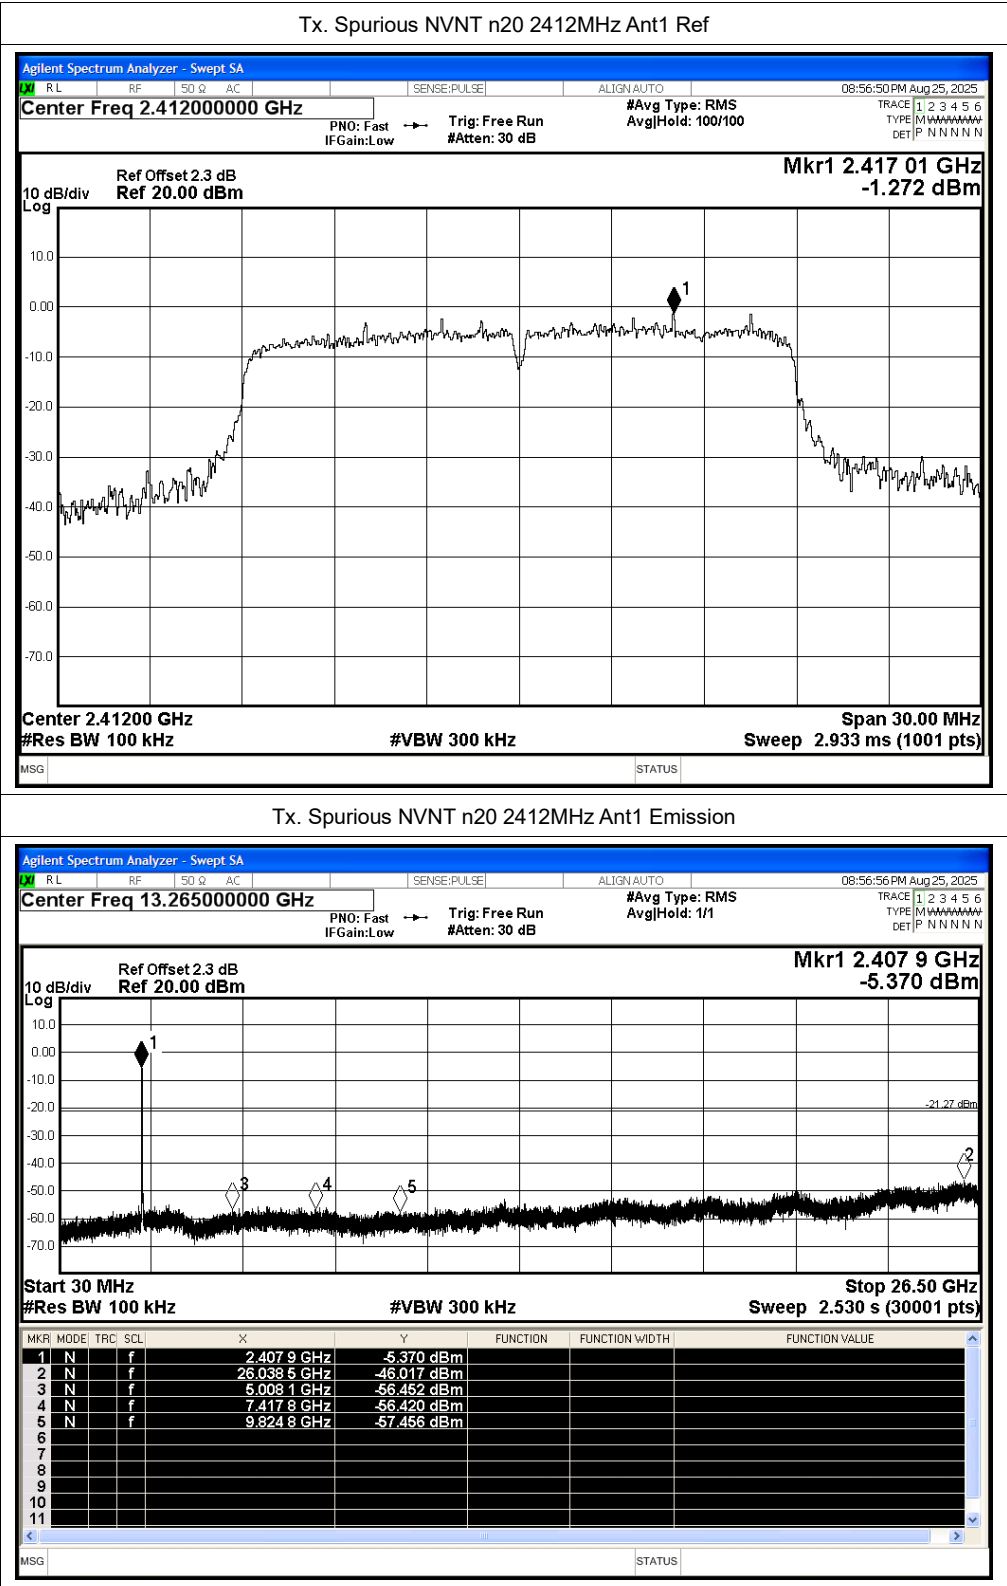

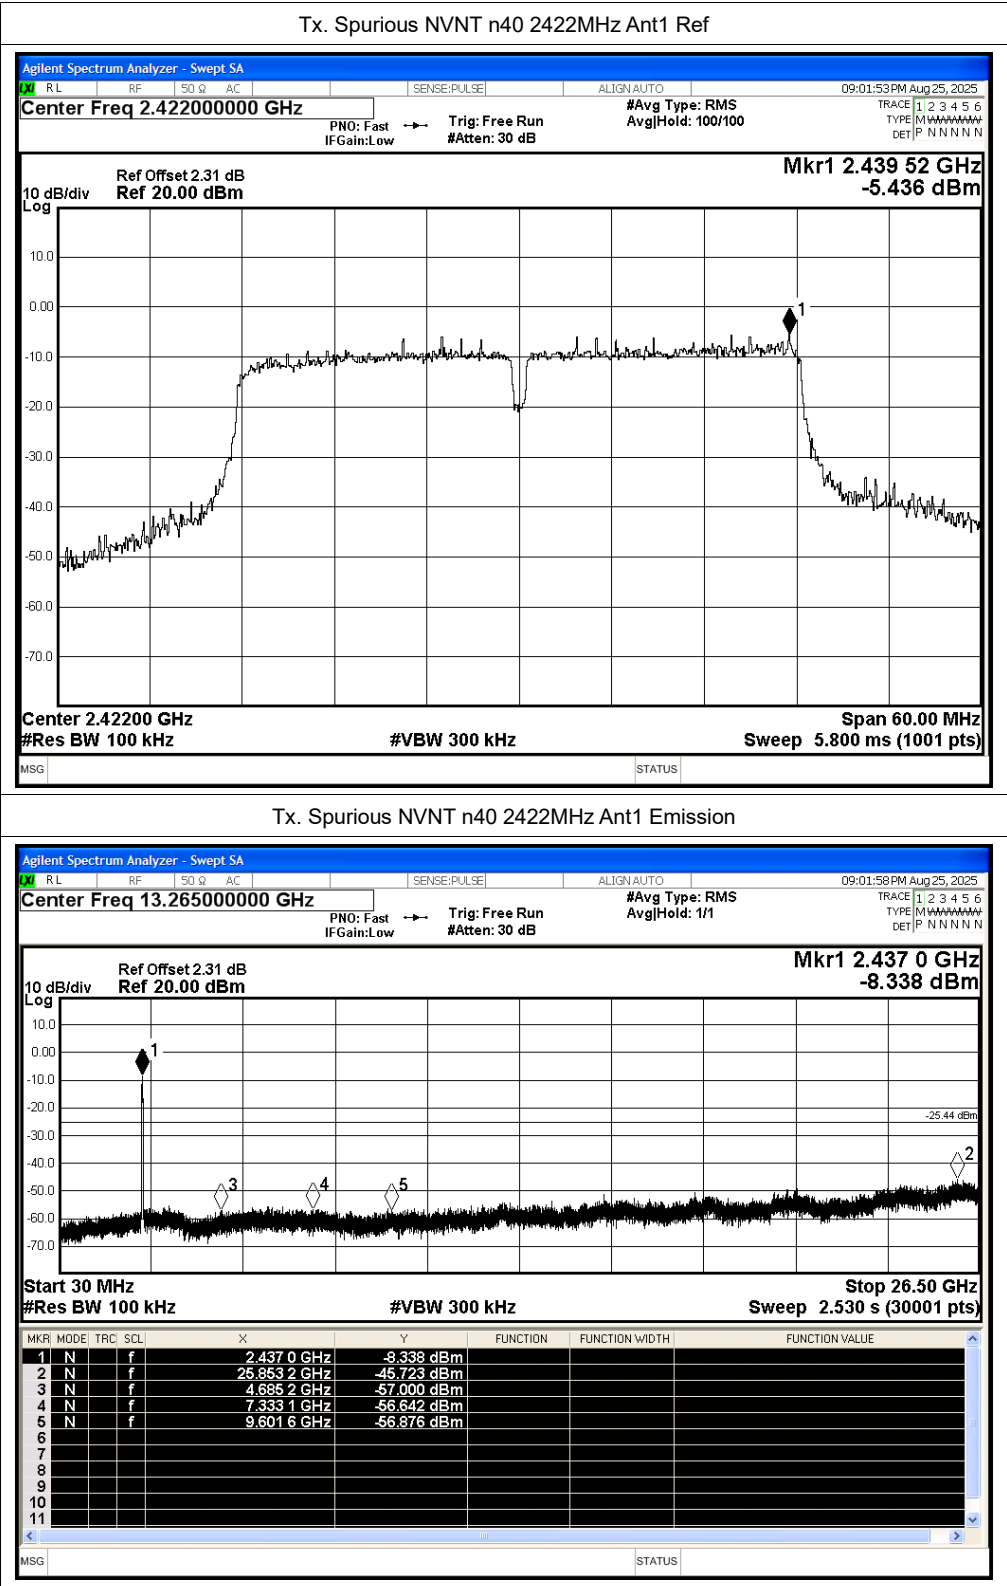


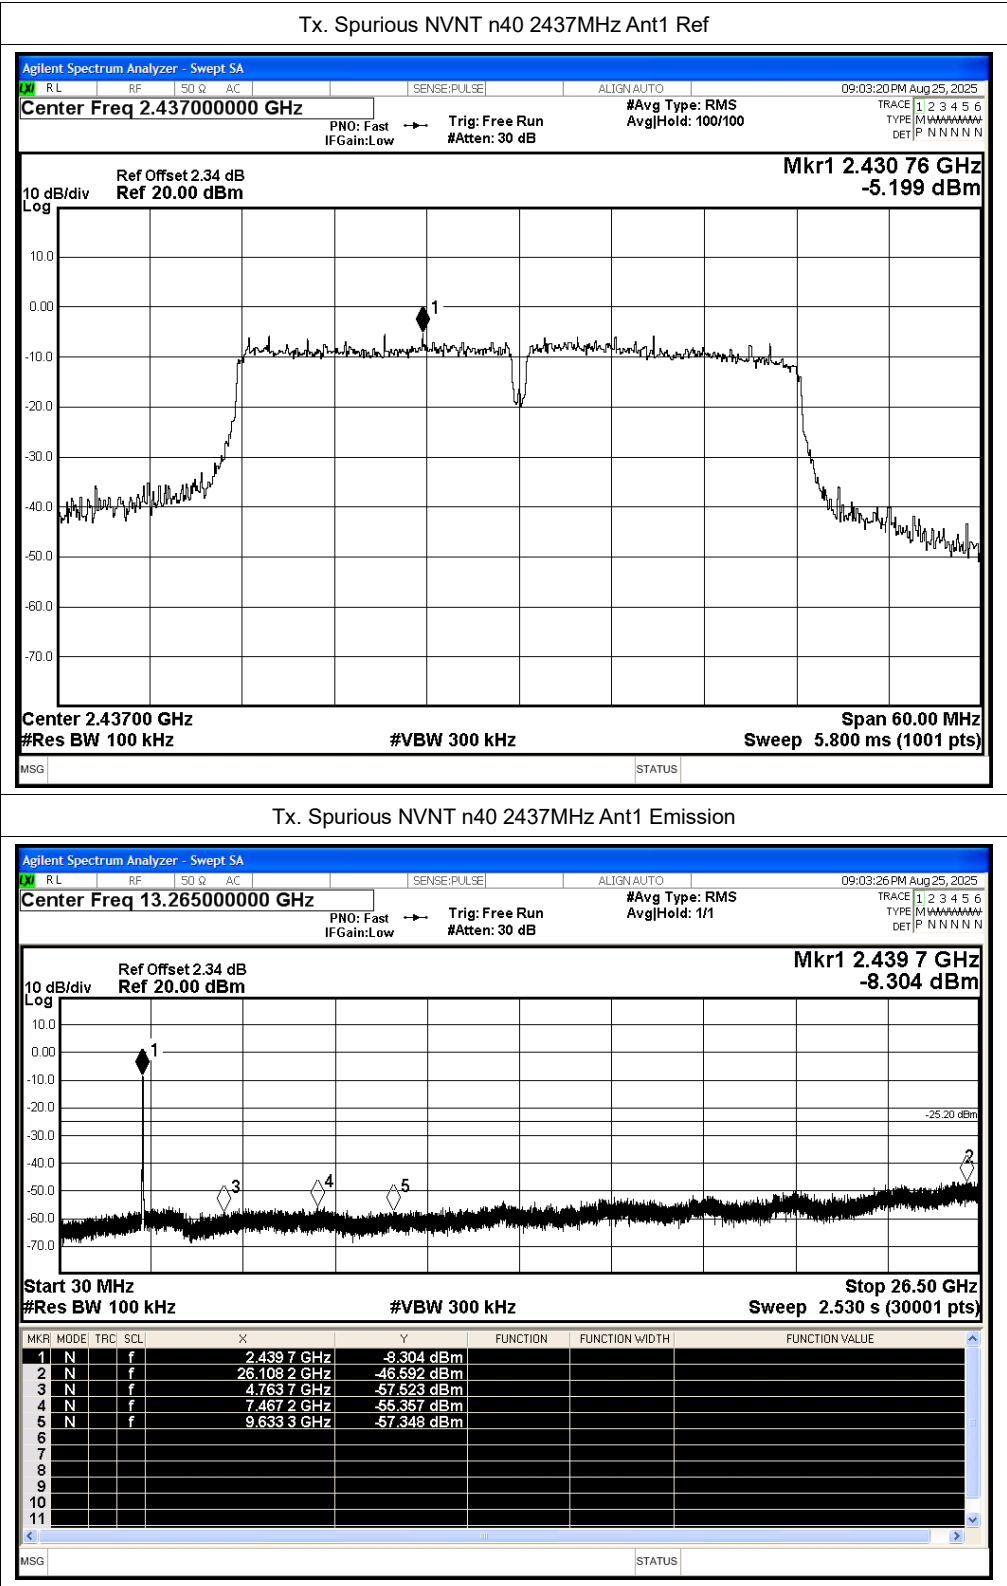


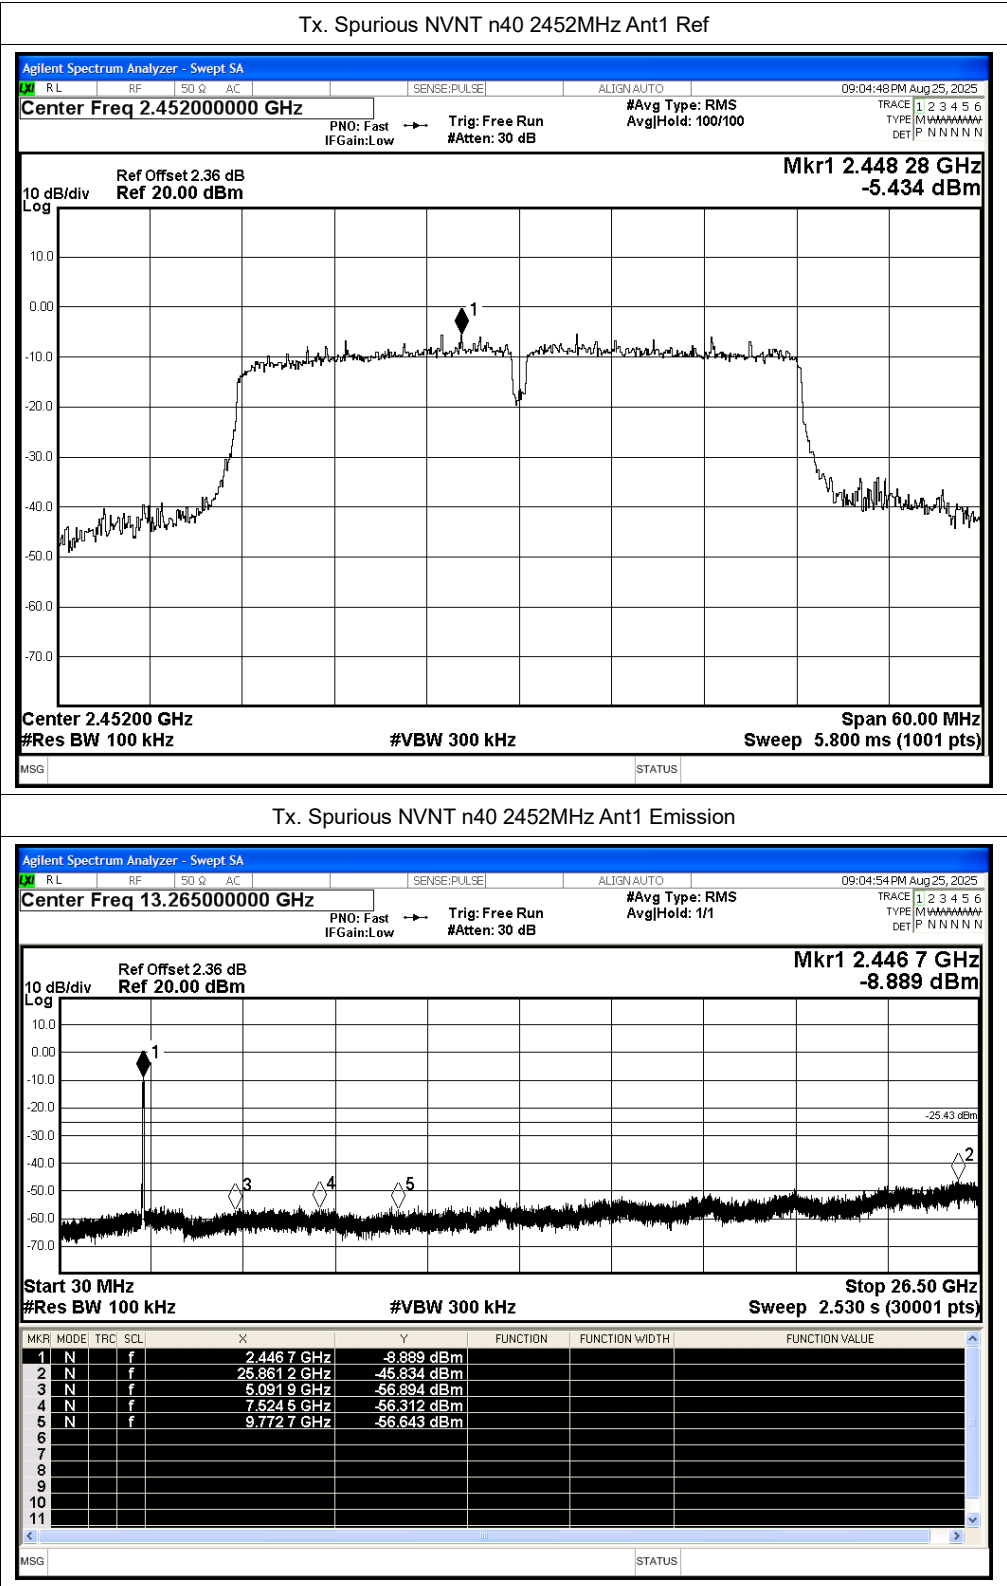



B.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.16	0	0.15
NVNT	b	2437	Ant1	99.16	0	0.15
NVNT	b	2462	Ant1	99.16	0	0.15
NVNT	g	2412	Ant1	97.68	0.1	0.37
NVNT	g	2437	Ant1	97.75	0.1	0.37
NVNT	g	2462	Ant1	97.75	0.1	0.37
NVNT	n20	2412	Ant1	97.33	0.12	0.44
NVNT	n20	2437	Ant1	97.25	0.12	0.44
NVNT	n20	2462	Ant1	97.33	0.12	0.44
NVNT	n40	2422	Ant1	94.71	0.24	0.9
NVNT	n40	2437	Ant1	94.7	0.24	0.9
NVNT	n40	2452	Ant1	94.71	0.24	0.9


Duty Cycle NVNT b 2412MHz Ant1

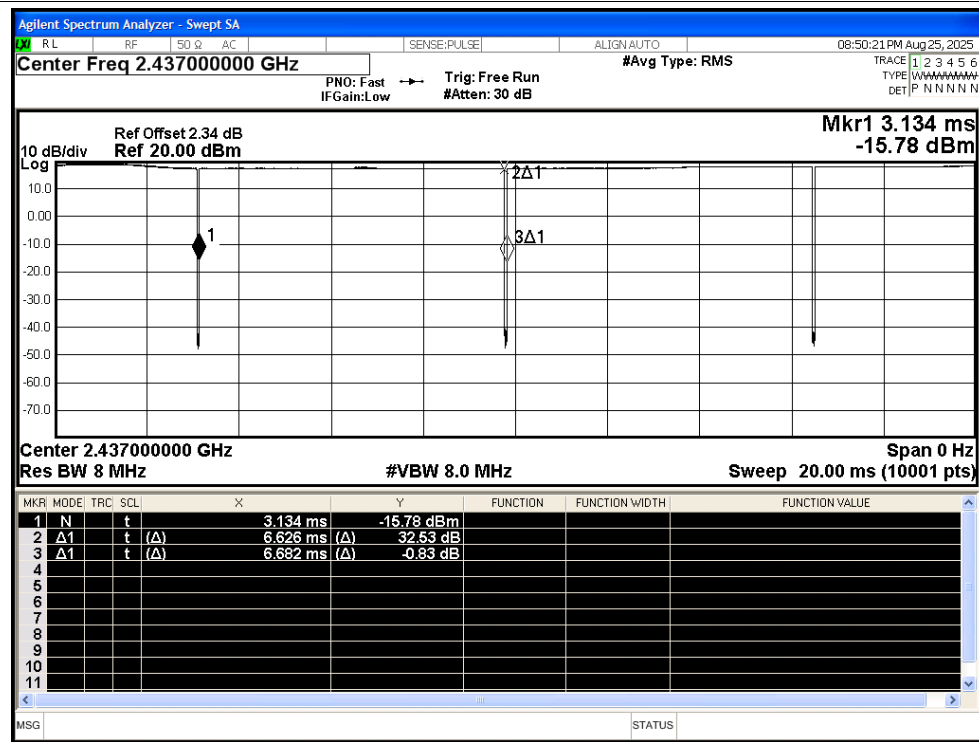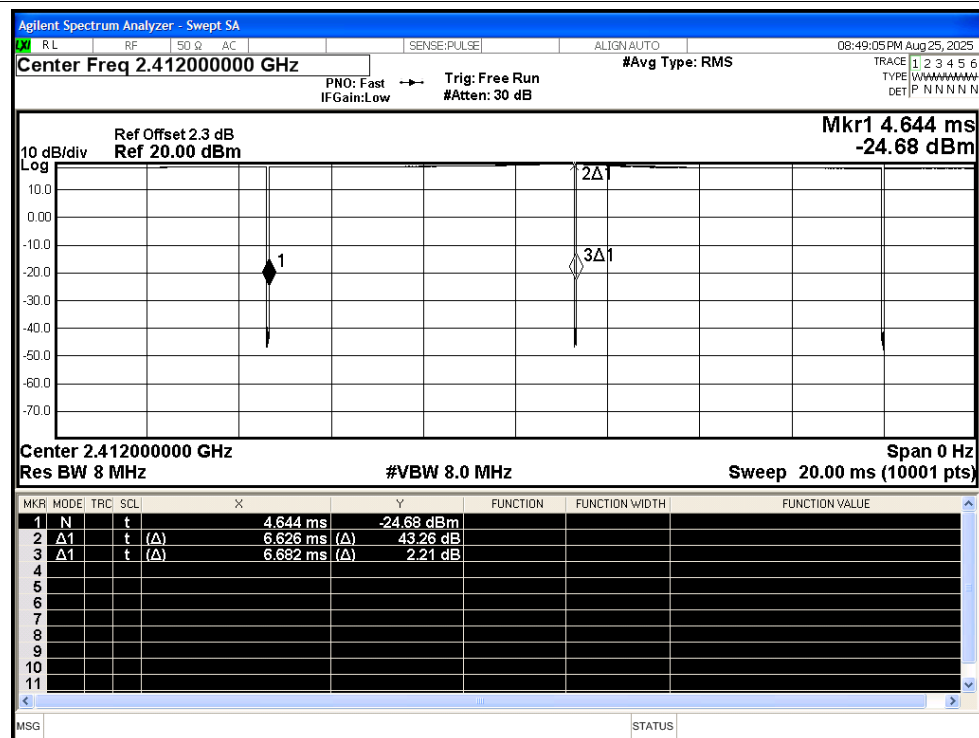


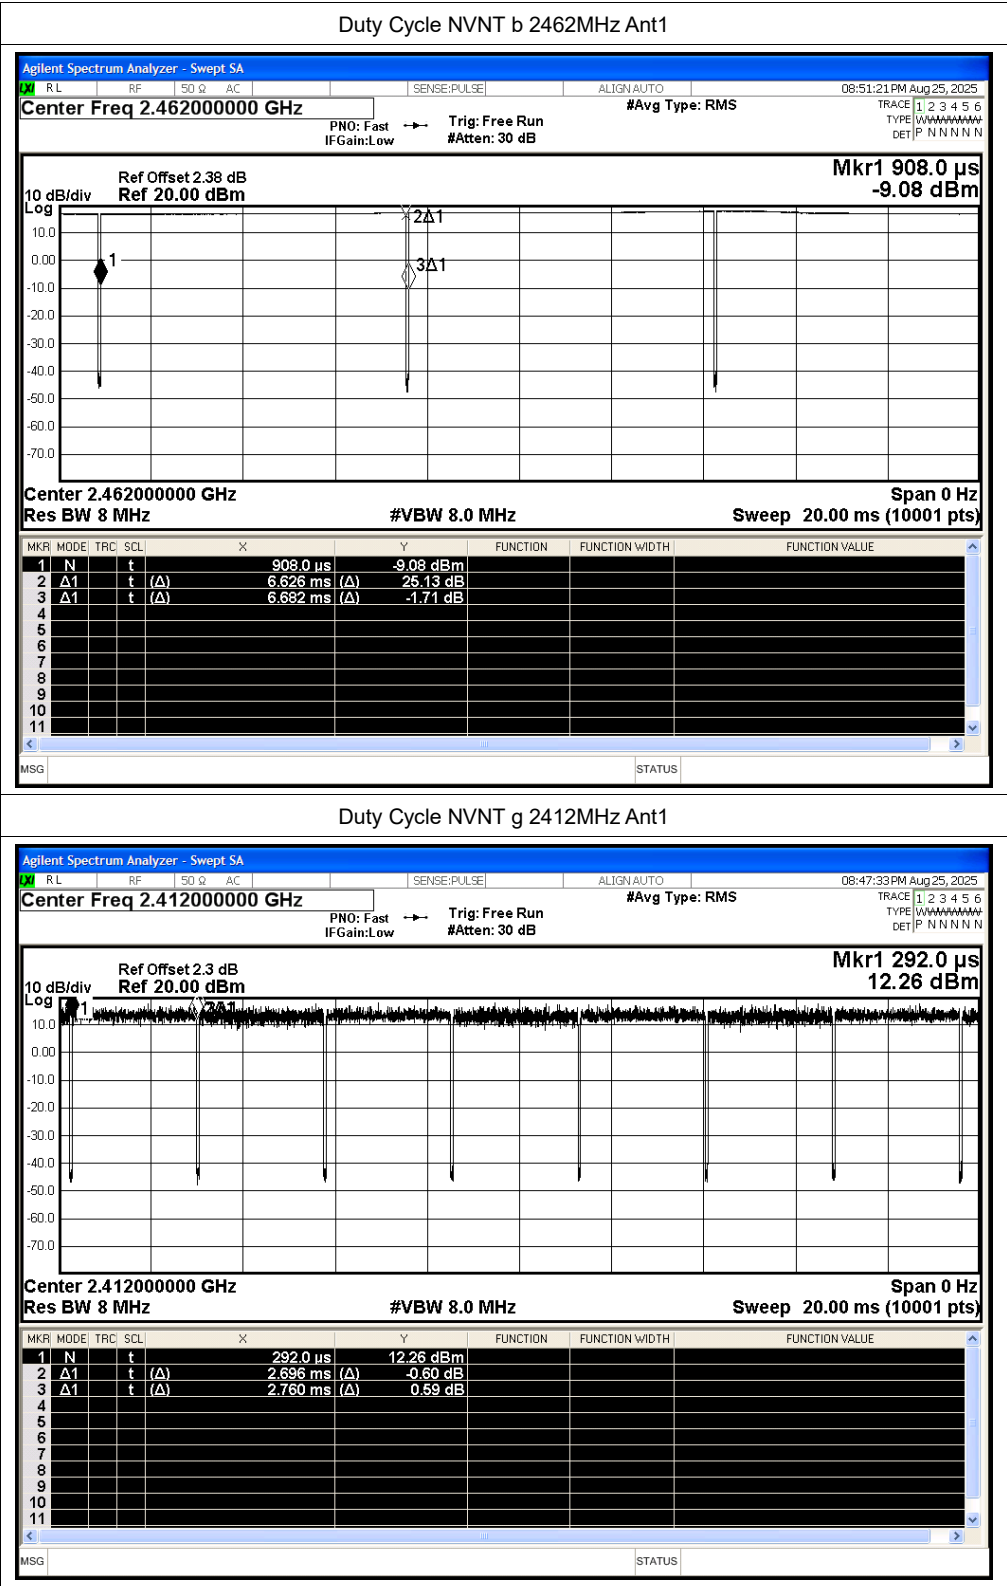

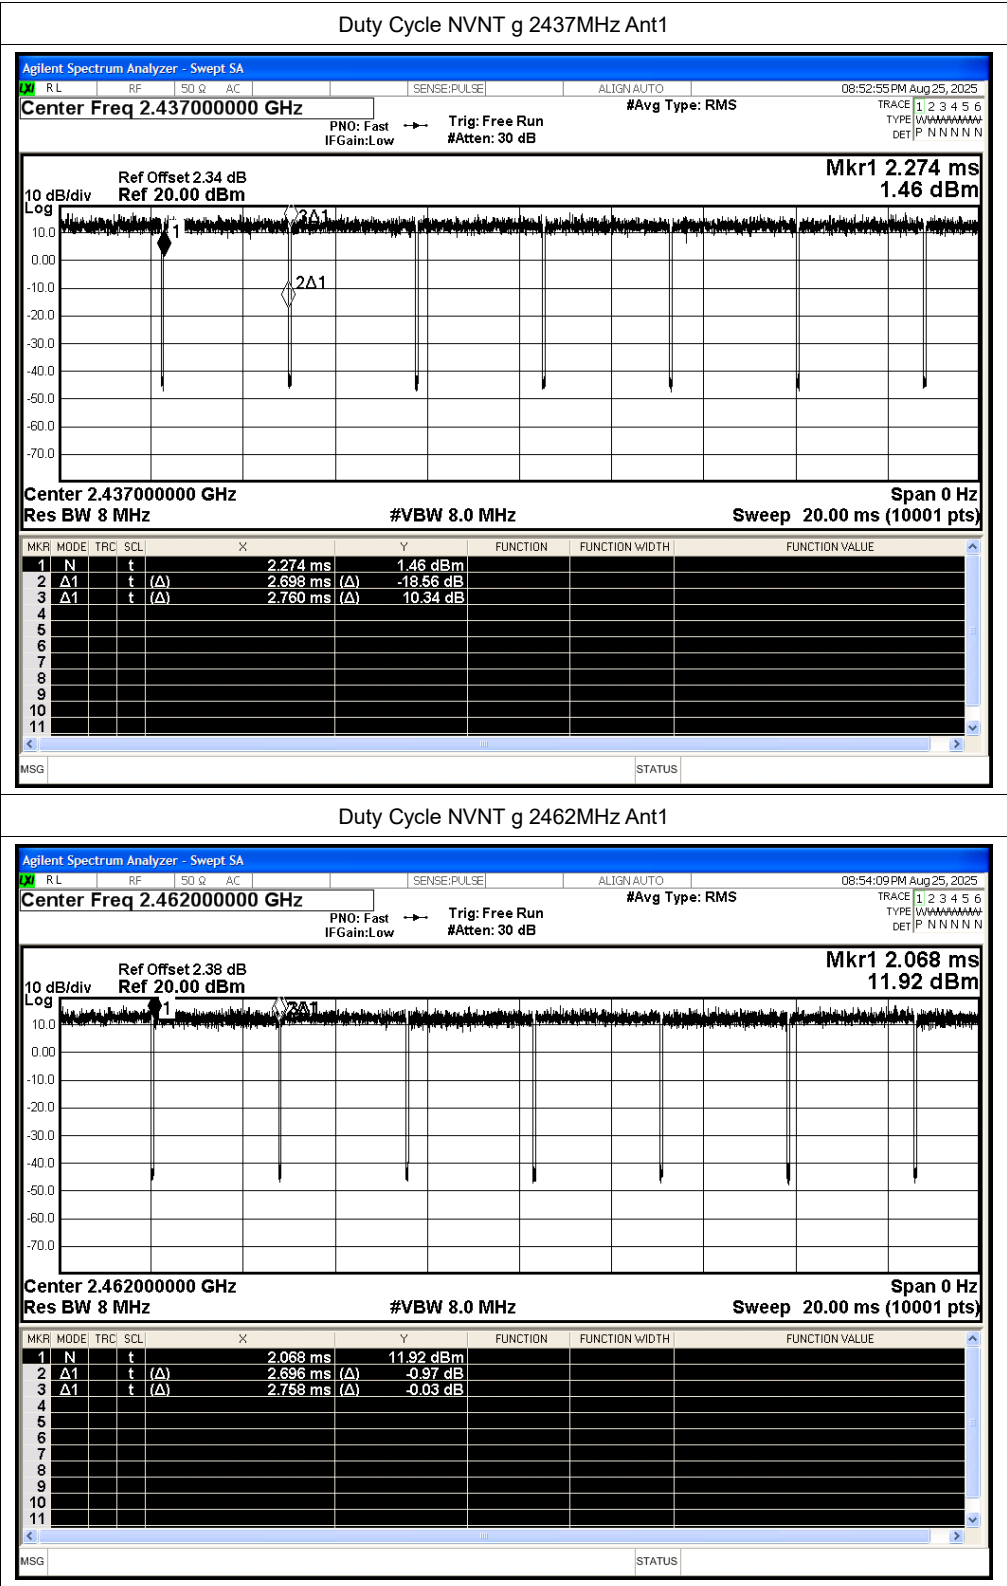

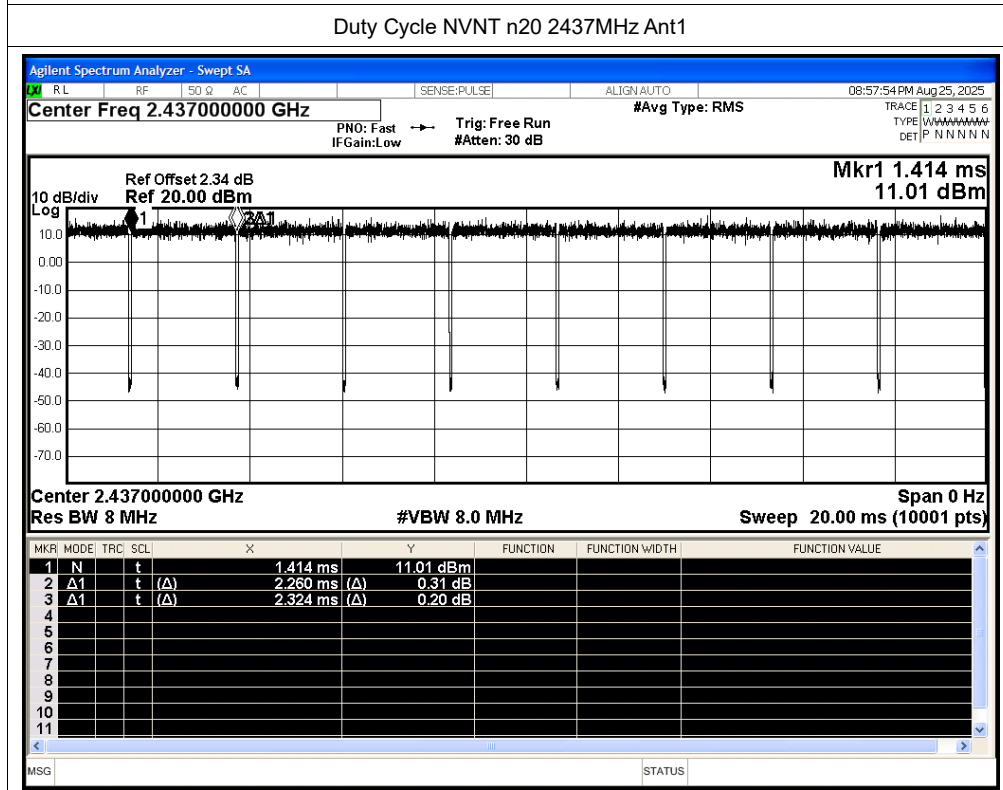

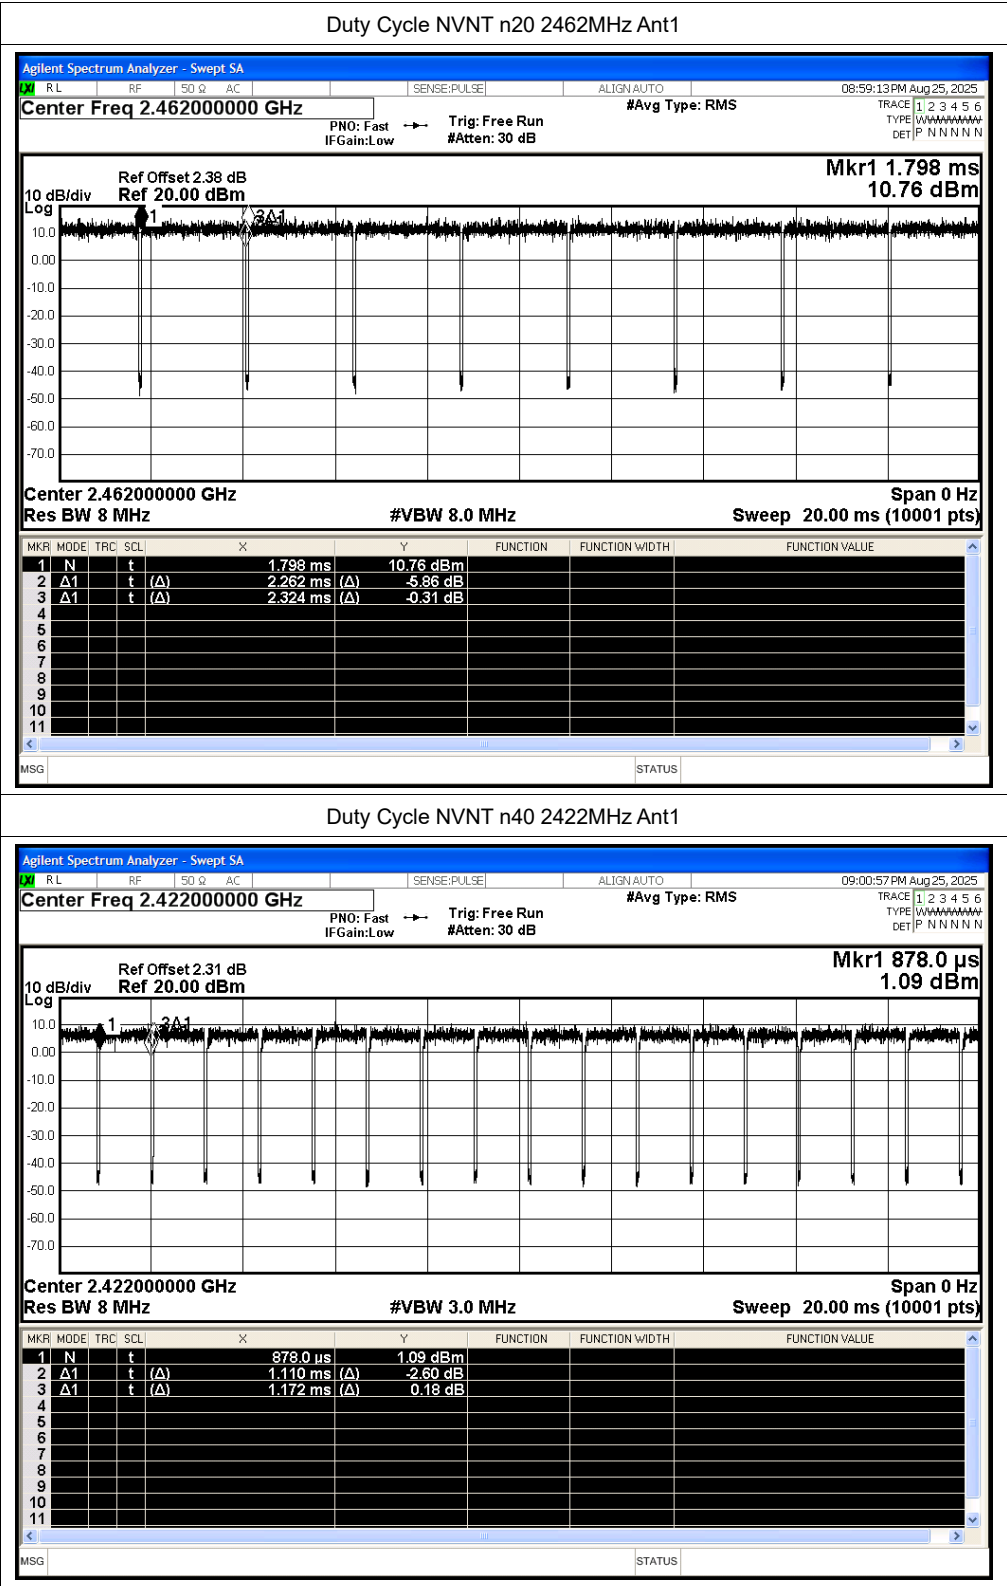

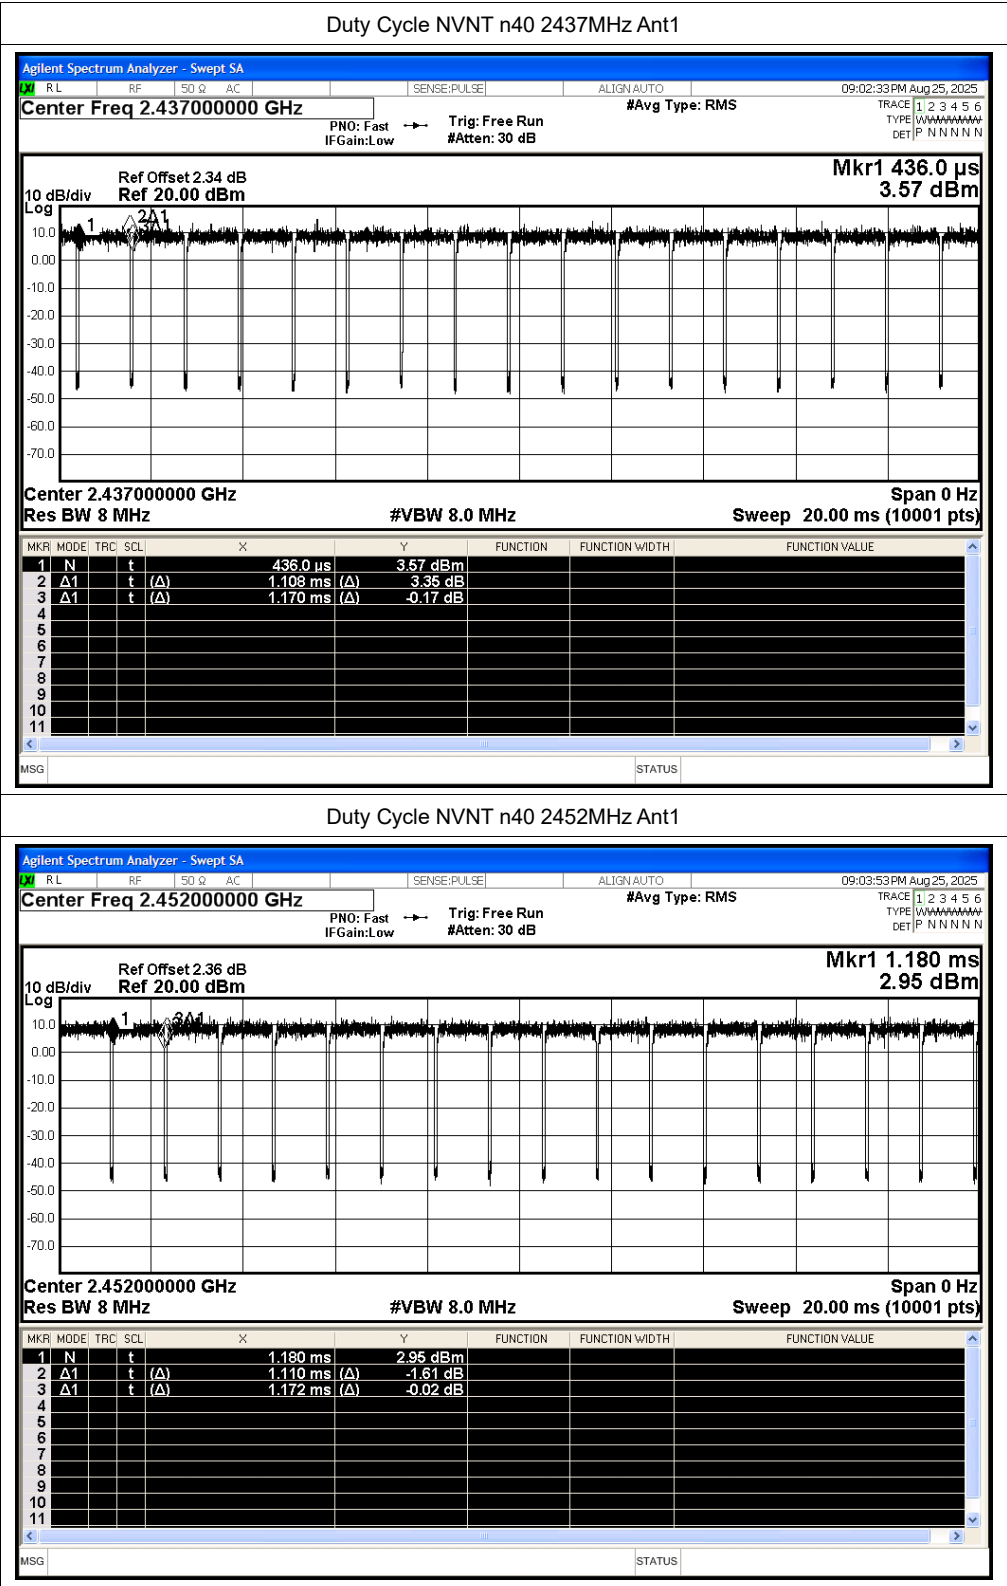

B.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-51.72	3.37	-	46.91	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-58.25	3.37	0	40.38	Average	54	Pass
NVNT	b	2412	Ant1	2363.001	-46.24	3.37	-	52.39	Peak	74	Pass
NVNT	b	2412	Ant1	2389.443	-55.54	3.37	0	43.09	Average	54	Pass
NVNT	b	2412	Ant1	2390	-47.4	3.37	-	51.23	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-56.07	3.37	0	42.56	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-48	3.37	-	50.63	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-55.55	3.37	0	43.08	Average	54	Pass
NVNT	b	2462	Ant1	2485.213	-45.29	3.37	-	53.34	Peak	74	Pass
NVNT	b	2462	Ant1	2484.736	-54.1	3.37	0	44.53	Average	54	Pass
NVNT	b	2462	Ant1	2500	-50.05	3.37	-	48.58	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-57.54	3.37	0	41.09	Average	54	Pass
NVNT	g	2412	Ant1	2310	-50.34	3.37	-	48.29	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-58.63	3.37	0.1	40.00	Average	54	Pass
NVNT	g	2412	Ant1	2389.56	-34.61	3.37	-	64.02	Peak	74	Pass
NVNT	g	2412	Ant1	2389.326	-52.38	3.37	0.1	46.25	Average	54	Pass
NVNT	g	2412	Ant1	2390	-38.83	3.37	-	59.80	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-53.84	3.37	0.1	44.79	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-44.15	3.37	-	54.48	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-56.41	3.37	0.1	42.22	Average	54	Pass
NVNT	g	2462	Ant1	2484.524	-40.73	3.37	-	57.90	Peak	74	Pass
NVNT	g	2462	Ant1	2483.676	-55.58	3.37	0.1	43.05	Average	54	Pass
NVNT	g	2462	Ant1	2500	-50.38	3.37	-	48.25	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-57.74	3.37	0.1	40.89	Average	54	Pass
NVNT	n20	2412	Ant1	2310	-51.12	3.37	-	47.51	Peak	74	Pass
NVNT	n20	2412	Ant1	2310	-58.36	3.37	0.12	40.27	Average	54	Pass
NVNT	n20	2412	Ant1	2389.677	-42.85	3.37	-	55.78	Peak	74	Pass
NVNT	n20	2412	Ant1	2389.794	-56.38	3.37	0.12	42.25	Average	54	Pass
NVNT	n20	2412	Ant1	2390	-47.73	3.37	-	50.90	Peak	74	Pass
NVNT	n20	2412	Ant1	2390	-56.55	3.37	0.12	42.08	Average	54	Pass
NVNT	n20	2462	Ant1	2483.5	-33.98	3.37	-	64.65	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.5	-55.62	3.37	0.12	43.01	Average	54	Pass
NVNT	n20	2462	Ant1	2483.517	-33.98	3.37	-	64.65	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.888	-54.27	3.37	0.12	44.36	Average	54	Pass
NVNT	n20	2462	Ant1	2500	-49.61	3.37	-	49.02	Peak	74	Pass
NVNT	n20	2462	Ant1	2500	-57.63	3.37	0.12	41.00	Average	54	Pass
NVNT	n40	2422	Ant1	2310	-51.24	3.37	-	47.39	Peak	74	Pass

Guangzhou LCS Compliance Testing Laboratory Ltd.

Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China

Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

NVNT	n40	2422	Ant1	2310	-58.87	3.37	0.24	39.76	Average	54	Pass
NVNT	n40	2422	Ant1	2389.378	-42.89	3.37	-	55.74	Peak	74	Pass
NVNT	n40	2422	Ant1	2389.946	-55.25	3.37	0.24	43.38	Average	54	Pass
NVNT	n40	2422	Ant1	2390	-45.86	3.37	-	52.77	Peak	74	Pass
NVNT	n40	2422	Ant1	2390	-55.25	3.37	0.24	43.38	Average	54	Pass
NVNT	n40	2452	Ant1	2483.5	-44.16	3.37	-	54.47	Peak	74	Pass
NVNT	n40	2452	Ant1	2483.5	-54.03	3.37	0.24	44.60	Average	54	Pass
NVNT	n40	2452	Ant1	2483.542	-39.45	3.37	-	59.18	Peak	74	Pass
NVNT	n40	2452	Ant1	2484.088	-53.77	3.37	0.24	44.86	Average	54	Pass
NVNT	n40	2452	Ant1	2500	-48.91	3.37	-	49.72	Peak	74	Pass
NVNT	n40	2452	Ant1	2500	-58.09	3.37	0.24	40.54	Average	54	Pass

