

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 1 of 57

Applicant : Hangzhou Cyberstar Co., Ltd.
Address of Applicant : Ruili Center Bullding, No.568 Taiming street. Xiaoshan District, Hangzhou City

Product Name : New Technology Pet Quadruped Robot
Brand Name : Cyberstar
Model Name : Cyber1
Sample Acquisition Method : Sent by Client
Sample No. : E25110007-01#02

FCC ID : 2BS8P-CYBER1

Standards : FCC CFR47 Part 15.247, Subpart C

Date of Receipt : 2025-11-07
Date of Test : 2025-11-24~ 2025-12-13
Date of Issue : 2025-12-16

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Erik Yang (Erik Yang) Reviewed by: Jennifer Zhou (Jennifer Zhou) Approved by: Echo Mu (Authorized signatory: Echo Mu)

TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 2 of 57

Contents

- 1 GENERAL INFORMATION 3**
 - 1.1 TESTING LABORATORY 3
 - 1.2 DETAILS OF APPLICATION 3
 - 1.3 DETAILS OF EUT 3
 - 1.4 TEST METHODOLOGY 4
 - 1.5 TEST SUMMARY 5

- 2 TEST CONDITION 6**
 - 2.1 ENVIRONMENTAL CONDITIONS 6
 - 2.2 EQUIPMENT LIST 6
 - 2.3 MEASUREMENT UNCERTAINTY 7

- 3 TEST SET-UP AND OPERATION MODES 8**
 - 3.1 DETAILS OF TEST MODE 8
 - 3.2 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 8
 - 3.3 SUPPORT SOFTWARE 8
 - 3.4 TEST SETUP DIAGRAM 9

- 4 TEST RESULTS 11**
 - 4.1 TRANSMITTER REQUIREMENT & TEST SUITES 11
 - 4.1.1 *Antenna Requirement* 11
 - 4.1.2 *Maximum peak conducted output power* 12
 - 4.1.3 *6dB Bandwidth* 16
 - 4.1.4 *Maximum conducted output power spectral density* 20
 - 4.1.5 *Conducted Spurious Emission & Authorized-band band-edge* 24
 - 4.1.6 *Radiated Emission* 36
 - 4.1.7 *Band Edge (Restricted-band band-edge)* 37
 - 4.2 MAINS EMISSIONS 38
 - 4.2.1 *Conducted Emission on AC Mains* 38

- 5 APPENDIXES 41**
 - 5.1 EXTERNAL PHOTO OF THE SAMPLE 41
 - 5.2 INTERNAL PHOTO OF THE SAMPLE 45
 - 5.3 SET-UP FOR CONDUCTED EMISSIONS 56
 - 5.4 SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT 56
 - 5.5 SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ 57
 - 5.6 SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ 57

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 3 of 57

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	Hangzhou Cyberstar Co., Ltd.
Address	Ruili Center Building, No.568 Taiming street. Xiaoshan District, Hangzhou City
Contact Person	Duan Xinchun.
Telephone	+86 18868010846
Email	info@cyberstars.com.cn
Manufacturer Company Name	Hangzhou Cyberstar Co., Ltd.
Address	Ruili Center Building, No.568 Taiming street. Xiaoshan District, Hangzhou City

1.3 Details of EUT

Product Name	New Technology Pet Quadruped Robot
Brand Name	Cyberstar
Test Model Name	Cyber1
FCC ID	2BS8P-CYBER1
Mode of Operation	Bluetooth LE
Operating Frequency Range	2402MHz ~ 2480MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	BLE ☒ GFSK 1Mbps ☒ GFSK 2Mbps
Max RF Output Power	5.25dBm
Antenna Type	Internal Antenna
Antenna Gain	3.89dBi
Extreme Temperature Range	0°C~ +40°C
Test Voltage	DC 28.8V 2A by Battery Power Unit (Manufacturer: SHENZHEN GREEN DIGITAL POWER TECH CO.,LTD, Model:G168-336050, Input: AC 100-240V 2.2A 50/60Hz, Output: DC 33.6V 5A)
Hardware Version	V2.1
Software Version	V0.23
RF power setting in TEST SW	Bluetooth RF Test Tool (RtlBluetooth MP.dll Version: 5.3.2.37 RTLBTAPP Version: 5.2.3.58) Power level setting Default

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 4 of 57

Note:

1. The above information was declared by the manufacture.
2. For more details, please refer to the User's manual of the EUT.

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2.402GHz	14	2.430GHz	28	2.458GHz
1	2.404GHz	15	2.432GHz	29	2.460GHz
2	2.406GHz	16	2.434GHz	30	2.462GHz
3	2.408GHz	17	2.436GHz	31	2.464GHz
4	2.410GHz	18	2.438GHz	32	2.466GHz
5	2.412GHz	19	2.440GHz	33	2.468GHz
6	2.414GHz	20	2.442GHz	34	2.470GHz
7	2.416GHz	21	2.444GHz	35	2.472GHz
8	2.418GHz	22	2.446GHz	36	2.474GHz
9	2.420GHz	23	2.448GHz	37	2.476GHz
10	2.422GHz	24	2.450GHz	38	2.478GHz
11	2.424GHz	25	2.452GHz	39	2.480GHz
12	2.426GHz	26	2.454GHz		
13	2.428GHz	27	2.456GHz		

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 5 of 57

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	PASS
Maximum peak conducted output power	FCC Part 15.247(b)(3)	PASS
6dB Bandwidth	FCC Part 15.247(a)(2)	PASS
Maximum conducted output power spectral density	FCC Part 15.247(e)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 6 of 57

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	15-35
Humidity (%RH)	30-60
Barometric Pressure (mbar)	860-1060

Note: Actual values will be recorded during the test.

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY54101709	2025-06-30	2026-06-29
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2025-06-10	2026-06-09
Signal Generator	Rohde & Schwarz	SMR27	100184	2025-06-30	2026-06-29
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2025-06-09	2026-06-08
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2025-06-09	2026-06-08
V-network	SCHWARZBECK	NSLK 8127	8127-902	2025-06-09	2026-06-08
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2025-06-09	2026-06-08
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2025-03-24	2027-03-23
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2025-06-22	2027-06-21
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2025-06-23	2027-06-22
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2025-06-22	2027-06-21
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2025-06-09	2026-06-08
EMC chamber 9*6*6(L*W*H)	CHANGNING	966	N/A	2025-06-10	2028-06-09
Shielded Enclosure 8*5*4(L*W*H)	CHANGNING	854	N/A	2025-06-10	2028-06-09
Test Software	BL	BL410_E	Version:2.1.1.436	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 7 of 57

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter		Uncertainty
Antenna Port Conducted Emission		$\pm 1.04\text{dB}$
Radiated Emission	< 1GHz	$\pm 5.00\text{dB}$
	> 1GHz	$\pm 5.46\text{dB}$
Conducted Emission on AC Mains	150KHz-30MHz	$\pm 3.36\text{dB}$
Occupied Channel Bandwidth		$\pm 39.26\text{KHz}$
Maximum Conducted Output Power		$\pm 1.06\text{dB}$
Maximum Conducted Output Power Spectral Density		$\pm 1.12\text{dB}$

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 8 of 57

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software to control EUT work in continuous transmitting mode. Select test channel as below:

Channel	Frequency
The lowest channel(CH00)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
1. BLE mode

a. Transmitting

i. Low Channel

ii. Middle Channel

iii. High Channel

b. Receiving
2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model Name	Serial No.
Laptop 1	HP	HP ZHAN 66 Pro G1	5CD7438R1J
Laptop 2	Lenovo	TP00083A	PF-0PRDGN
USB Cable	N/A	N/A	1.00m Unshielded
Power Unit	GREEN DIGITAL POWER	G168-336050	2508-9575B


3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	Bluetooth RF Test Tool (RtlBluetooth MP.dll Version: 5.3.2.37 RTLBTAPP Version: 5.2.3.58)

TEST REPORT


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

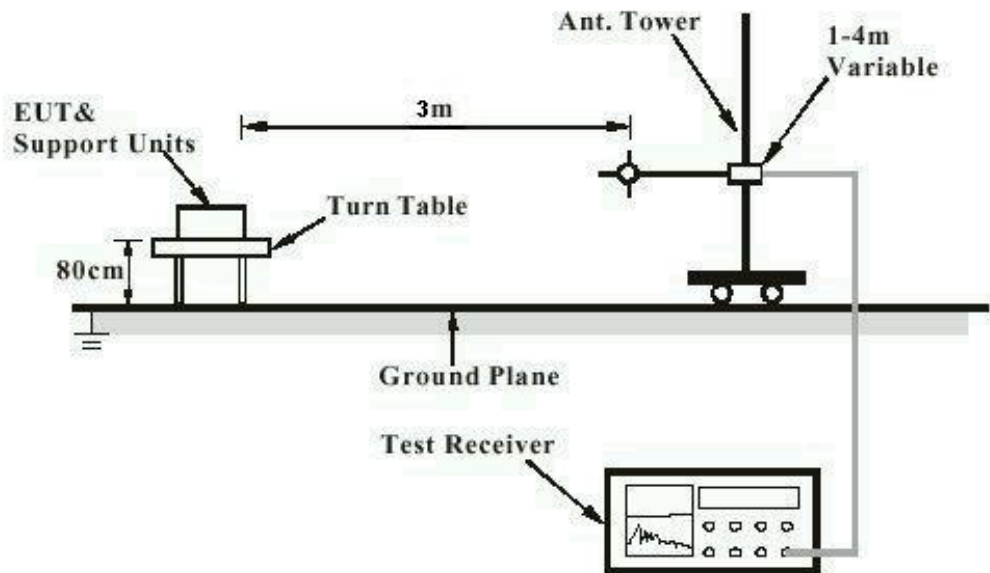

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Conduction Measurement

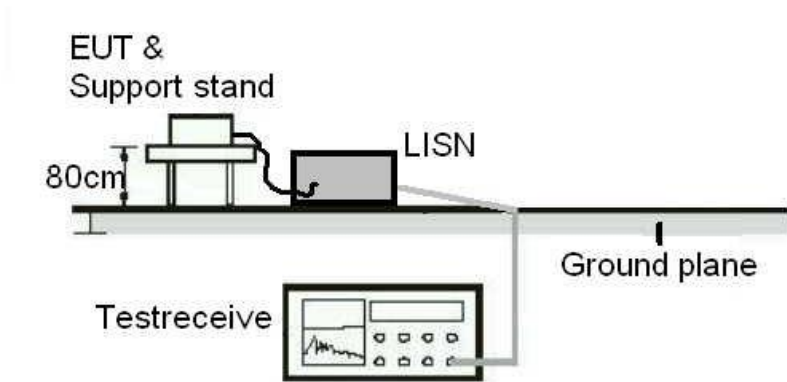


TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 10 of 57

Diagram of Measurement Equipment Configuration for Transmitter Test

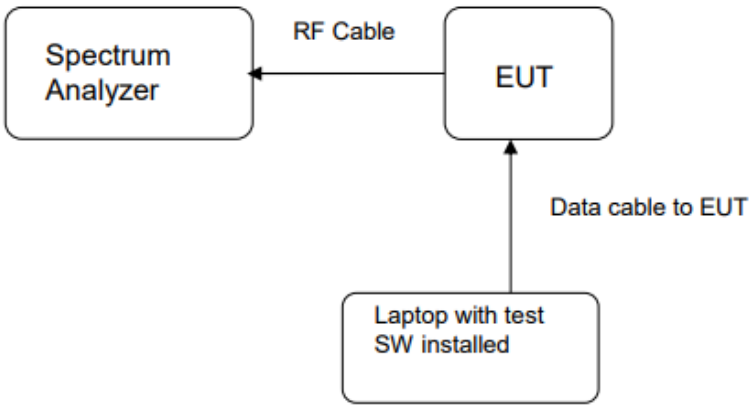

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 11 of 57

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	:	FCC Part 15.247(b)(4), Part 15.203
Requirement	:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. In addition, If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3.89dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 12 of 57

4.1.2 Maximum peak conducted output power

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)

Requirement : ANSI C63.10-2020 clause 11.9.1.1
KDB 558074 D01 v05r02, Clause 8.3.1

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.2°C

Relative humidity : 34%

Table 1: Maximum peak conducted output power

Test Mode	Test Channel (MHz)	Maximum peak conducted output power		Limit (W)
		(dBm)	(mW)	
BLE-1Mbps	2402	5.25	3.35	< 1
	2440	4.49	2.81	
	2480	4.99	3.16	
BLE-2Mbps	2402	4.88	3.08	
	2440	4.74	2.98	
	2480	5.03	3.18	

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 13 of 57

Figure 1: Peak Output Power, 2402MHz, BLE-1Mbps


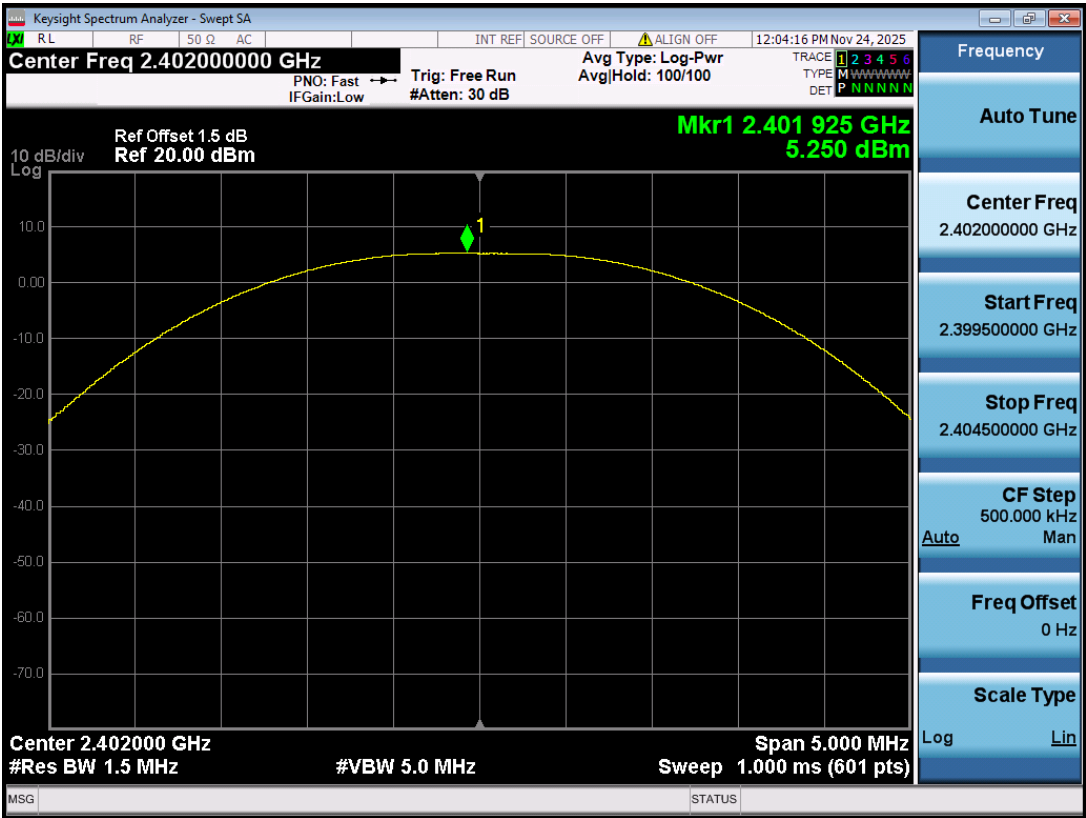


Figure 2: Peak Output Power, 2440MHz, BLE-1Mbps

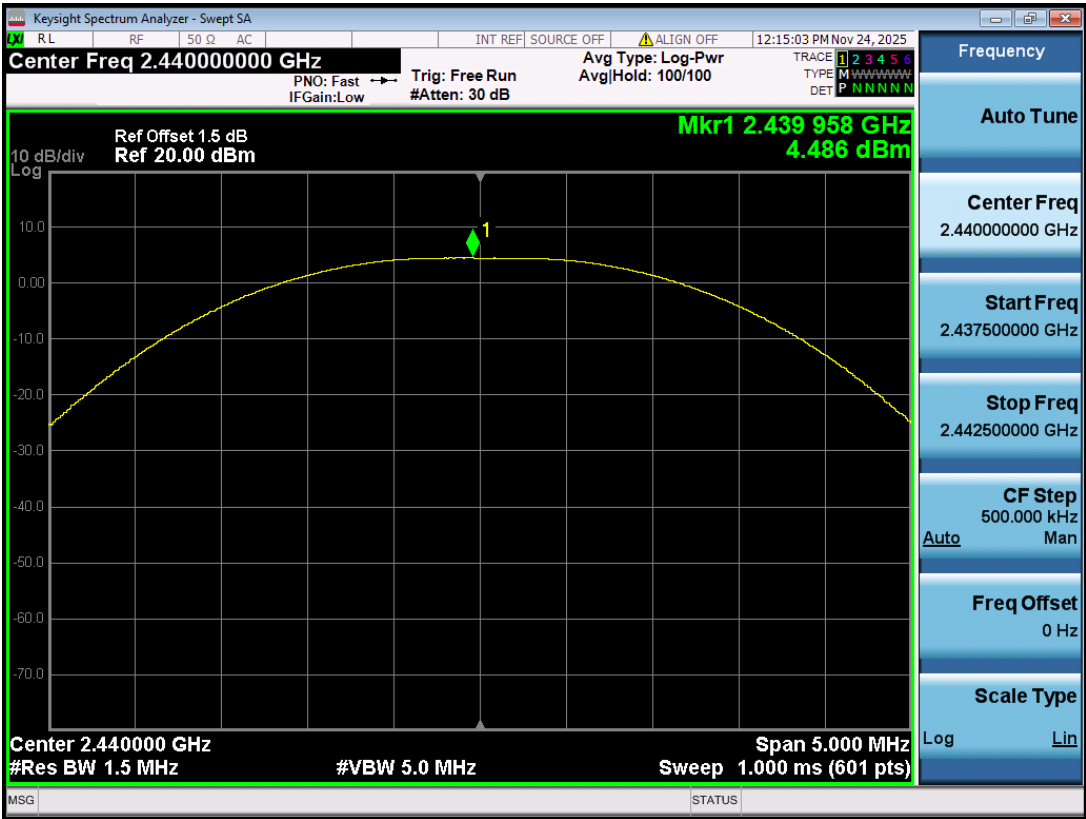

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 14 of 57

Figure 3: Peak Output Power, 2480MHz, BLE-1Mbps


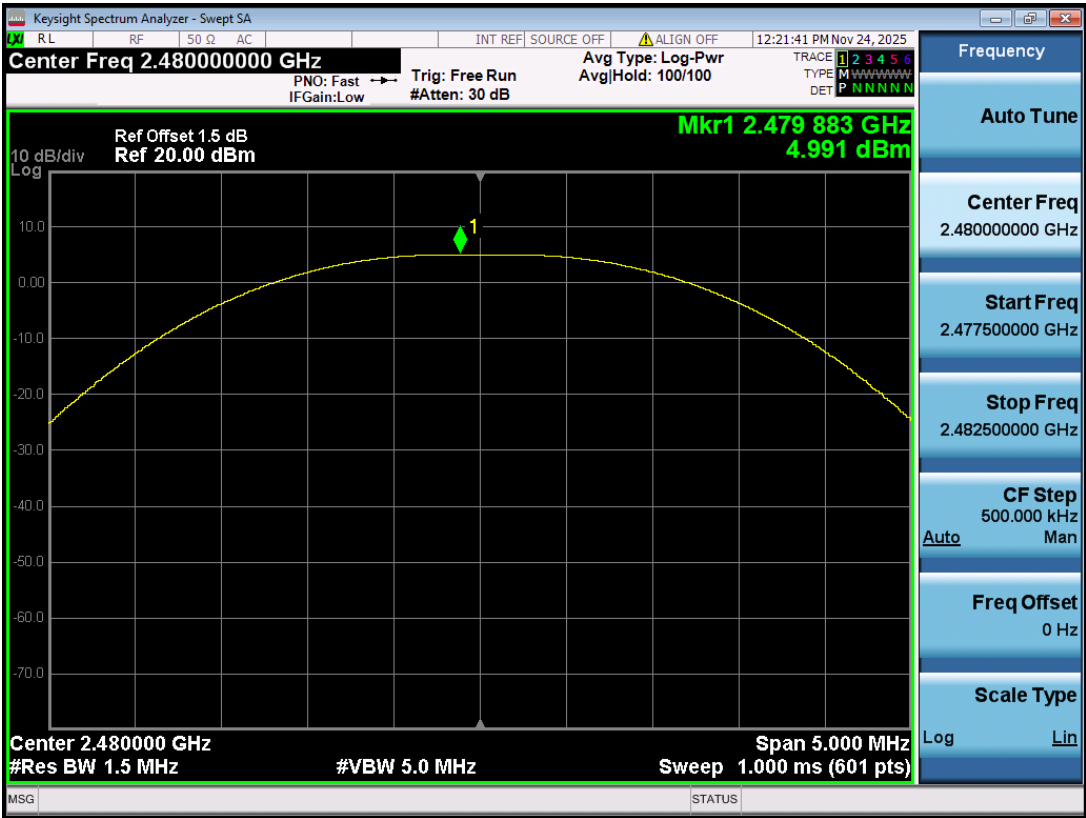


Figure 4: Peak Output Power, 2402MHz, BLE-2Mbps

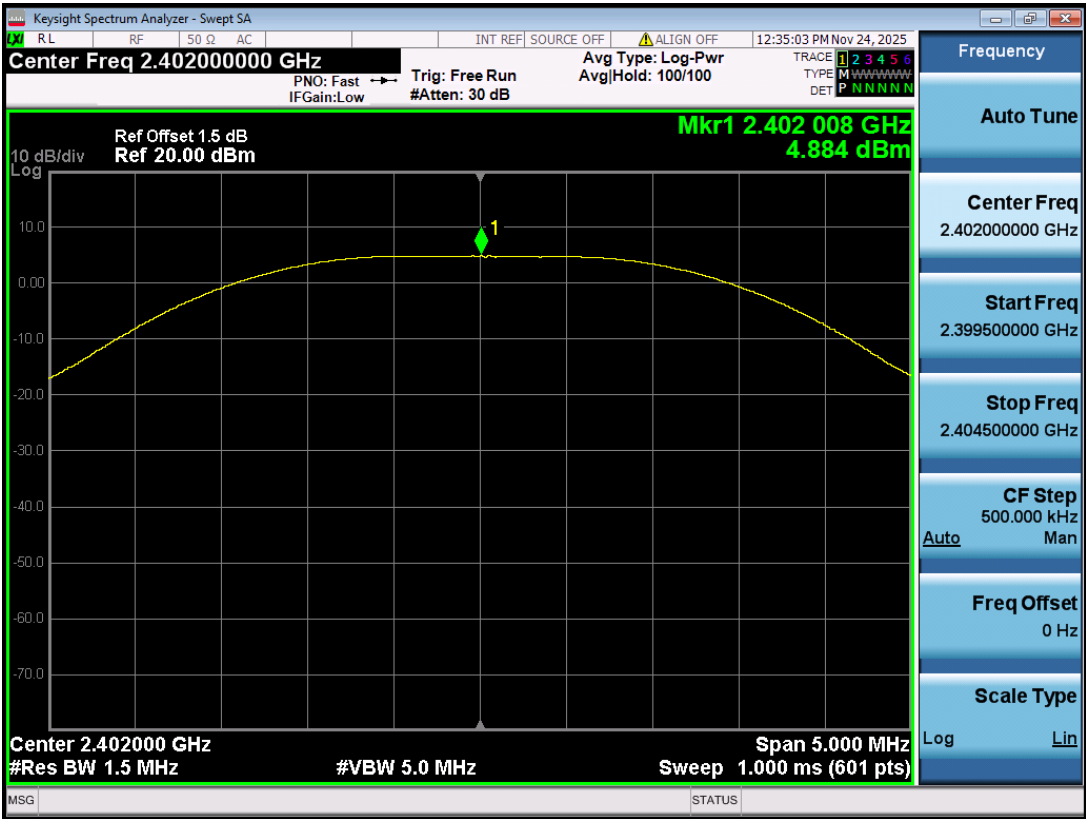

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 15 of 57

Figure 5: Peak Output Power, 2440MHz, BLE-2Mbps


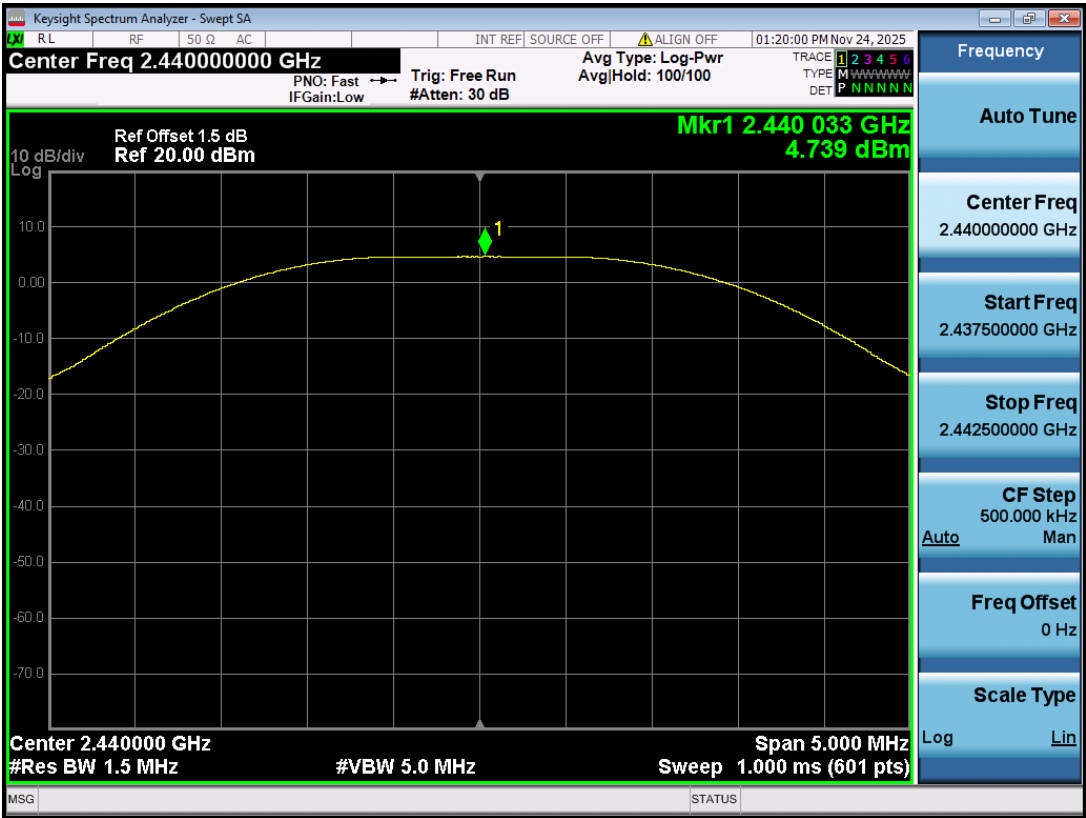


Figure 6: Peak Output Power, 2480MHz, BLE-2Mbps

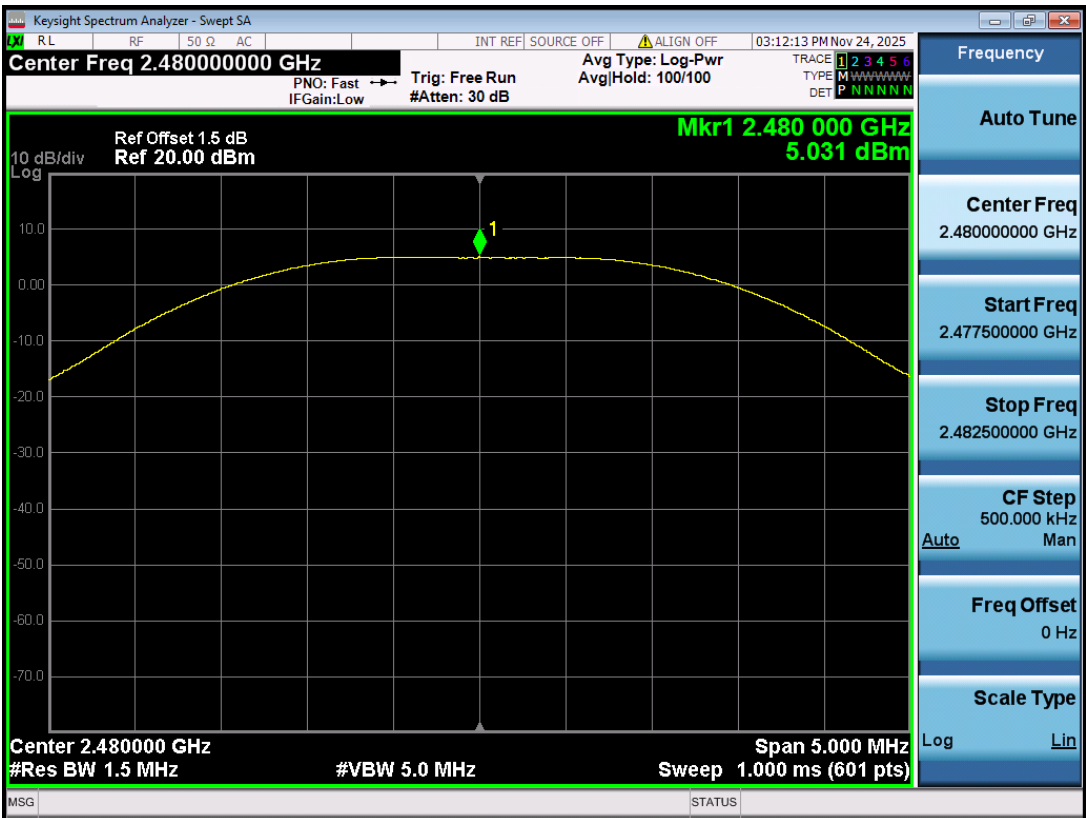

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 16 of 57

4.1.3 6dB Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)

Requirement : ANSI C63.10-2020 clause 11.8.1,
KDB 558074 D01 v05r02, Clause 8.2

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.2°C

Relative humidity : 34%

Table 2: 6dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit
BLE-1Mbps	2402	0.6742	≥0.5 MHz
	2440	0.6578	
	2480	0.6537	
BLE-2Mbps	2402	0.9464	
	2440	1.0510	
	2480	1.0830	

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 17 of 57

Figure 7: 6dB Bandwidth, 2402MHz, BLE-1Mbps


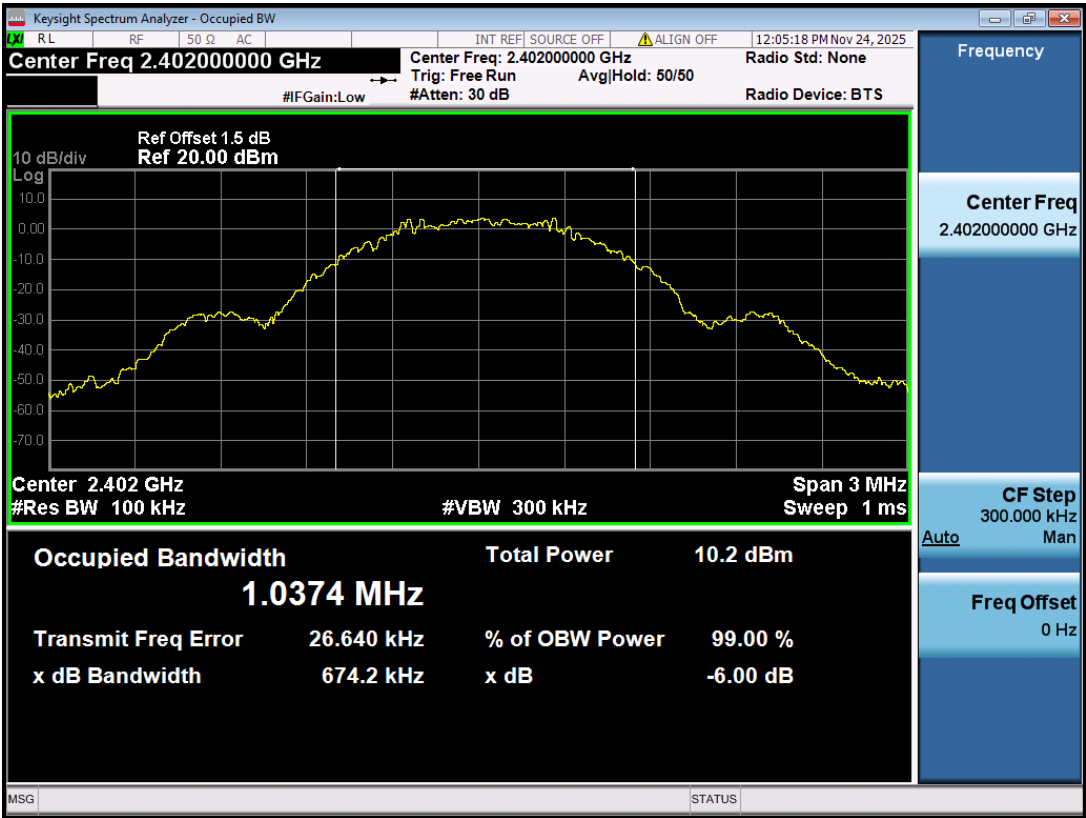


Figure 8: 6dB Bandwidth, 2440MHz, BLE-1Mbps

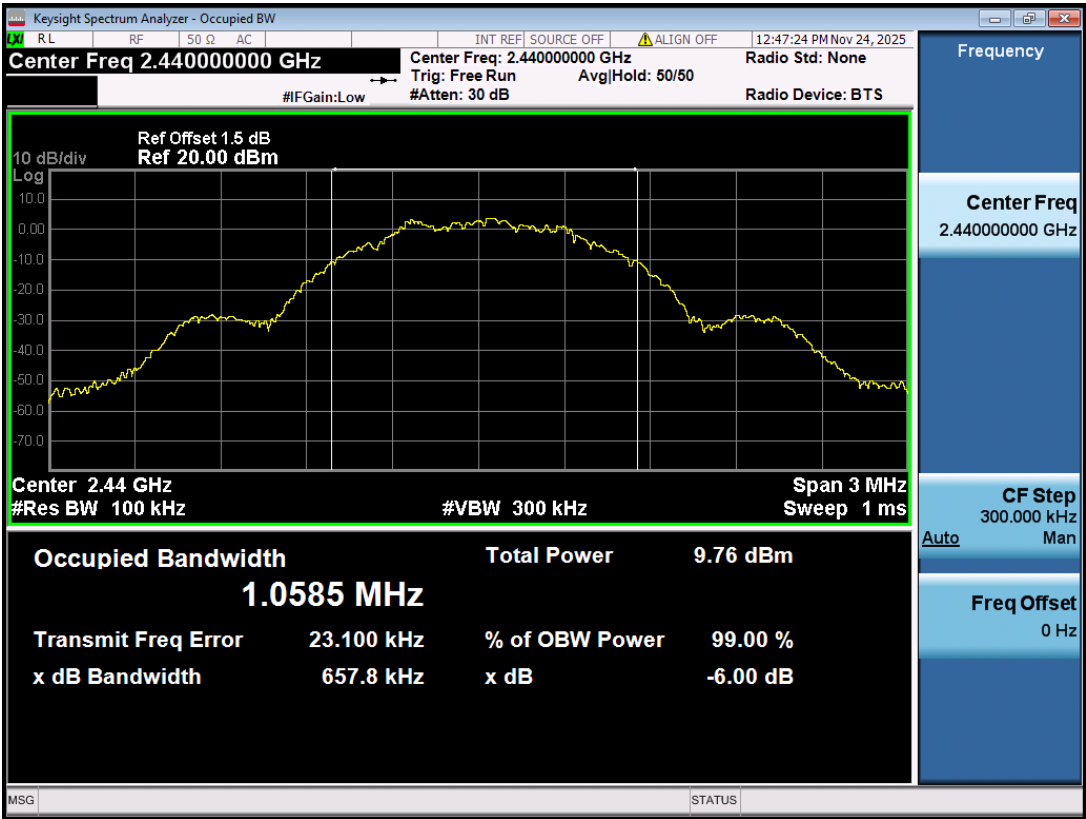

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 18 of 57

Figure 9: 6dB Bandwidth, 2480MHz, BLE-1Mbps

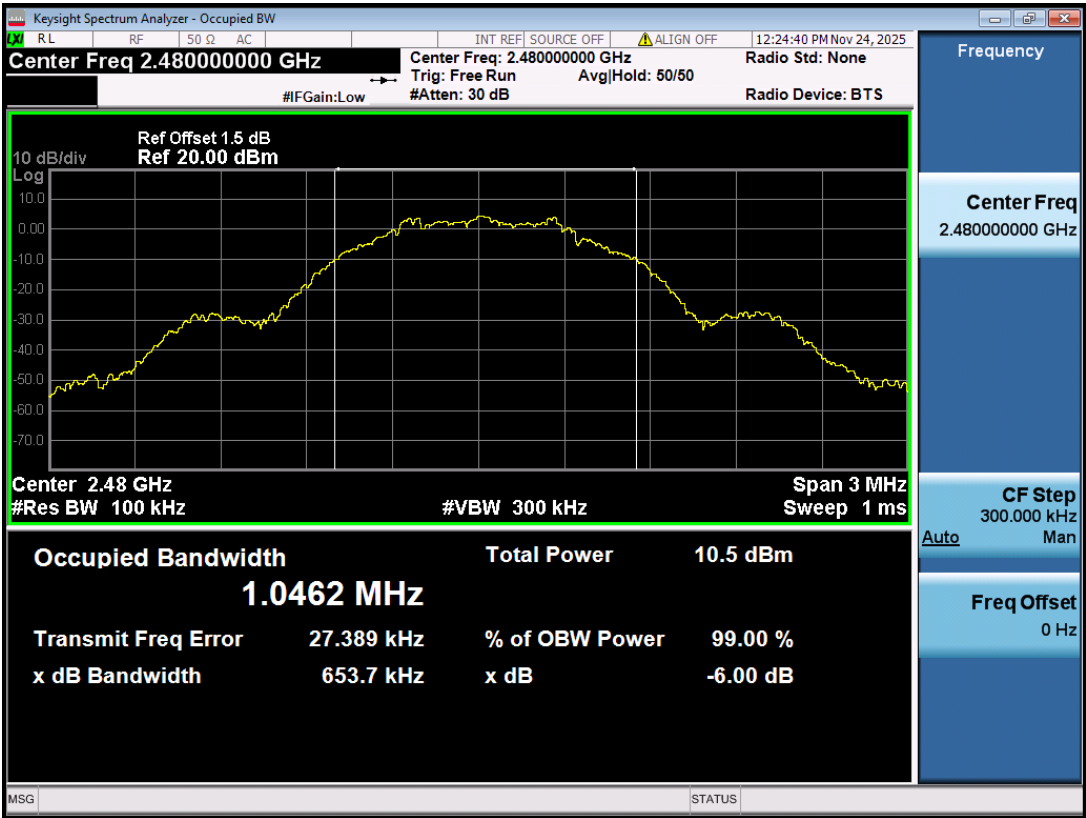


Figure 10: 6dB Bandwidth, 2402MHz, BLE-2Mbps



TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 19 of 57

Figure 11: 6dB Bandwidth, 2440MHz, BLE-2Mbps


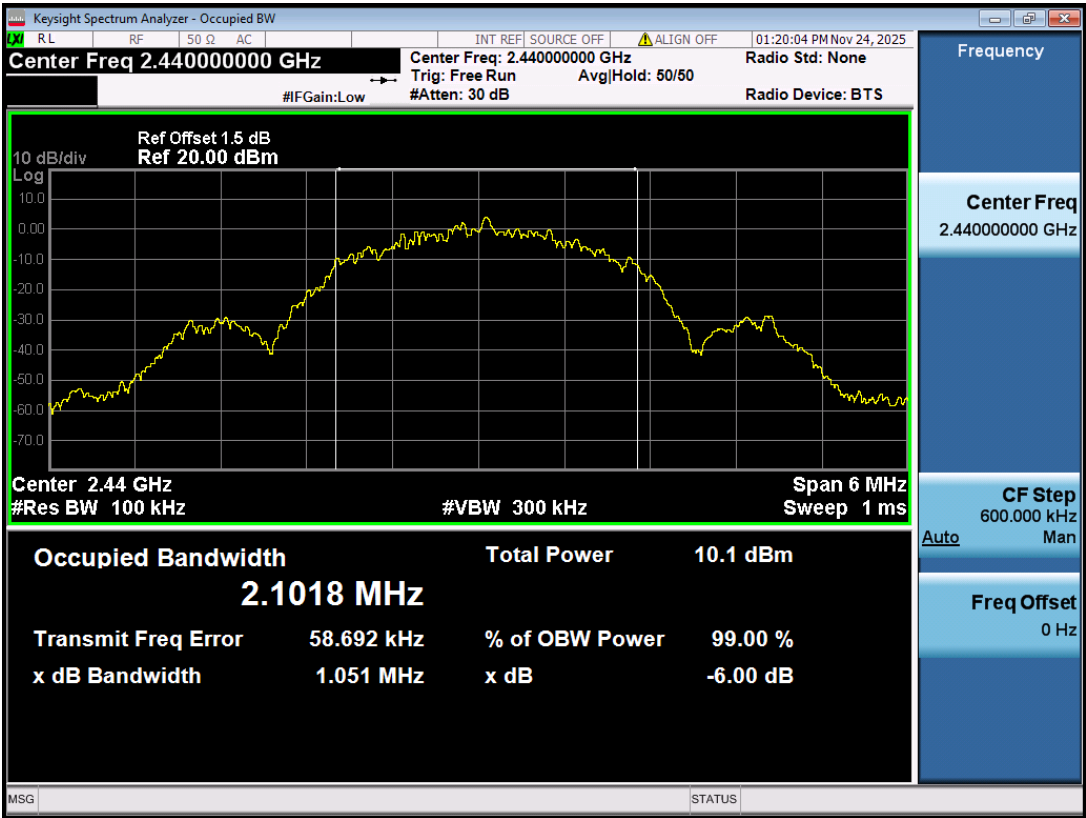


Figure 12: 6dB Bandwidth, 2480MHz, BLE-2Mbps

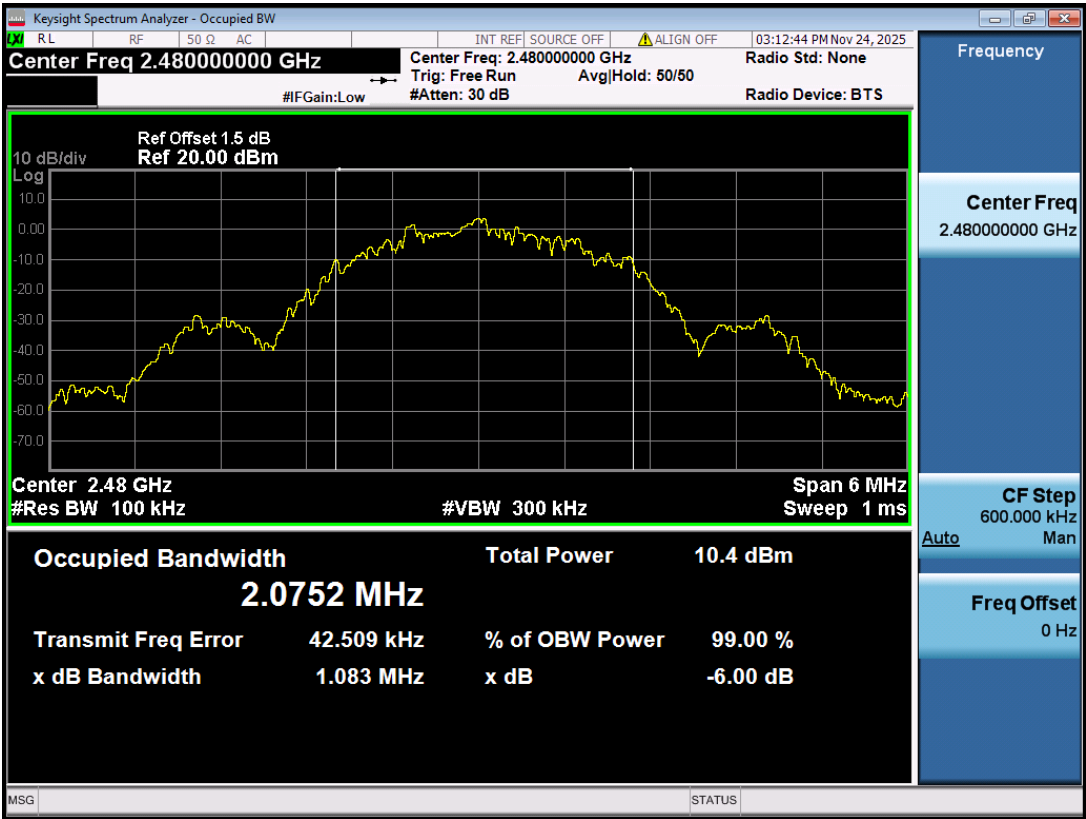

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 20 of 57

4.1.4 Maximum conducted output power spectral density

RESULT:

PASS

Test standard : FCC Part 15.247(e)

Requirement : ANSI C63.10-2020 clause 11.10.2,
KDB 558074 D01 v05r02, Clause 8.4

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.2°C

Relative humidity : 34%

Table 3: Maximum conducted output power spectral density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
BLE-1Mbps	2402	-9.94	8
	2440	-10.98	
	2480	-10.20	
BLE-2Mbps	2402	-12.62	
	2440	-13.16	
	2480	-14.47	

TEST REPORT

Figure 13: Power Spectral Density, 2402MHz, BLE-1Mbps



Figure 14: Power Spectral Density, 2440MHz, BLE-1Mbps



TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 22 of 57

Figure 15: Power Spectral Density, 2480MHz, BLE-1Mbps


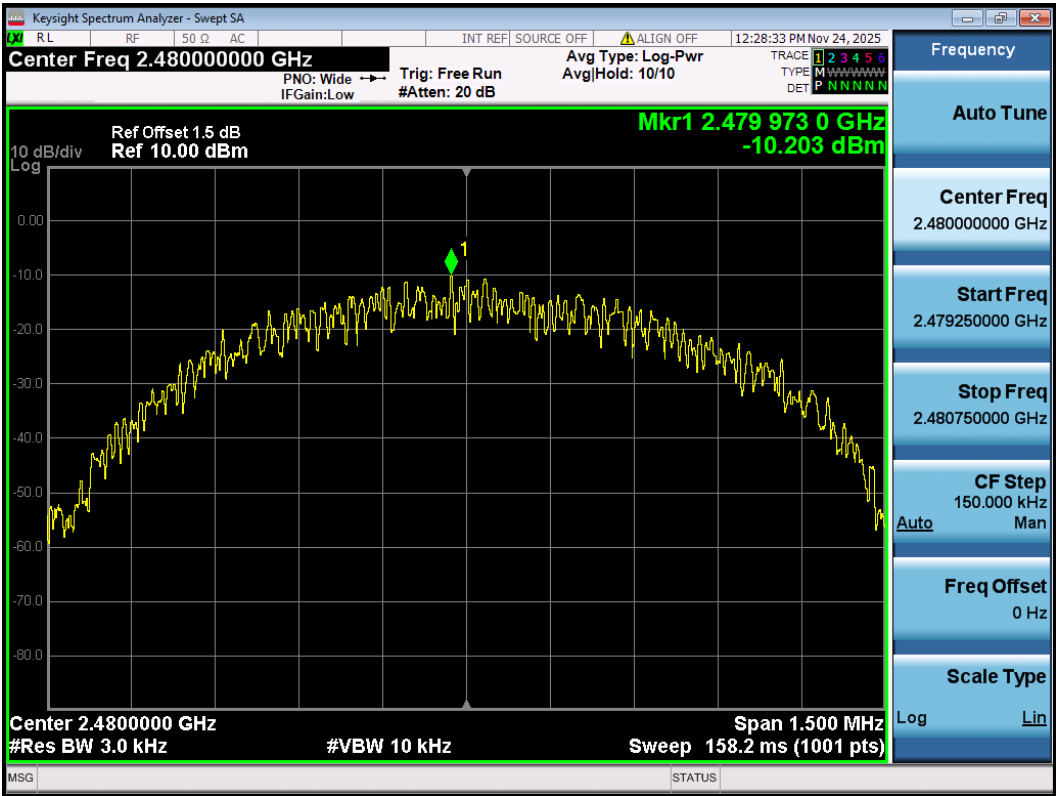


Figure 16: Power Spectral Density, 2402MHz, BLE-2Mbps

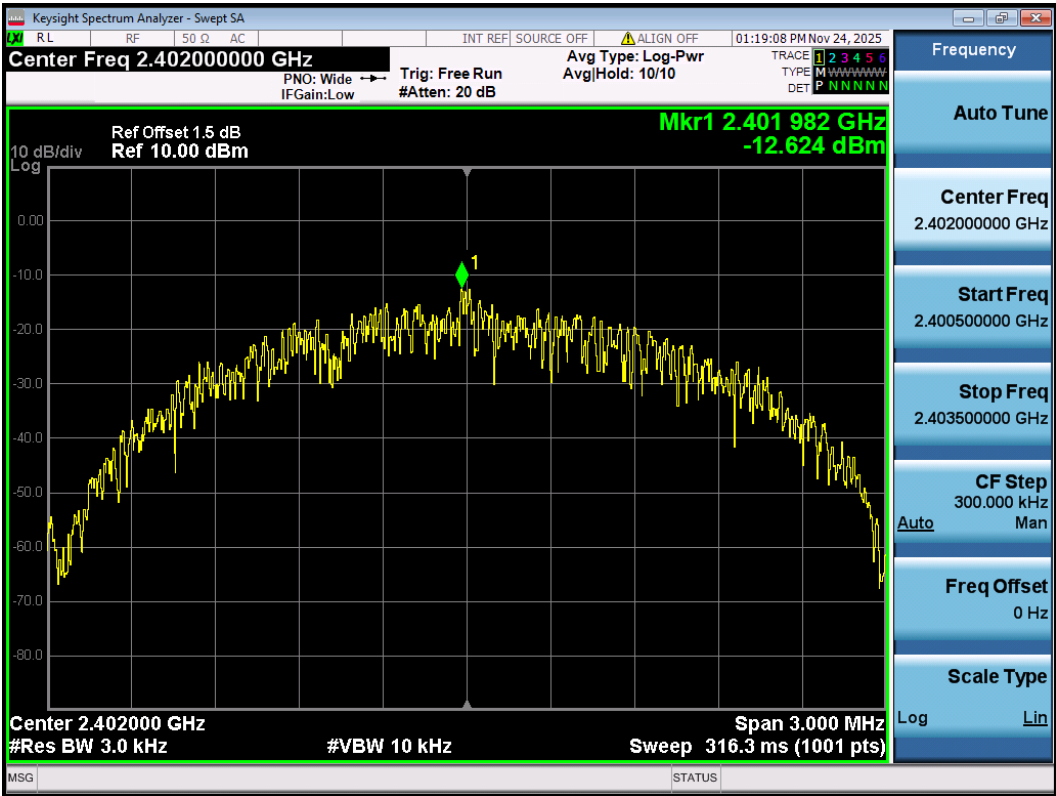

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 23 of 57

Figure 17: Power Spectral Density, 2440MHz, BLE-2Mbps


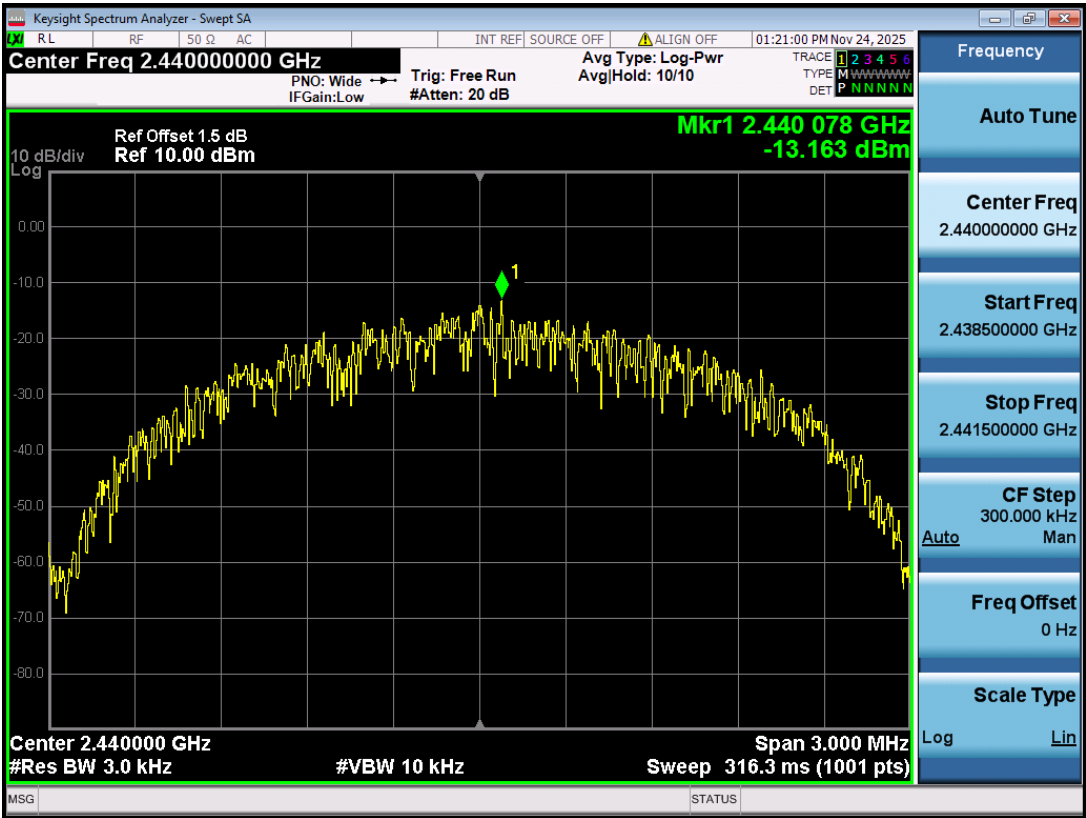


Figure 18: Power Spectral Density, 2480MHz, BLE-2Mbps

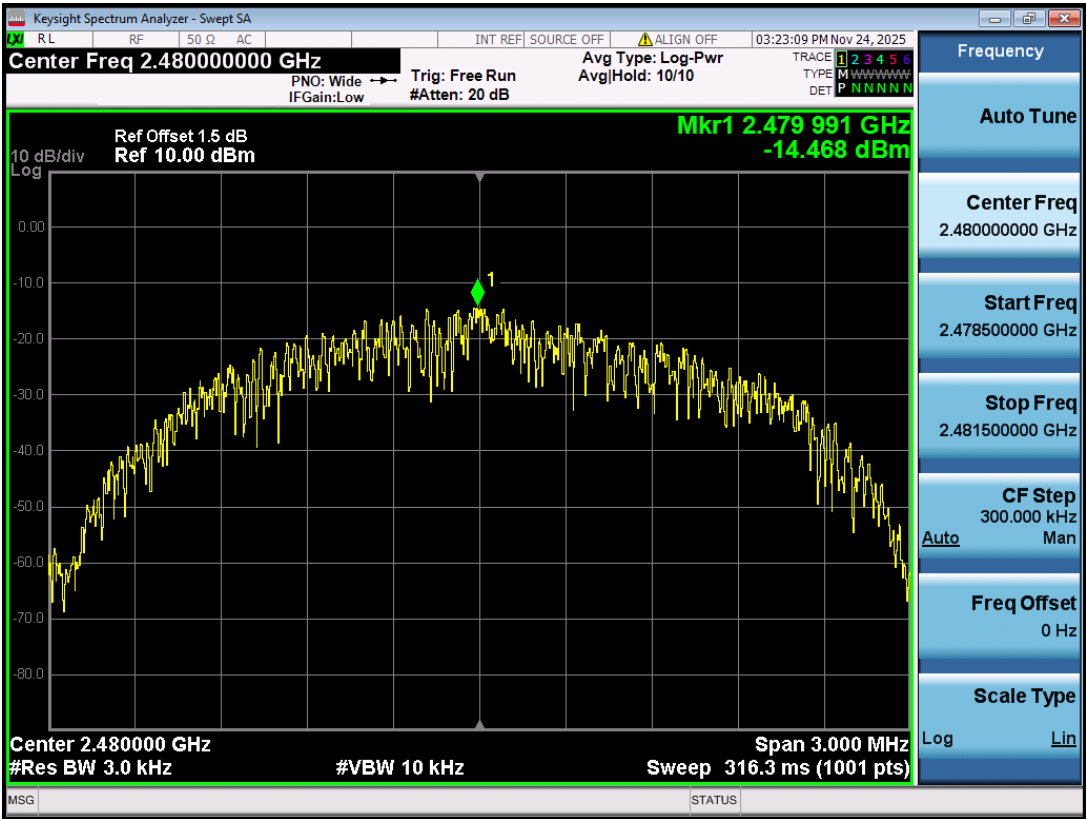

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 24 of 57

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS

Test standard

: FCC Part 15.247(d)

Requirement

: ANSI C63.10-2020, Clause 11.11.1

KDB 558074 D01 v05r02, Clause 8.5

Kind of test site

: Shielded room

Test setup

Test Channel

: Low/Middle/High for spurious, Low/High for Band

Edge

Operation Mode

: A.1.a


Ambient temperature

: 24.2°C

Relative humidity

: 34%


For details refer to following test plot.



TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 26 of 57


Conducted spurious emissions 30MHz-25GHz

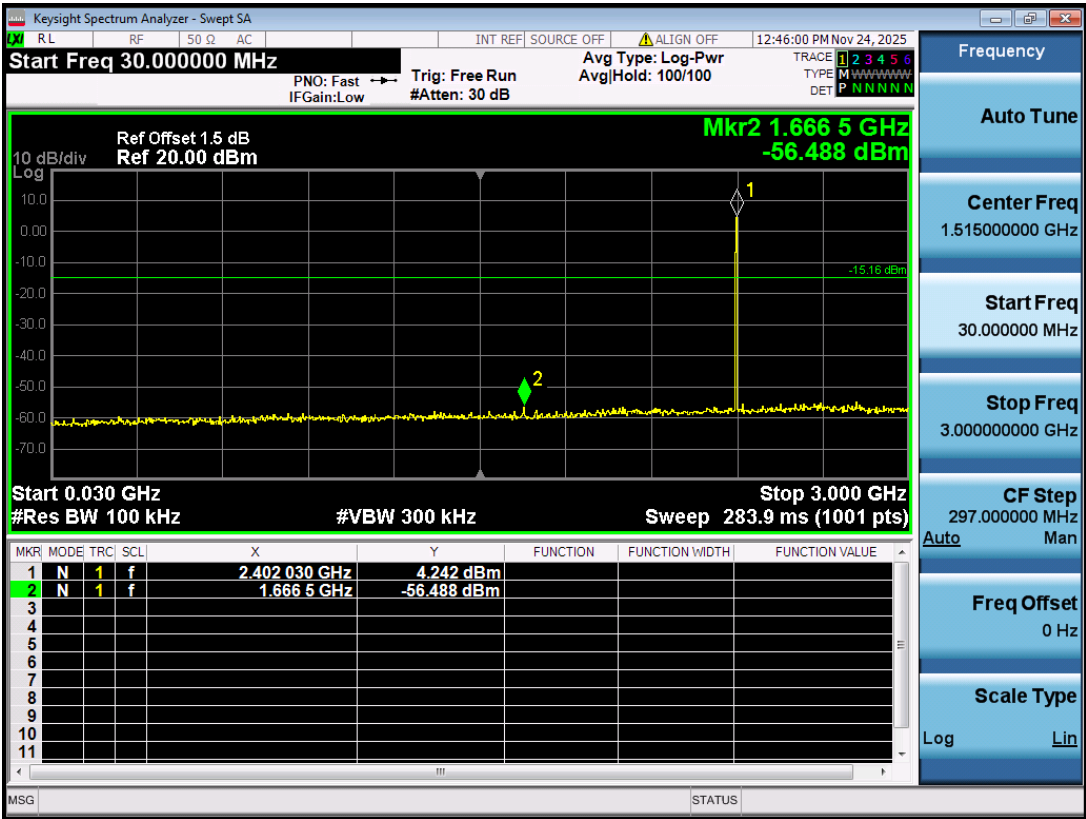


TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 27 of 57

Figure 20: Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-1Mbps Carrier Level

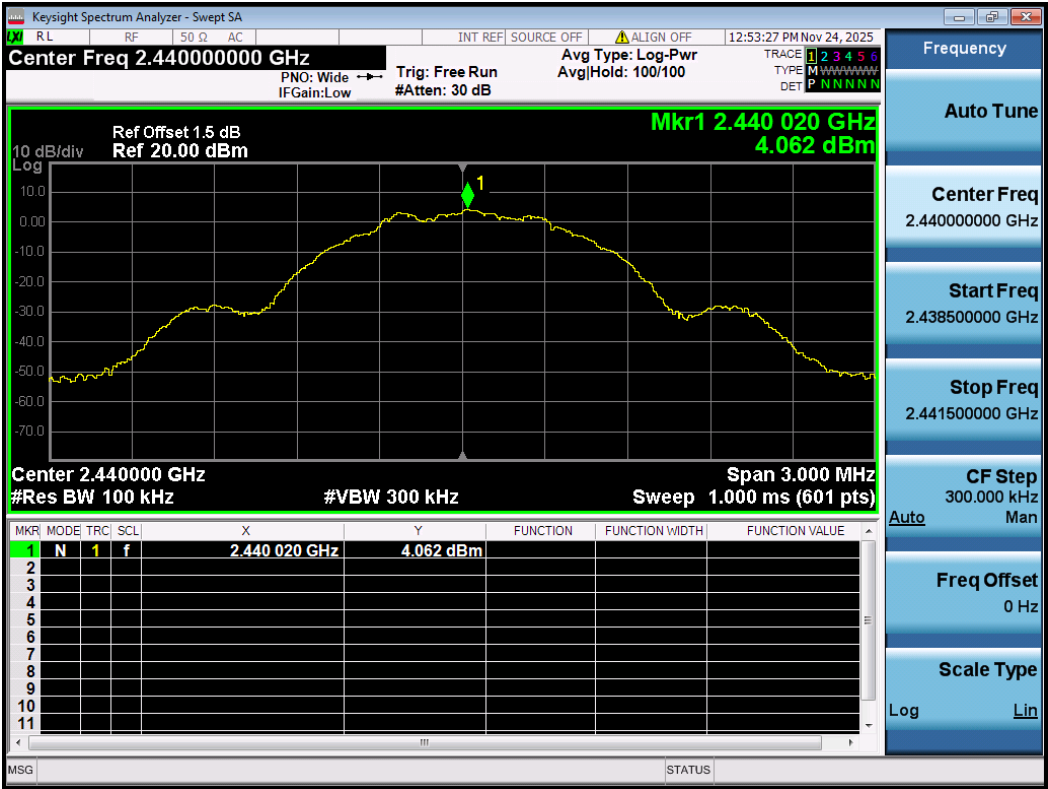

Conducted spurious emissions 30MHz-25GHz

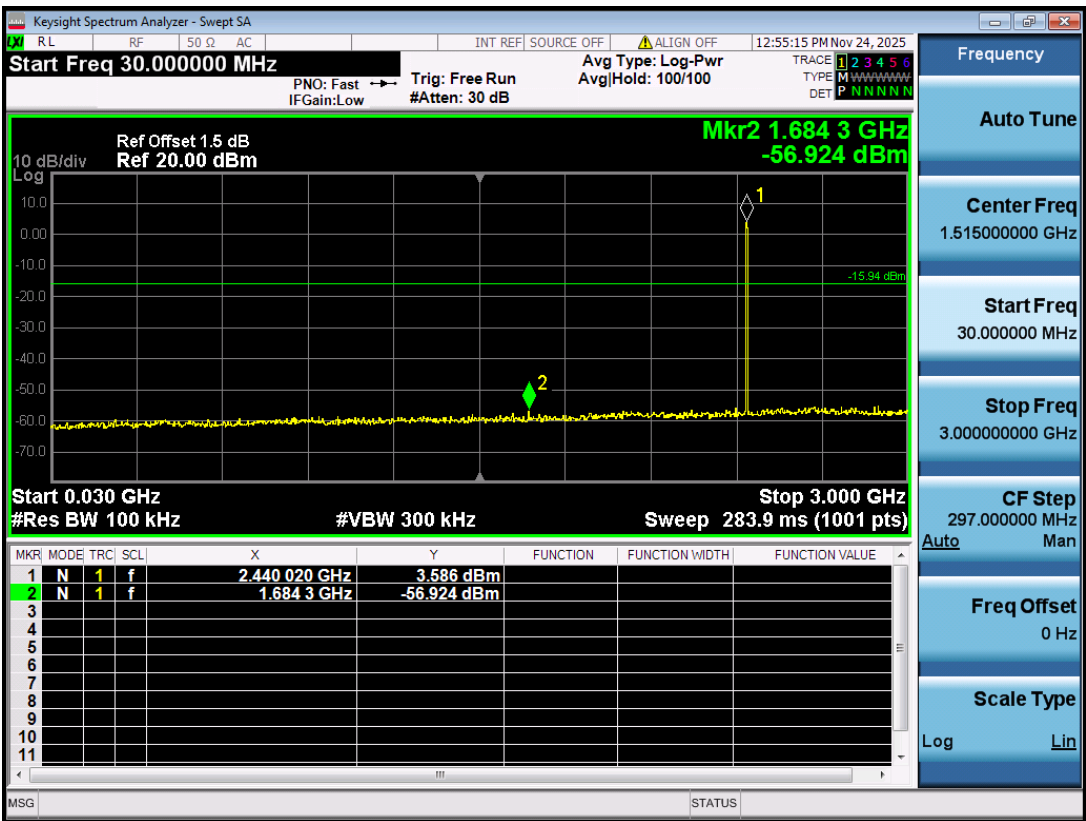

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 28 of 57



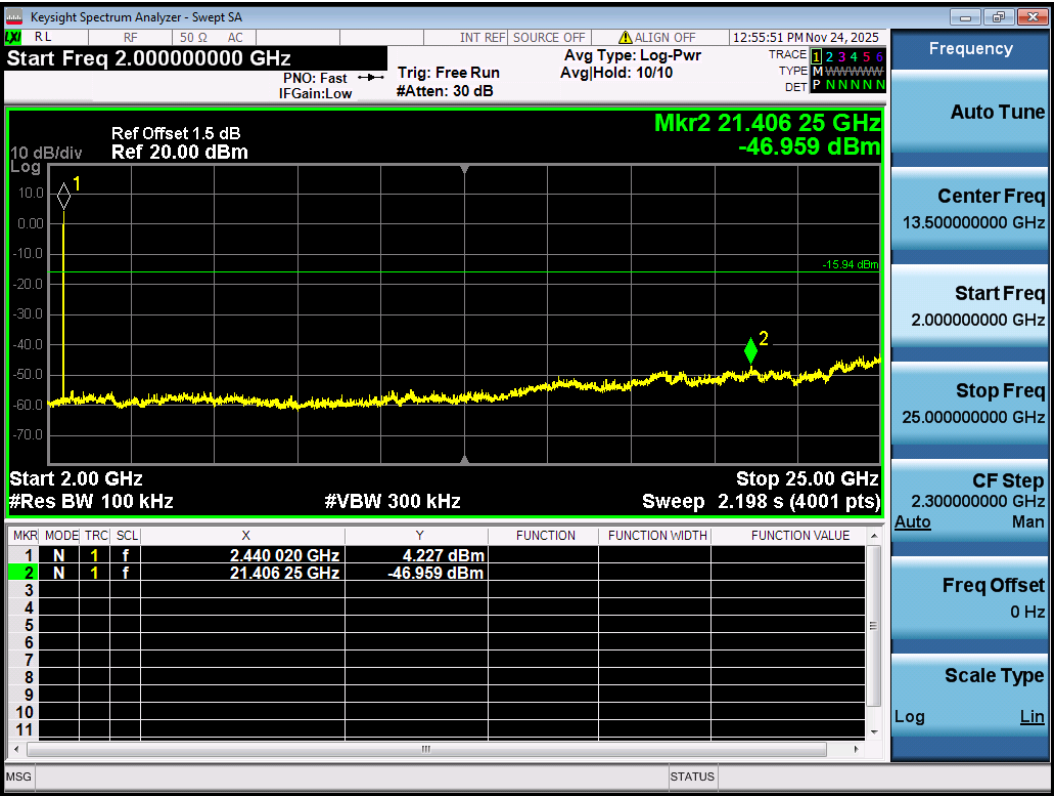


Figure 21: Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-1Mbps Carrier Level

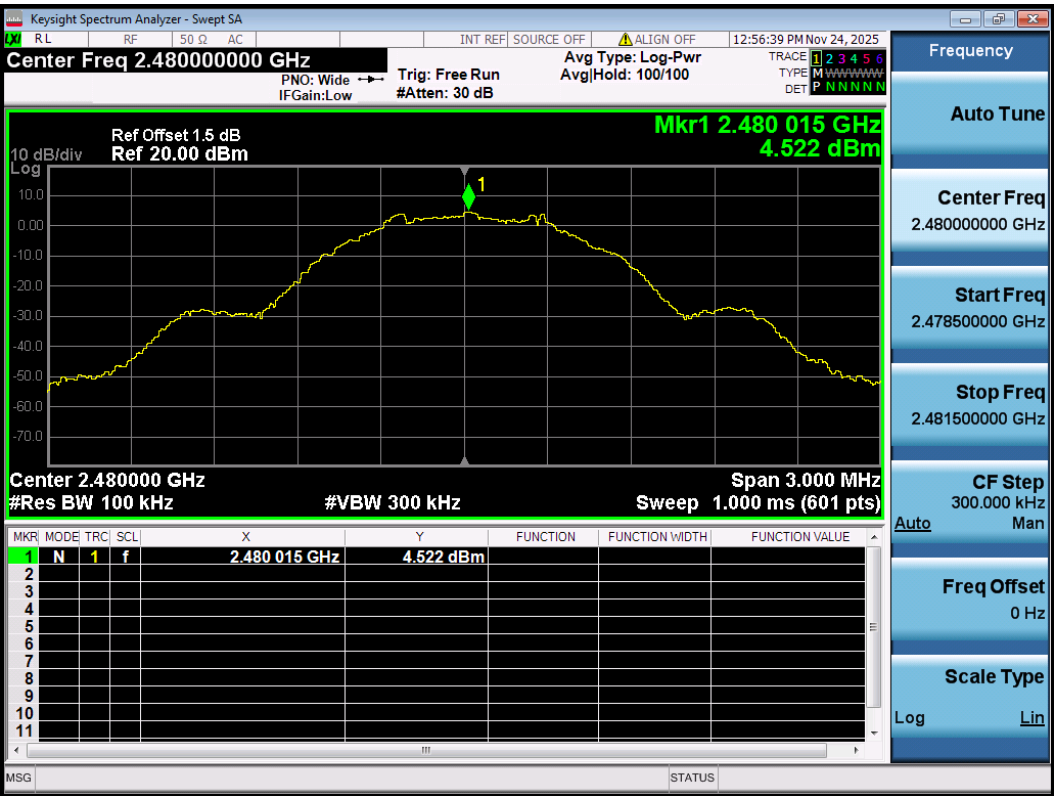

Page 29 of 57

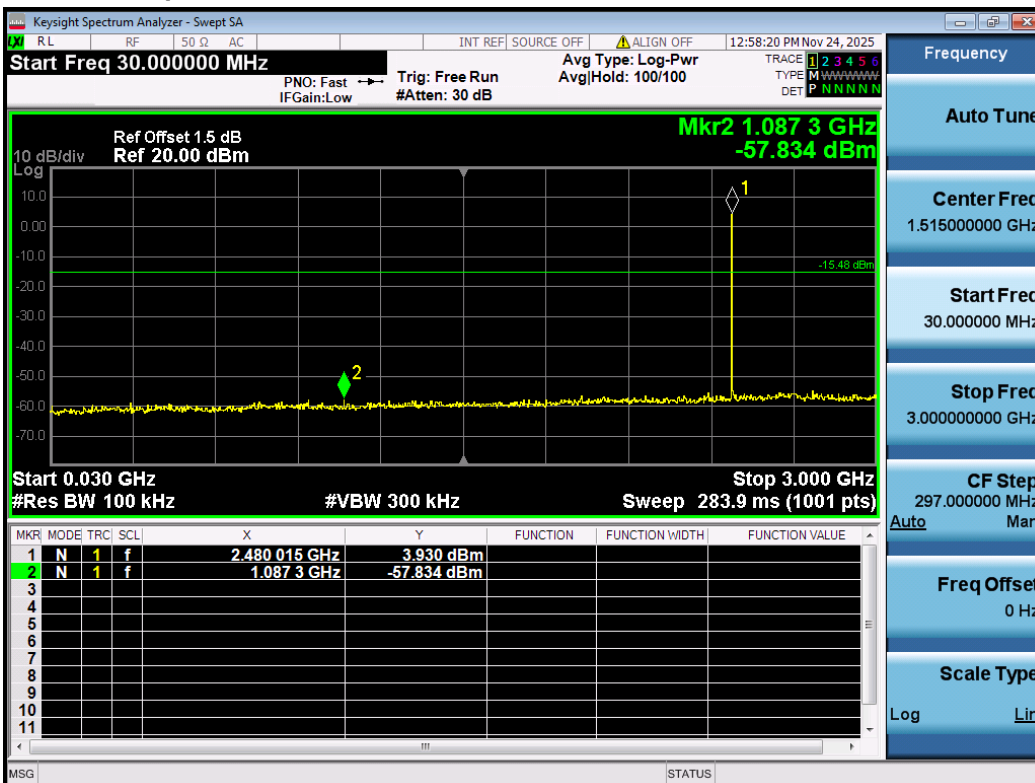

TEST REPORT


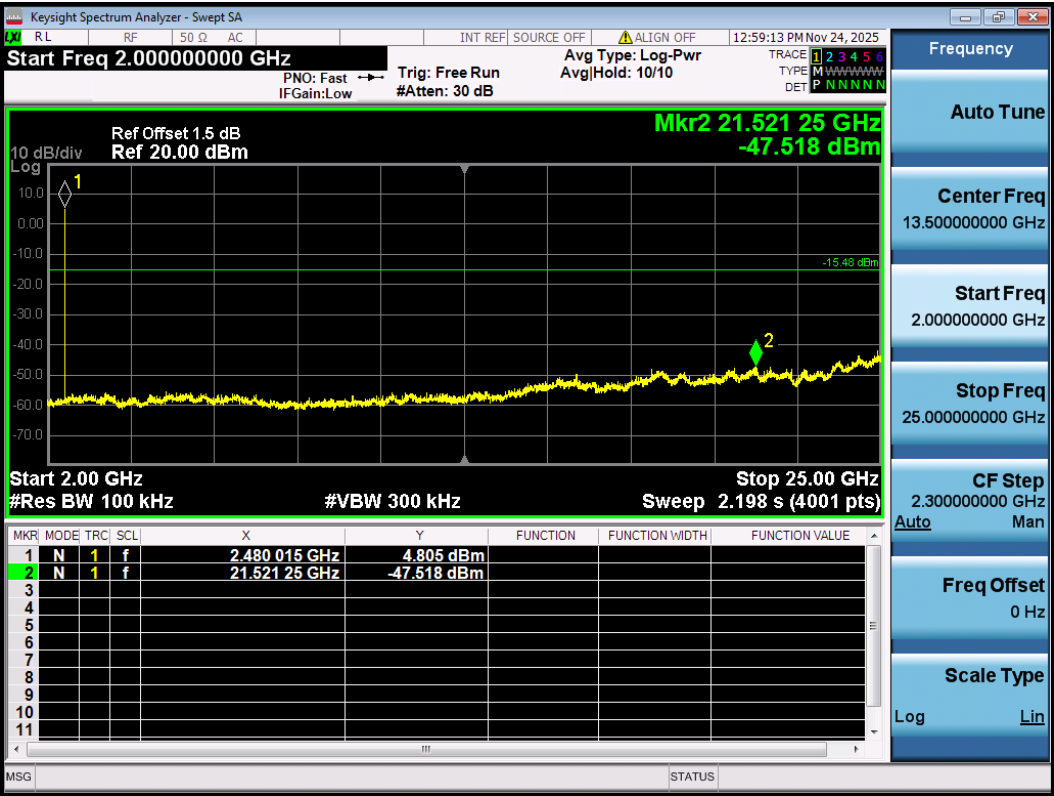


Figure 22: Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-2Mbps Carrier Level

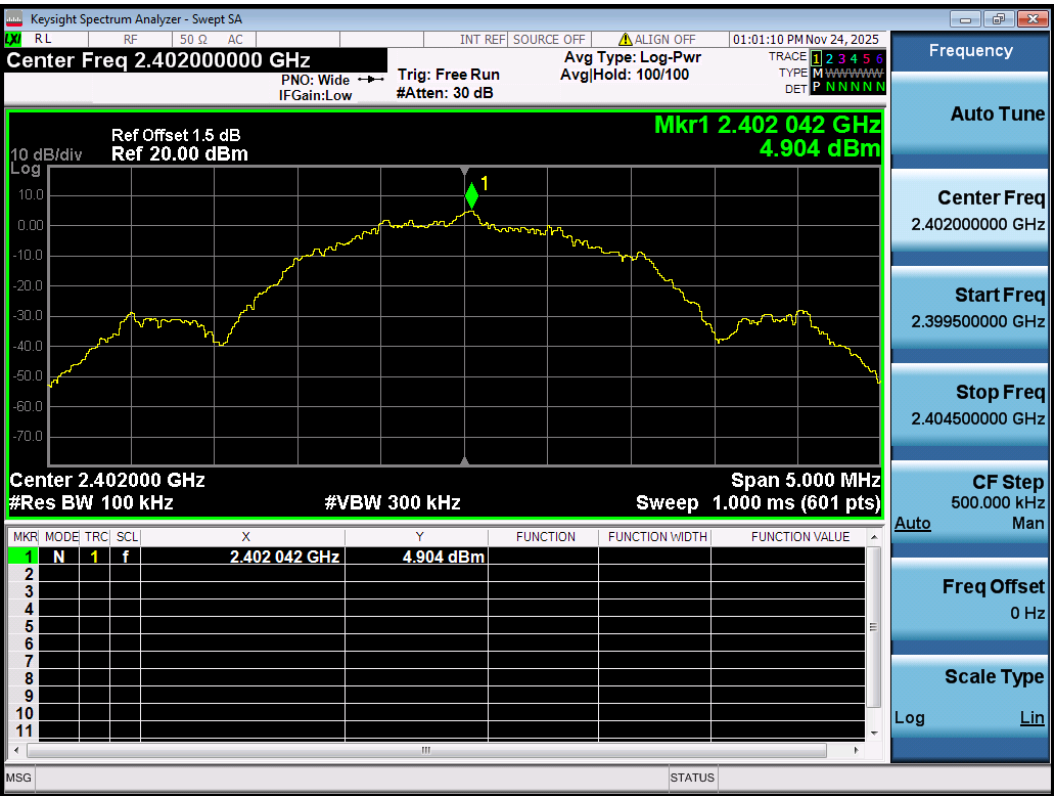


TEST REPORT

SHE25110007-01CE


2025-12-16

Page 31 of 57

Band Edge

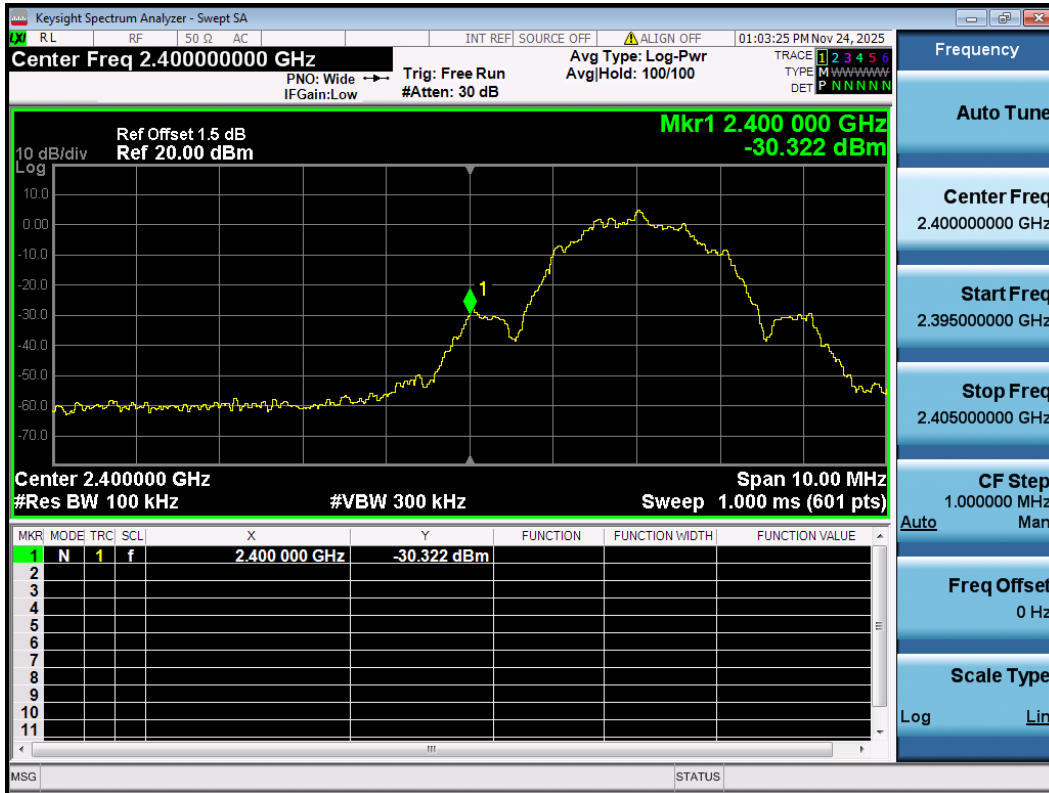

Conducted spurious emissions 30MHz-25GHz

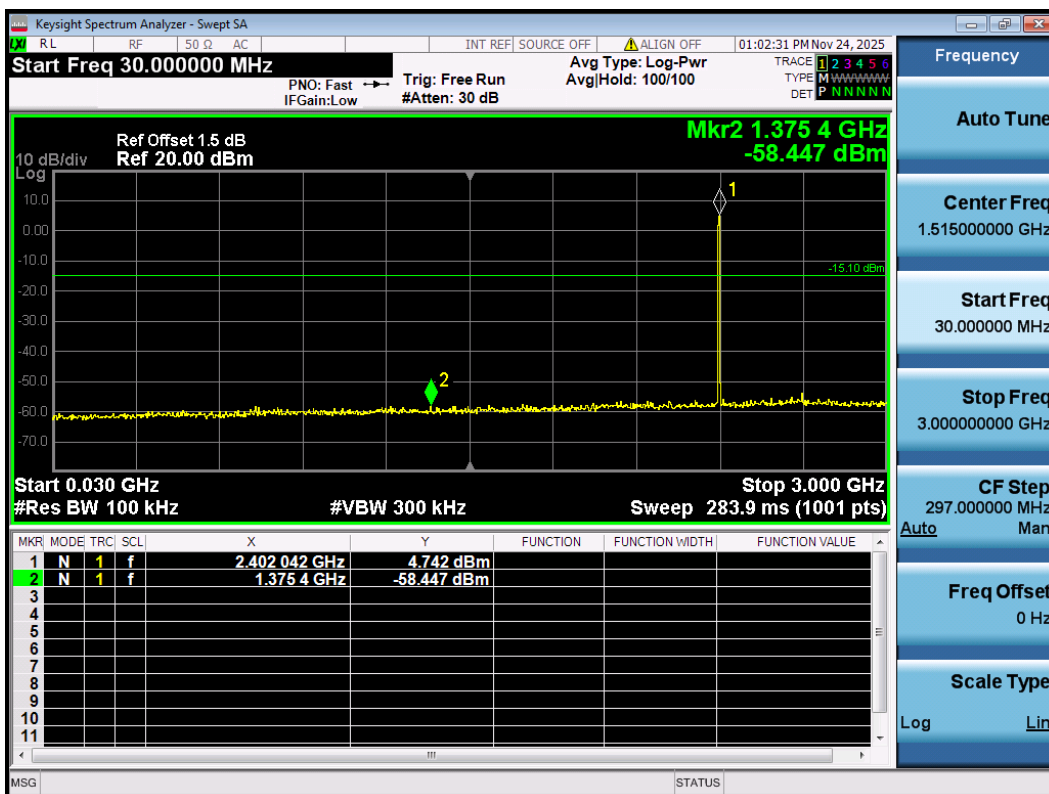

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 32 of 57


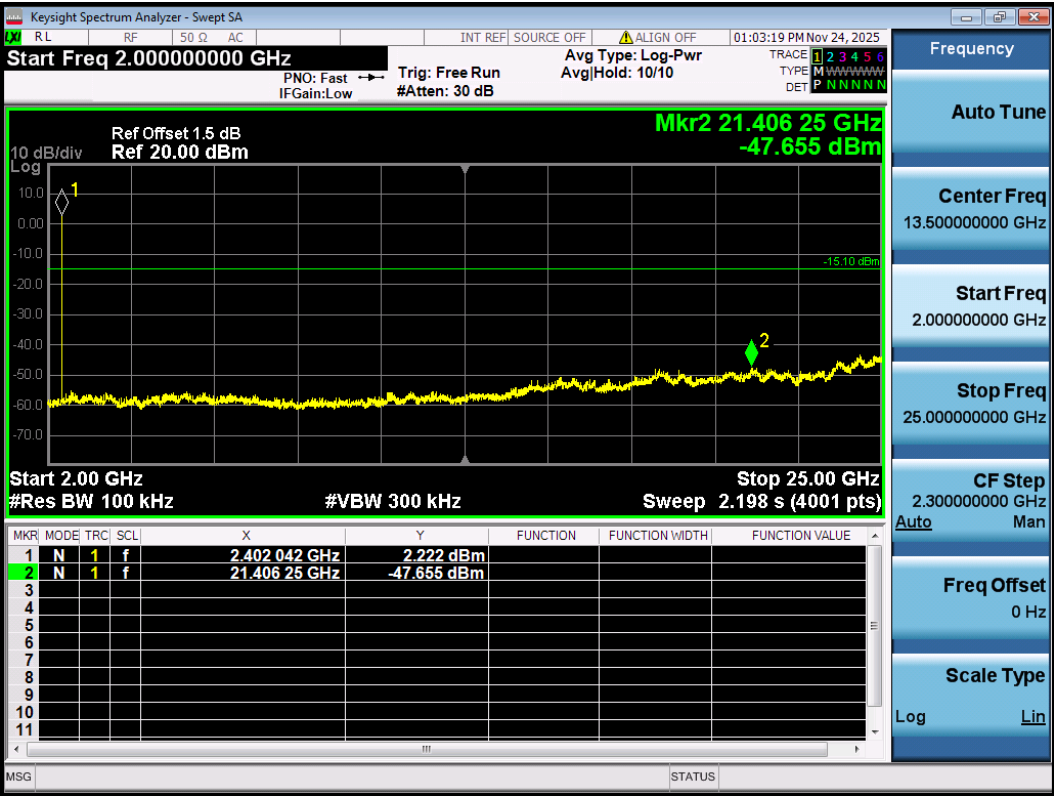




Figure 23: Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-2Mbps Carrier Level

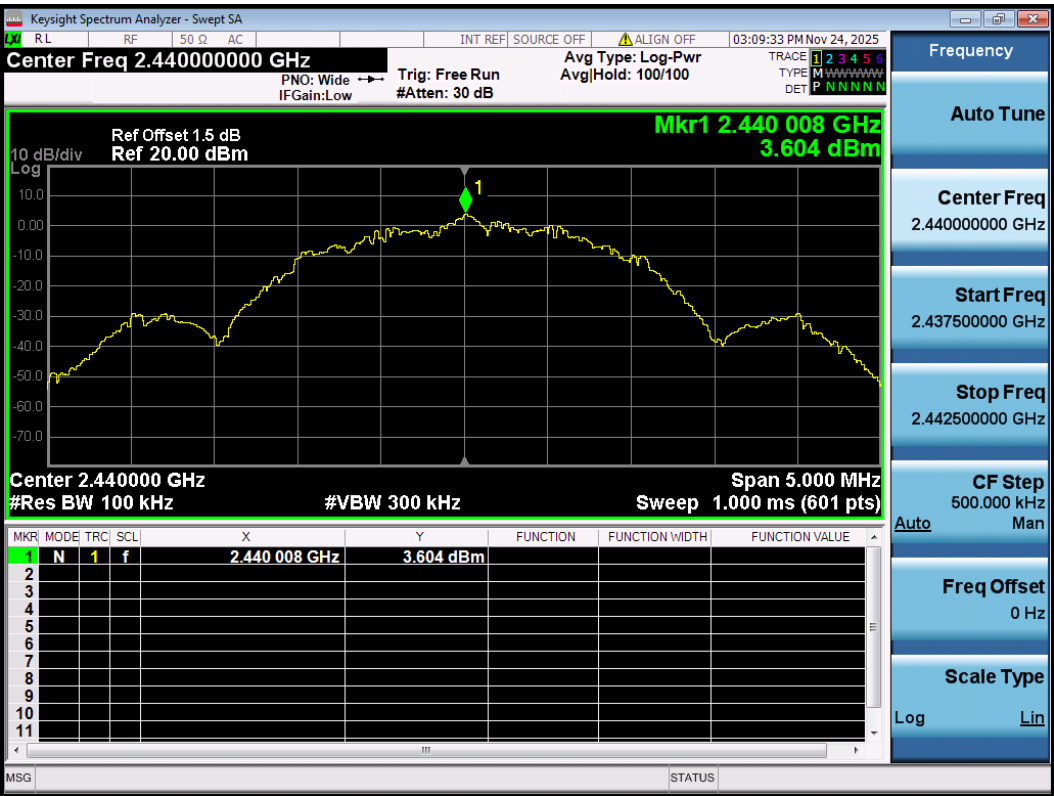

TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 33 of 57

Conducted spurious emissions 30MHz-25GHz

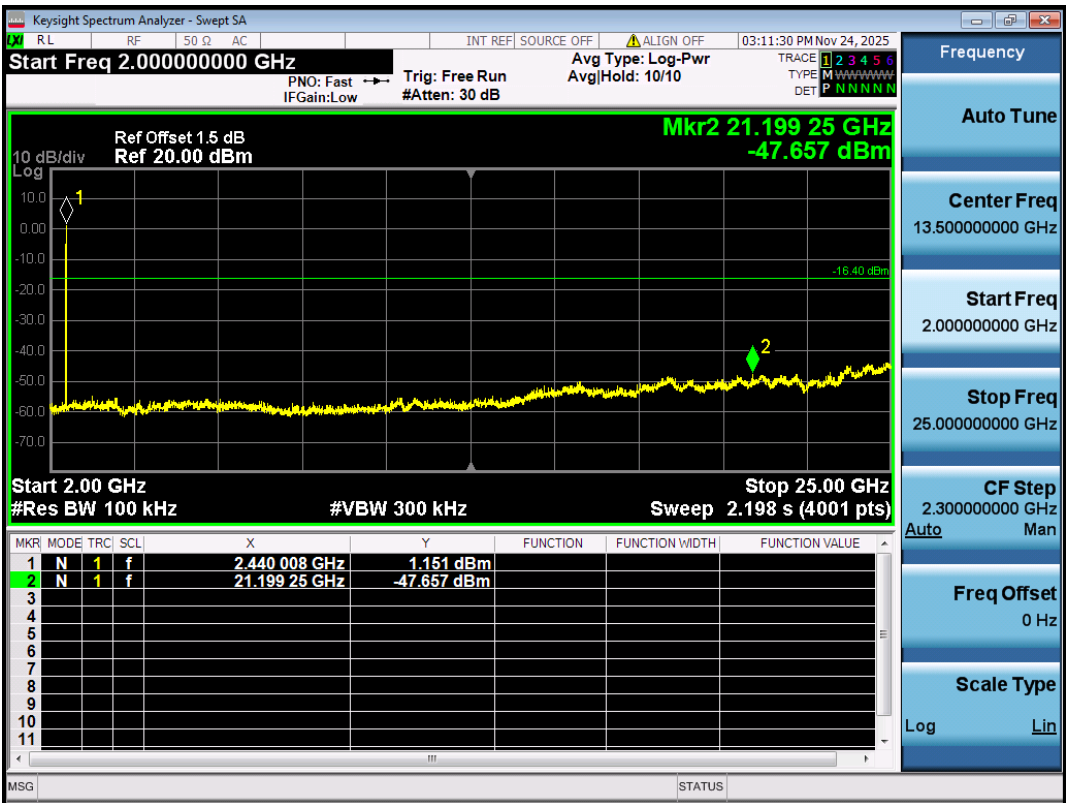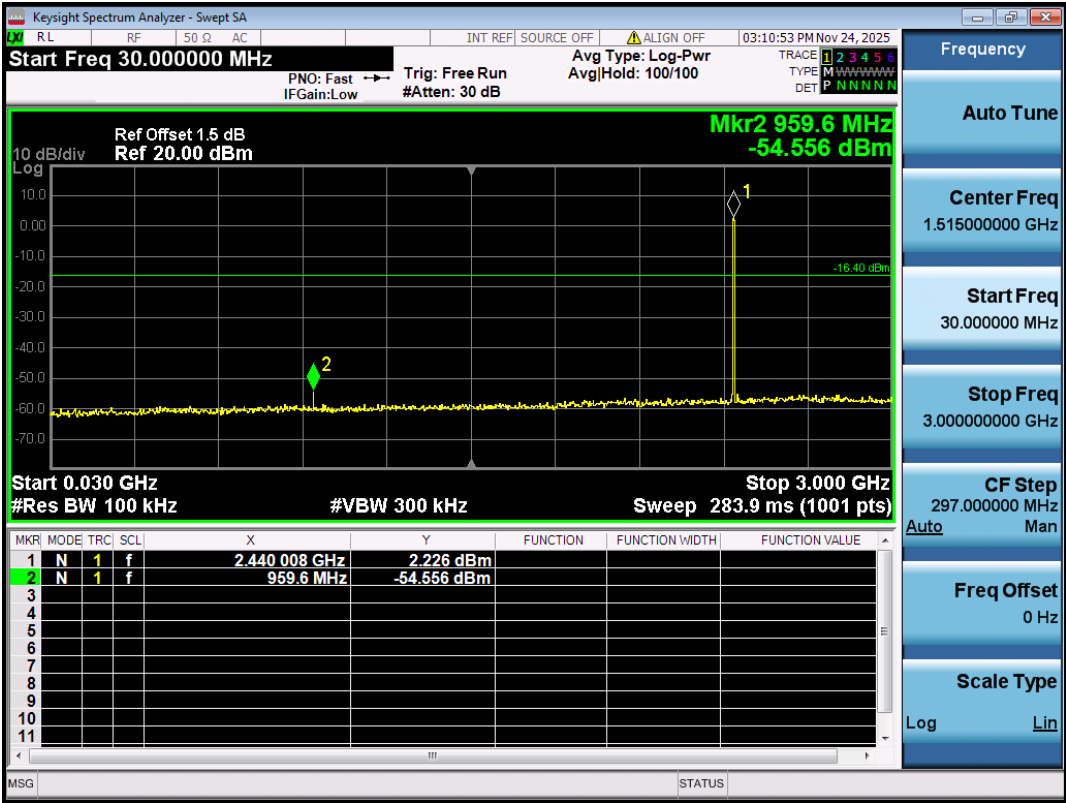


TEST REPORT

SHE25110007-01CE


Date: 2025-12-16

Page 34 of 57

Figure 24: Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-2Mbps Carrier Level

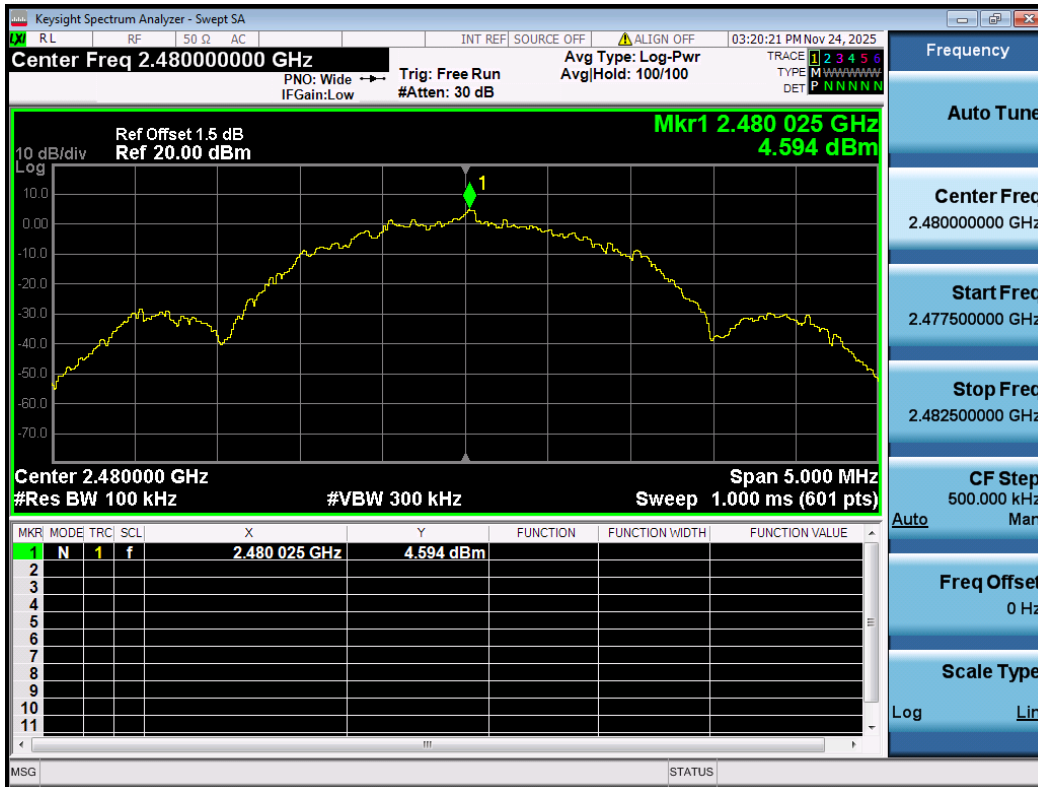



Band Edge

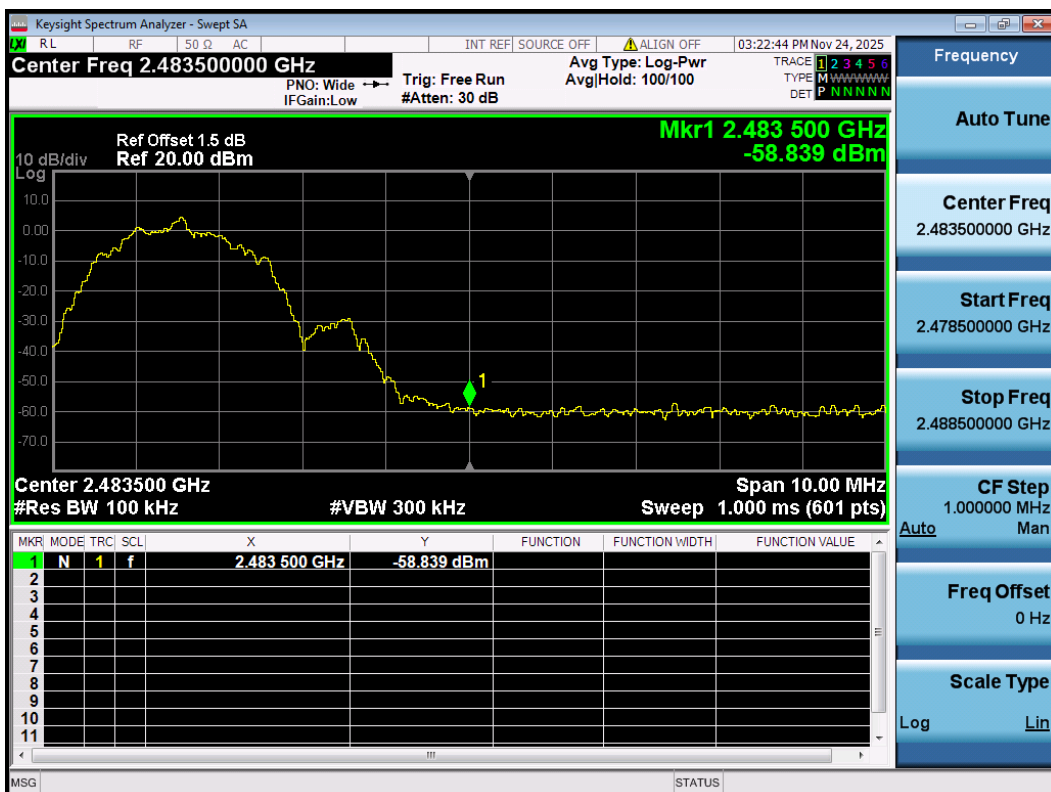

TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 35 of 57

Conducted spurious emissions 30MHz-25GHz

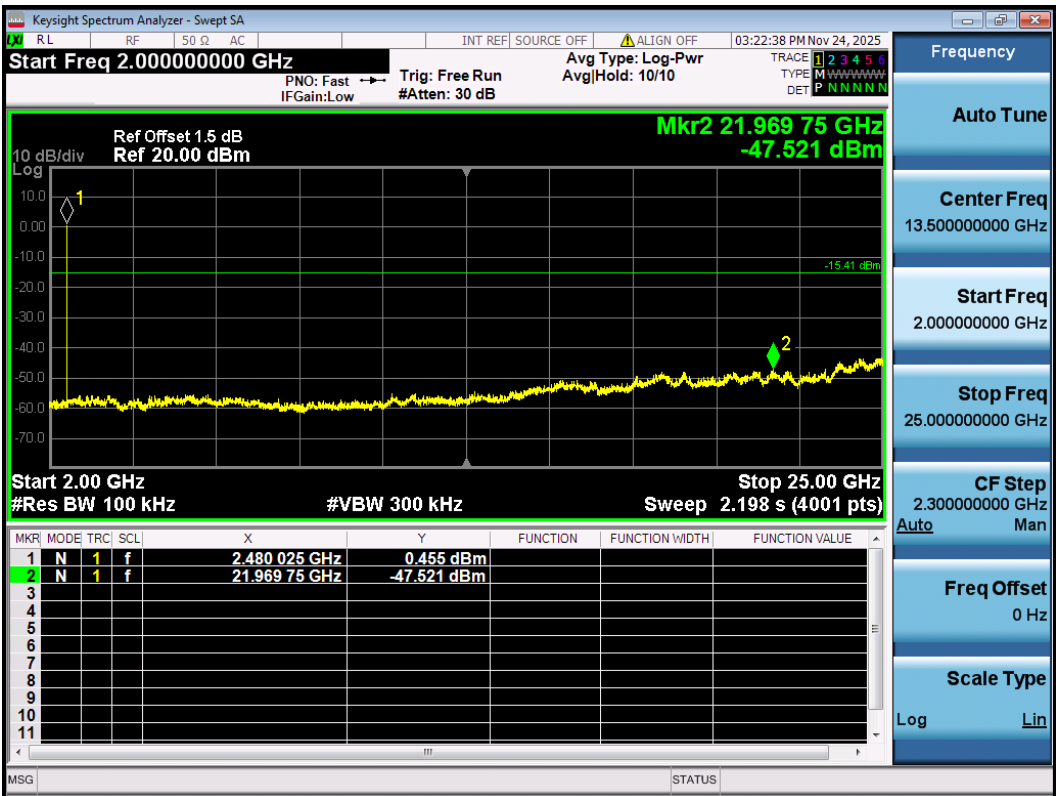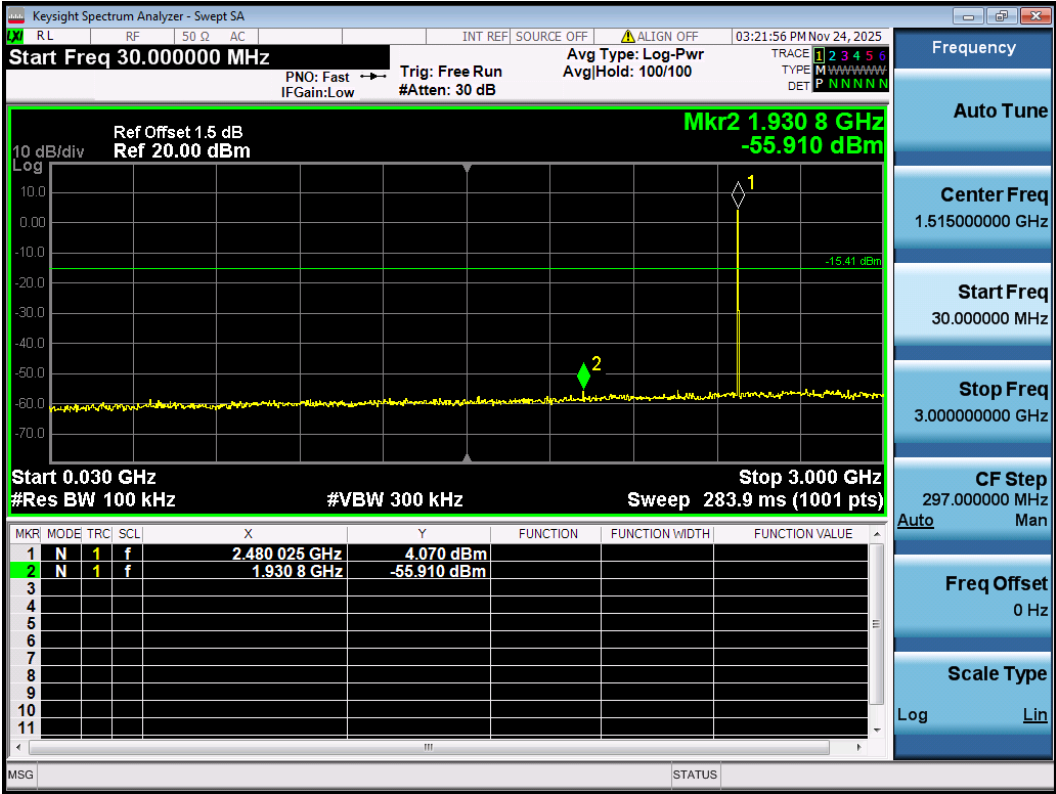

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 36 of 57

4.1.6 Radiated Emission

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209
Requirement	: ANSI C63.10-2020 clause 11.12.1 KDB 558074 D01 v05r02, Clause 8.6
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A
Ambient temperature	: 23.1°C
Relative humidity	: 45%

Notes

Test plots please refer to the annex document "SHE25110007-01CE DATA BLE-TX EXHIBIT A".

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported. In addition, During 30MHz to 1GHz test frequency range, only the worst mode data was reported in this report.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 37 of 57

4.1.7 Band Edge (Restricted-band band-edge)

RESULT: PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209
Requirement	: ANSI C63.10-2020 clause 11.12.3 KDB 558074 D01 v05r02, Clause 8.7
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 23.1°C
Relative humidity	: 45%

Notes

Test plots please refer to the annex document “SHE25110007-01CE DATA BLE-TX EXHIBIT A”.

TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 38 of 57

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT: **PASS**

Test standard	: FCC Part 15.207(a)
Requirement	: ANSI C63.10-2020, Clause 6.2
Kind of test site	: Shielded room

Test setup

Input Voltage	: DC 33.6V 5A supply by Power Unit (which received AC 120V, 60Hz)
Operation Mode	: A.1.a
Earthing	: Disconnected to GND
Ambient temperature	: 23.2°C
Relative humidity	: 47%

For details refer to following test plot.

TEST REPORT


Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 39 of 57

Note: The all configurations were tested respectively, but only the worst data (at BLE-1Mbps low channel) shown here.


Figure 25: Conducted Emission on AC Mains, L Phase

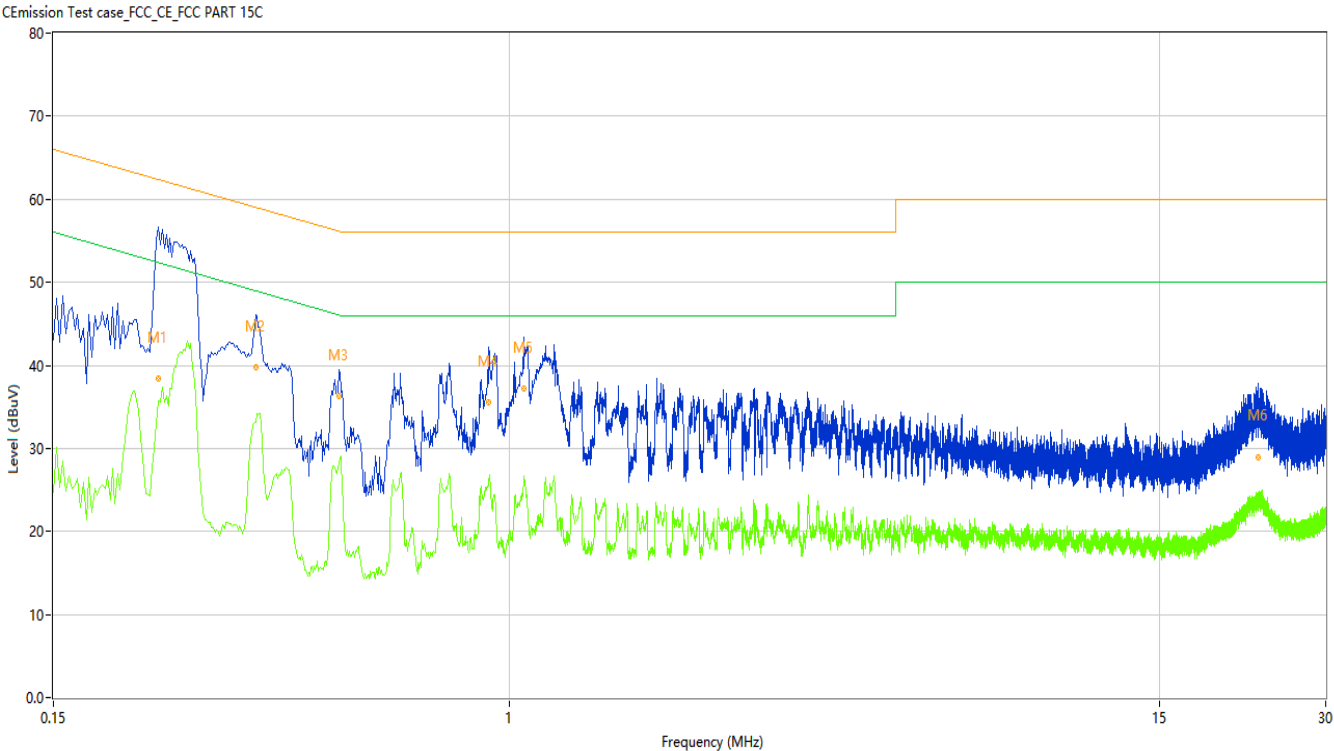

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.232	42.77	10.22	62.38	19.61	Peak	L	Pass
1*	0.232	38.48	10.22	62.38	23.90	QP	L	Pass
1**	0.232	35.67	10.22	52.38	16.71	AV	L	Pass
2	0.348	45.07	10.23	59.01	13.94	Peak	L	Pass
2*	0.348	39.80	10.23	59.01	19.21	QP	L	Pass
2**	0.348	33.18	10.23	49.01	15.83	AV	L	Pass
3	0.492	39.87	10.20	56.13	16.26	Peak	L	Pass
3*	0.492	36.29	10.20	56.13	19.84	QP	L	Pass
3**	0.492	28.21	10.20	46.13	17.92	AV	L	Pass
4	0.920	41.23	10.18	56.00	14.77	Peak	L	Pass
4*	0.920	35.51	10.18	56.00	20.49	QP	L	Pass
4**	0.920	25.90	10.18	46.00	20.10	AV	L	Pass
5	1.066	43.71	9.97	56.00	12.29	Peak	L	Pass
5*	1.066	37.17	9.97	56.00	18.83	QP	L	Pass
5**	1.066	26.65	9.97	46.00	19.35	AV	L	Pass
6	22.614	36.40	10.97	60.00	23.60	Peak	L	Pass
6*	22.614	29.00	10.97	60.00	31.00	QP	L	Pass
6**	22.614	24.64	10.97	50.00	25.36	AV	L	Pass

TEST REPORT

Figure 26: Conducted Emission on AC Mains, N Phase

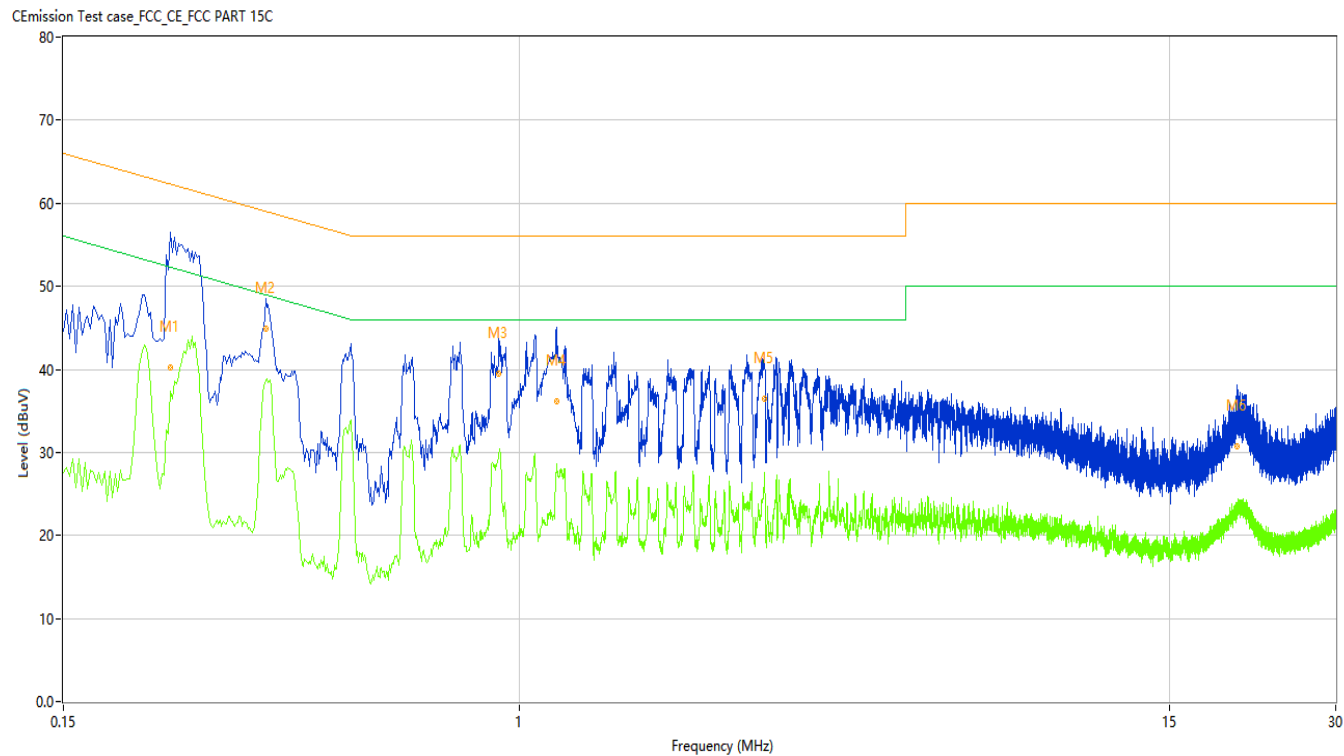

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.234	45.80	10.16	62.31	16.51	Peak	N	Pass
1*	0.234	40.21	10.16	62.31	22.10	QP	N	Pass
1**	0.234	37.33	10.16	52.31	14.98	AV	N	Pass
2	0.348	47.06	10.12	59.01	11.95	Peak	N	Pass
2*	0.348	44.89	10.12	59.01	14.12	QP	N	Pass
2**	0.348	38.77	10.12	49.01	10.24	AV	N	Pass
3	0.920	42.82	10.05	56.00	13.18	Peak	N	Pass
3*	0.920	39.44	10.05	56.00	16.56	QP	N	Pass
3**	0.920	29.68	10.05	46.00	16.32	AV	N	Pass
4	1.170	42.00	9.84	56.00	14.00	Peak	N	Pass
4*	1.170	36.18	9.84	56.00	19.82	QP	N	Pass
4**	1.170	28.59	9.84	46.00	17.41	AV	N	Pass
5	2.782	40.51	10.08	56.00	15.49	Peak	N	Pass
5*	2.782	36.39	10.08	56.00	19.61	QP	N	Pass
5**	2.782	27.45	10.08	46.00	18.55	AV	N	Pass
6	19.856	38.85	10.80	60.00	21.15	Peak	N	Pass
6*	19.856	30.72	10.80	60.00	29.28	QP	N	Pass
6**	19.856	23.28	10.80	50.00	26.72	AV	N	Pass

TEST REPORT


Report No.: SHE25110007-01CE

Date: 2025-12-16


Page 41 of 57

5 Appendixes

5.1 External Photo of the Sample

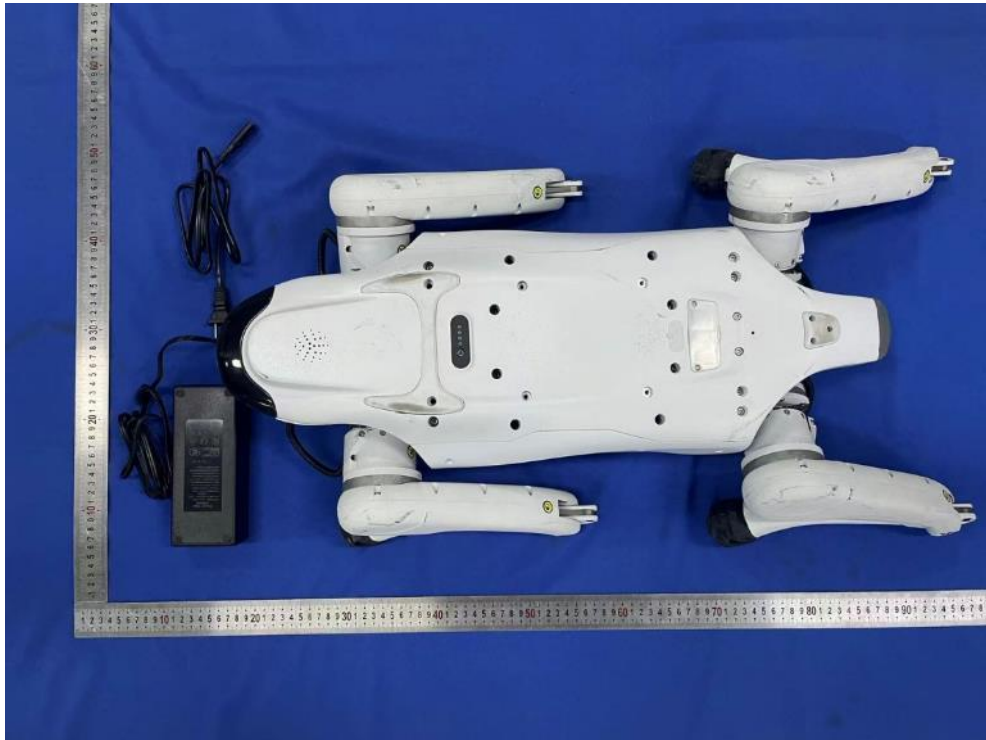


All of the sample

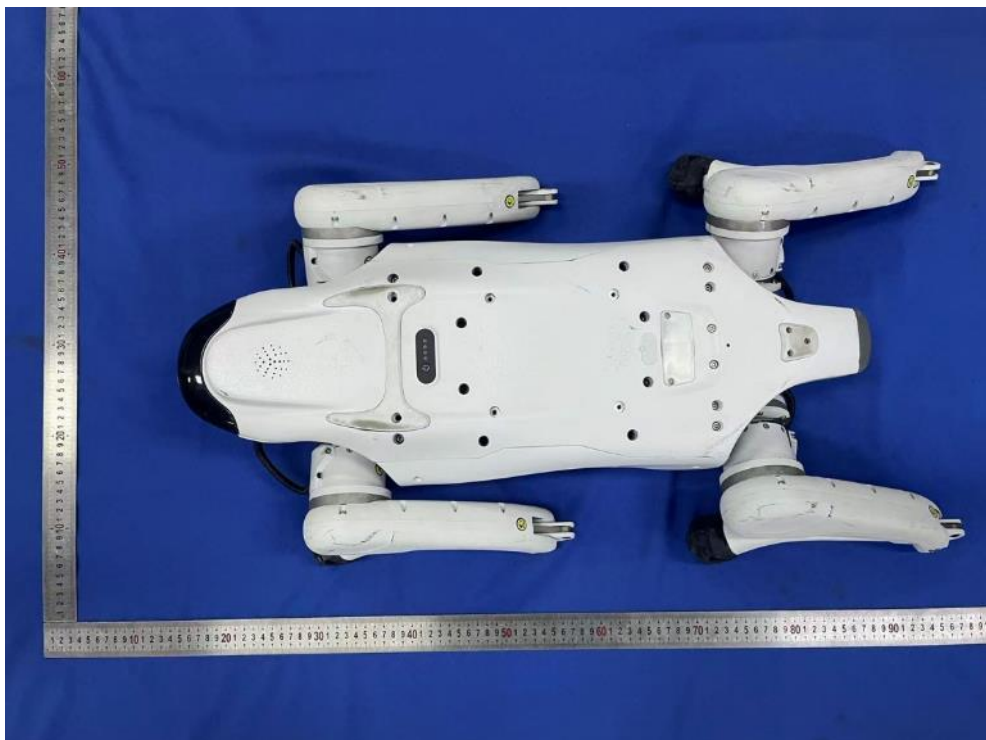


Top of the sample

TEST REPORT

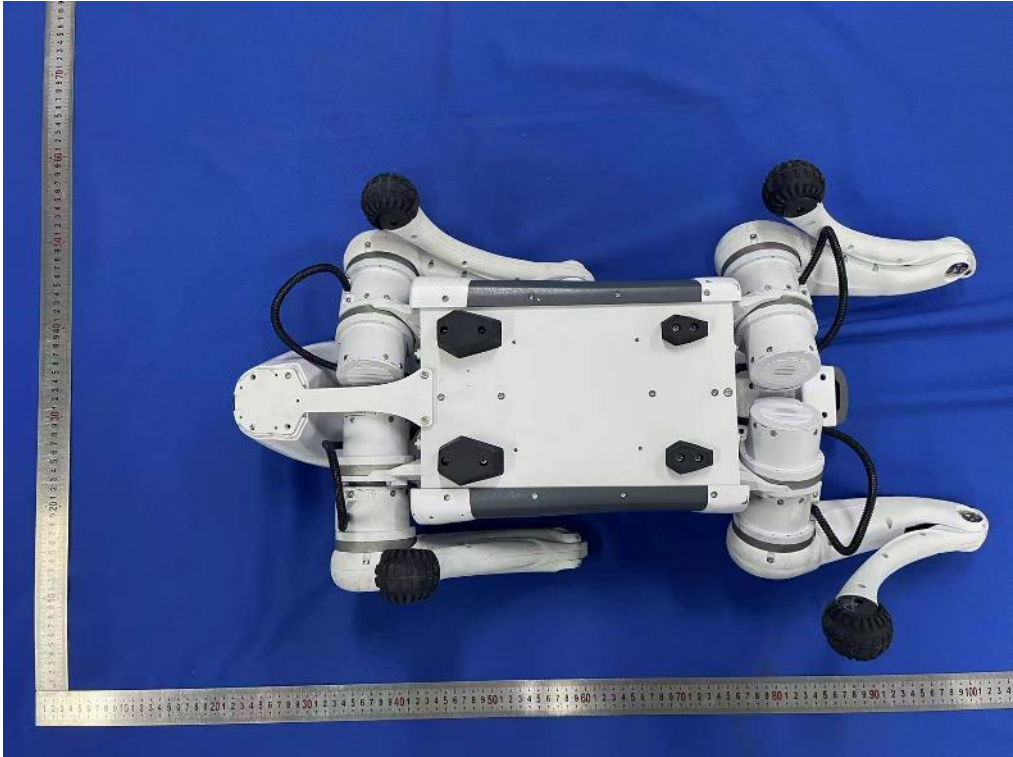

Bottom of the sample

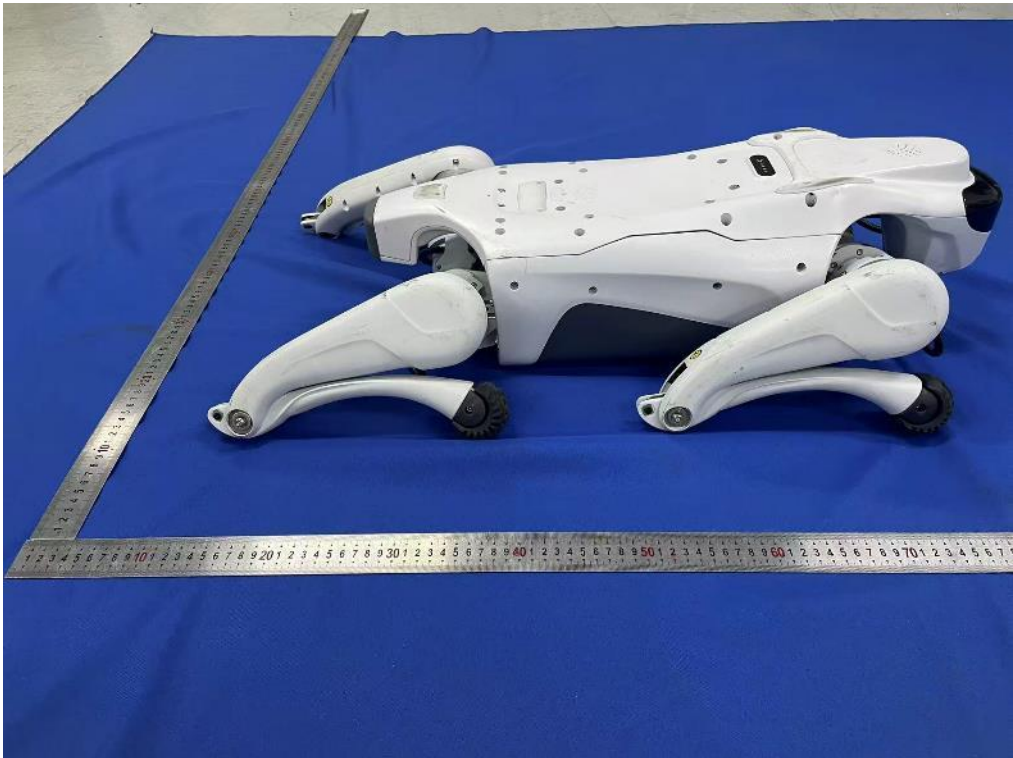

Left of the sample

TEST REPORT


Report No.:

SHE25110007-01CE

Date:

2025-12-16

Page 43 of 57

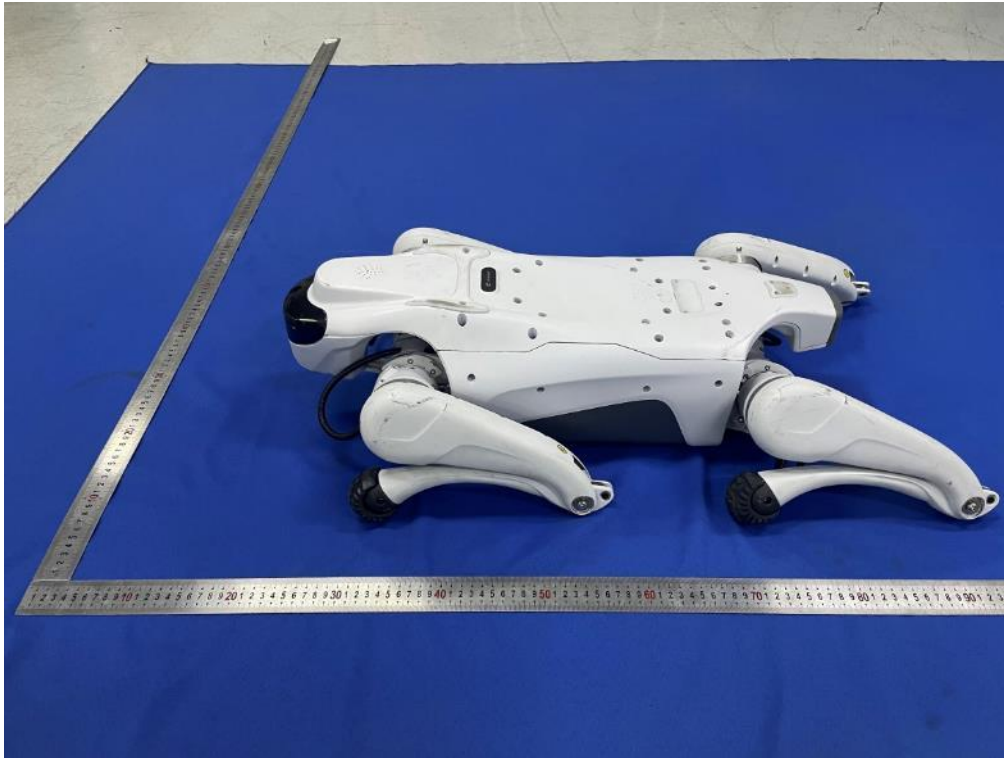

Right of the sample



Front of the sample

TEST REPORT

Report No.:

SHE25110007-01CE

Date:

2025-12-16

Page 44 of 57



Back of the sample



Port of the sample


TEST REPORT

Report No.: SHE25110007-01CE


Date: 2025-12-16

Page 45 of 57

5.2 Internal Photo of the Sample

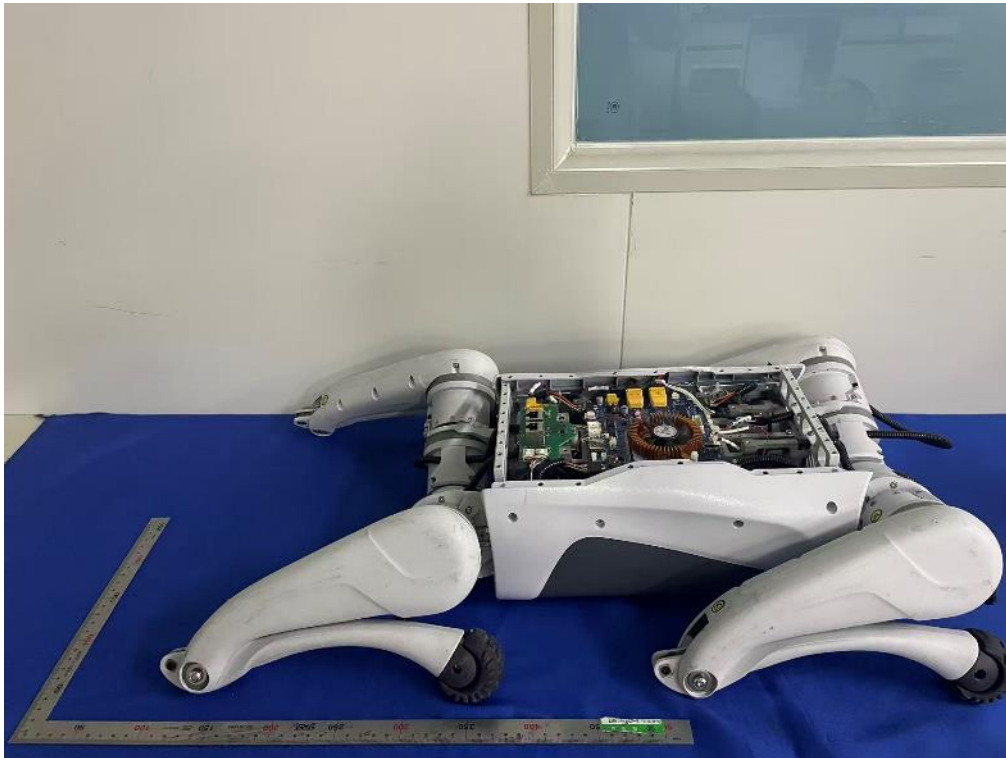


Open-1 of the sample

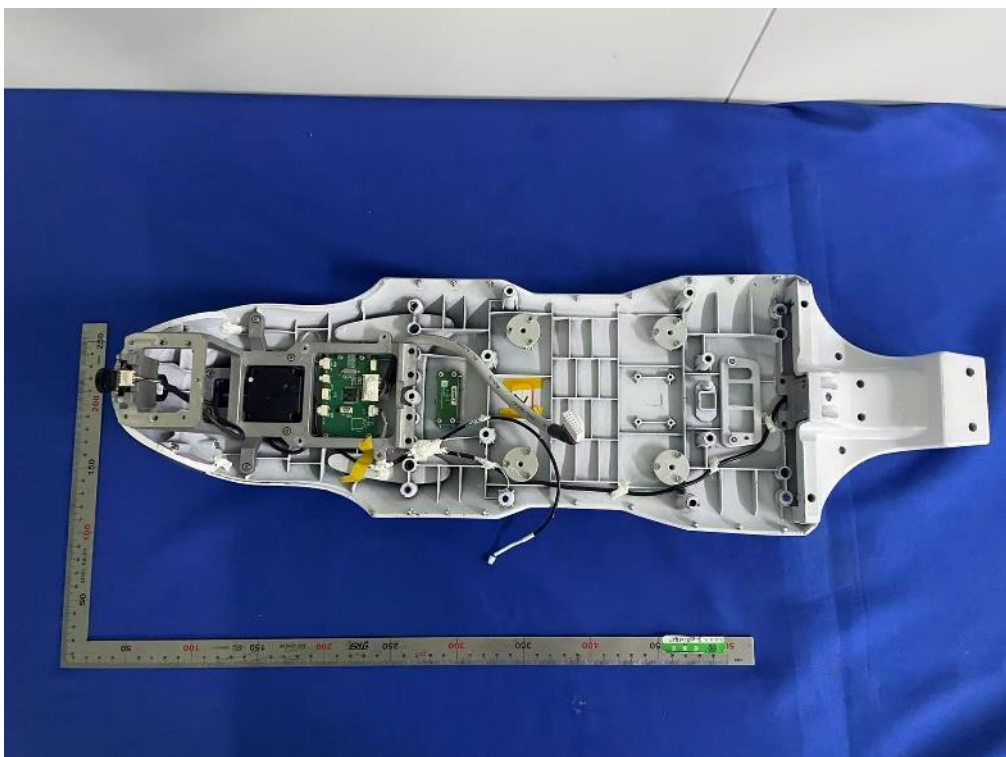


Open-2 of the sample

TEST REPORT

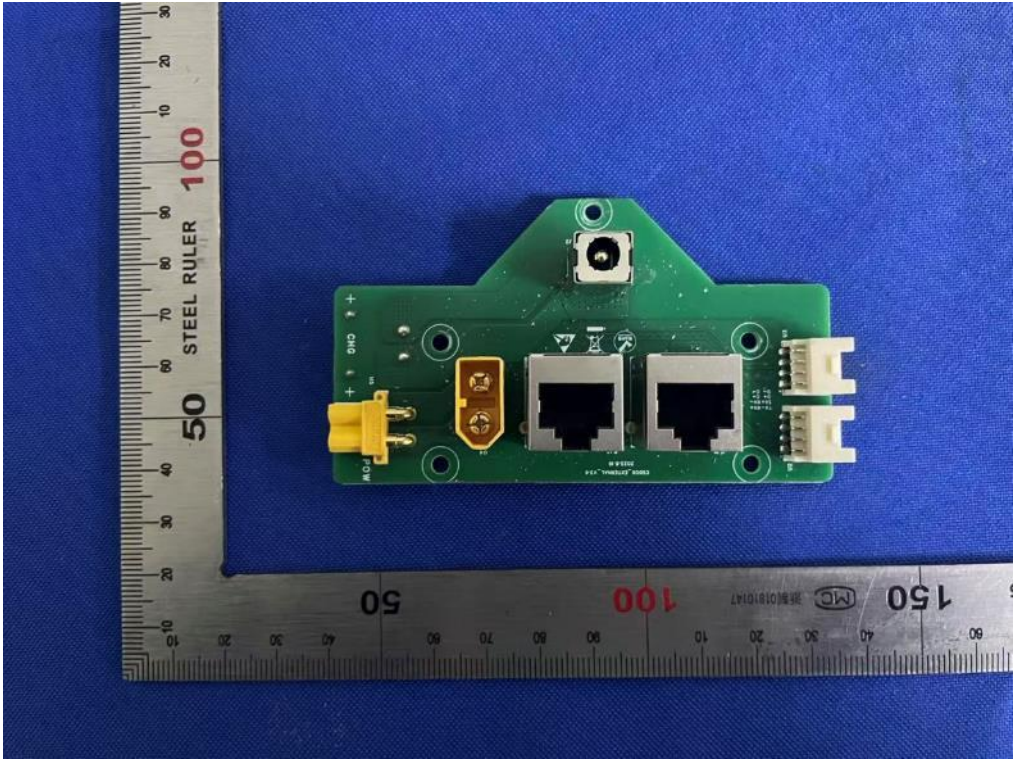


Internal-1 of the sample

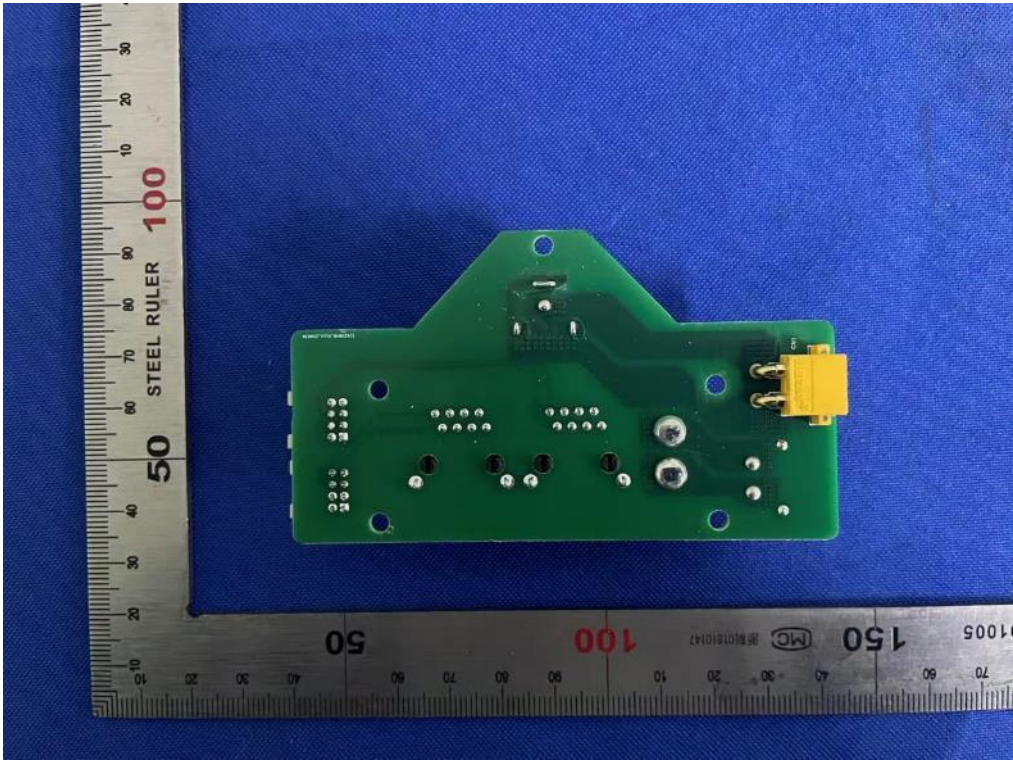


Internal-2 of the sample

TEST REPORT

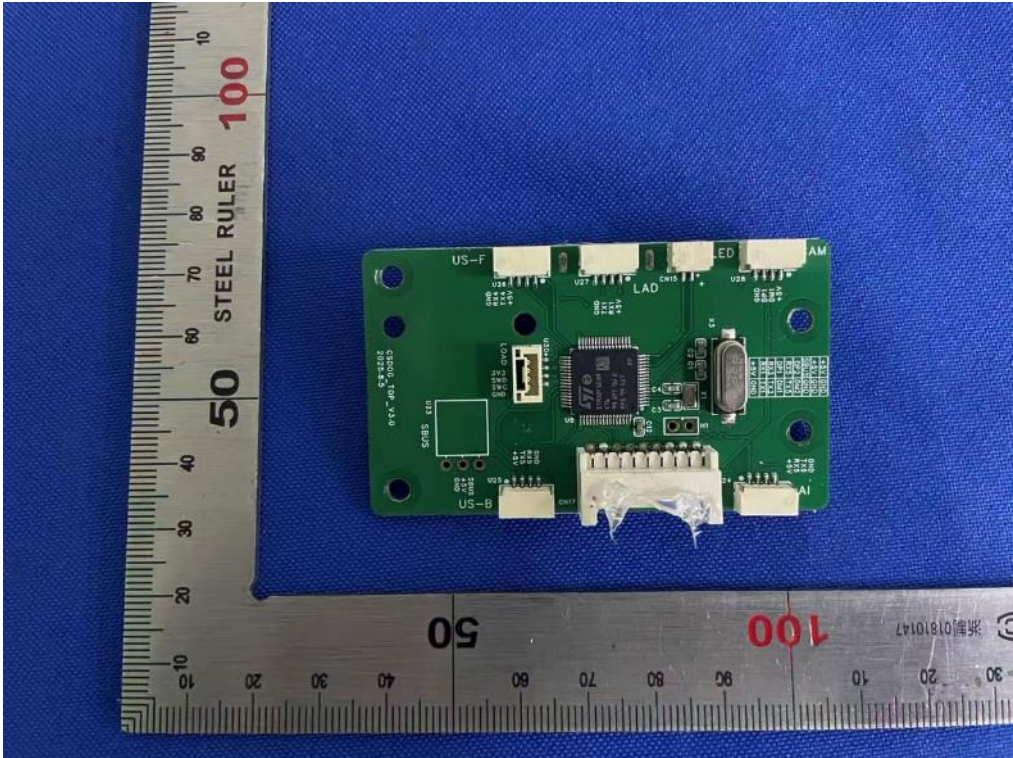


Internal-3 of the sample

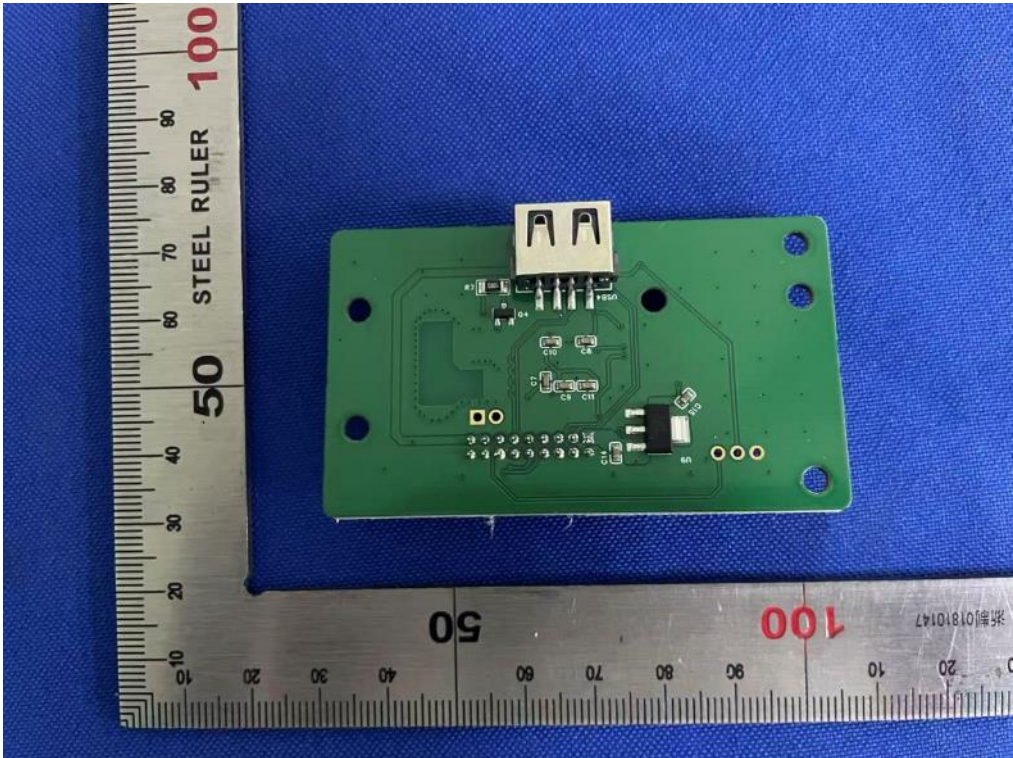


Internal-4 of the sample

TEST REPORT

Report No.: SHE25110007-01CE Date: 2025-12-16 Page 48 of 57

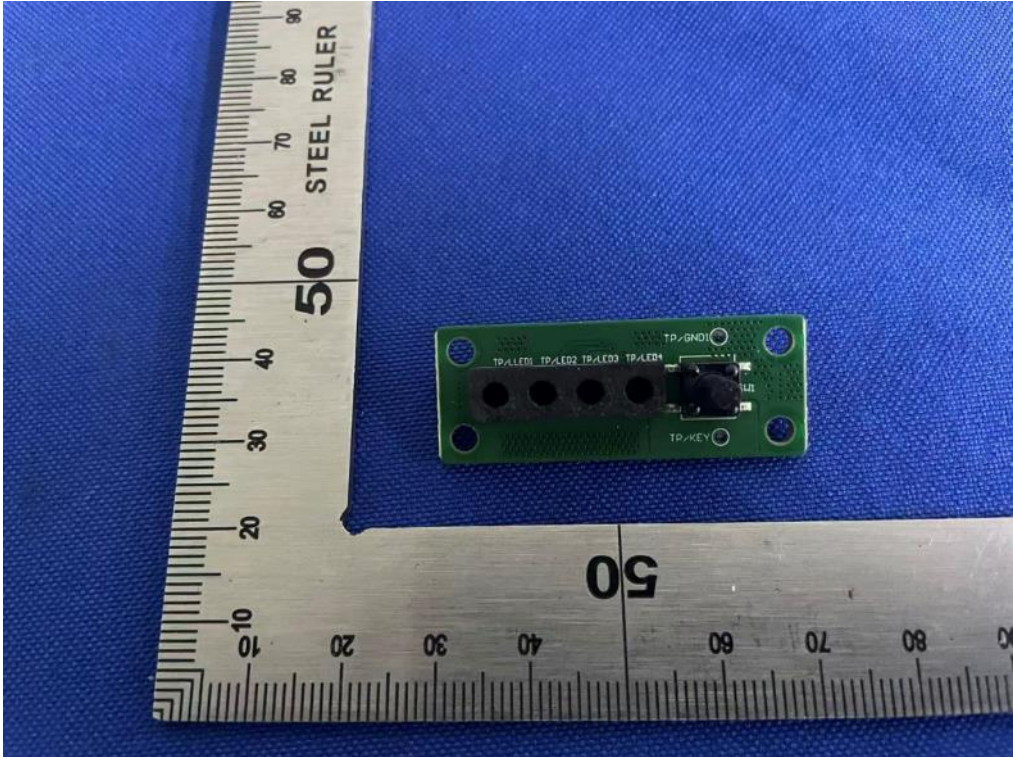


Internal-5 of the sample

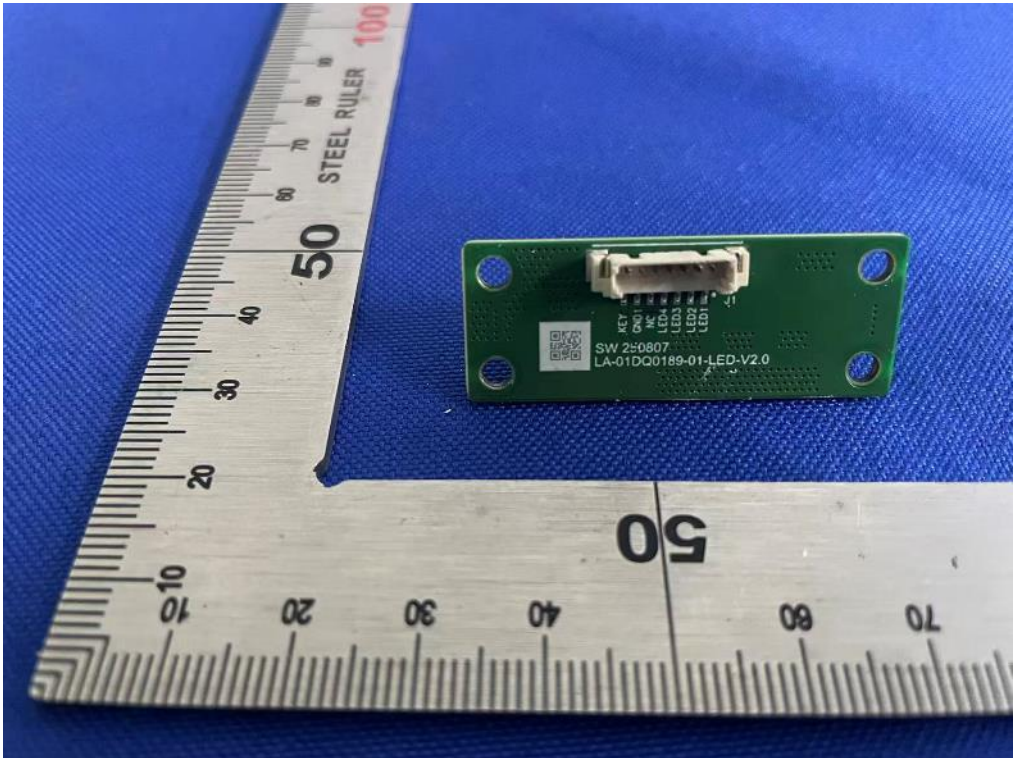


Internal-6 of the sample

TEST REPORT

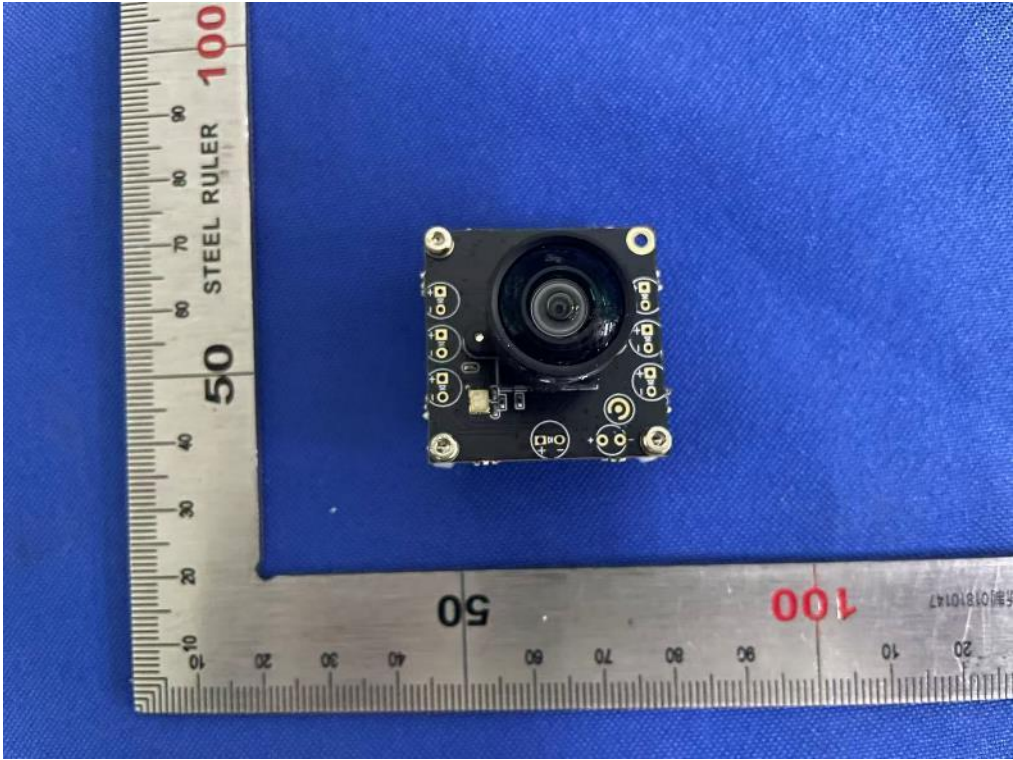

Internal-7 of the sample

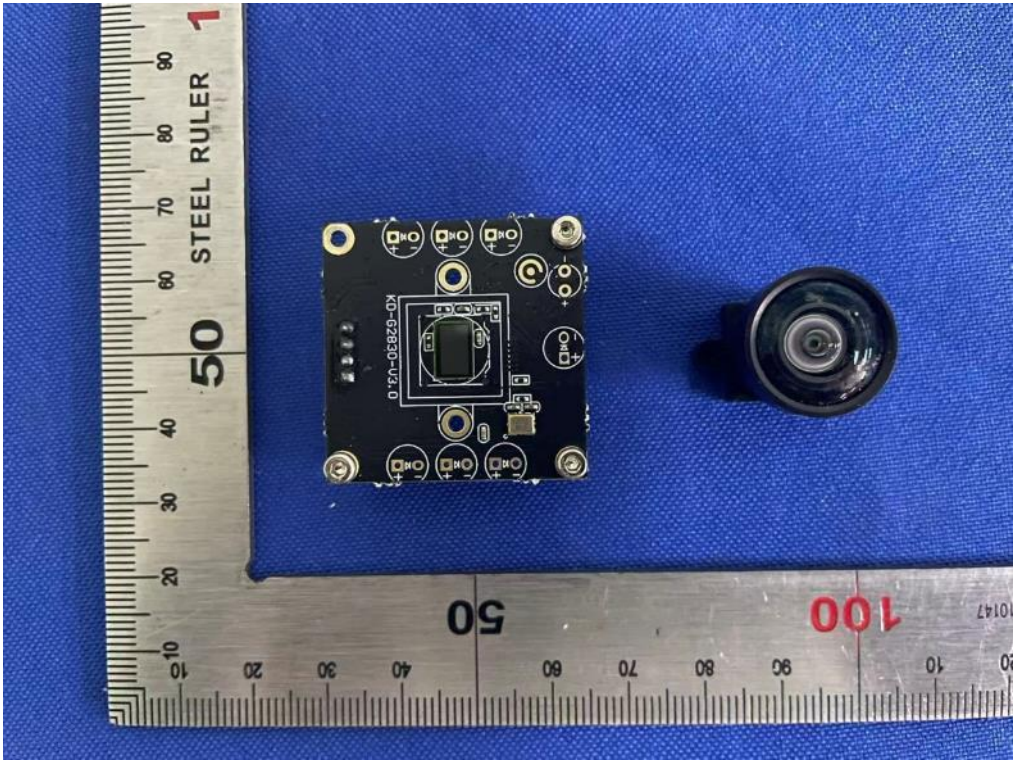

Internal-8 of the sample

TEST REPORT


Report No.:

SHE25110007-01CE


Date:

2025-12-16

Page 50 of 57

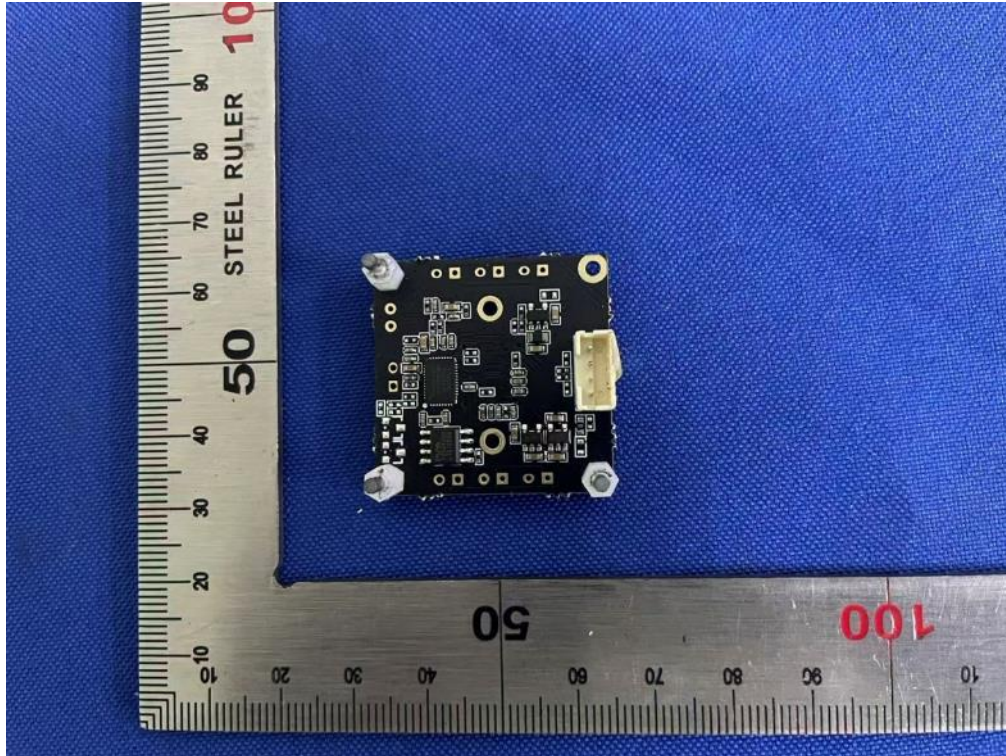

Internal-9 of the sample

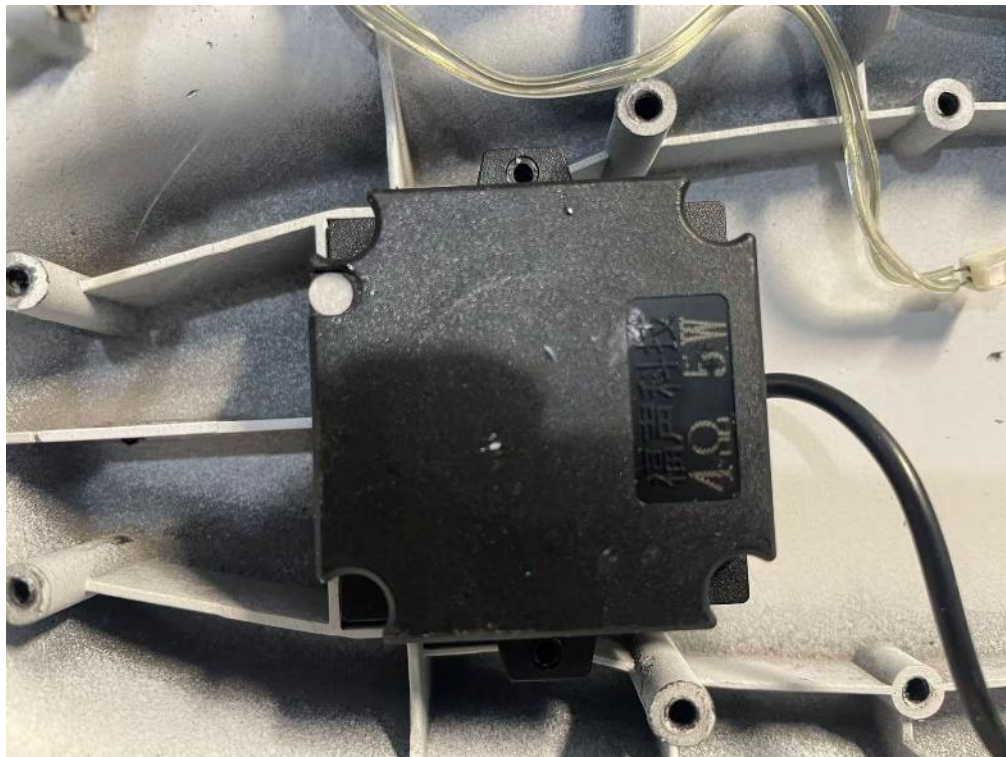

Internal-10 of the sample

TEST REPORT


Report No.:

SHE25110007-01CE


Date:

2025-12-16

Page 51 of 57

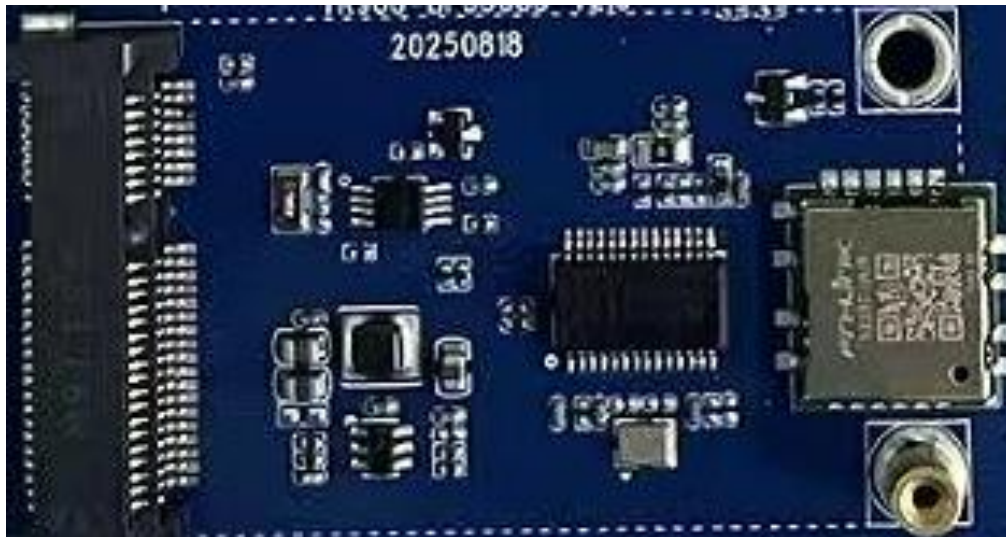

Internal-11 of the sample (Module with shielding cover)

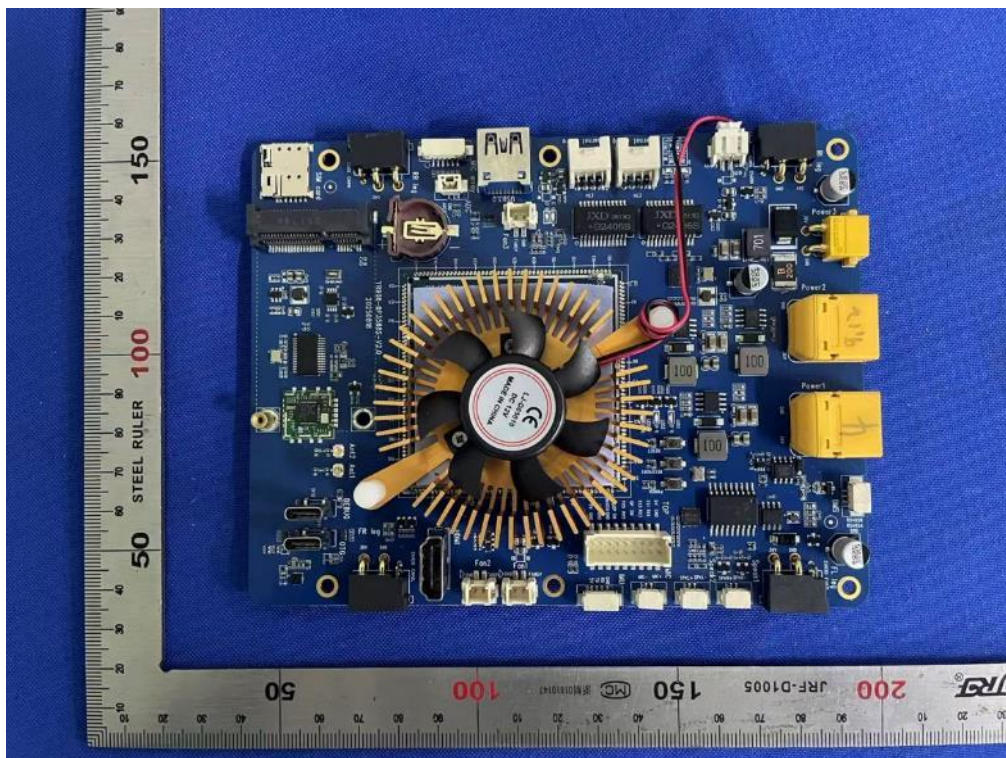


Internal-12 of the sample (Remove the module shielding cover)

TEST REPORT


Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 52 of 57

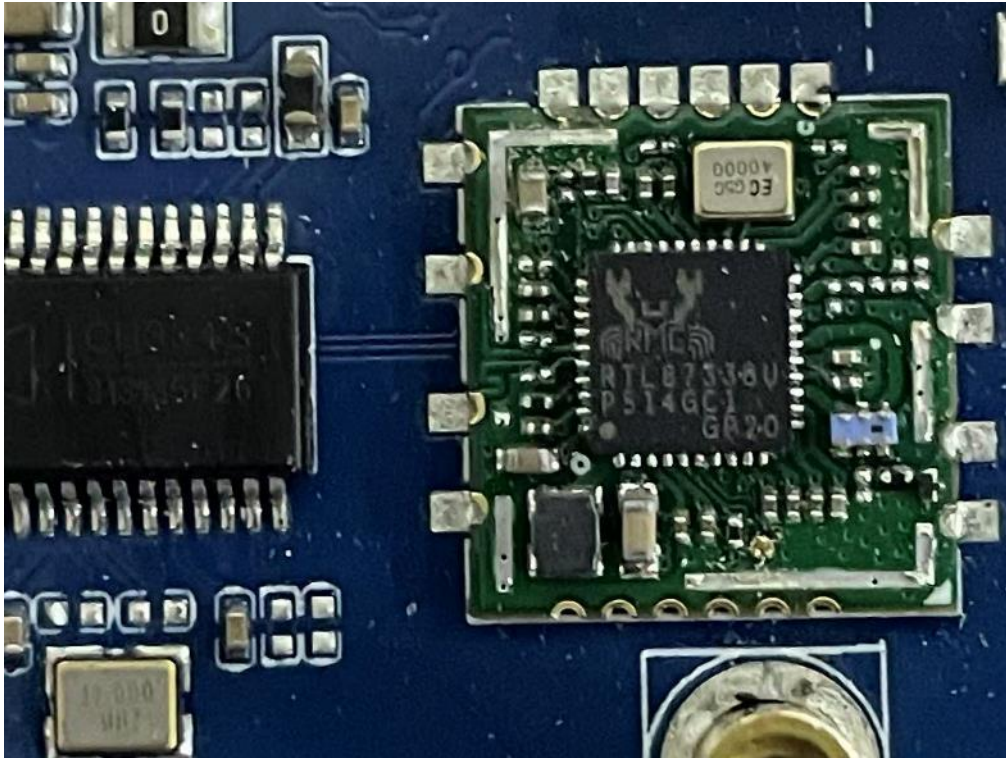

Internal-13 of the sample

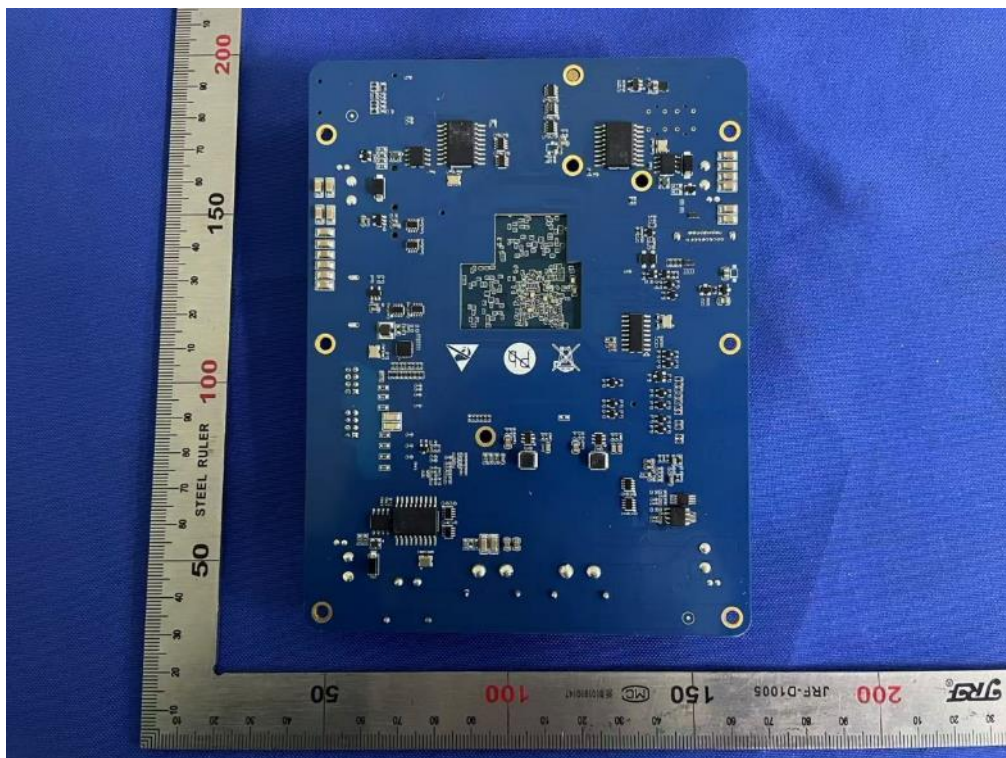

Internal-14 of the sample

TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 53 of 57



Internal-15 of the sample




Battery of the sample

TEST REPORT



Power Unit

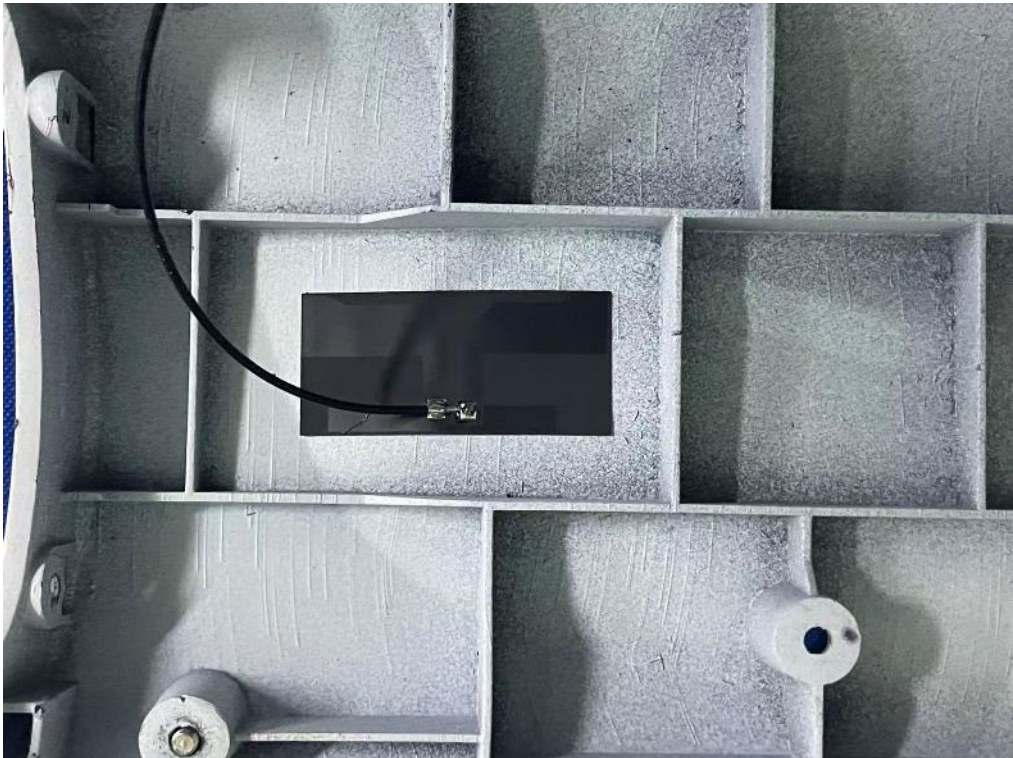

Antenna Position

TEST REPORT


Report No.:

SHE25110007-01CE


Date:

2025-12-16

Page 55 of 57

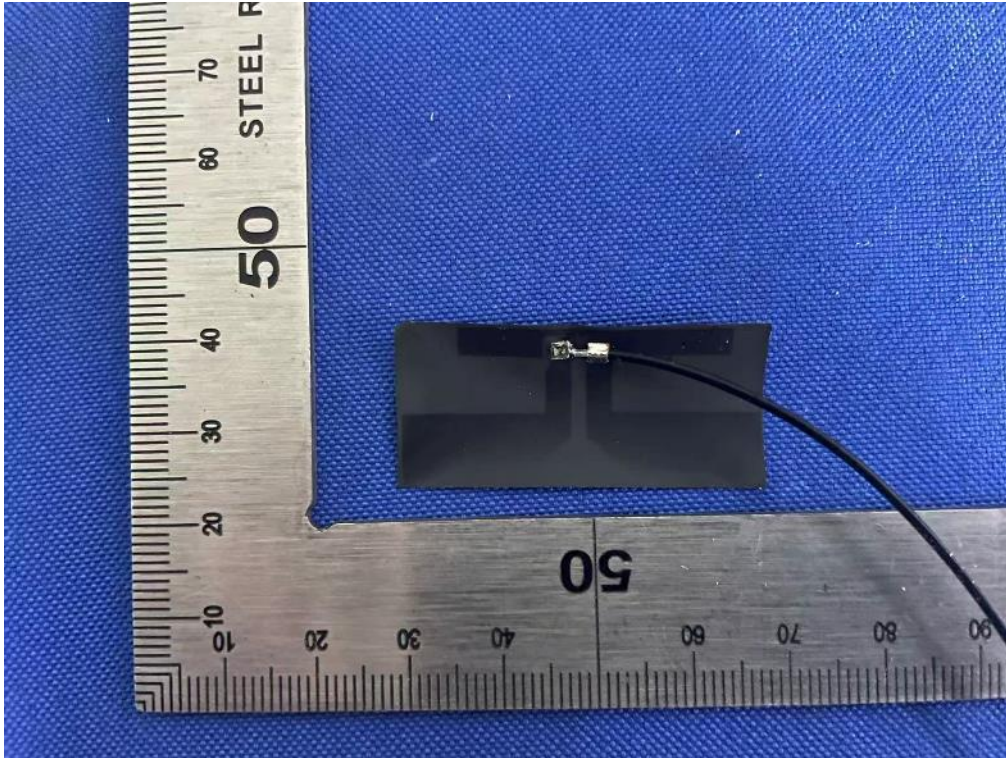

Antenna Photo-Front

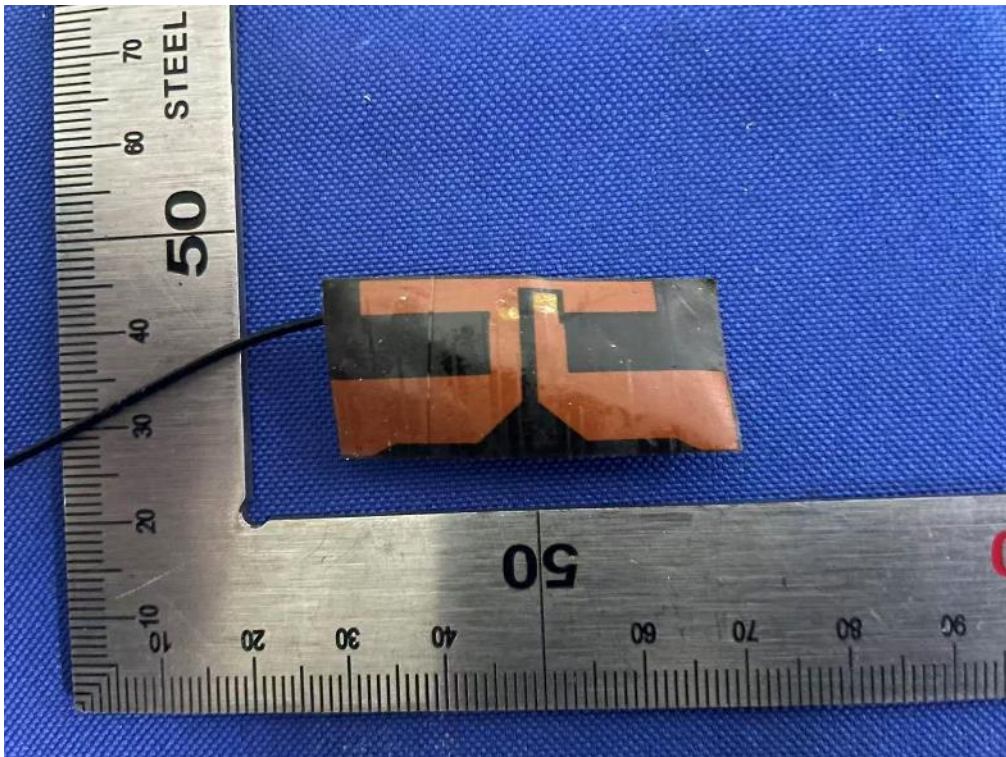

Antenna-Back


TEST REPORT

Report No.: SHE25110007-01CE


Date: 2025-12-16

Page 56 of 57

5.3 Set-up for Conducted Emissions

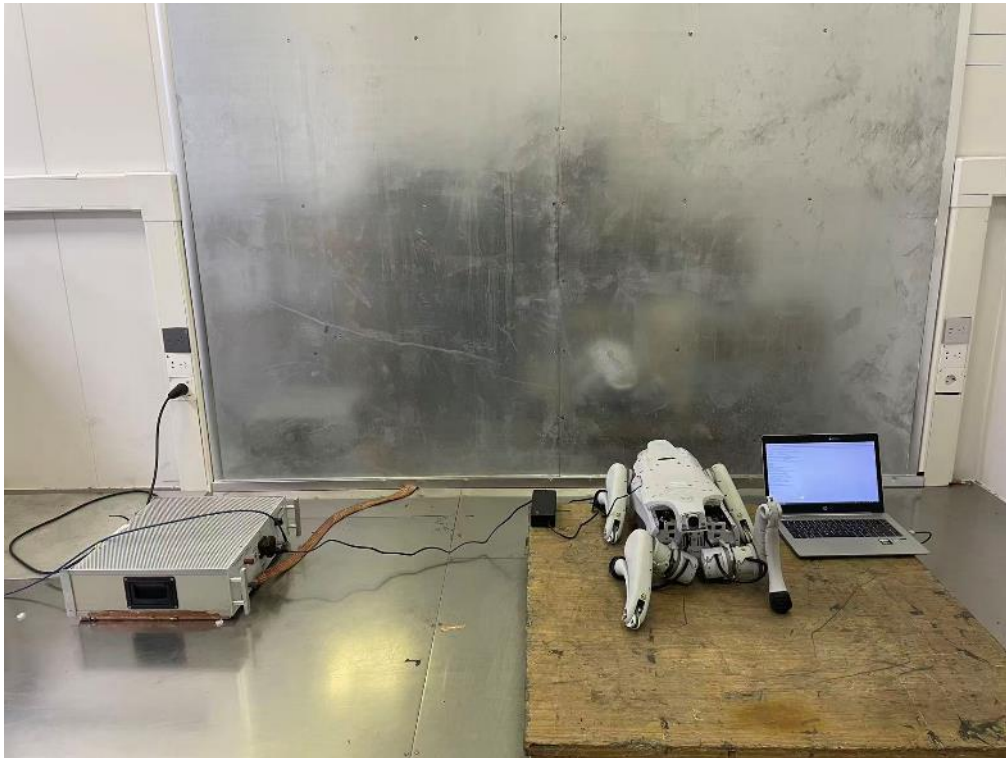

5.4 Set-up for Conducted RF test at Antenna Port

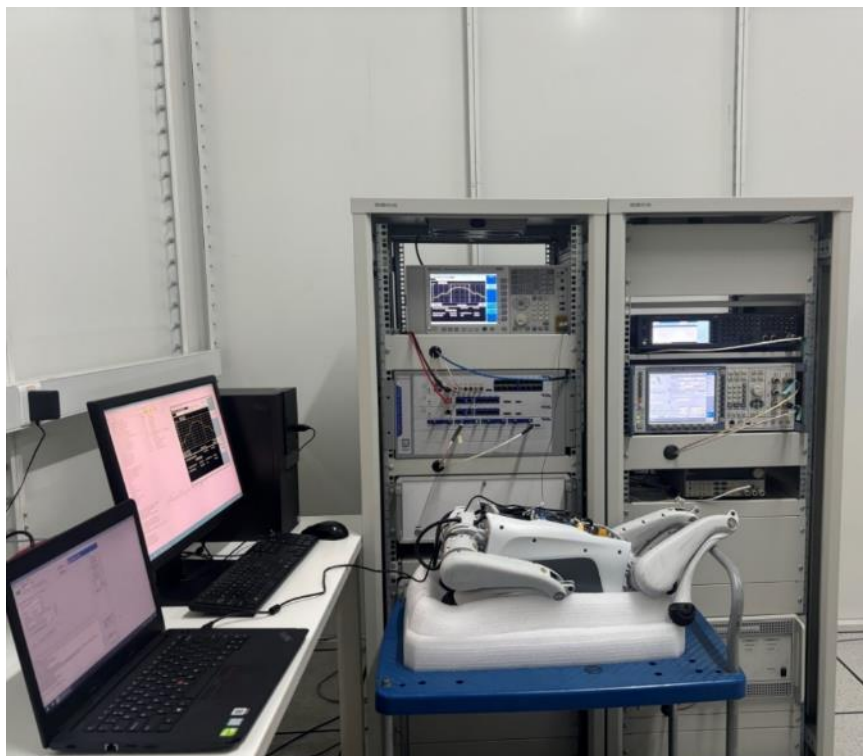


TEST REPORT

Report No.: SHE25110007-01CE

Date: 2025-12-16

Page 57 of 57

5.5 Set-up for Spurious Emissions below 1GHz

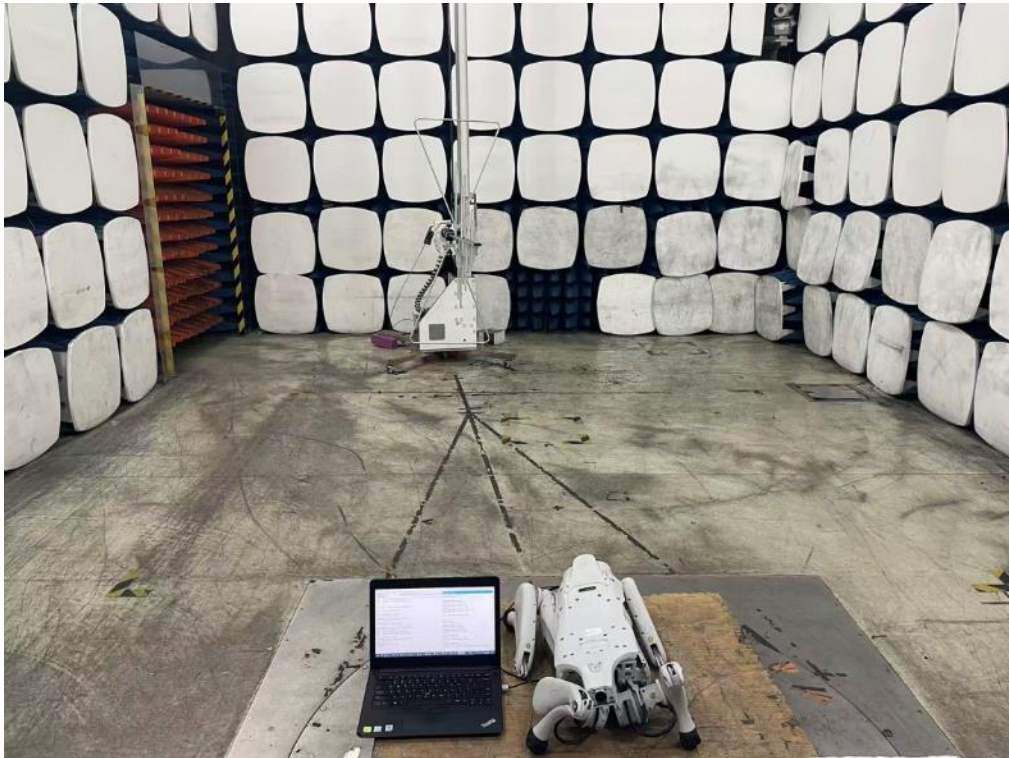

5.6 Set-up for Spurious Emissions above 1GHz



End of the report