TEST REPORT

Applicant	:	Hangzhou Cyberstar Co., Ltd.
Address of Applicant	:	Ruili Center Bullding, No.568 Taiming street. Xiaoshan District, Hangzhou City
Product Name	:	New Technology Pet Quadruped Robot
Brand Name	:	Cyberstar
Model Name	:	Cyber1
Sample Acquisition Method	:	Sent by Client
Sample No.	:	E25110007-01#02
FCC ID	:	2BS8P-CYBER1
Standards	:	FCC CFR47 Part 15.247, Subpart C
Date of Receipt	:	2025-11-07
Date of Test	:	2025-11-24~ 2025-12-13
Date of Issue	:	2025-12-16

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Erik. Yang (Erik Yang) Reviewed by: Jennifer zhou (Jennifer Zhou) Approved by: Echo Mu (Authorized signatory: Echo Mu)

Contents

1 GENERAL INFORMATION 3

1.1 TESTING LABORATORY 3
1.2 DETAILS OF APPLICATION 3
1.3 DETAILS OF EUT 3
1.4 TEST METHODOLOGY 5
1.5 TEST SUMMARY 5

2 TEST CONDITION 6

2.1 ENVIRONMENTAL CONDITIONS 6
2.2 EQUIPMENT LIST 6
2.3 MEASUREMENT UNCERTAINTY 7

3 TEST SET-UP AND OPERATION MODES 8

3.1 DETAILS OF TEST MODE 8
3.2 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 8
3.3 SUPPORT SOFTWARE 8
3.4 TEST SETUP DIAGRAM 9

4 TEST RESULTS 11

4.1 TRANSMITTER REQUIREMENT & TEST SUITES 11
4.1.1 Antenna Requirement 11
4.1.2 Maximum Peak Output Power 12
4.1.3 20dB Bandwidth and 99% Bandwidth 18
4.1.4 Conducted Spurious Emission & Authorized-band band-edge 24
4.1.5 Radiated Spurious Emission 49
4.1.6 Band Edge (Restricted-band band-edge) 50
4.1.7 Hopping Frequency Separation 51
4.1.8 Number of Hopping Frequency 54
4.1.9 Time of Occupancy 57
4.2 MAINS EMISSIONS 63
4.2.1 Conducted Emission on AC Mains 63

5 APPENDIXES 66

5.1 EXTERNA PHOTO OF THE SAMPLE 66
5.2 INTERNAL PHOTO OF THE SAMPLE 70
5.3 SET-UP FOR CONDUCTED EMISSION ON AC MAINS 81
5.4 SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT 81
5.5 SET-UP FOR RADIATED SPURIOUS EMISSIONS BELOW 1GHZ 82
5.6 SET-UP FOR RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ 82

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	Hangzhou Cyberstar Co., Ltd.
Applicant Company Address	Ruili Center Bullding, No.568 Taiming street. Xiaoshan District, Hangzhou City
Contact Person	Duan Xinchen.
Telephone	+86 18868010846
Email	info@cyberstars.com.cn
Manufacturer Company Name	Hangzhou Cyberstar Co., Ltd.
Manufacturer Company Address	Ruili Center Bullding, No.568 Taiming street. Xiaoshan District, Hangzhou City

1.3 Details of EUT

Product Name	New Technology Pet Quadruped Robot
Brand Name	Cyberstar
Test Model Name	Cyber1
FCC ID	2BS8P-CYBER1
Mode of Operation	Bluetooth BR/EDR
Operating Frequency Range	2402MHz ~ 2480MHz
Number of Channels	79 (at intervals of 1 MHz)
Modulation Type	GFSK, π/4-DQPSK, 8-DPSK
Max RF Output Power	7.96dBm
Antenna Type	Internal Antenna
Antenna Gain	3.89dBi
Extreme Temperature Range	0℃~ +40℃
Test Voltage	DC 28.8V 2A by Battery Power Unit (Manufacturer: SHENZHEN GREEN DIGITAL POWER TECH CO.,LTD, Model: G168-336050, Input: AC 100-240V 2.2A 50/60Hz, Output: DC 33.6V 5A)
Hardware Version	V2.1
Software Version	V0.23
RF power setting in TEST_SW	Bluetooth RF Test Tool (RtlBluetooth MP.dll Version: 5.3.2.37 RTLBTAPP

	Version: 5.2.3.58)_Power level setting_ Default

Note:

1. *The above information was declared by the manufacture.*
2. *For more details, please refer to the User's manual of the EUT.*

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2.402GHz	27	2.429GHz	54	2.456GHz
01	2.403GHz	28	2.430GHz	55	2.457GHz
02	2.404GHz	29	2.431GHz	56	2.458GHz
03	2.405GHz	30	2.432GHz	57	2.459GHz
04	2.406GHz	31	2.433GHz	58	2.460GHz
05	2.407GHz	32	2.434GHz	59	2.461GHz
06	2.408GHz	33	2.435GHz	60	2.462GHz
07	2.409GHz	34	2.436GHz	61	2.463GHz
08	2.410GHz	35	2.437GHz	62	2.464GHz
09	2.411GHz	36	2.438GHz	63	2.465GHz
10	2.412GHz	37	2.439GHz	64	2.466GHz
11	2.413GHz	38	2.440GHz	65	2.467GHz
12	2.414GHz	39	2.441GHz	66	2.468GHz
13	2.415GHz	40	2.442GHz	67	2.469GHz
14	2.416GHz	41	2.443GHz	68	2.470GHz
15	2.417GHz	42	2.444GHz	69	2.471GHz
16	2.418GHz	43	2.445GHz	70	2.472GHz
17	2.419GHz	44	2.446GHz	71	2.473GHz
18	2.420GHz	45	2.447GHz	72	2.474GHz
19	2.421GHz	46	2.448GHz	73	2.475GHz
20	2.422GHz	47	2.449GHz	74	2.476GHz
21	2.423GHz	48	2.450GHz	75	2.477GHz
22	2.424GHz	49	2.451GHz	76	2.478GHz
23	2.425GHz	50	2.452GHz	77	2.479GHz
24	2.426GHz	51	2.453GHz	78	2.480GHz
25	2.427GHz	52	2.454GHz		
26	2.428GHz	53	2.455GHz		

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), FCC Part 15.203	PASS
Maximum Conducted Peak Output Power	FCC Part 15.247(b)(1)	PASS
20dB Bandwidth and 99% Bandwidth	FCC Part 15.247(a)(1)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	PASS
Hopping Frequency Separation	FCC Part 15.247(a)(1)	PASS
Number of Hopping Frequency	FCC Part 15.247(a)(1)(iii)	PASS
Time of Occupancy	FCC Part 15.247(a)(1)(iii)	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	15-35
Humidity (%RH)	30-60
Barometric Pressure (mbar)	860-1060

Note: Actual values will be recorded during the test.

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY54101709	2025-06-30	2026-06-29
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2025-06-10	2026-06-09
Signal Generator	Rohde & Schwarz	SMR27	100184	2025-06-30	2026-06-29
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2025-06-09	2026-06-08
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2025-06-09	2026-06-08
V-network	SCHWARZBECK	NSLK 8127	8127-902	2025-06-09	2026-06-08
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2025-06-09	2026-06-08
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2025-03-24	2027-03-23
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2025-06-22	2027-06-21
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2025-06-23	2027-06-22
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2025-06-22	2027-06-21
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2025-06-09	2026-06-08
EMC chamber 9*6*6(L*W*H)	CHANGNING	966	N/A	2025-06-10	2028-06-09
Shielded Enclosure 8*5*4(L*W*H)	CHANGNING	854	N/A	2025-06-10	2028-06-09
Test Software	BL	BL410_E	Version:2.1.1.436	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Parameter		Uncertainty
Antenna Port Conducted Emission		± 1.04dB
Radiated Emission	< 1GHz	± 5.00dB
	> 1GHz	± 5.46dB
Conducted Emission on AC Mains	150kHz-30MHz	± 3.36dB
Occupied Channel Bandwidth		±39.26KHz
Maximum Conducted Output Power		±1.12dB

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software to control EUT work in continuous transmitting mode. Select test channel as below:

Channel	Frequency
The lowest channel (CH00)	2402MHz
The middle channel (CH39)	2441MHz
The highest channel (CH78)	2480MHz

The basic operation modes are:

A. On
   1. BR/EDR mode
      a. Transmitting
         i. Low Channel
         ii. Middle Channel
         iii. High Channel
         iv. Hopping mode
      b. Receiving
   2. Normal working with Bluetooth on

B. Standby

C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model Name	Serial No.
Laptop 1	HP	HP ZHAN 66 Pro G1	5CD7438R1J
Laptop 2	Lenovo	TP00083A	PF-0PRDGN
USB Cable	N/A	N/A	1.00m Unshielded
Power Unit	GREEN DIGITAL POWER	G168-336050	2508-9575B

3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	Bluetooth RF Test Tool (RtlBluetooth MP.dll Version: 5.3.2.37 RTLBTAPP Version: 5.2.3.58

3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

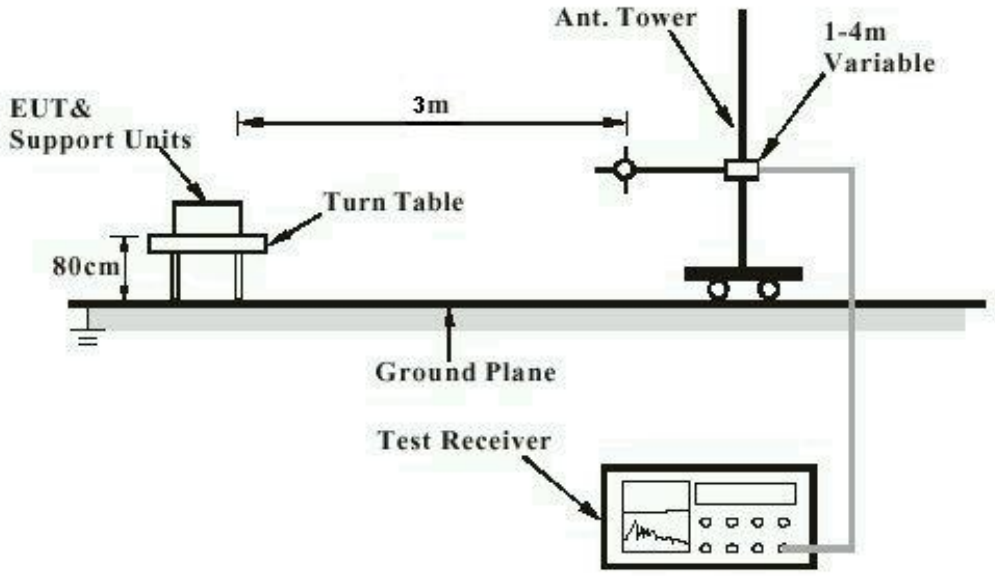

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Configuration for Conduction Test

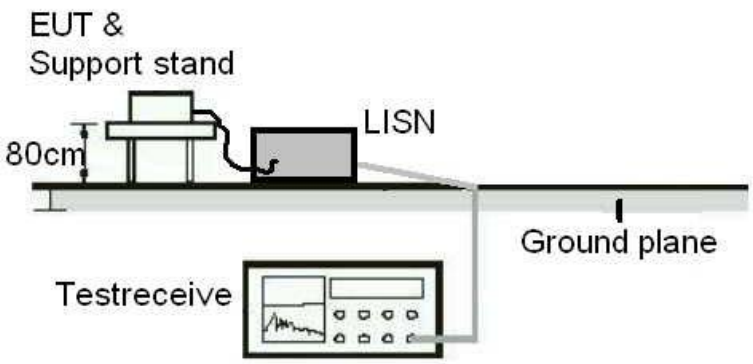

Diagram of Measurement Configuration for Transmitter Test

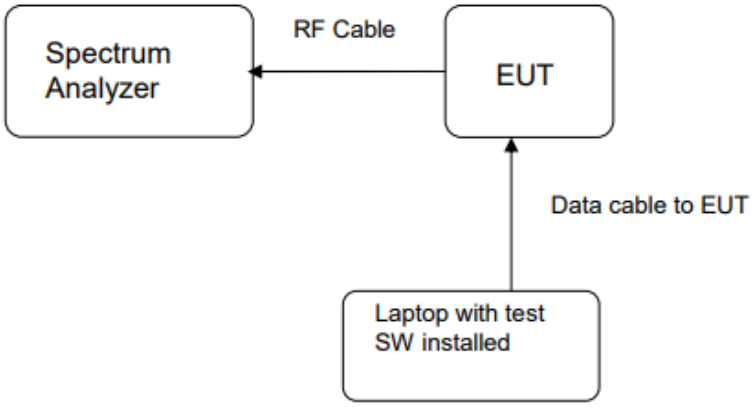

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT: **PASS**

Test standard	:	FCC Part 15.247(b)(4), Part 15.203
Requirement	:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. In addition, If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3.89dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

4.1.2 Maximum Peak Output Power

RESULT: **PASS**

Test standard : FCC Part 15.247(b)(1)
Requirement : ANSI C63.10-2020, Clause 7.8.5
KDB 558074 D01 v05r02, Clause 2.2
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.2°C
Relative humidity : 35%

Table 1: Maximum Peak Output Power

Test Mode	Test Channel (MHz)	Peak Output Power Measurement Result		Limit (W)
		(dBm)	(mW)	
GFSK	2402	4.91	3.10	< 1
	2441	4.16	2.61	
	2480	4.56	2.86	
π/4-DQPSK	2402	7.08	5.11	< 0.125
	2441	6.35	4.31	
	2480	7.40	5.50	
8-DPSK	2402	7.64	5.81	< 0.125
	2441	6.91	4.91	
	2480	7.96	6.26	

Figure 1: Maximum Peak Output Power, 2402MHz, GFSK

Figure 2: Maximum Peak Output Power, 2441MHz, GFSK

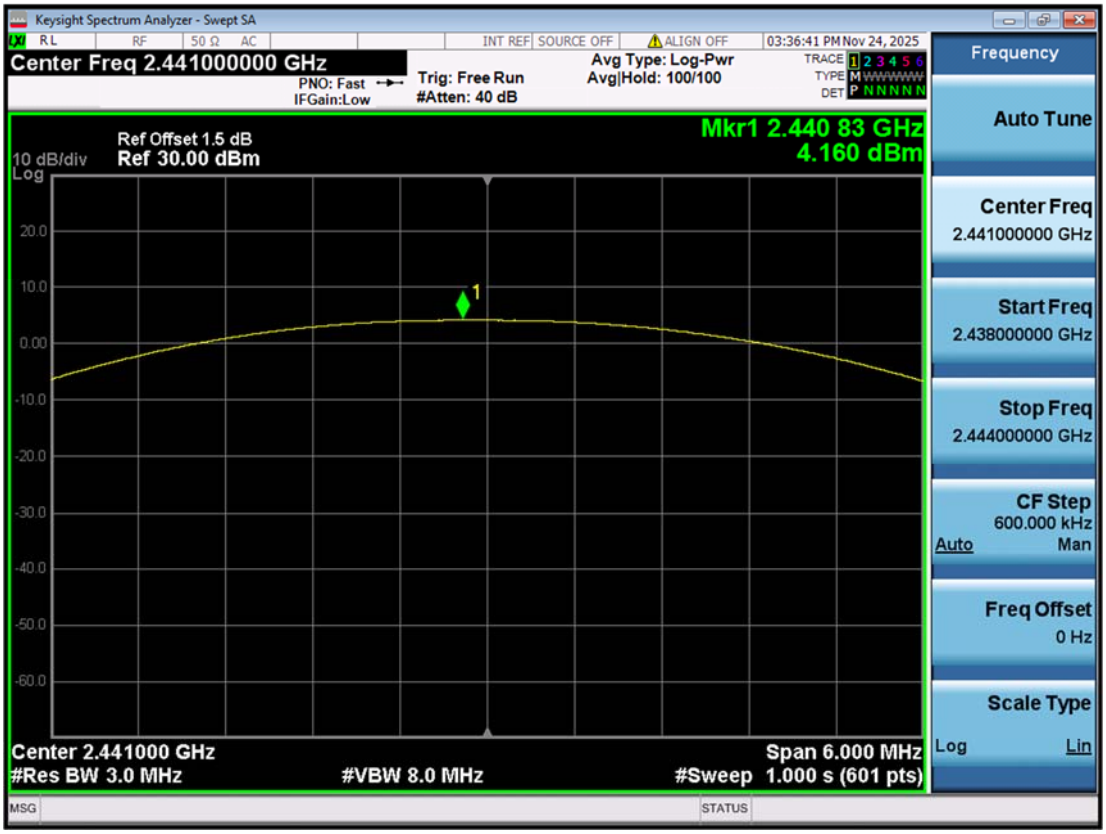

Figure 3: Maximum Peak Output Power, 2480MHz, GFSK

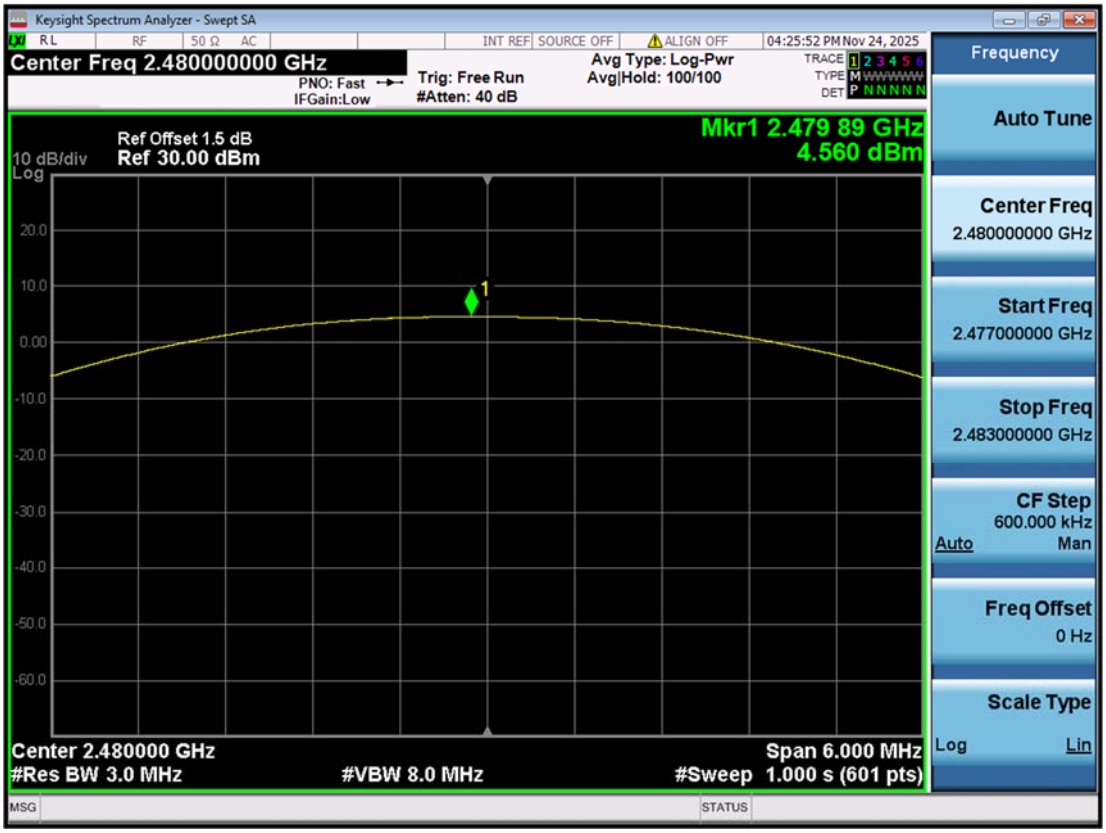

Figure 4: Maximum Peak Output Power, 2402MHz, π/4-DQPSK

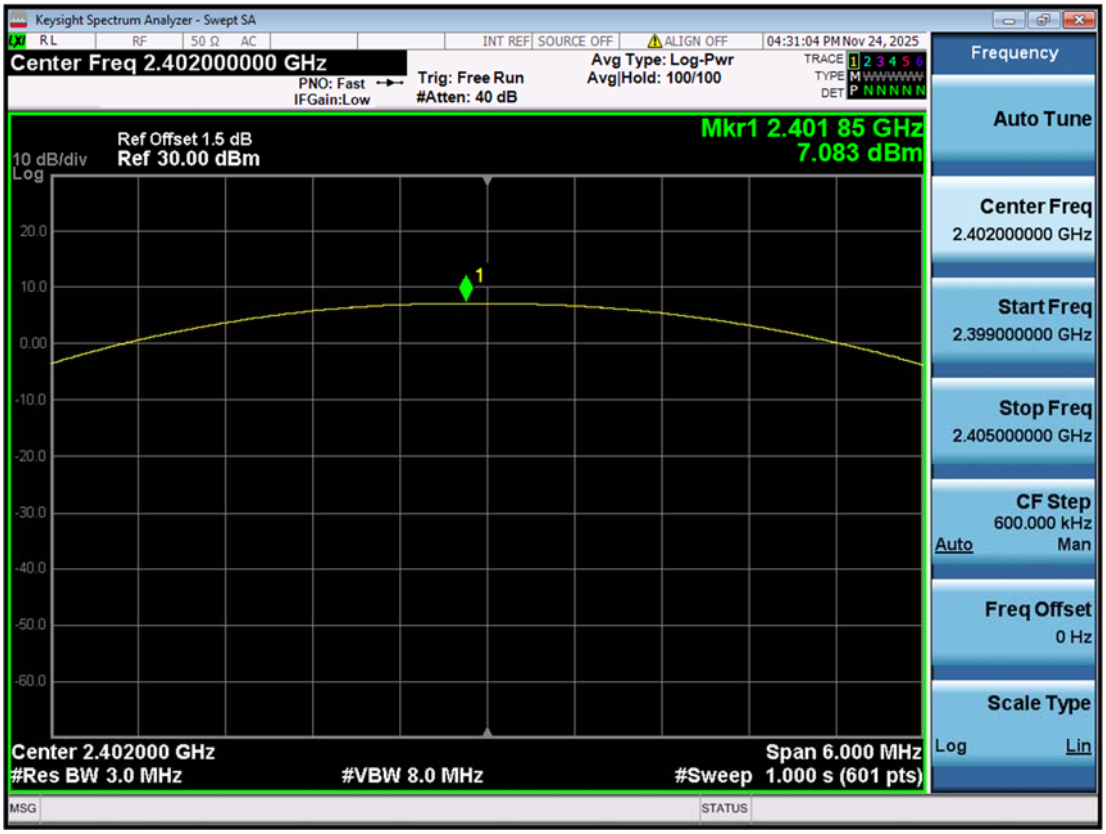

Figure 5: Maximum Peak Output Power, 2441MHz, π/4-DQPSK

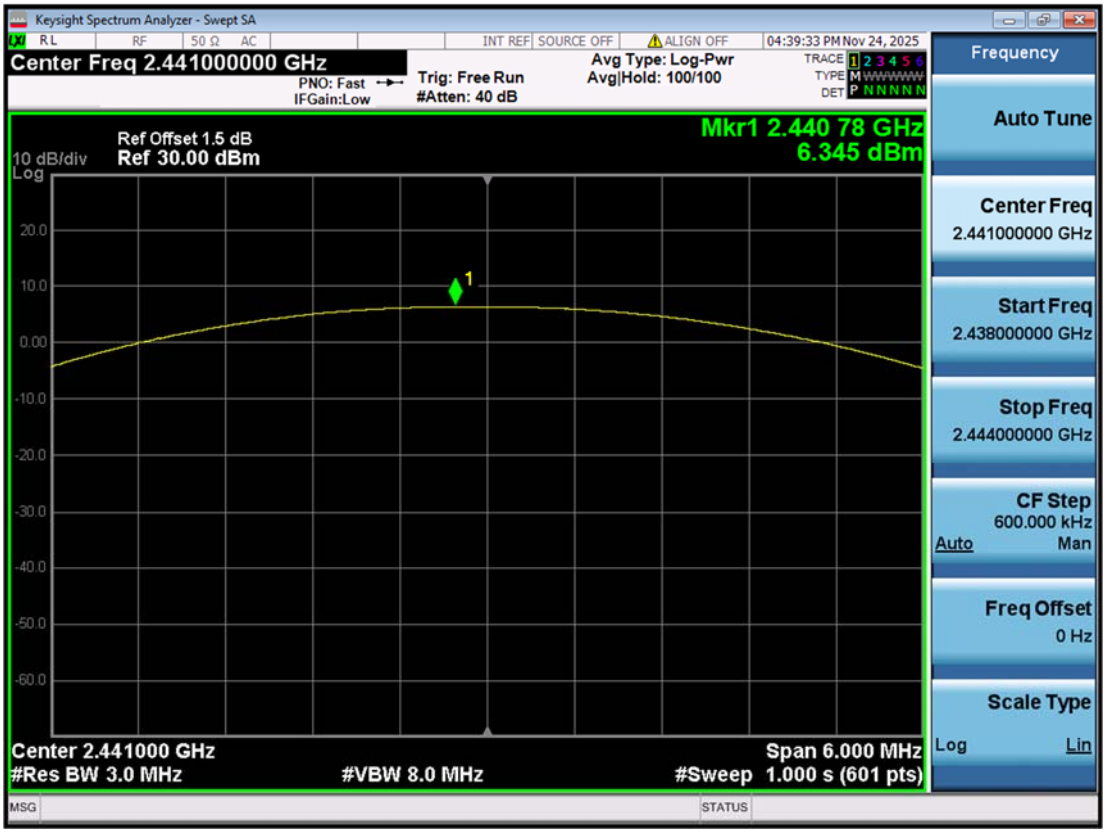

Figure 6: Maximum Peak Output Power, 2480MHz, π/4-DQPSK

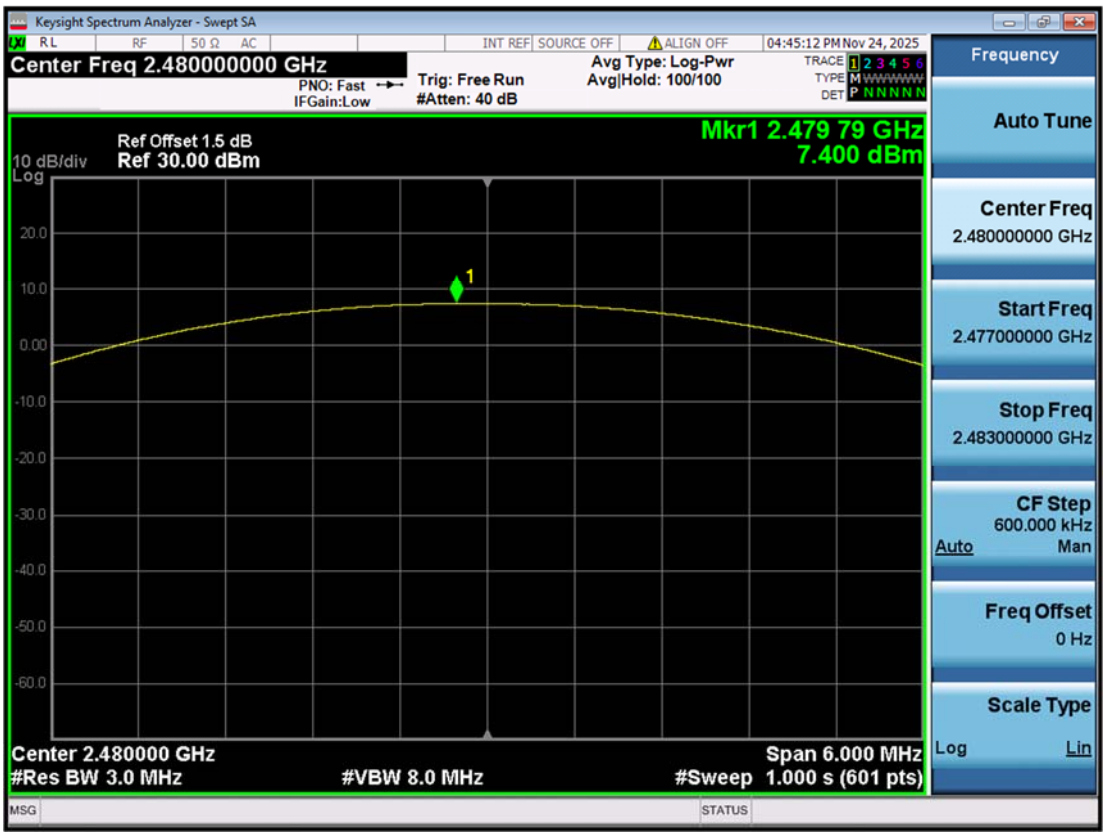

Figure 7: Maximum Peak Output Power, 2402MHz, 8-DPSK

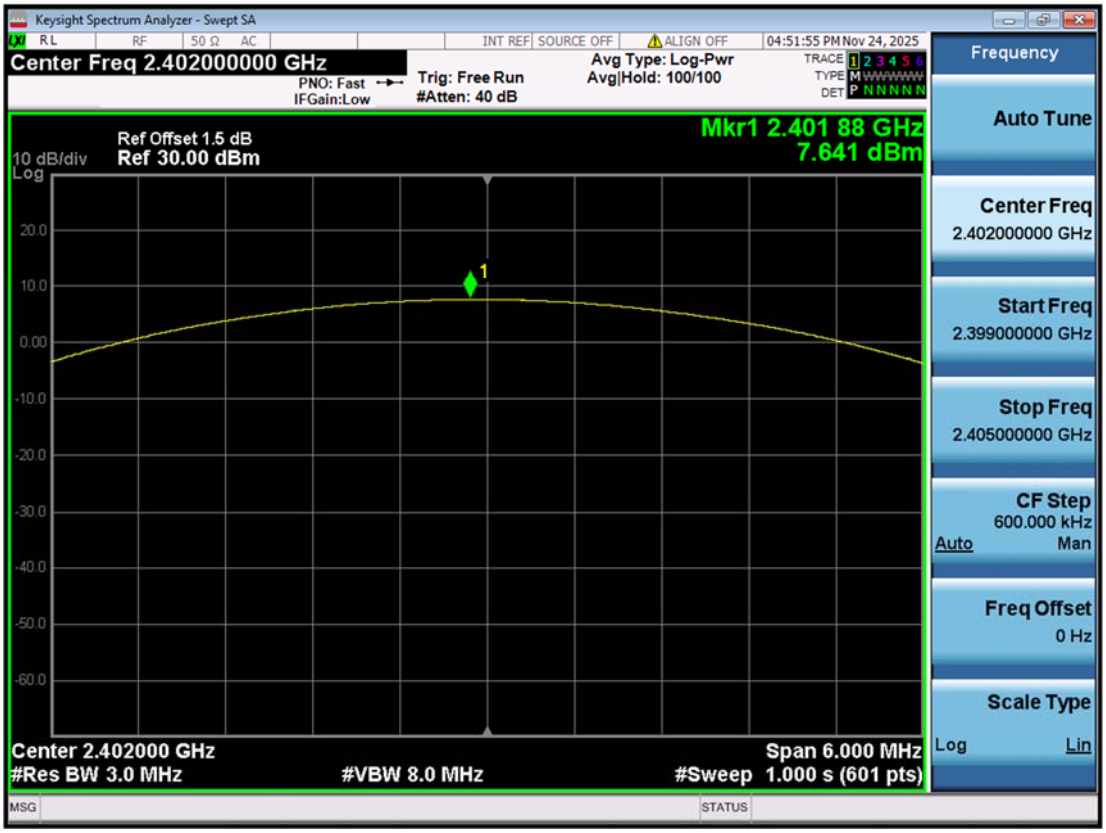

Figure 8: Maximum Peak Output Power, 2441MHz, 8-DPSK

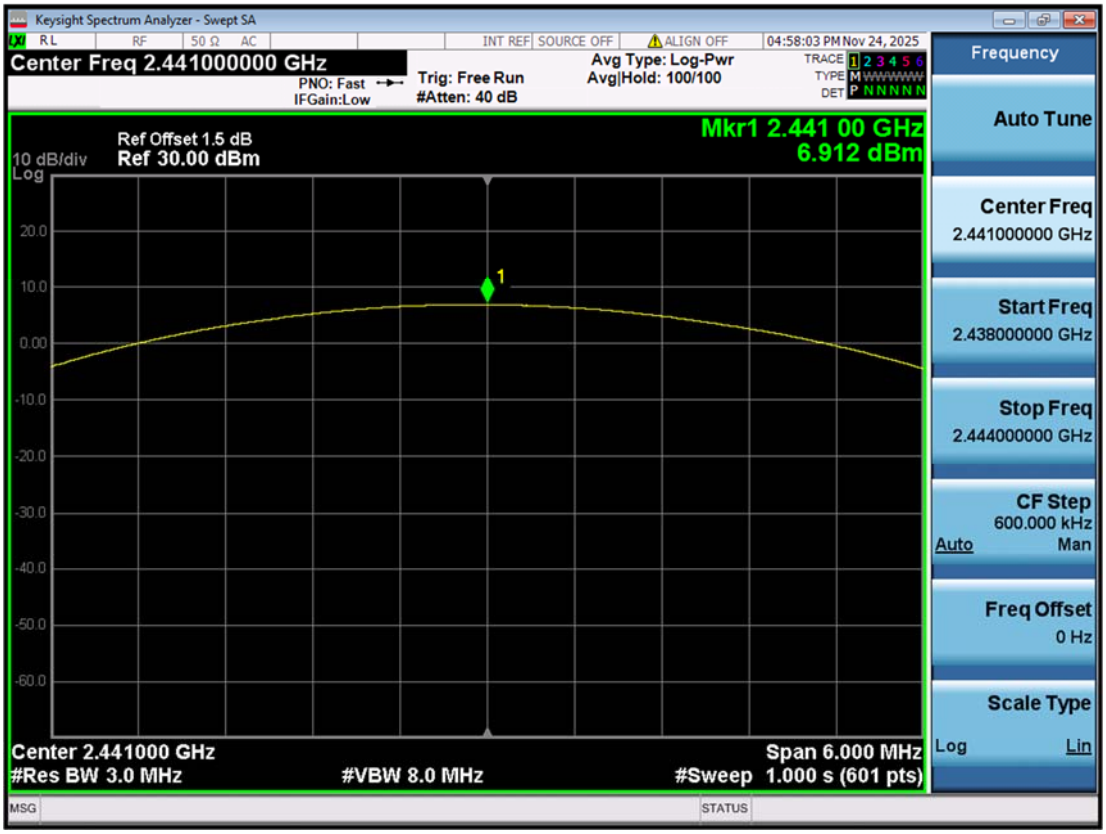

Figure 9: Maximum Peak Output Power, 2480MHz, 8-DPSK

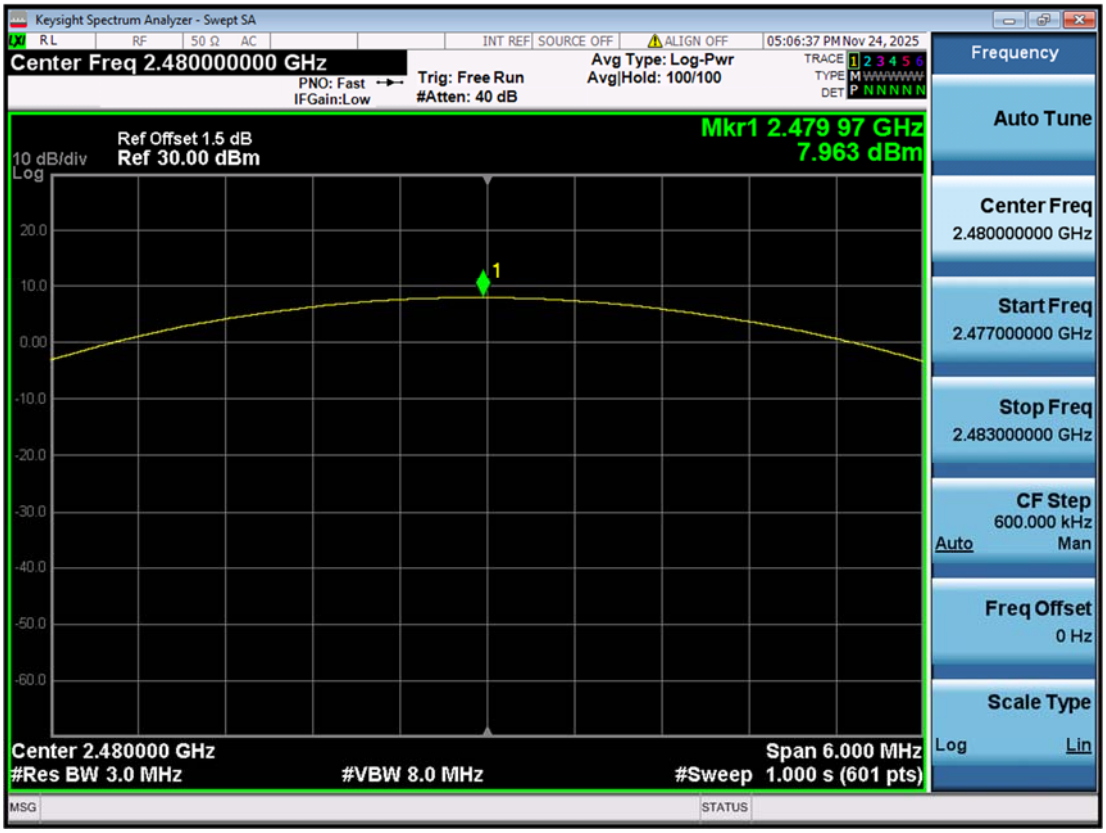

4.1.3 20dB Bandwidth and 99% Bandwidth

RESULT: **PASS**

Test standard : FCC Part 15.247(a)(1)
Requirement : ANSI C63.10-2020, Clause 7.8.6
KDB 558074 D01 v05r02, Clause 2.2
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.2°C
Relative humidity : 35%

Table 2: 20dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
GFSK	2402	0.9648	0.8906
	2441	0.9638	0.8909
	2480	0.9660	0.8907
π/4-DQPSK	2402	1.3700	1.1948
	2441	1.3700	1.1946
	2480	1.3700	1.1939
8-DPSK	2402	1.3510	1.2042
	2441	1.3510	1.2039
	2480	1.3500	1.2033

Figure 10: 20dB Bandwidth and 99% Bandwidth, 2402MHz, GFSK

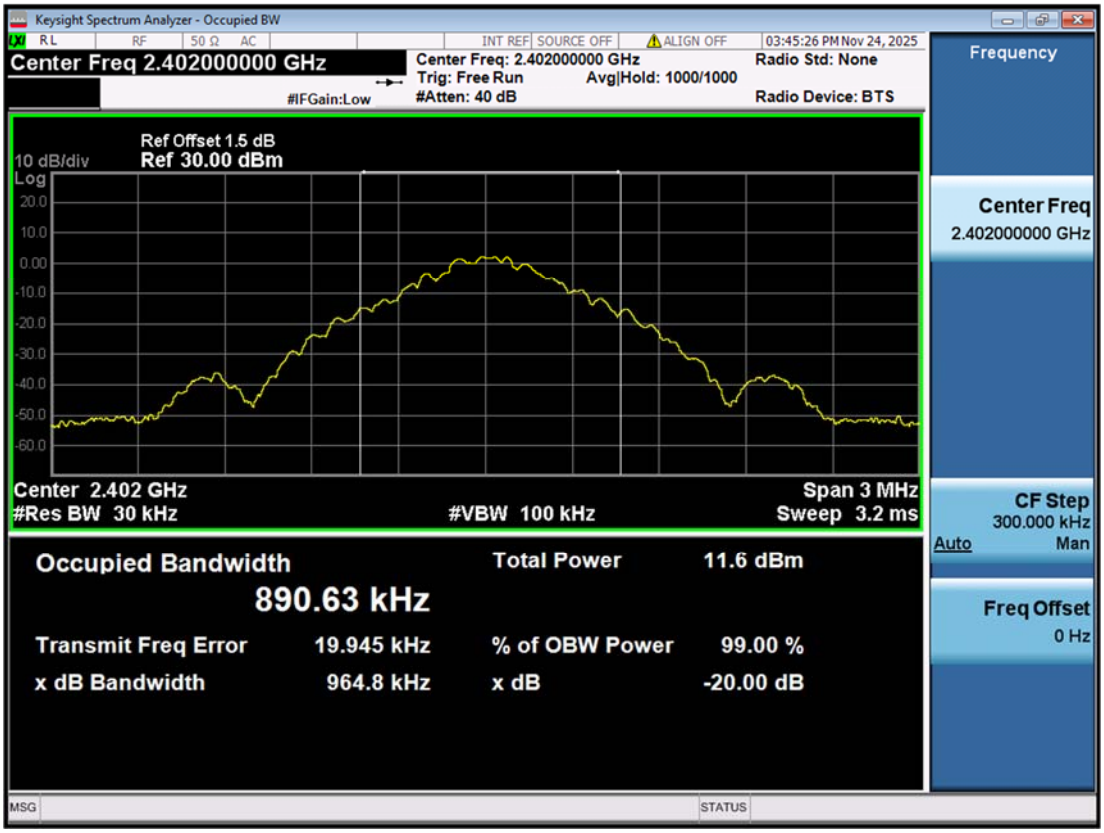

Figure 11: 20dB Bandwidth and 99% Bandwidth, 2441MHz, GFSK

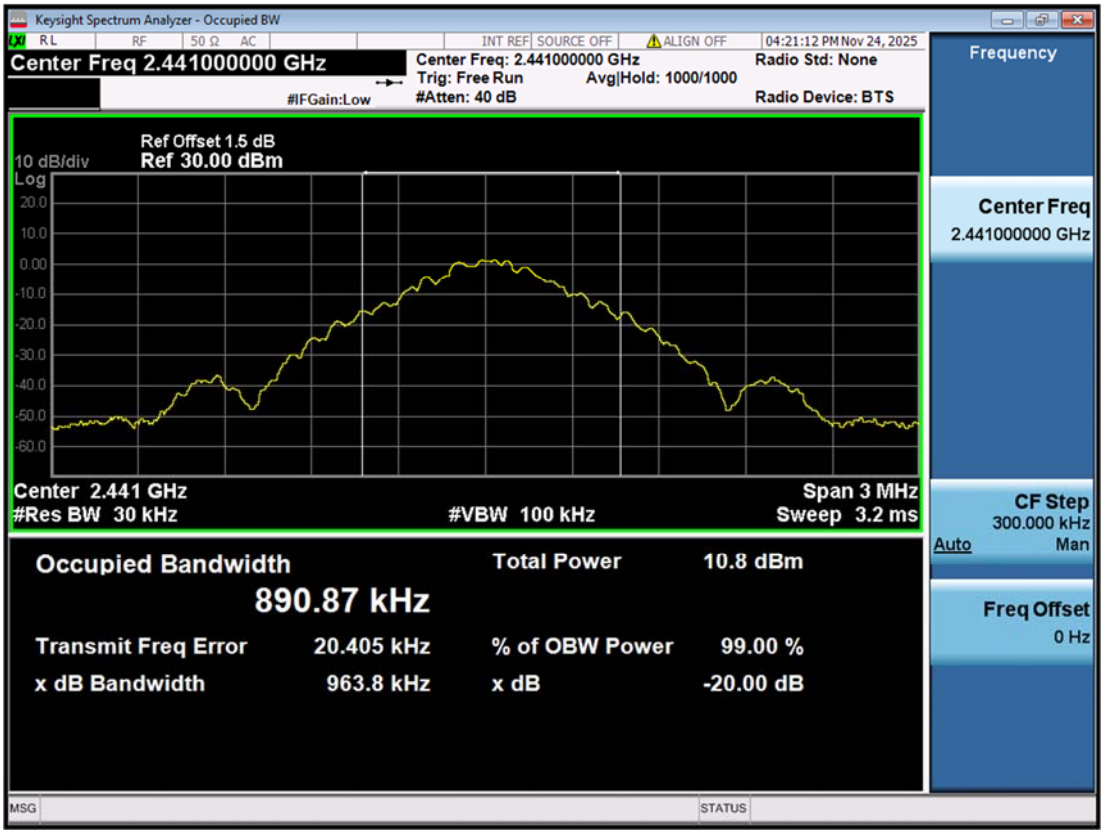

Figure 12: 20dB Bandwidth and 99% Bandwidth, 2480MHz, GFSK

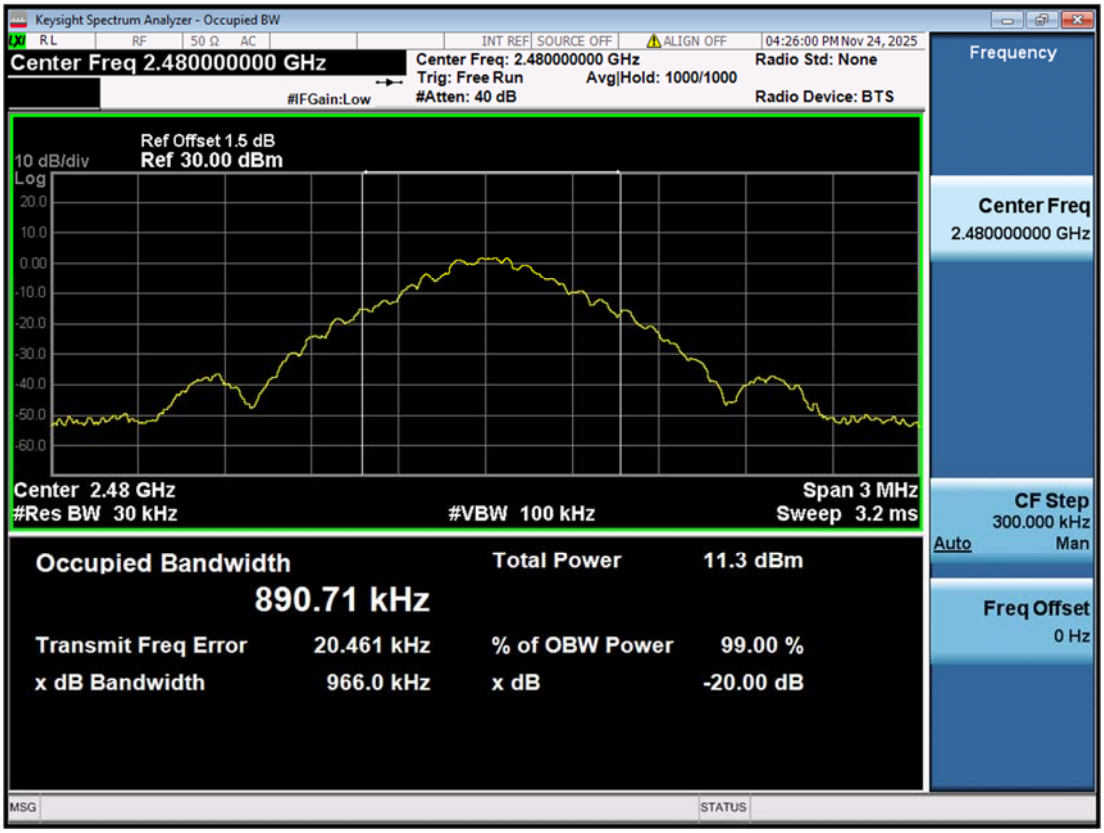

Figure 13: 20dB Bandwidth and 99% Bandwidth, 2402MHz, π/4-DQPSK

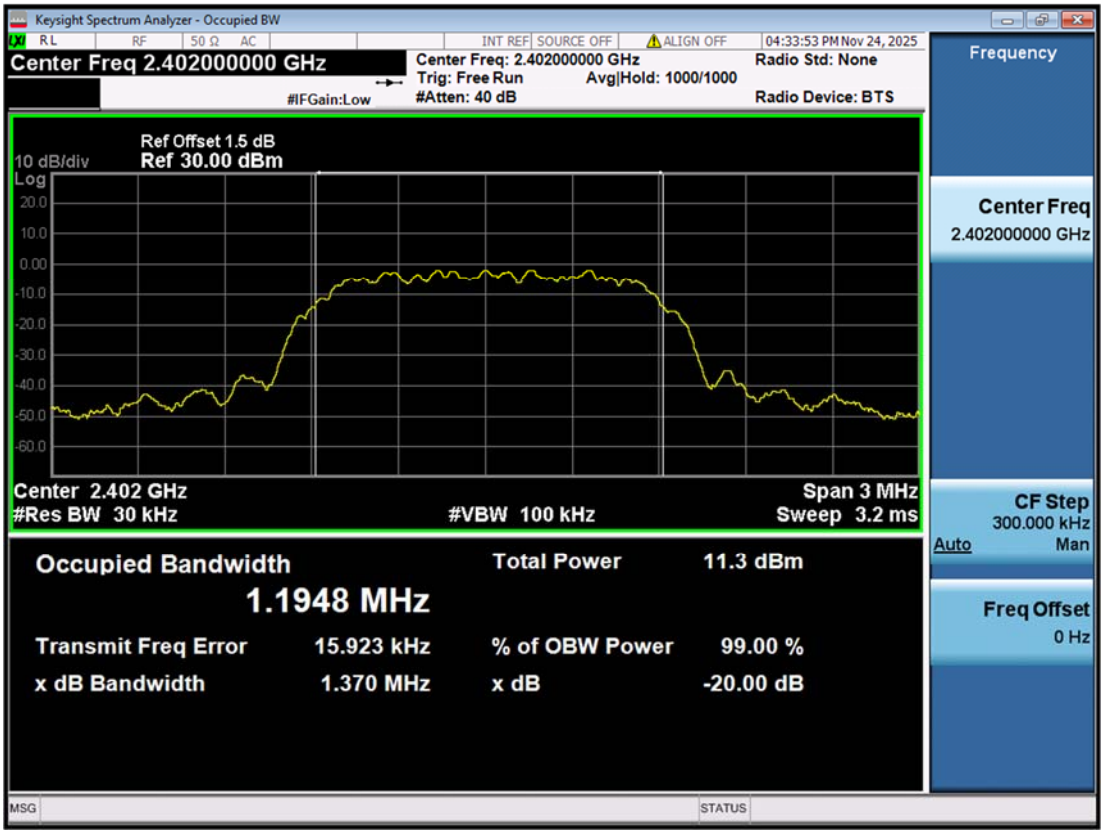

Figure 14: 20dB Bandwidth and 99% Bandwidth, 2441MHz, π/4-DQPSK

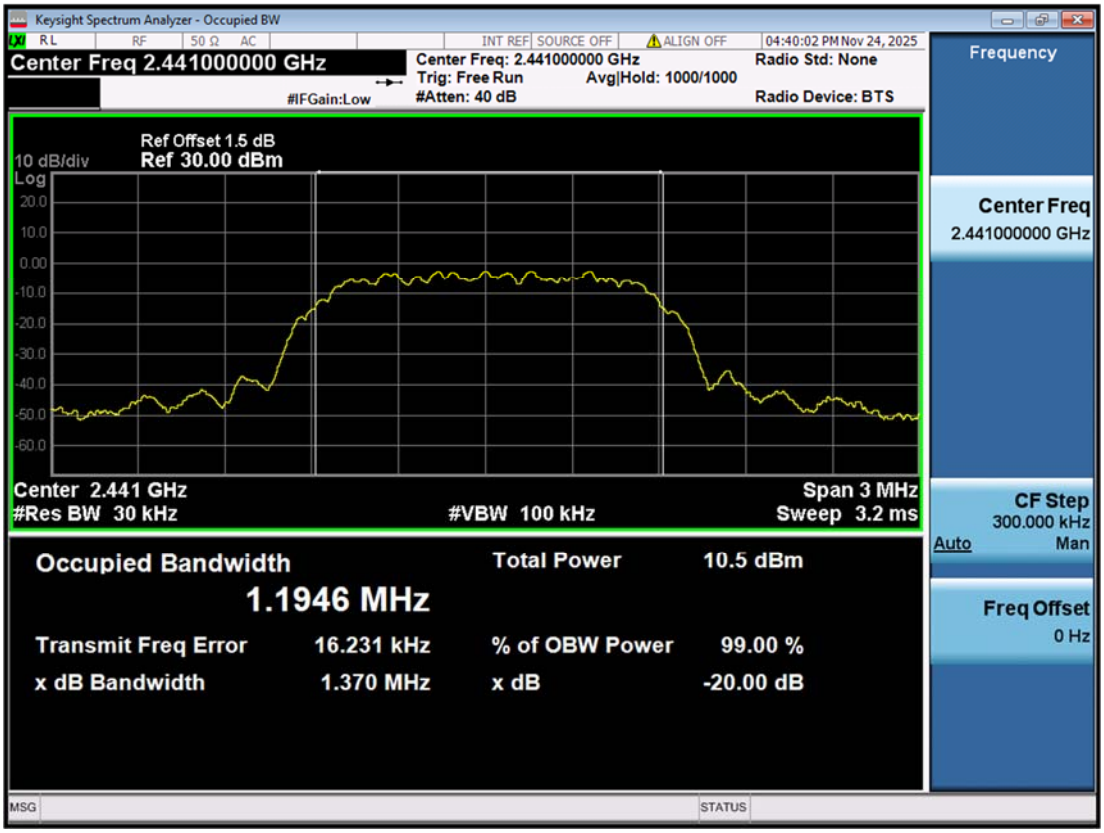

Figure 15: 20dB Bandwidth and 99% Bandwidth, 2480MHz, π/4-DQPSK

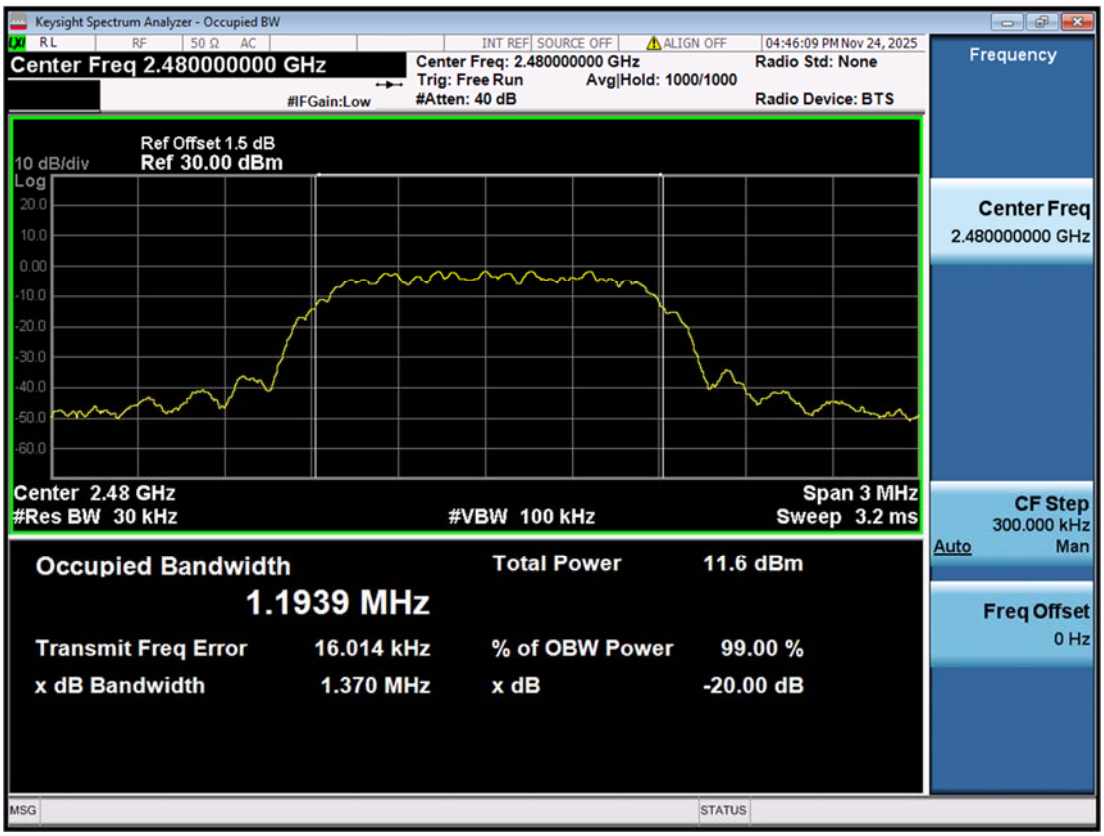

Figure 16: 20dB Bandwidth and 99% Bandwidth, 2402MHz, 8-DPSK

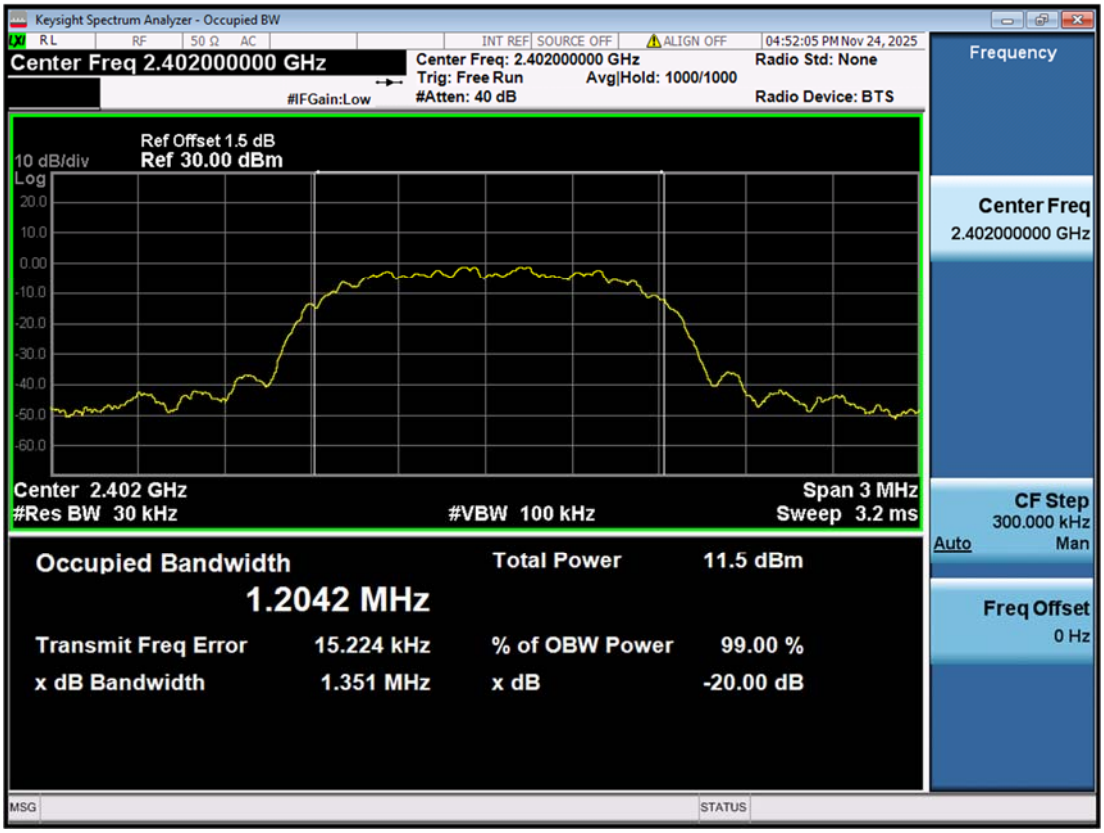

Figure 17: 20dB Bandwidth and 99% Bandwidth, 2441MHz, 8-DPSK

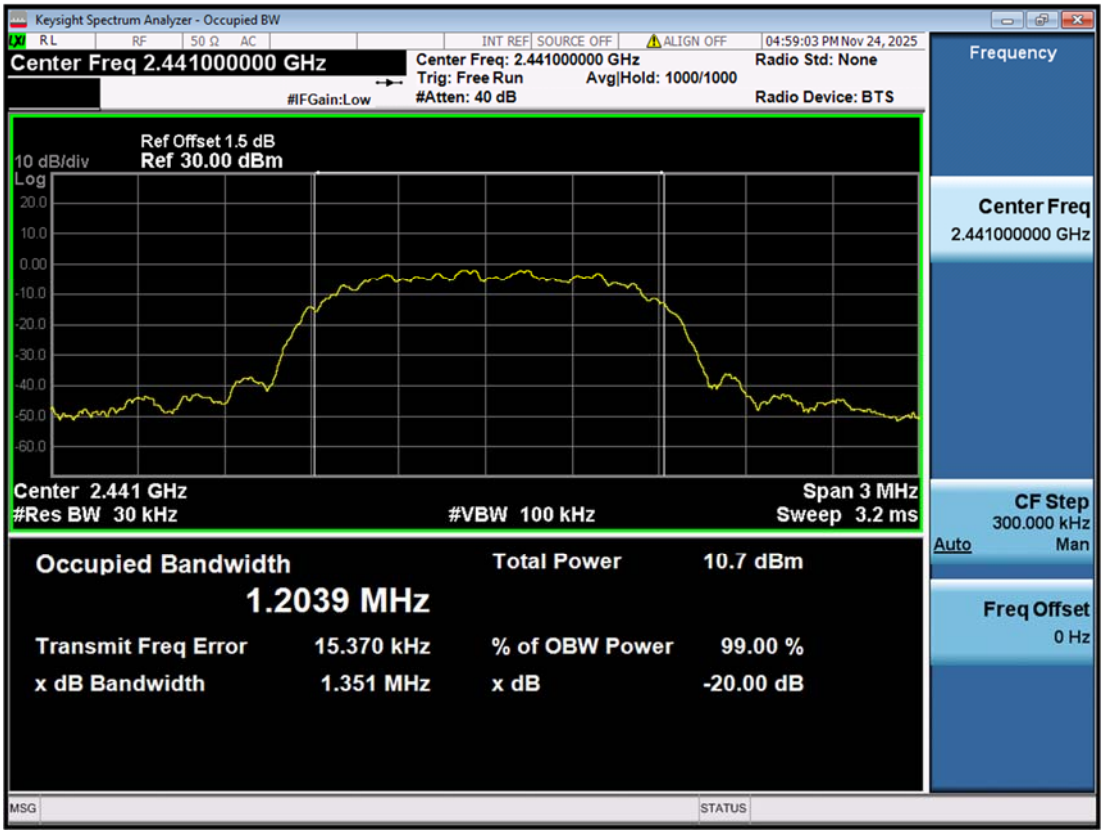

Figure 18: 20dB Bandwidth and 99% Bandwidth, 2480MHz, 8-DPSK

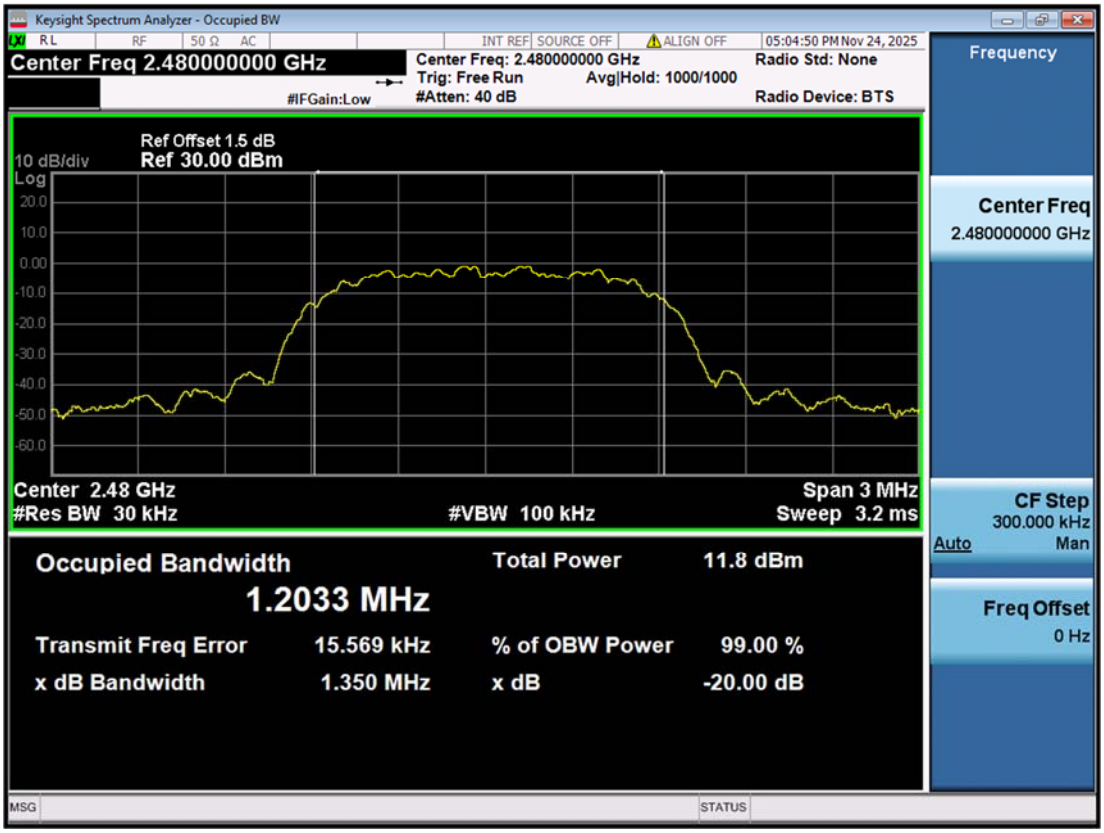

4.1.4 Conducted Spurious Emission & Authorized-band band-edge

RESULT: **PASS**

Test standard	:	FCC Part 15.247(d)
Requirement	:	ANSI C63.10-2020, Clause 7.8.7
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/Middle/High for spurious, Low/High for Band Edge
Operation Mode	:	A.1.a
Ambient temperature	:	24.2°C
Relative humidity	:	35%

For details refer to following test plot.

Figure 19: Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, GFSK

Carrier Level

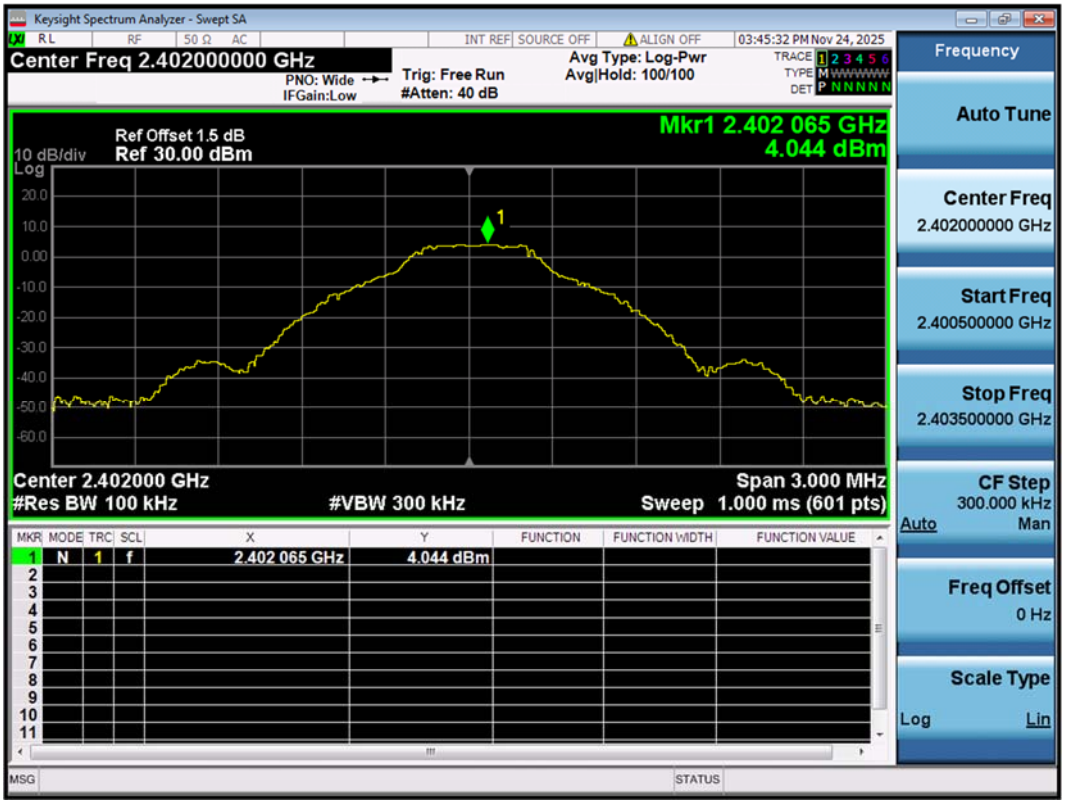

Band Edge

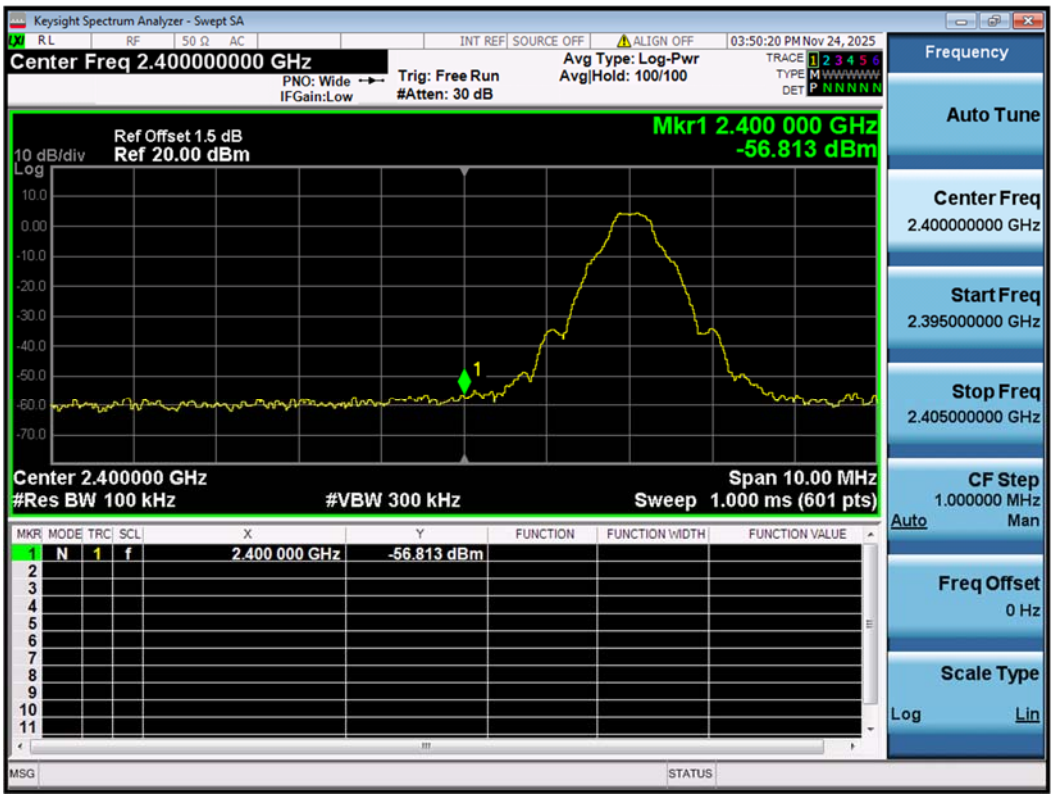

Conducted spurious emissions 30MHz-25GHz

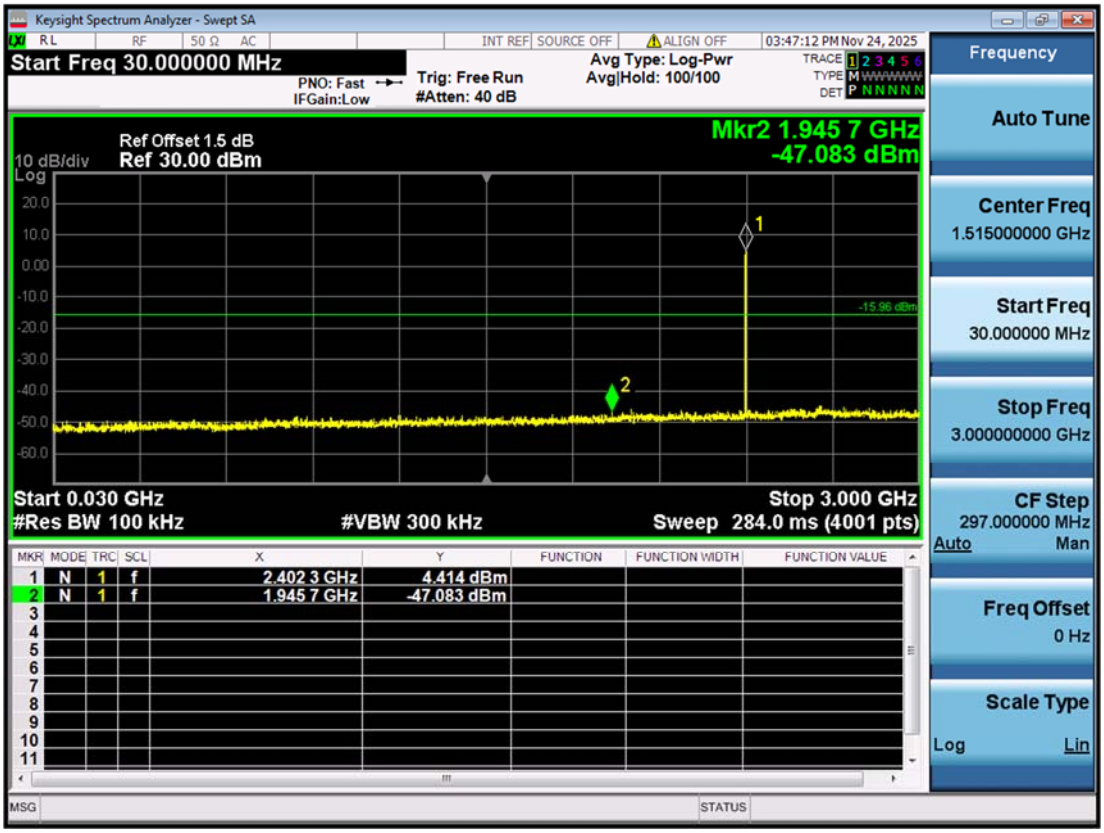

Figure 20: Conducted Spurious Emission & Authorized-band band-edge, 2441MHz, GFSK

Carrier Level

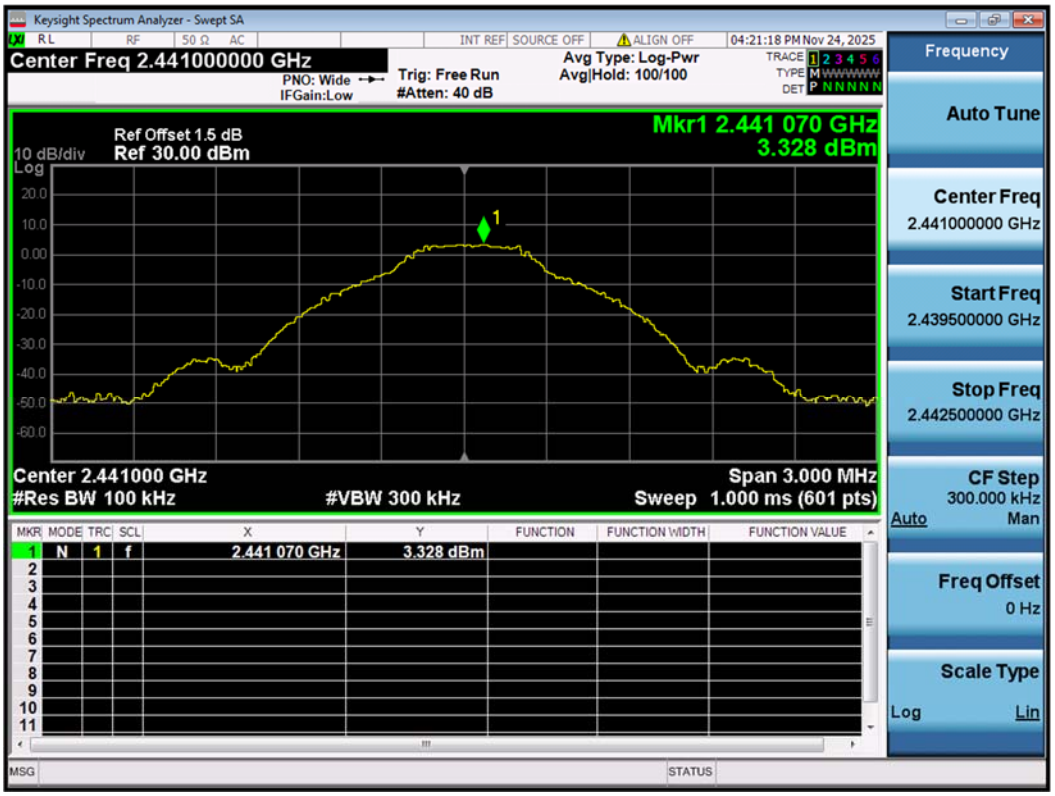

Conducted spurious emissions 30MHz-25GHz

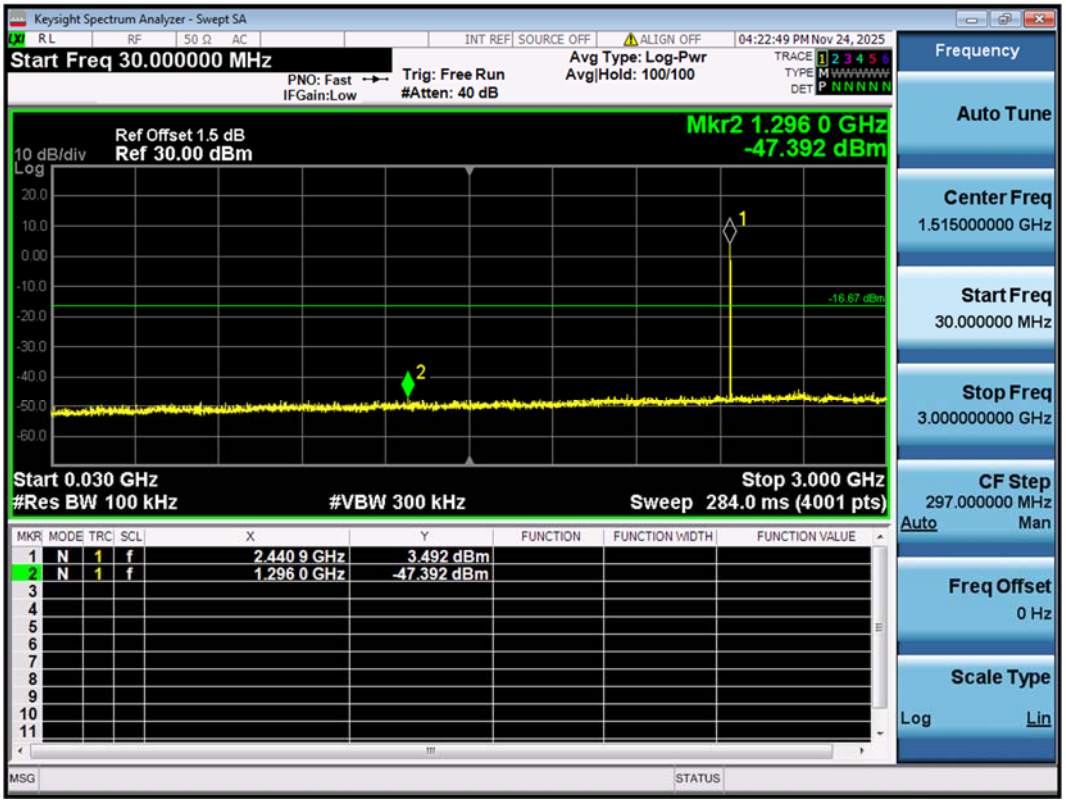

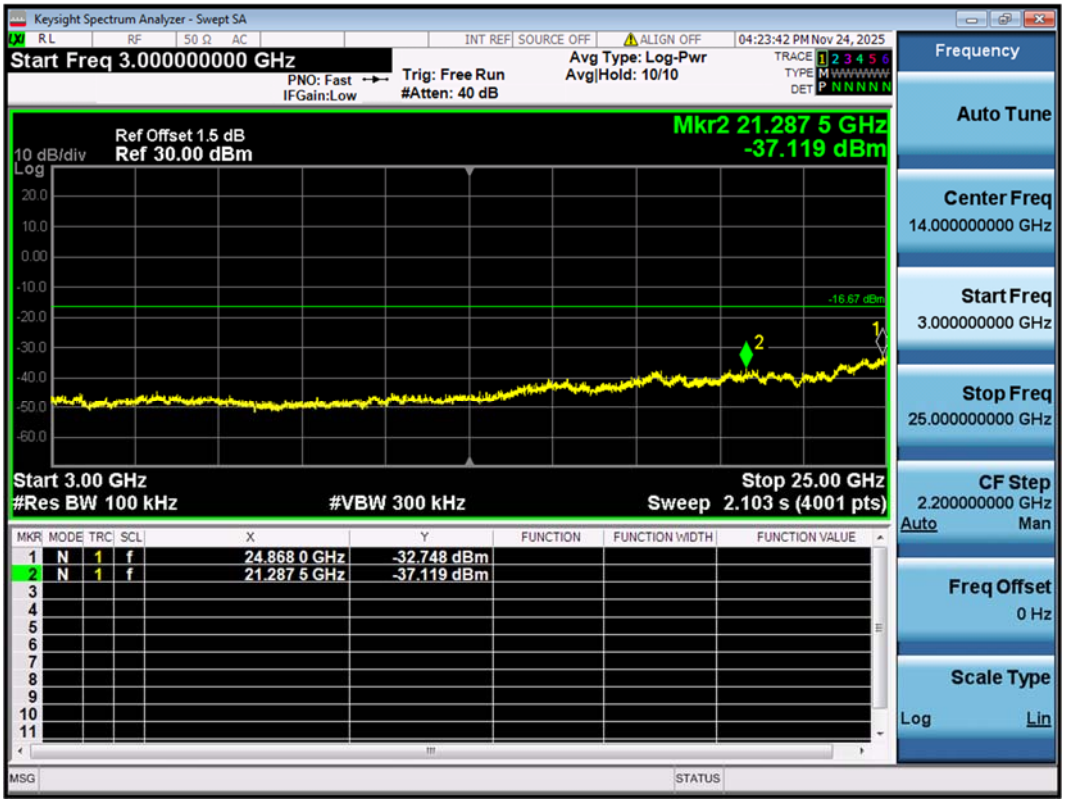

Figure 21: Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, GFSK Carrier Level

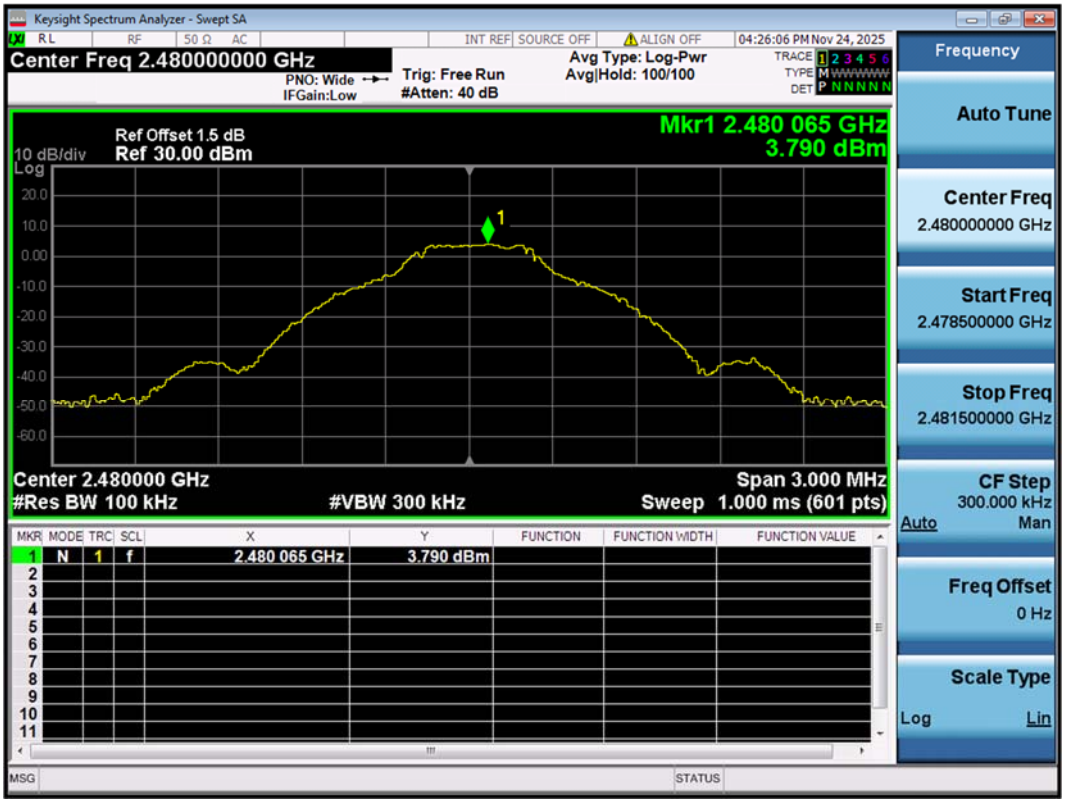

Band Edge

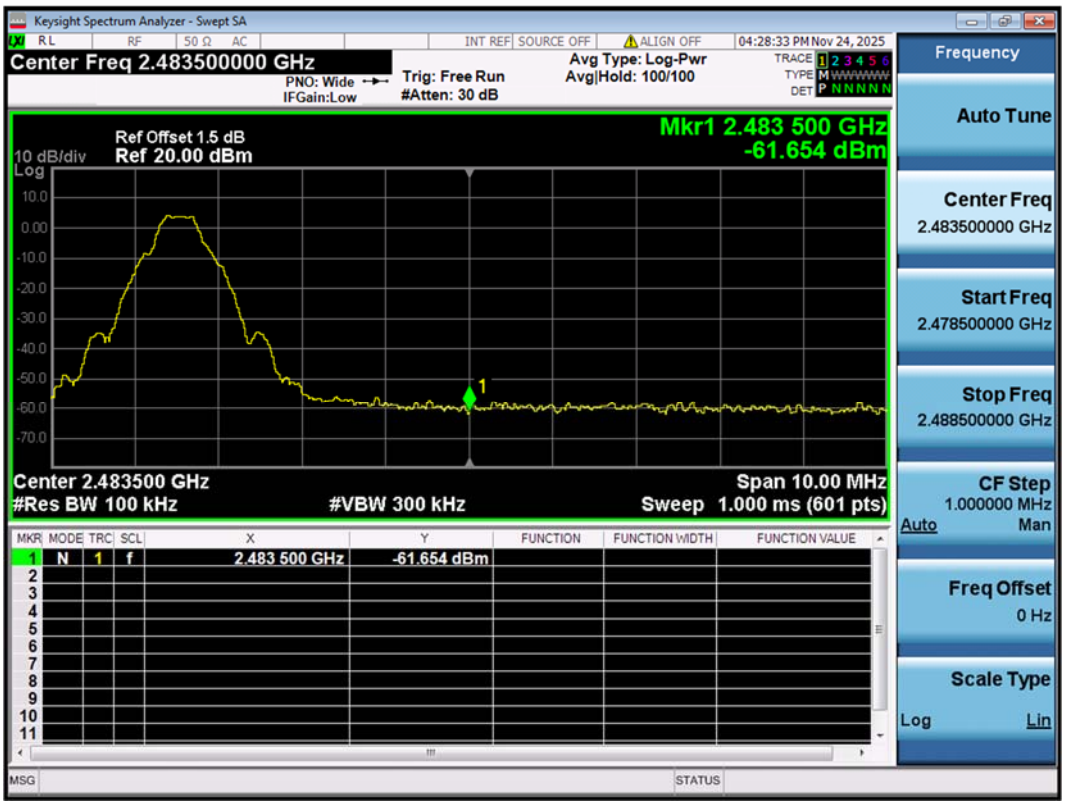

Conducted spurious emissions 30MHz-25GHz

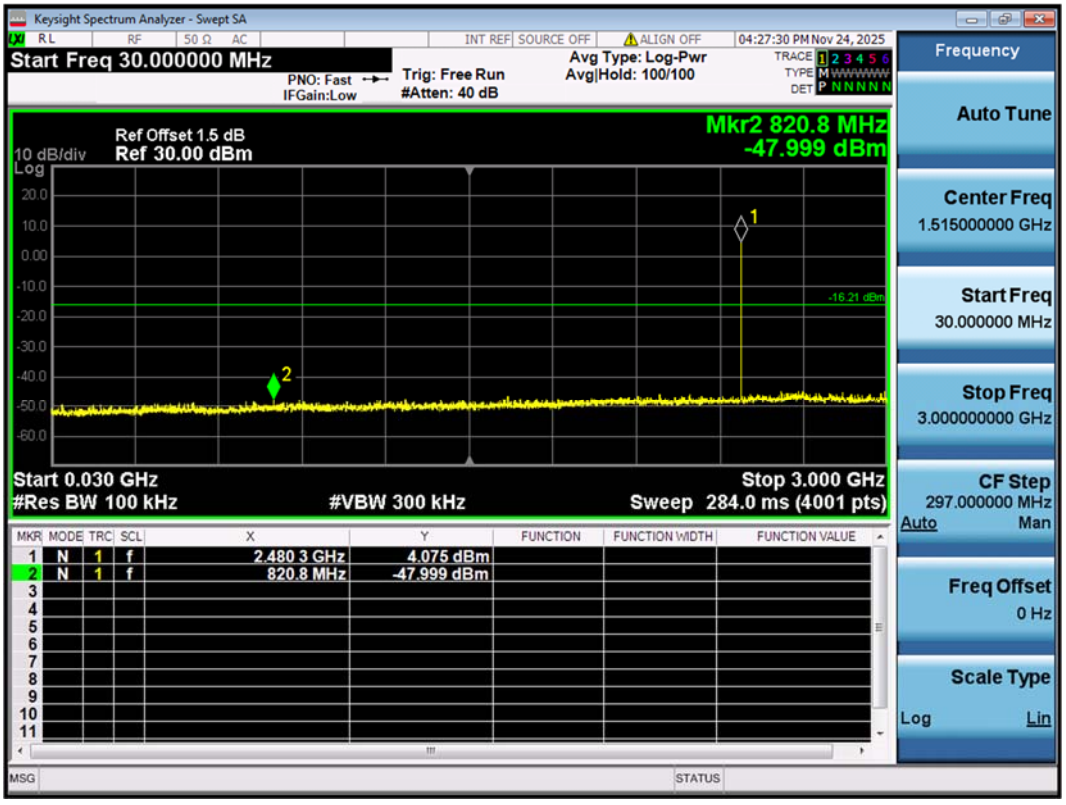

Figure 22: Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, π/4-DQPSK Carrier Level

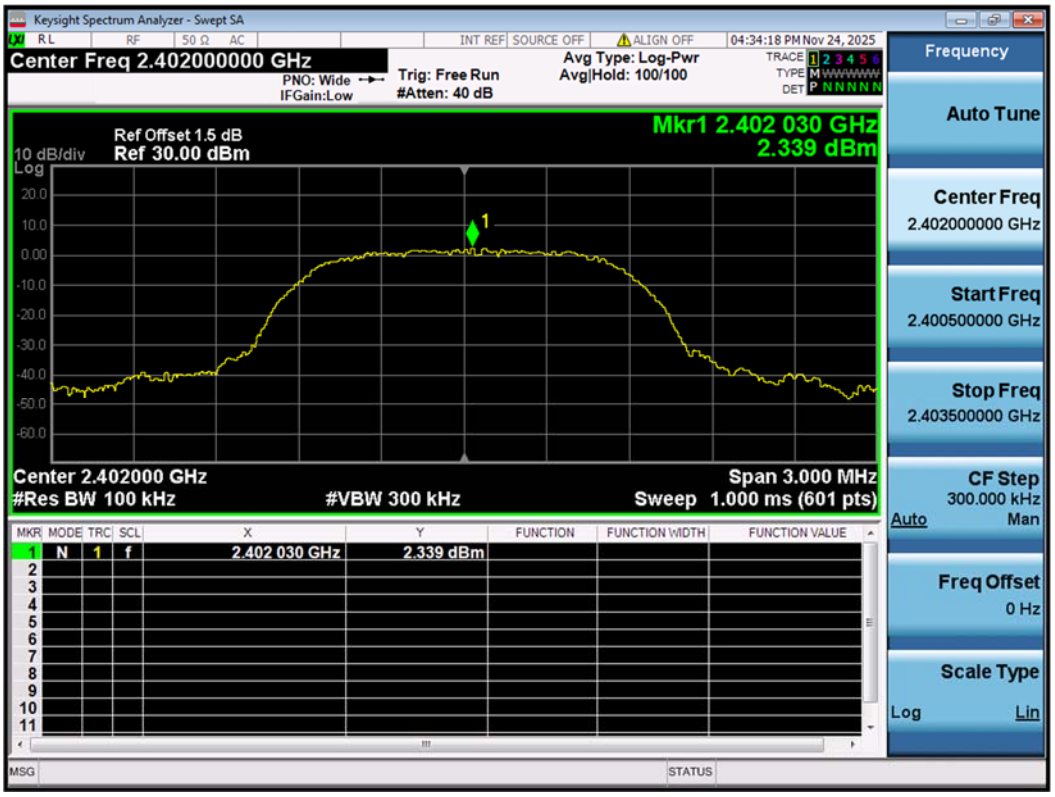

Band Edge

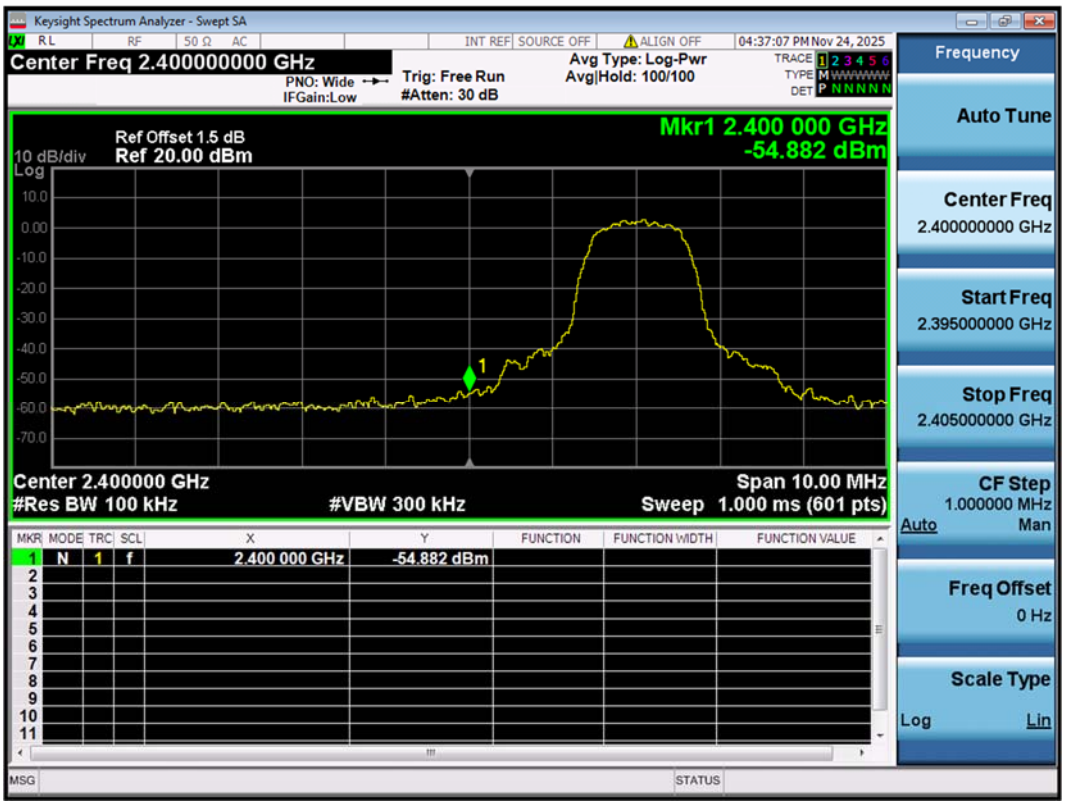

Conducted spurious emissions 30MHz-25GHz

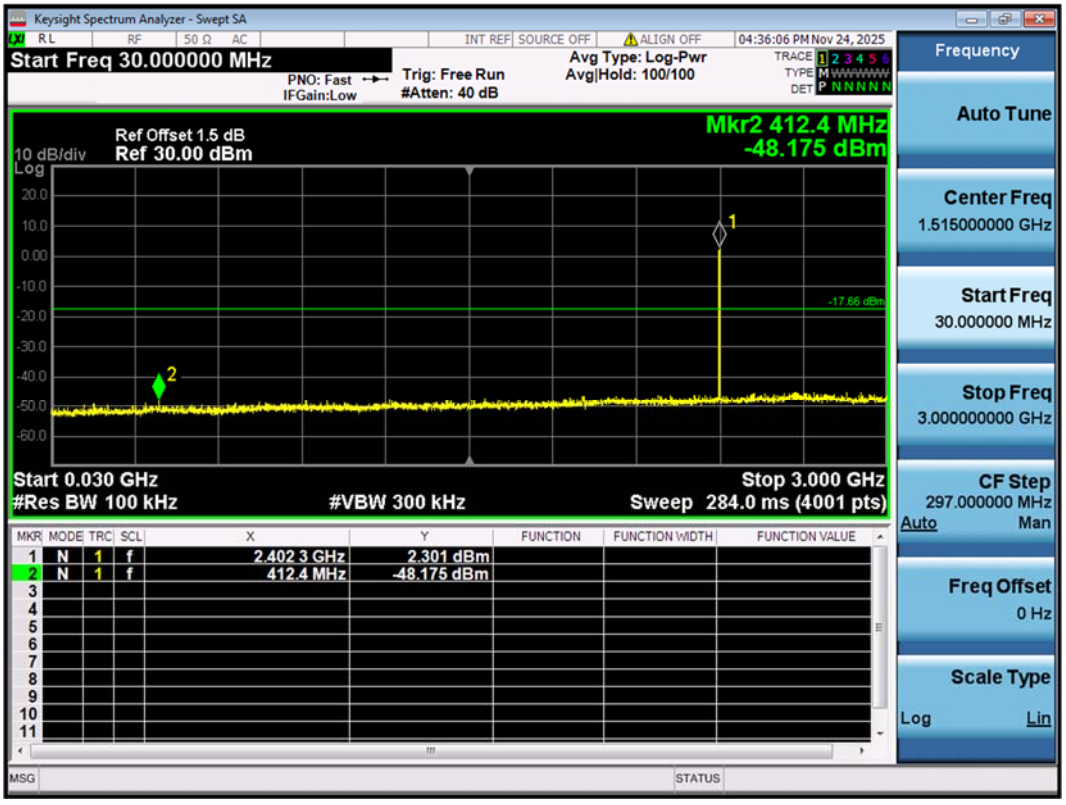

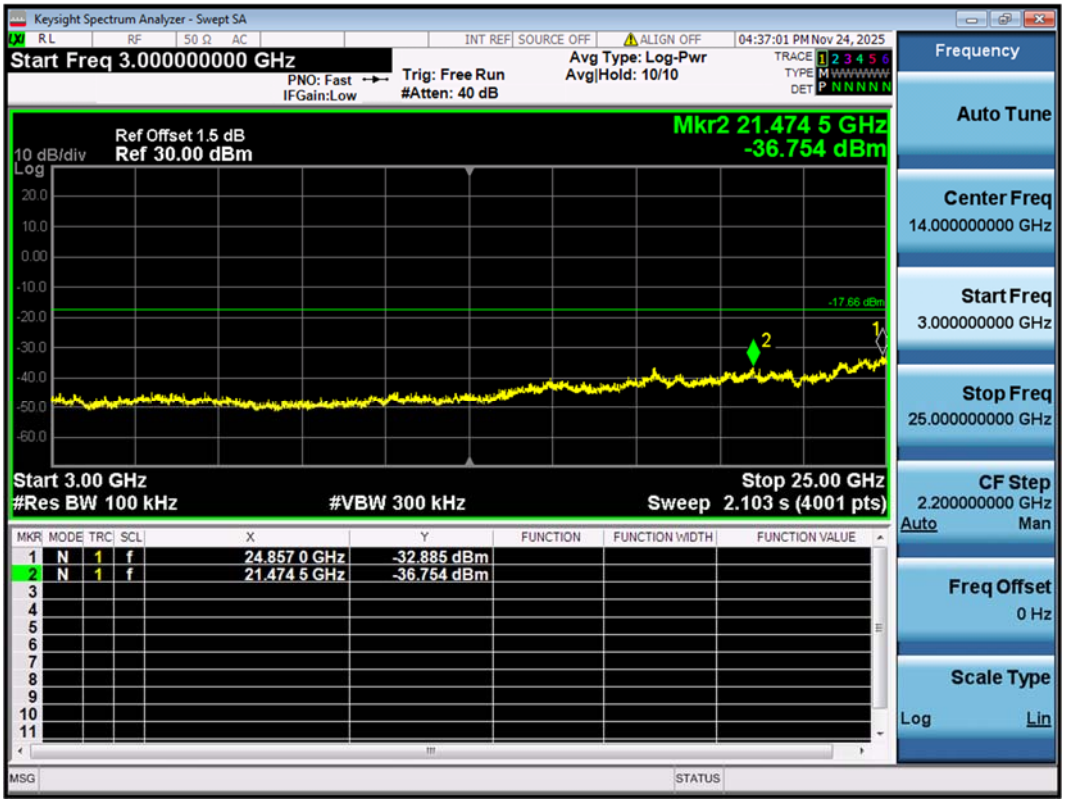

Figure 23: Conducted Spurious Emission & Authorized-band band-edge, 2441MHz, π/4-DQPSK Carrier Level

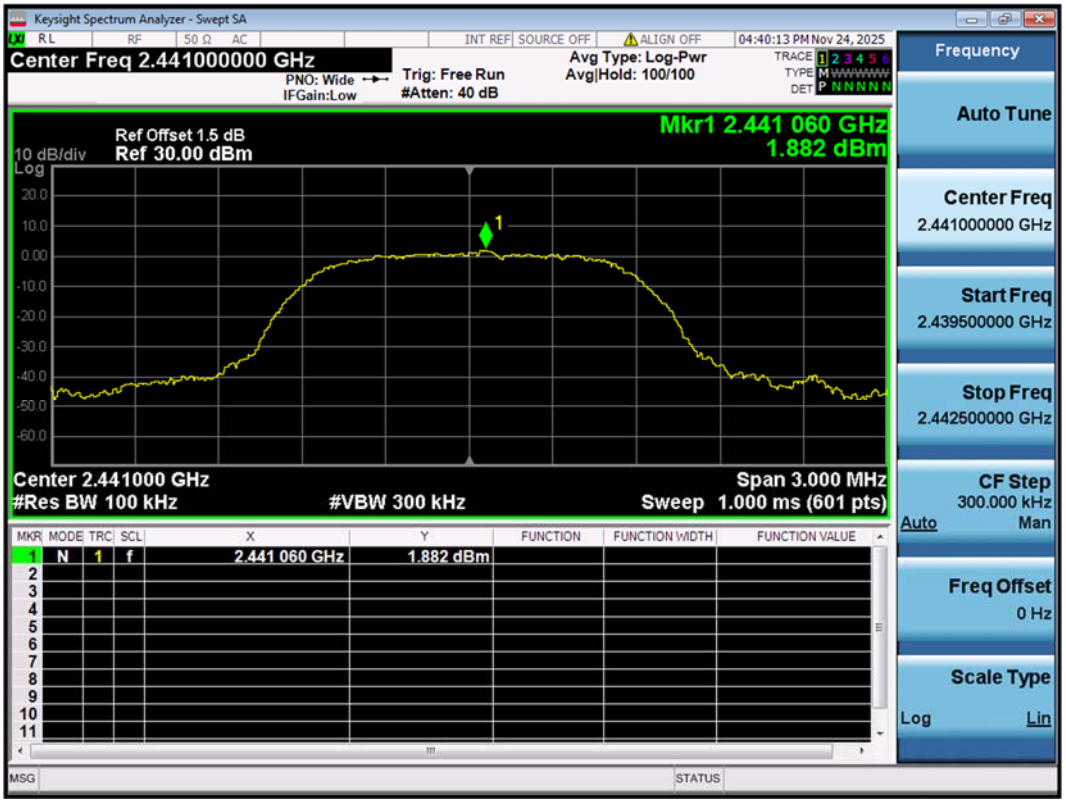
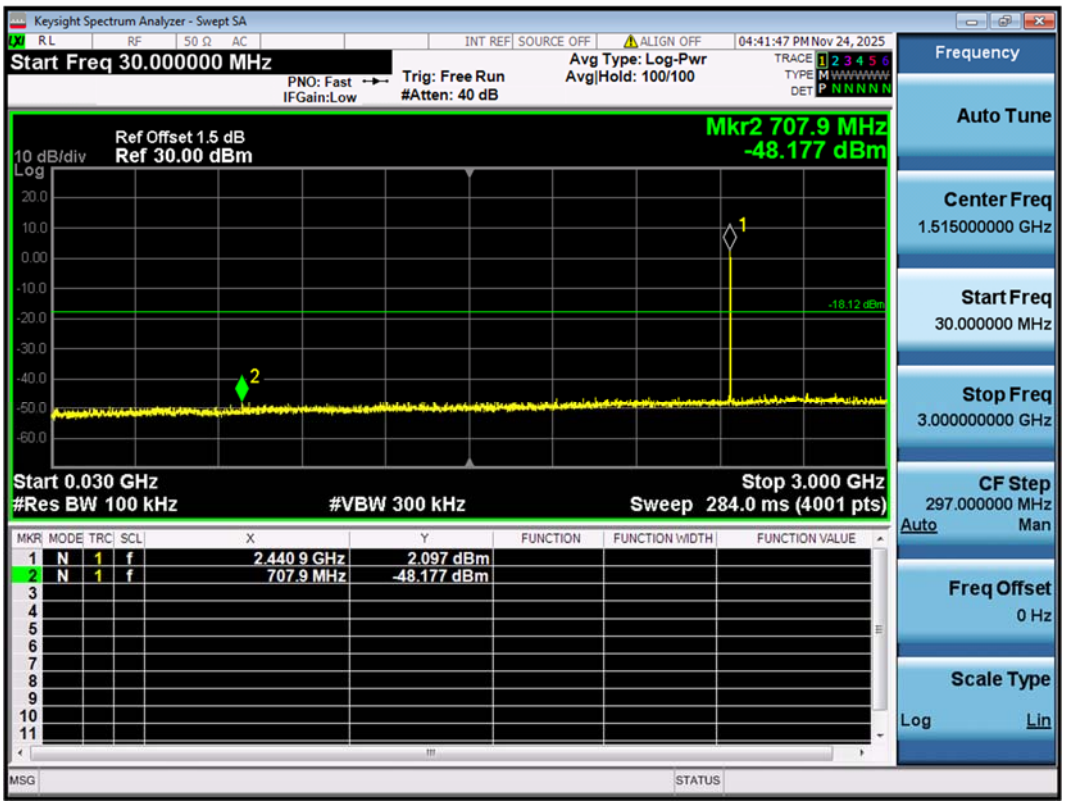
Conducted spurious emissions 30MHz-25GHz