

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-15

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11AC80 5530MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

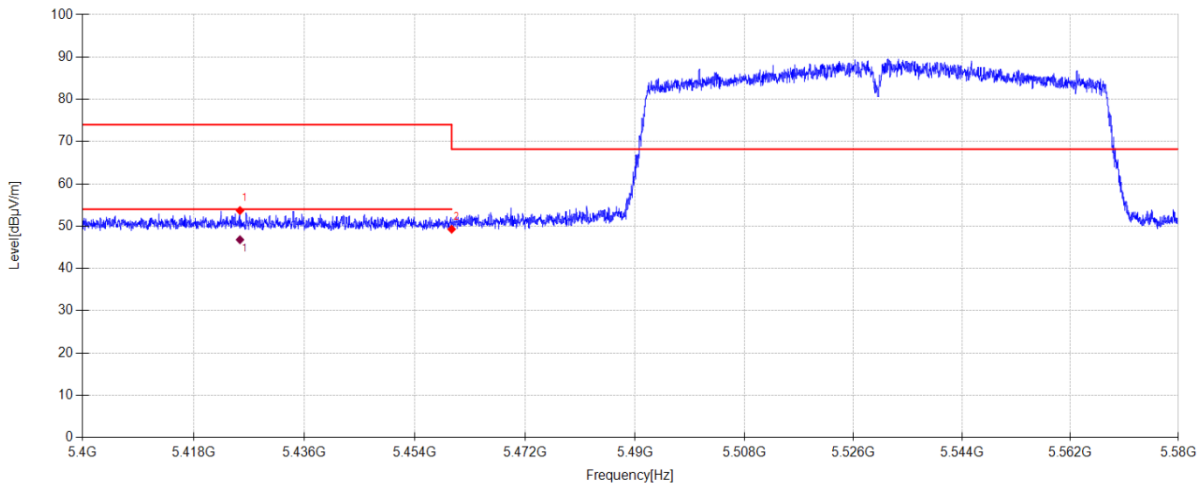
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\78

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5425.524	45.38	32.85	5.17	-29.71	53.69	74.00	20.31	PK	Vertical
2	5460.000	40.89	32.90	5.19	-29.71	49.27	68.20	18.93	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5425.524	38.49	32.85	5.17	46.80	54.00	7.20	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-15

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11AC80 5610MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

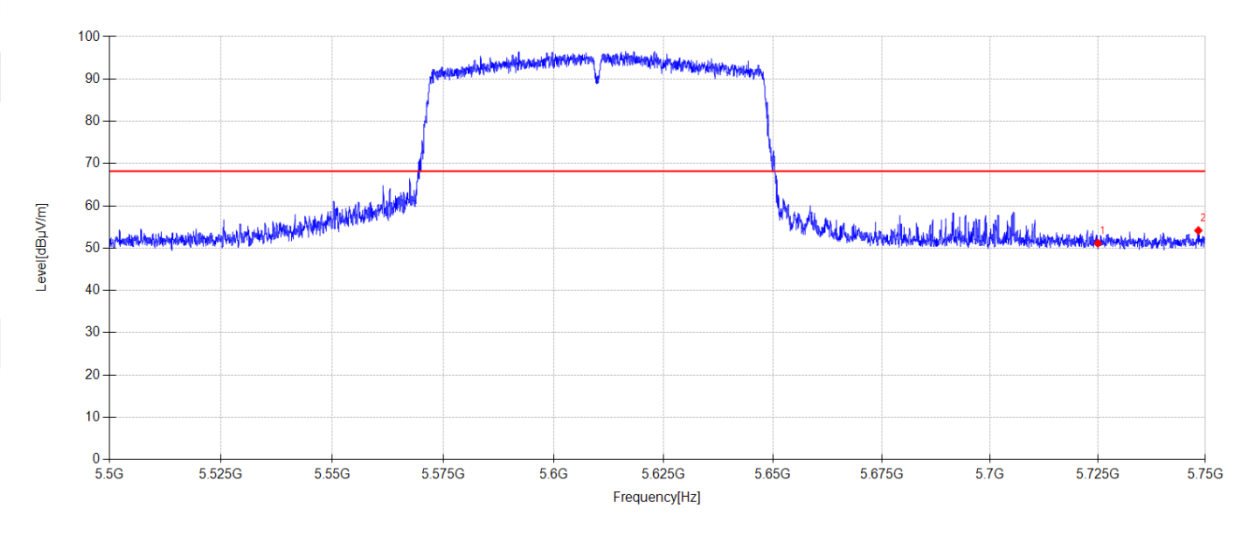
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\79

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.06	33.45	5.32	-29.66	51.17	68.20	17.03	PK	Horizontal
2	5748.375	44.70	33.78	5.33	-29.65	54.16	68.20	14.04	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-10-15

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11AC80 5610MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

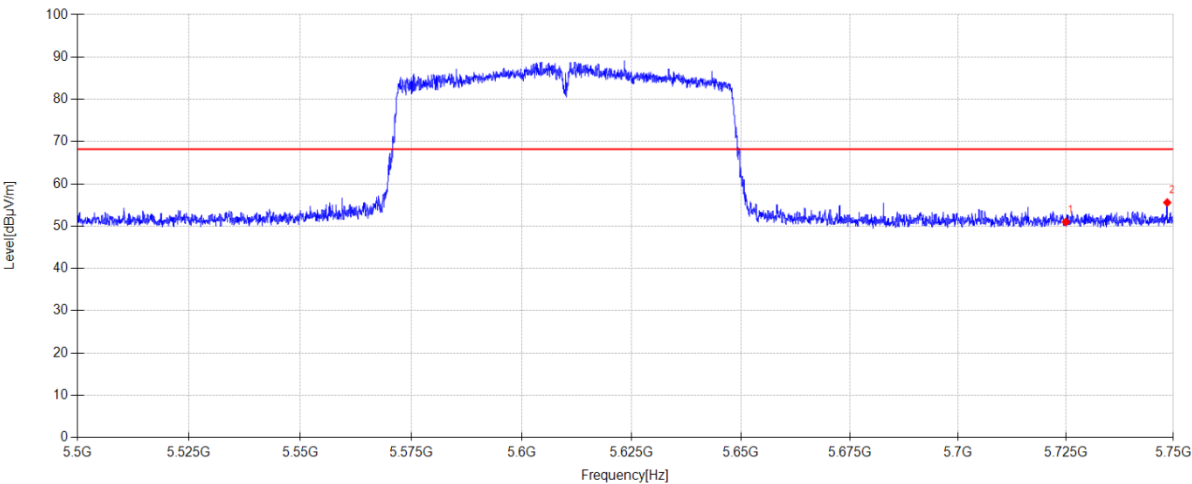
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\80

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.87	33.45	5.32	-29.66	50.98	68.20	17.22	PK	Vertical
2	5748.575	46.13	33.78	5.33	-29.65	55.59	68.20	12.61	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11A 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

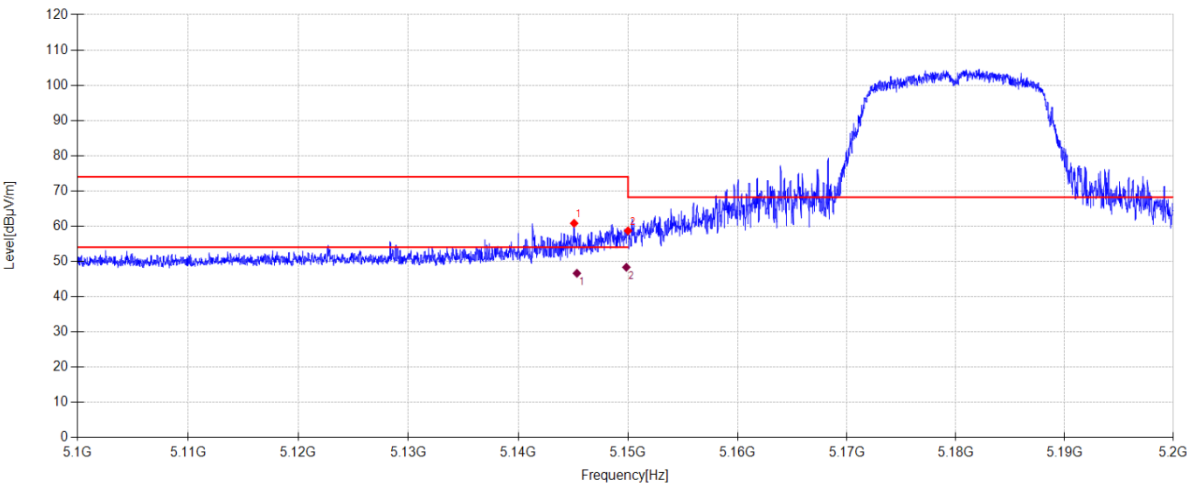
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\83

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.090	52.69	32.86	5.03	-29.77	60.81	74.00	13.19	PK	Horizontal
2	5150.000	50.52	32.90	5.04	-29.77	58.69	68.20	9.51	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5145.340	38.51	32.86	5.03	46.63	54.00	7.37	AV	Horizontal	
2	5149.851	40.17	32.90	5.04	48.34	54.00	5.66	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11A 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

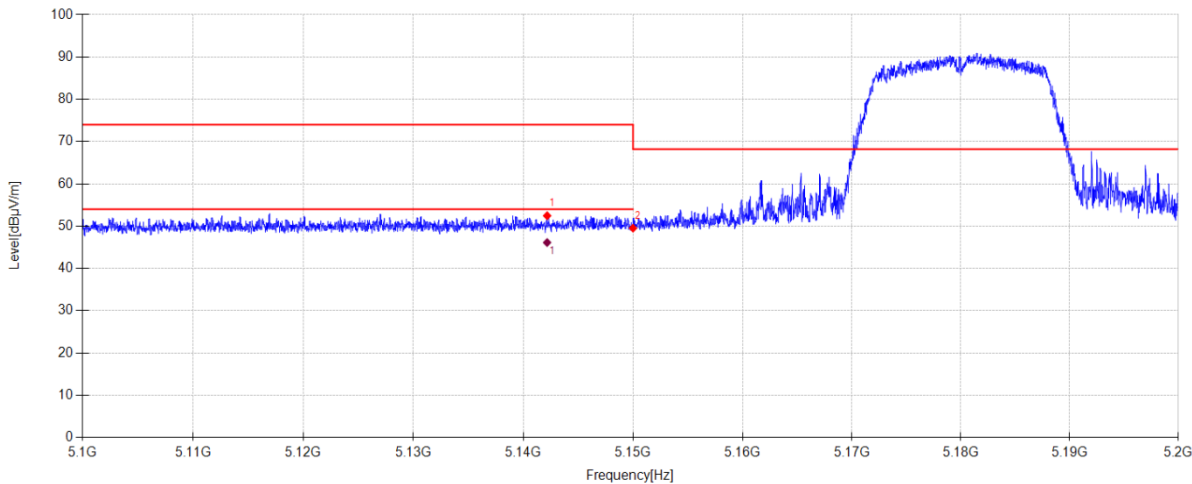
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\84

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5142.170	44.37	32.84	5.03	-29.77	52.47	74.00	21.53	PK	Vertical
2	5150.000	41.36	32.90	5.04	-29.77	49.53	68.20	18.67	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5142.170	38.03	32.84	5.03	46.13	54.00	7.87	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

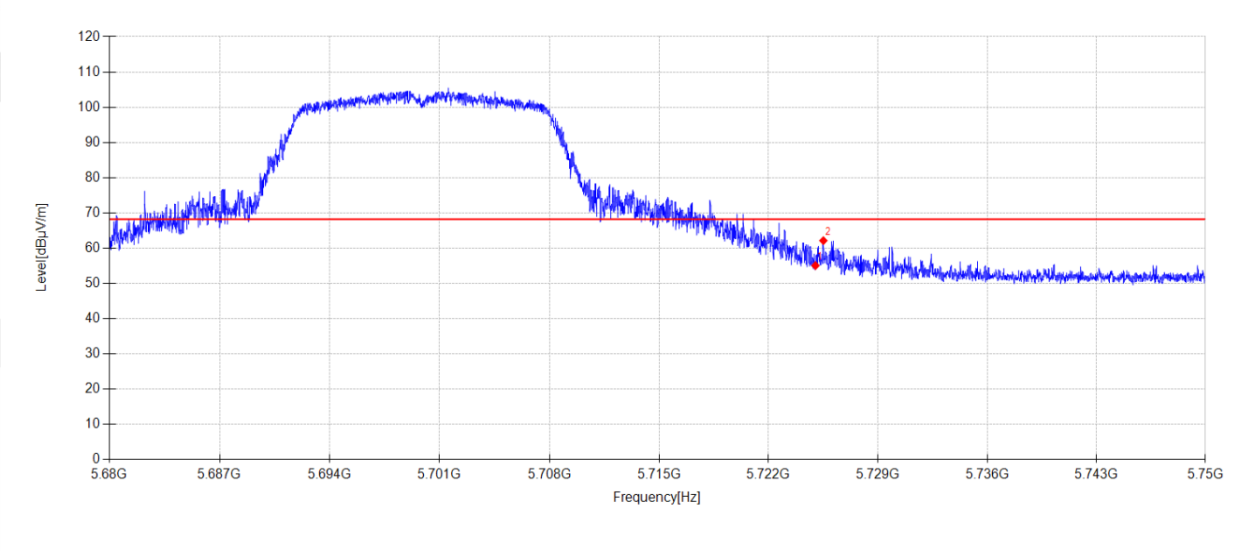
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\85

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.93	33.45	5.32	-29.65	55.05	68.20	13.15	PK	Horizontal
2	5725.507	53.00	33.46	5.32	-29.65	62.13	68.20	6.07	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Li Xiongbin

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

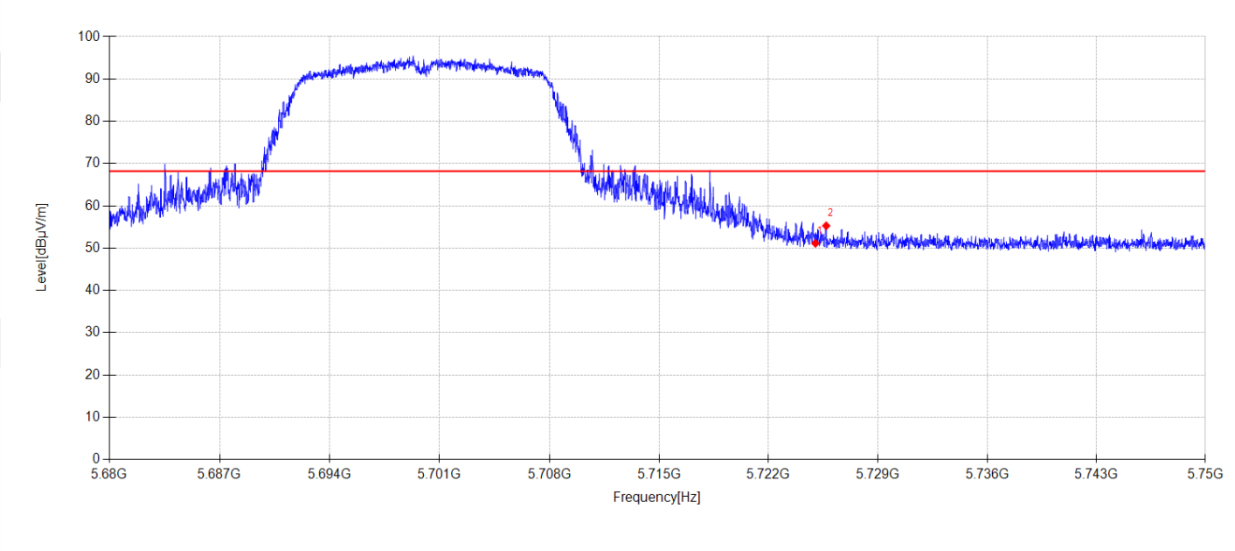
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\86

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.02	33.45	5.32	-29.65	51.14	68.20	17.06	PK	Vertical
2	5725.689	46.16	33.46	5.32	-29.65	55.29	68.20	12.91	PK	Vertical

Note:

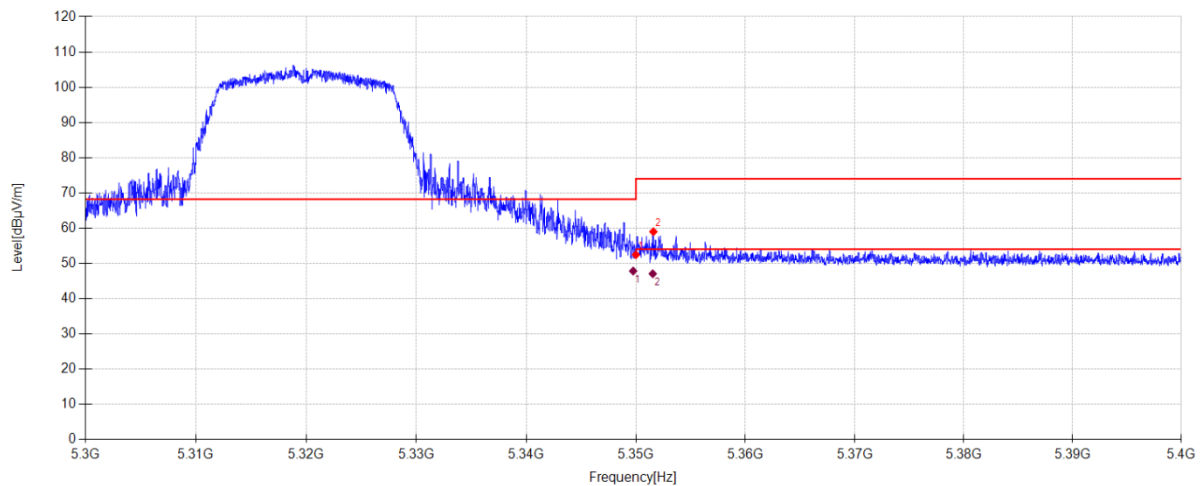
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-05 **Tested By:** Li Xiongbin
EUT: AI Speaker **Model Number:** KID
Test Mode: TX 11A 5320MHz Mode **Power Supply:** Battery
Condition: Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\87
Memo: Sample Numbler:S25091019-002

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.55	32.50	5.14	-29.73	52.46	68.20	15.74	PK	Horizontal
2	5351.600	51.08	32.51	5.14	-29.73	59.00	74.00	15.00	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.751	39.92	32.50	5.14	47.83	54.00	6.17	AV	Horizontal
2	5351.537	39.14	32.51	5.14	47.06	54.00	6.94	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11A 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

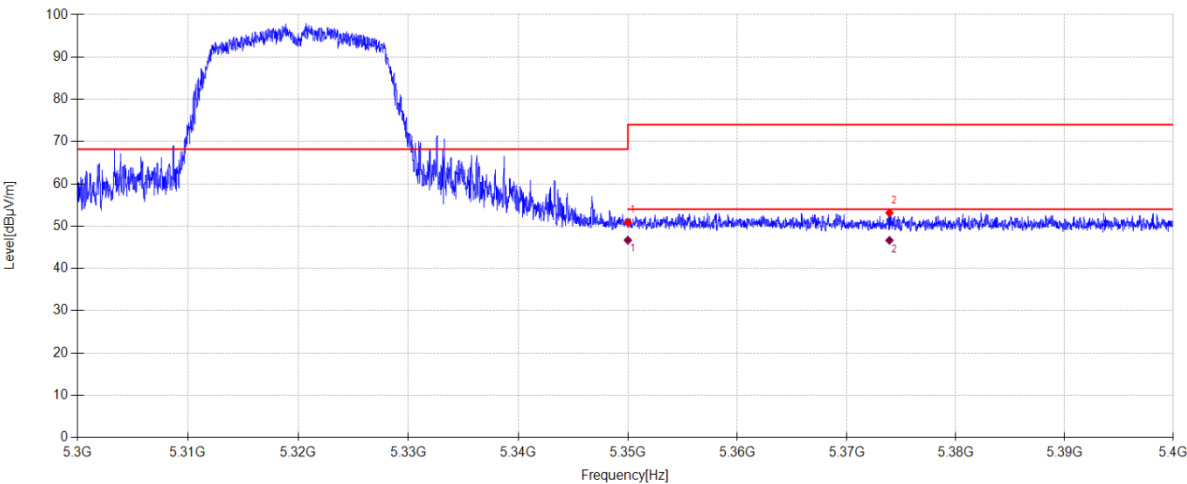
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\88

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.94	32.50	5.14	-29.73	50.85	68.20	17.35	PK	Vertical
2	5373.920	45.02	32.69	5.15	-29.73	53.13	74.00	20.87	PK	Vertical

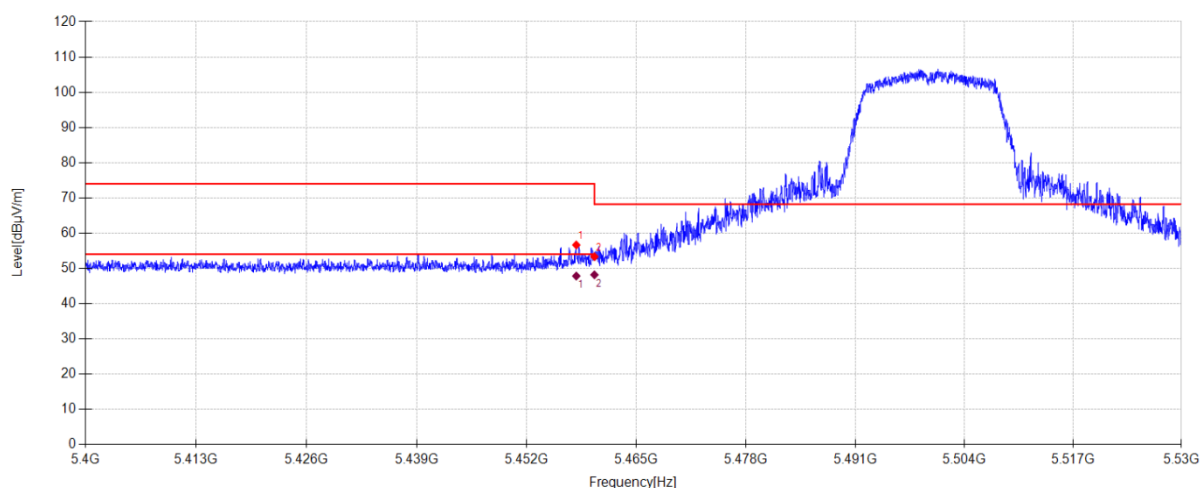
Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	38.77	32.50	5.14	46.68	54.00	7.32	AV	Vertical	
2	5373.920	38.54	32.69	5.15	46.65	54.00	7.35	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-05 **Tested By:** Li Xiongbin
EUT: AI Speaker **Model Number:** KID
Test Mode: TX 11A 5500MHz Mode **Power Supply:** Battery
Condition: Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\89
Memo: Sample Numbler:S25091019-002

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.850	48.29	32.88	5.19	-29.71	56.65	74.00	17.35	PK	Horizontal
2	5460.000	44.95	32.90	5.19	-29.71	53.33	68.20	14.87	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.850	39.47	32.88	5.19	47.83	54.00	6.17	AV	Horizontal
2	5460.000	39.81	32.90	5.19	48.19	54.00	5.81	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Li Xiongbín

EUT:

AI Speaker

Model Number:

KID

Test Mode:

TX 11A 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:

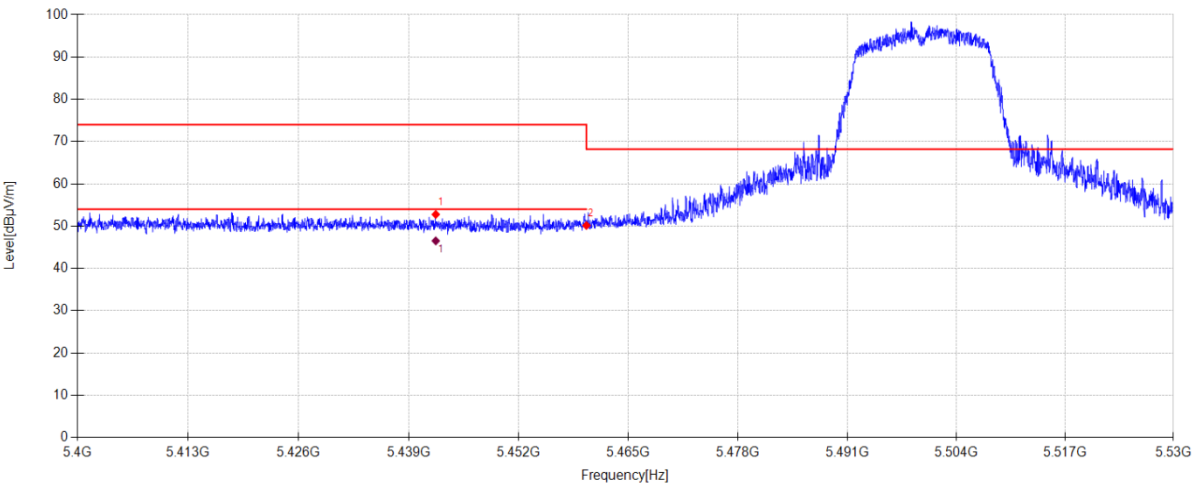
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5G\90

Memo:

Sample Numbler:S25091019-002



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5442.172	44.48	32.82	5.18	-29.71	52.77	74.00	21.23	PK	Vertical
2	5460.000	41.78	32.90	5.19	-29.71	50.16	68.20	18.04	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5442.172	38.23	32.82	5.18	46.52	54.00	7.48	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

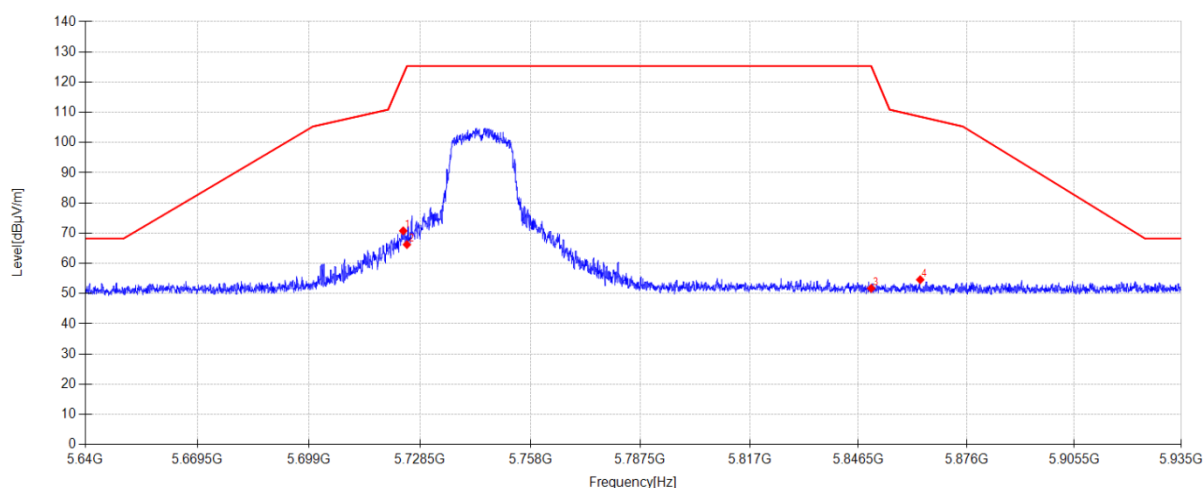
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11A 5745MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\1
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbn
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.016	61.73	33.44	5.26	-29.66	70.77	122.47	51.70	PK	Horizontal
2	5725.000	57.15	33.45	5.26	-29.65	66.21	125.30	59.09	PK	Horizontal
3	5850.000	42.15	33.90	5.31	-29.63	51.73	125.30	73.57	PK	Horizontal
4	5863.345	44.89	34.01	5.32	-29.63	54.59	108.56	53.97	PK	Horizontal

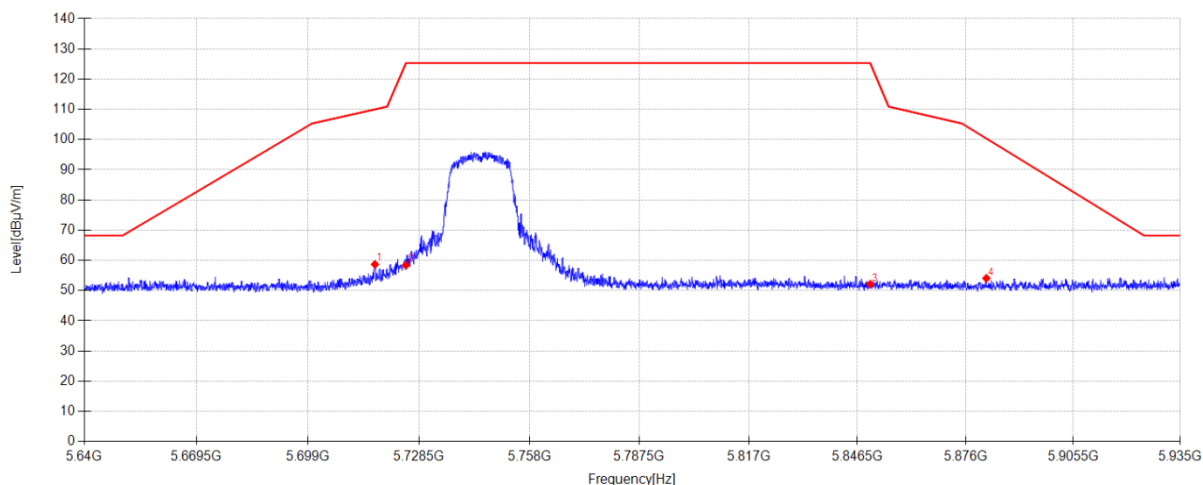
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11A 5745MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\2
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbin
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.759	49.73	33.33	5.26	-29.66	58.66	109.99	51.33	PK	Vertical
2	5725.000	49.32	33.45	5.26	-29.65	58.38	125.30	66.92	PK	Vertical
3	5850.000	42.51	33.90	5.31	-29.63	52.09	125.30	73.21	PK	Vertical
4	5881.694	44.22	34.15	5.32	-29.62	54.07	100.33	46.26	PK	Vertical

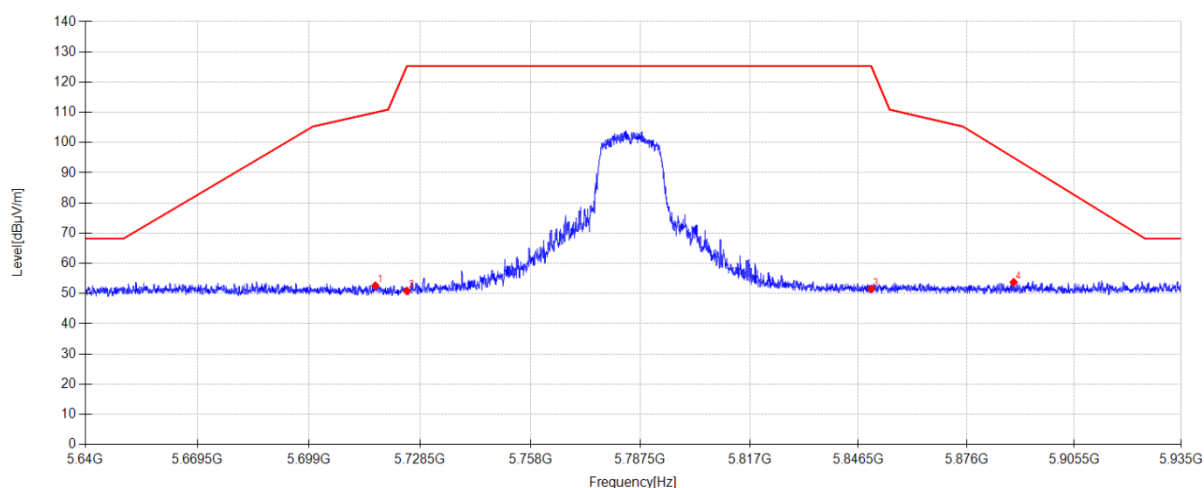
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11A 5785MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\3
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbn
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.612	43.68	33.33	5.26	-29.66	52.61	109.95	57.34	PK	Horizontal
2	5725.000	41.80	33.45	5.26	-29.65	50.86	125.30	74.44	PK	Horizontal
3	5850.000	41.95	33.90	5.31	-29.63	51.53	125.30	73.77	PK	Horizontal
4	5888.892	43.81	34.21	5.33	-29.62	53.73	94.99	41.26	PK	Horizontal

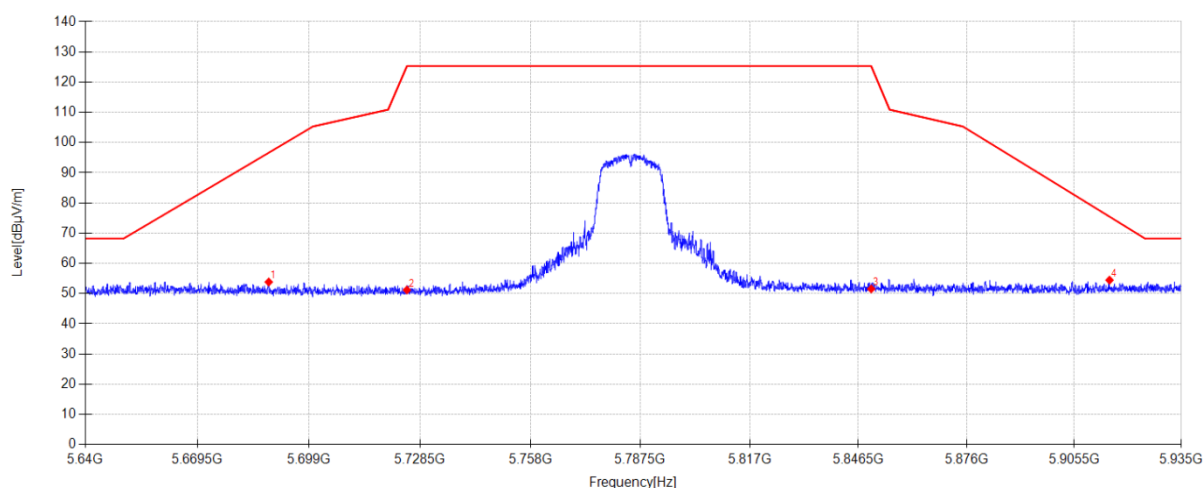
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11A 5785MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\4
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbin
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

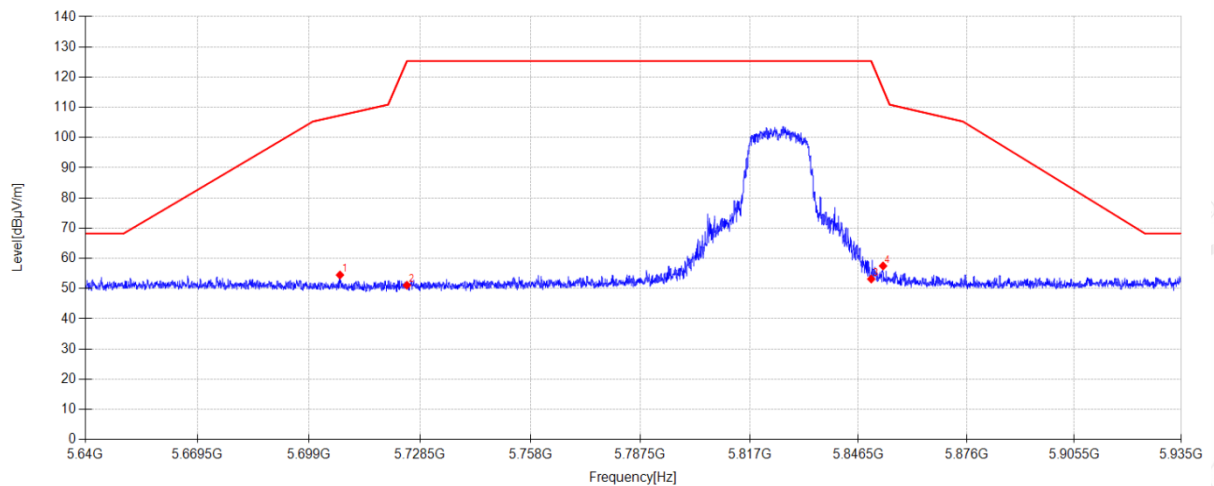
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.321	45.04	33.19	5.25	-29.66	53.82	96.63	42.81	PK	Vertical
2	5725.000	42.13	33.45	5.26	-29.65	51.19	125.30	74.11	PK	Vertical
3	5850.000	41.96	33.90	5.31	-29.63	51.54	125.30	73.76	PK	Vertical
4	5915.206	44.40	34.33	5.34	-29.62	54.45	75.47	21.02	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06 **Tested By:** Li Xiongbin
EUT: AI Speaker **Model Number:** KID
Test Mode: TX 11A 5825MHz Mode **Power Supply:** Battery
Condition: Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\5
Memo: Sample Numbler:S25091019-002

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5707.201	45.70	33.20	5.25	-29.66	54.49	107.32	52.83	PK	Horizontal
2	5725.000	42.04	33.45	5.26	-29.65	51.10	125.30	74.20	PK	Horizontal
3	5850.000	43.58	33.90	5.31	-29.63	53.16	125.30	72.14	PK	Horizontal
4	5853.226	47.88	33.93	5.31	-29.63	57.49	116.01	58.52	PK	Horizontal

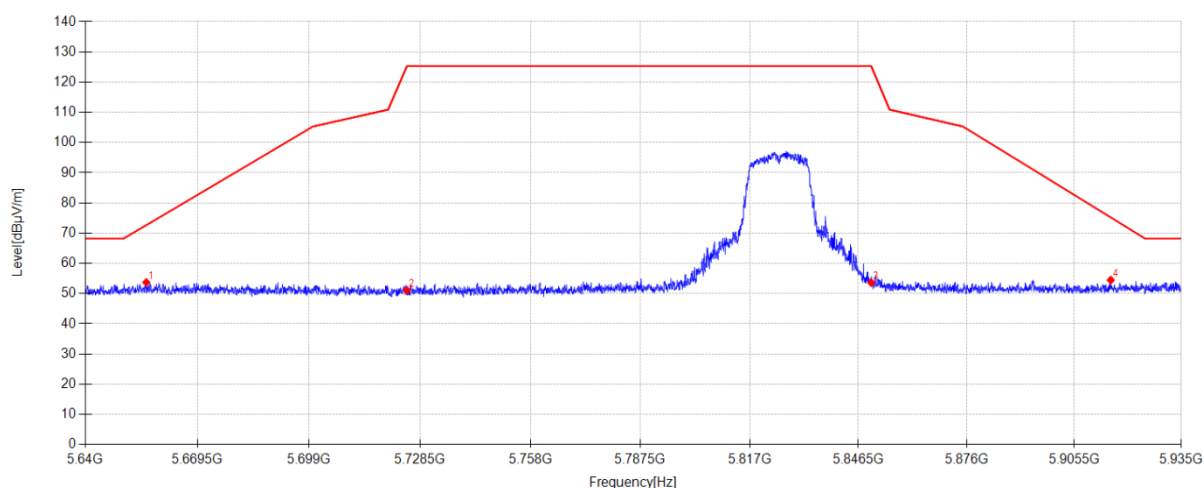
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11A 5825MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\6
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbin
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5656.019	44.69	33.45	5.23	-29.67	53.70	72.67	18.97	PK	Vertical
2	5725.000	42.01	33.45	5.26	-29.65	51.07	125.30	74.23	PK	Vertical
3	5850.000	44.03	33.90	5.31	-29.63	53.61	125.30	71.69	PK	Vertical
4	5915.560	44.43	34.33	5.34	-29.62	54.48	75.20	20.72	PK	Vertical

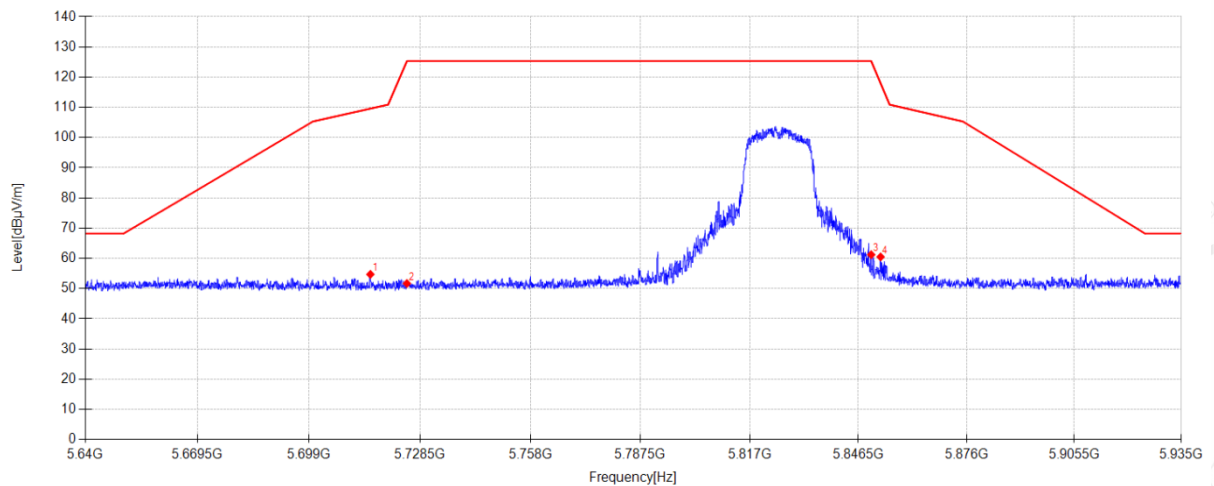
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11N20 5825MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\13
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbn
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.284	45.80	33.31	5.26	-29.66	54.71	109.58	54.87	PK	Horizontal
2	5725.000	42.63	33.45	5.26	-29.65	51.69	125.30	73.61	PK	Horizontal
3	5850.000	51.64	33.90	5.31	-29.63	61.22	125.30	64.08	PK	Horizontal
4	5852.548	50.89	33.92	5.31	-29.63	60.49	117.96	57.47	PK	Horizontal

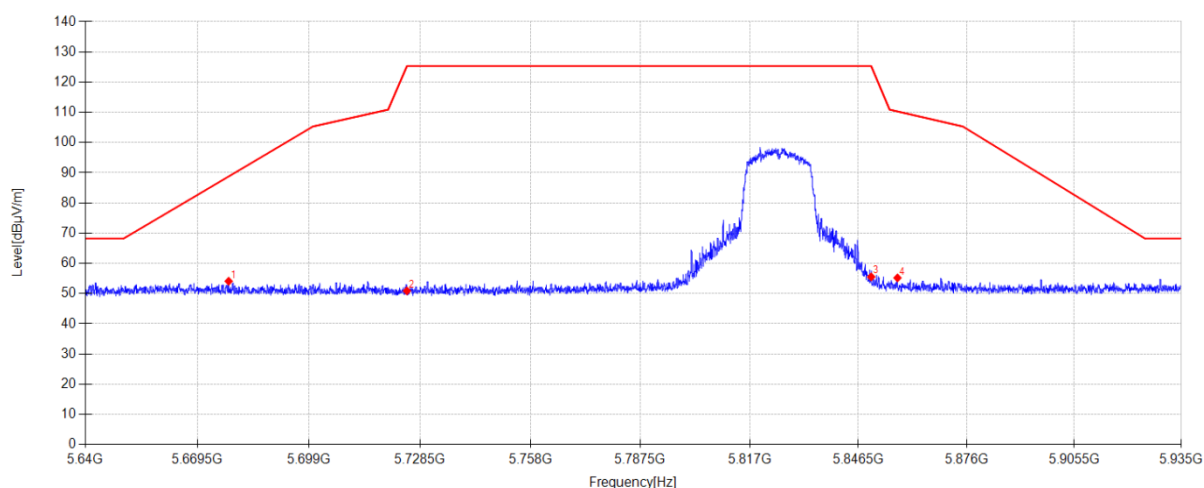
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11N20 5825MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\14
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbn
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5677.731	45.23	33.28	5.24	-29.66	54.09	88.78	34.69	PK	Vertical
2	5725.000	41.83	33.45	5.26	-29.65	50.89	125.30	74.41	PK	Vertical
3	5850.000	45.95	33.90	5.31	-29.63	55.53	125.30	69.77	PK	Vertical
4	5857.150	45.56	33.96	5.31	-29.63	55.20	110.30	55.10	PK	Vertical

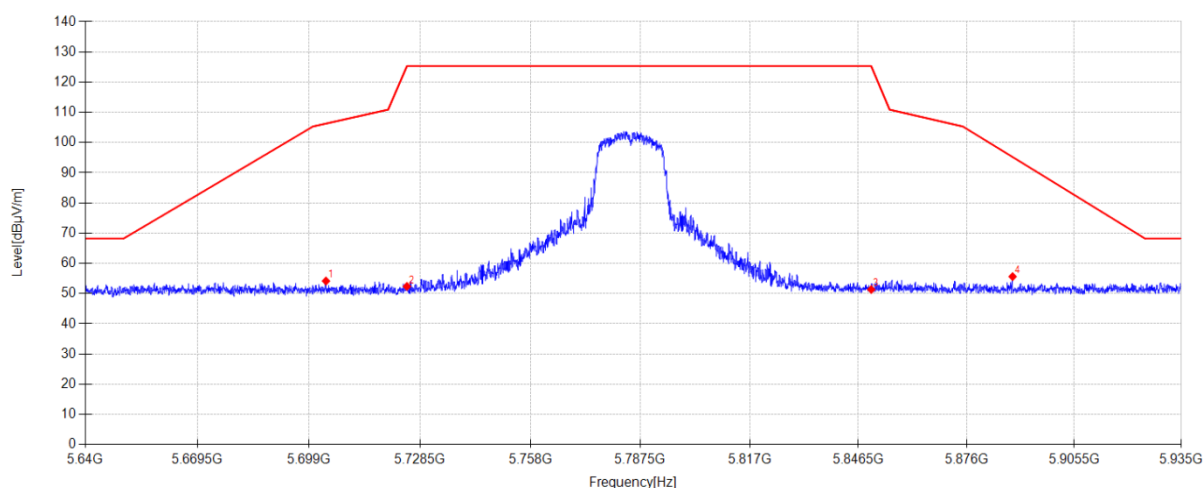
Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-06
EUT: AI Speaker
Test Mode: TX 11N20 5785MHz Mode
Condition: Temp:23.9°C;Humi:54.9%
File Path: d:\ts\2025 report date\Q25091019-1E\FCC Above 1G 5.8G\15
Memo: Sample Numbler:S25091019-002

Tested By: Li Xiongbin
Model Number: KID
Power Supply: Battery
Test Site: DDT 3# Chamber

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5703.484	45.42	33.15	5.25	-29.66	54.16	106.28	52.12	PK	Horizontal
2	5725.000	43.31	33.45	5.26	-29.65	52.37	125.30	72.93	PK	Horizontal
3	5850.000	41.77	33.90	5.31	-29.63	51.35	125.30	73.95	PK	Horizontal
4	5888.597	45.70	34.21	5.33	-29.62	55.62	95.21	39.59	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.