




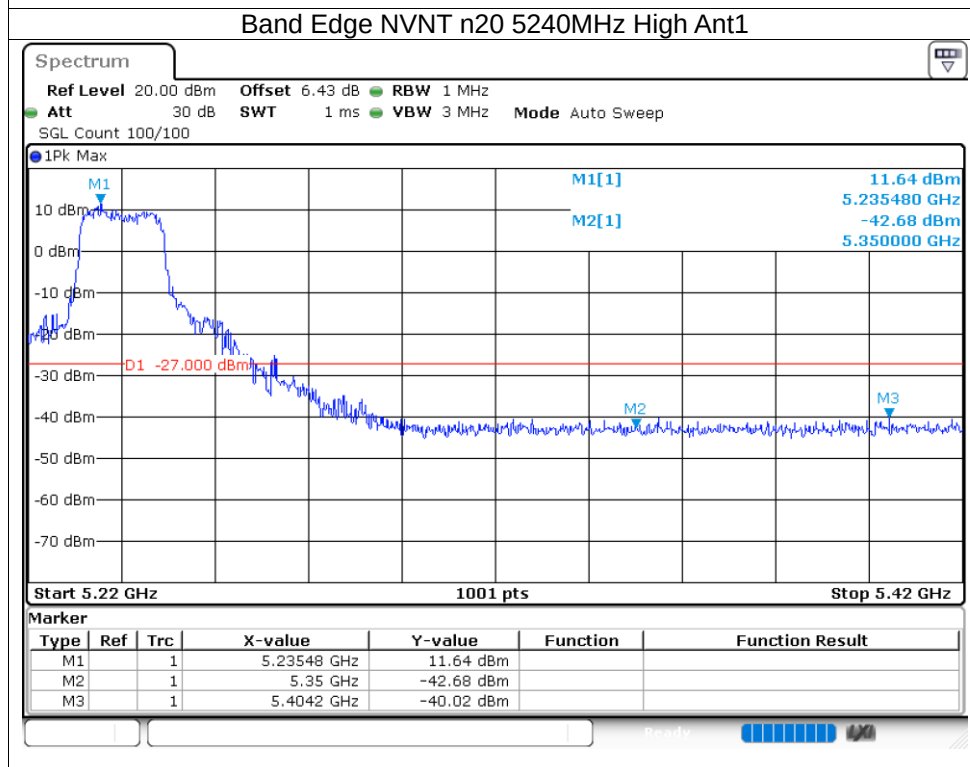
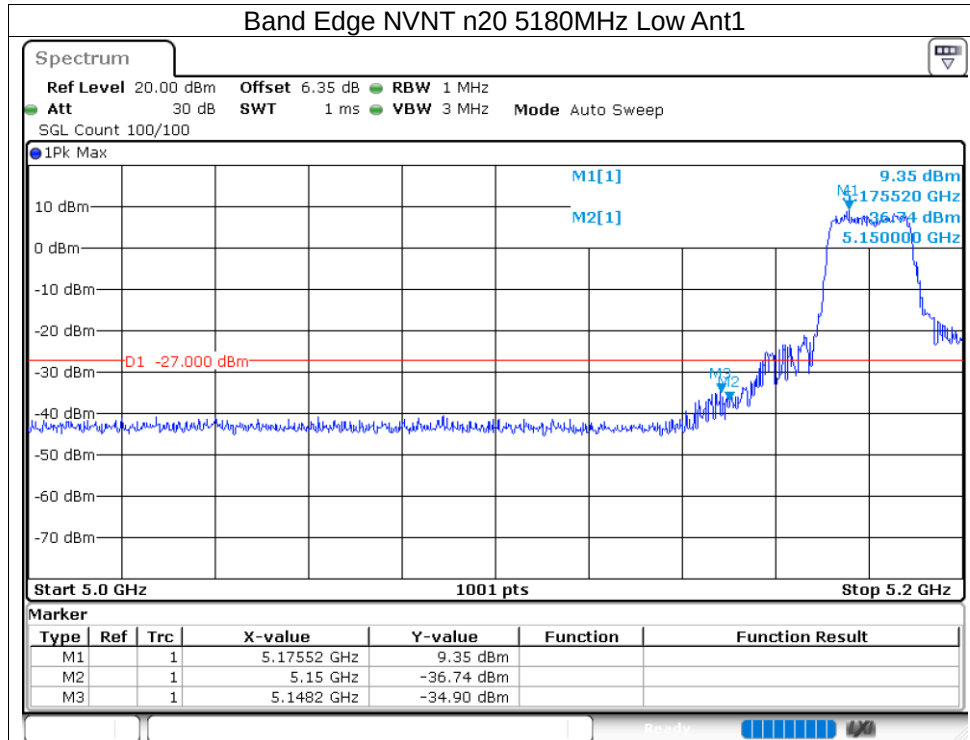
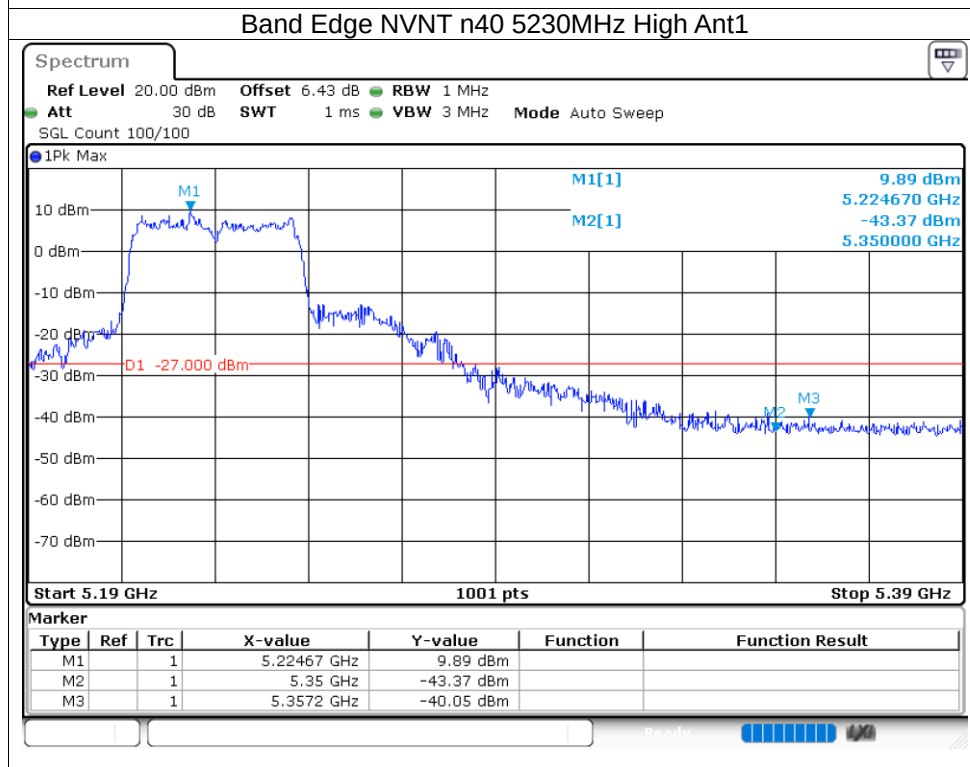
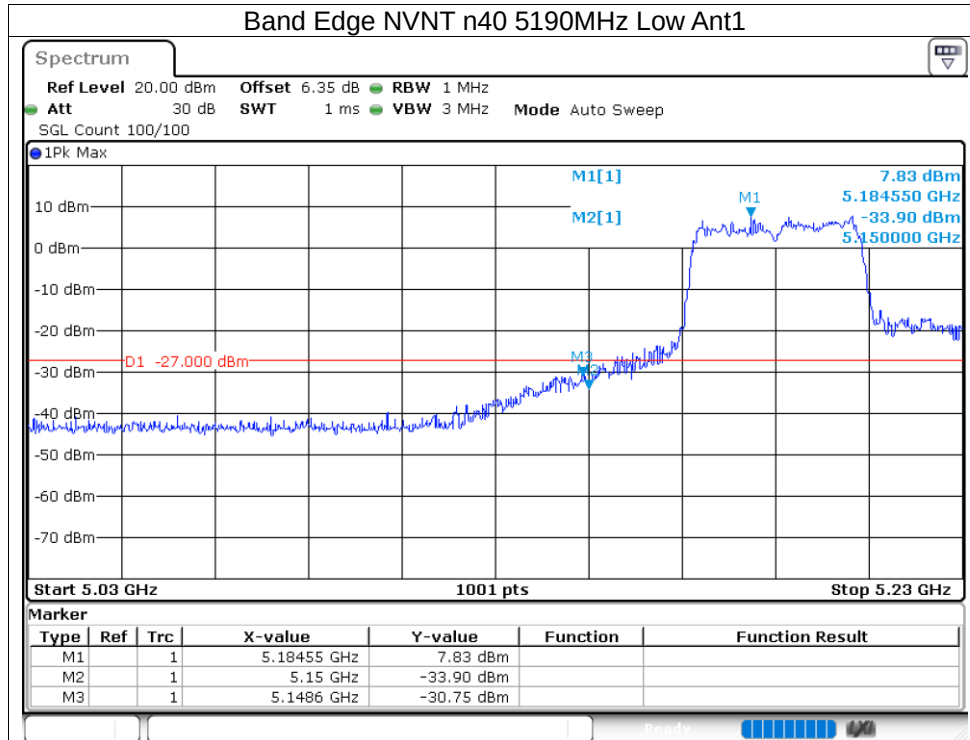


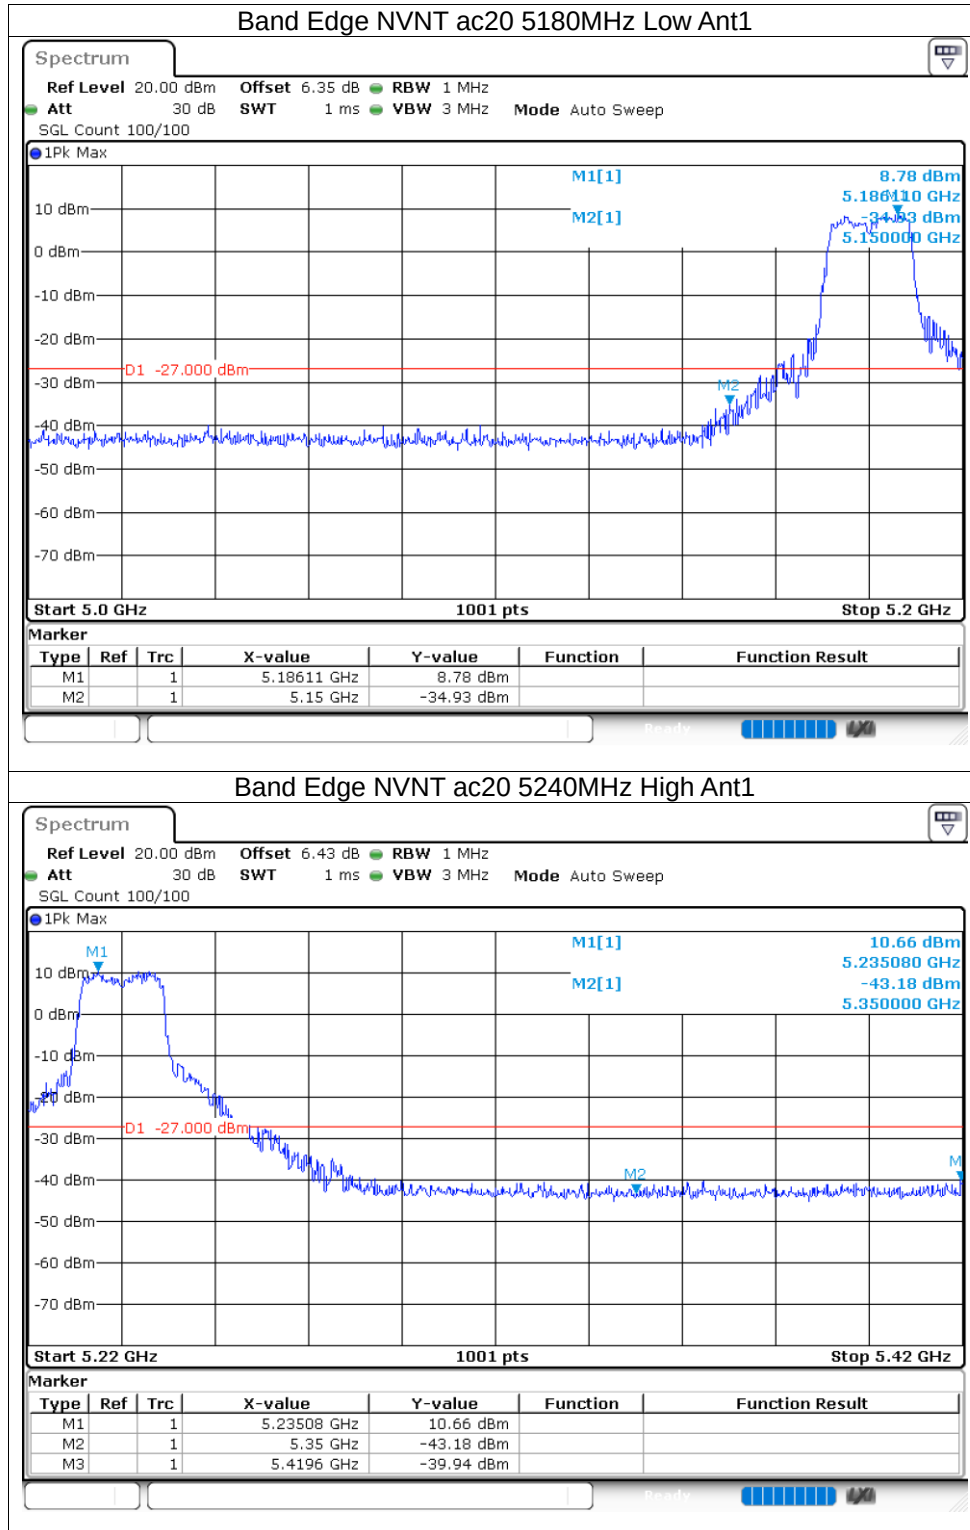

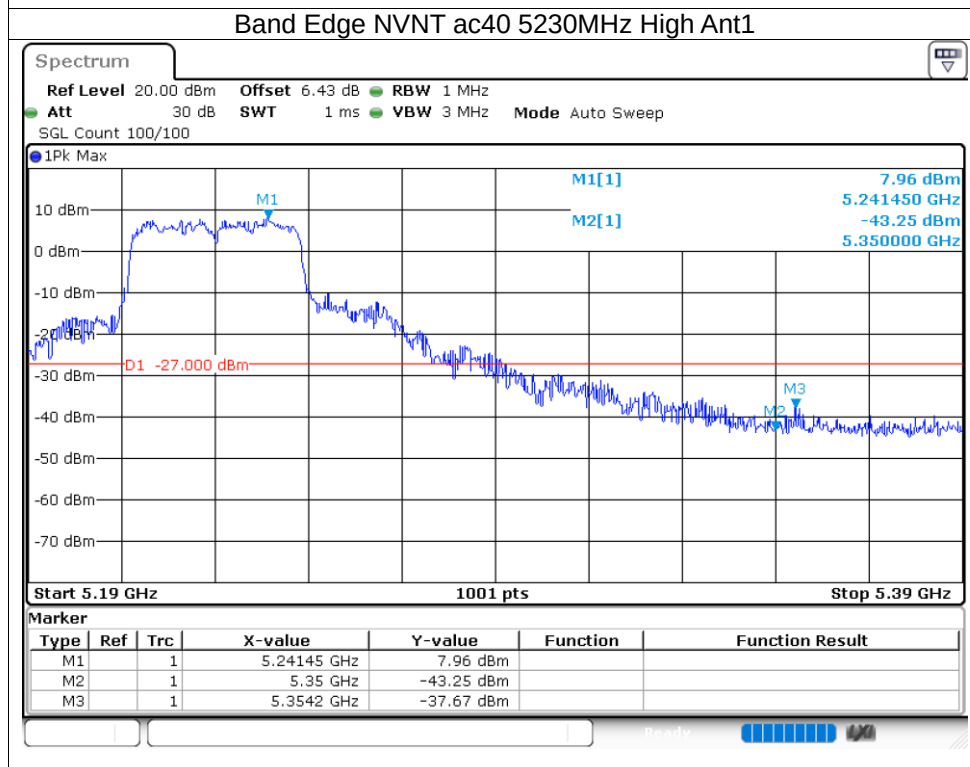

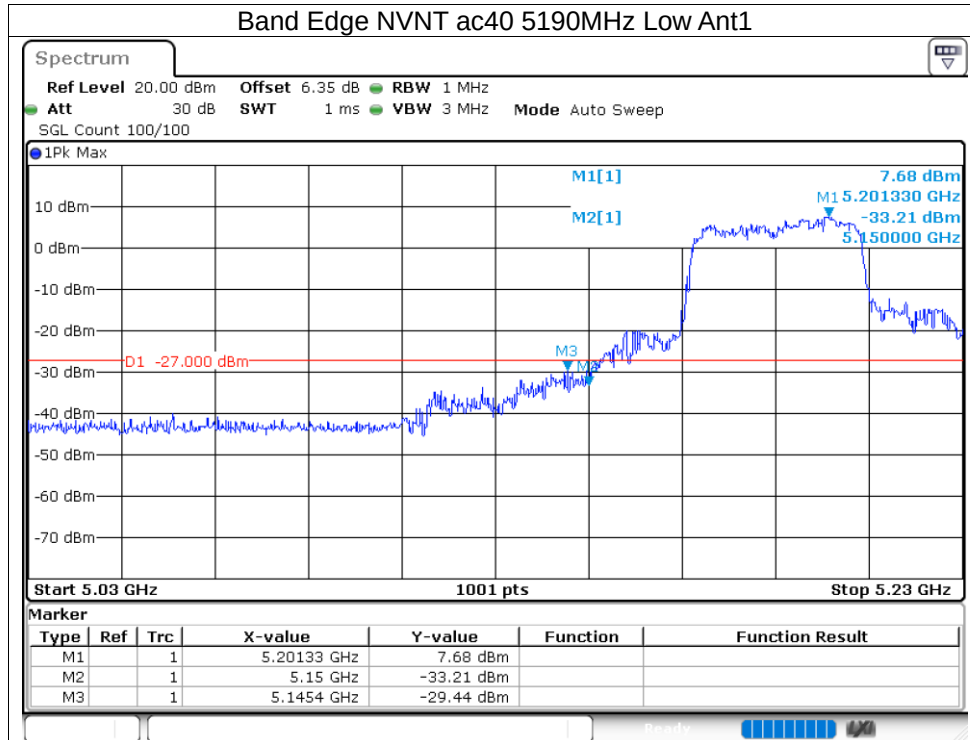



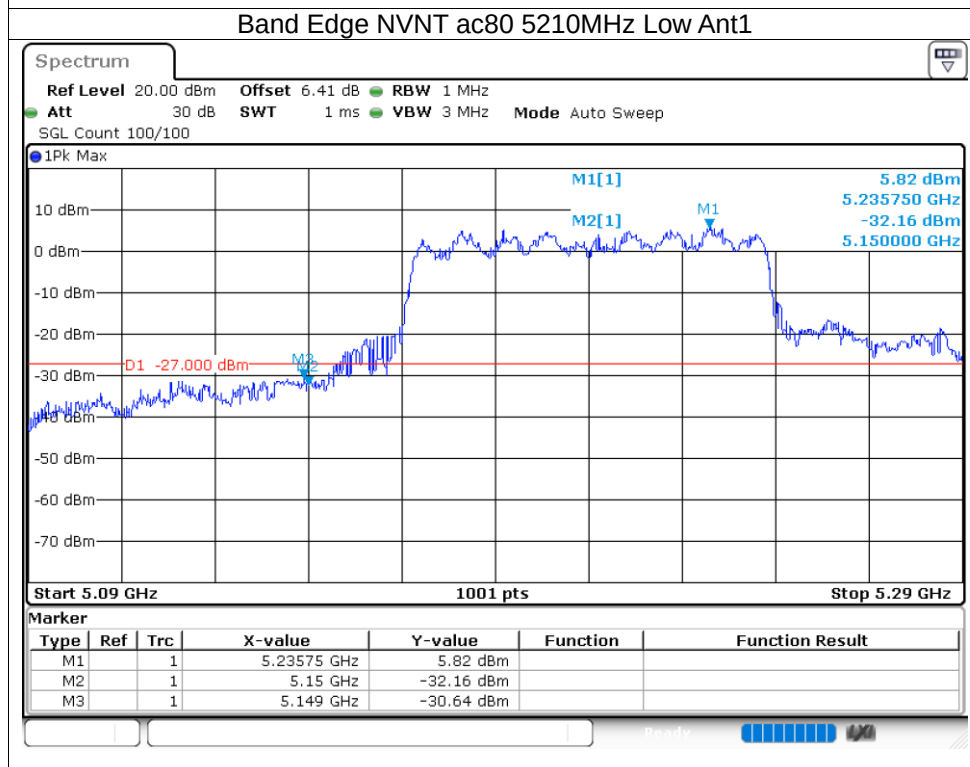



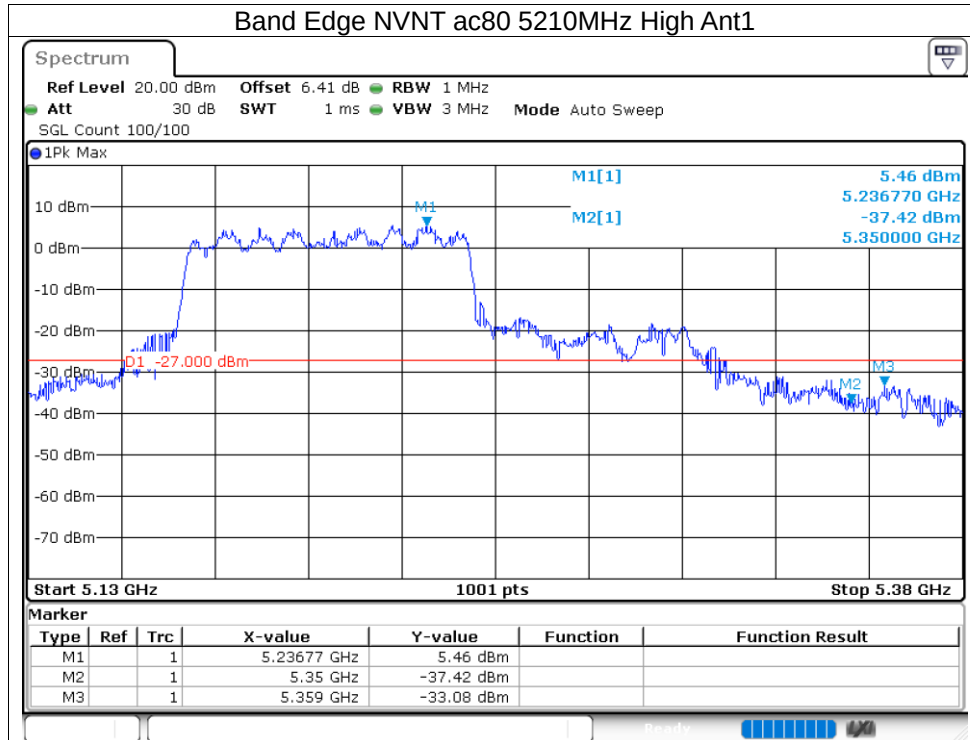




5.7 CONDUCTED RF SPURIOUS EMISSION



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-31.18	-27	Pass
NVNT	a	5200	Ant1	-32.39	-27	Pass
NVNT	a	5240	Ant1	-31.53	-27	Pass
NVNT	n20	5180	Ant1	-31.8	-27	Pass
NVNT	n20	5200	Ant1	-32.27	-27	Pass
NVNT	n20	5240	Ant1	-31.8	-27	Pass
NVNT	n40	5190	Ant1	-32.03	-27	Pass
NVNT	n40	5230	Ant1	-31.65	-27	Pass
NVNT	ac20	5180	Ant1	-31.48	-27	Pass
NVNT	ac20	5200	Ant1	-32.29	-27	Pass
NVNT	ac20	5240	Ant1	-31.21	-27	Pass
NVNT	ac40	5190	Ant1	-30.43	-27	Pass
NVNT	ac40	5230	Ant1	-31.14	-27	Pass
NVNT	ac80	5210	Ant1	-31.61	-27	Pass


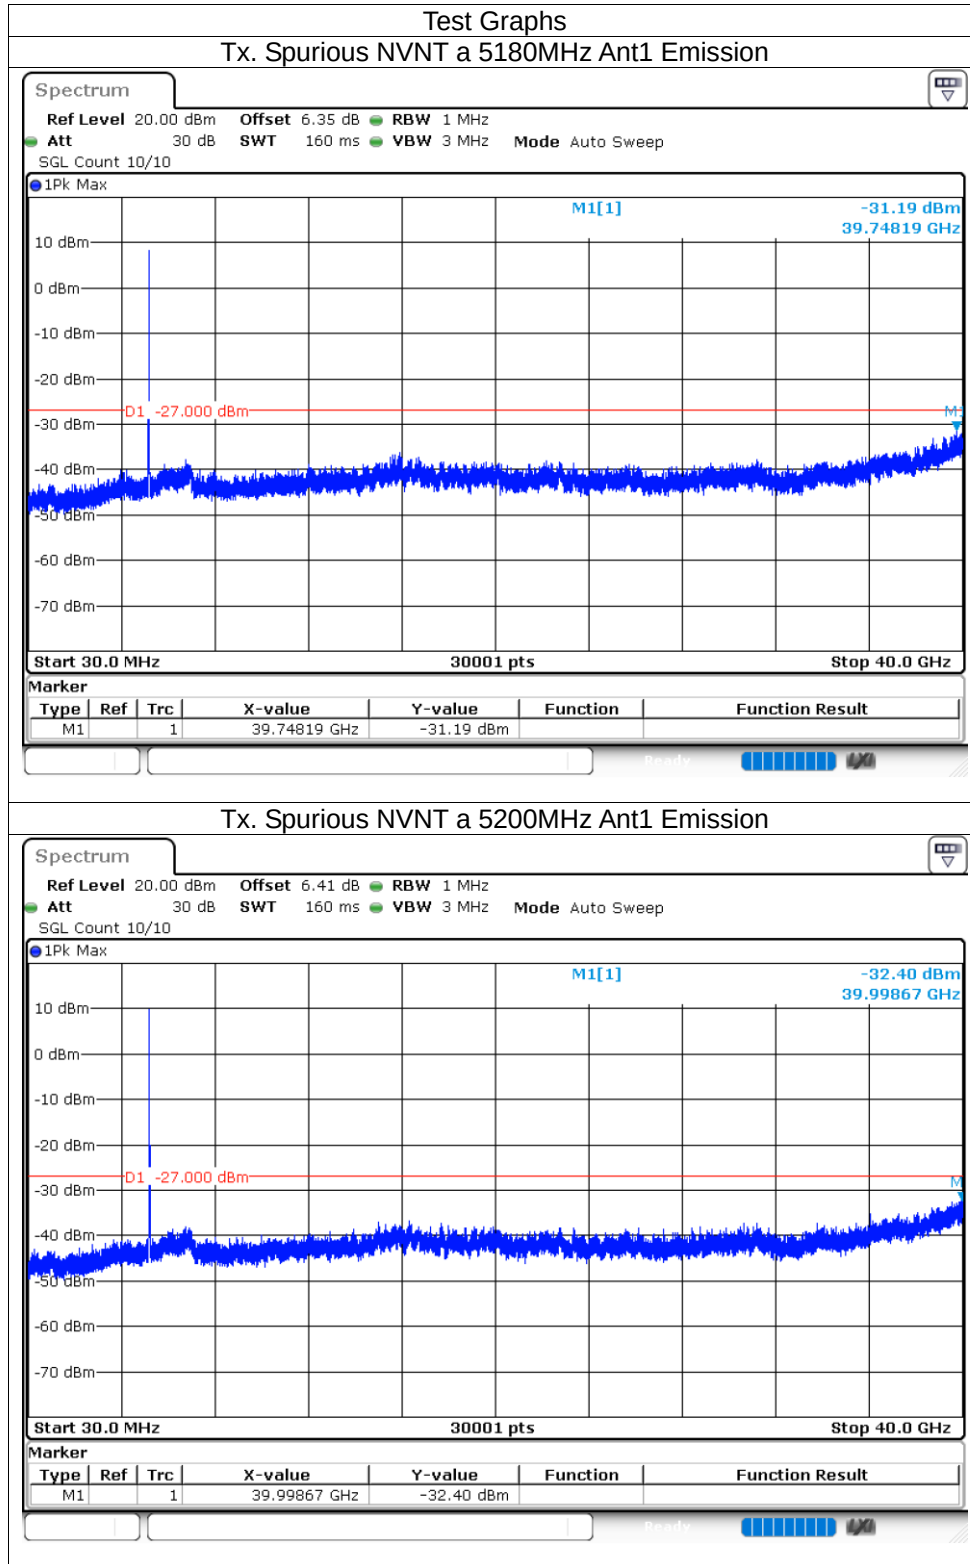


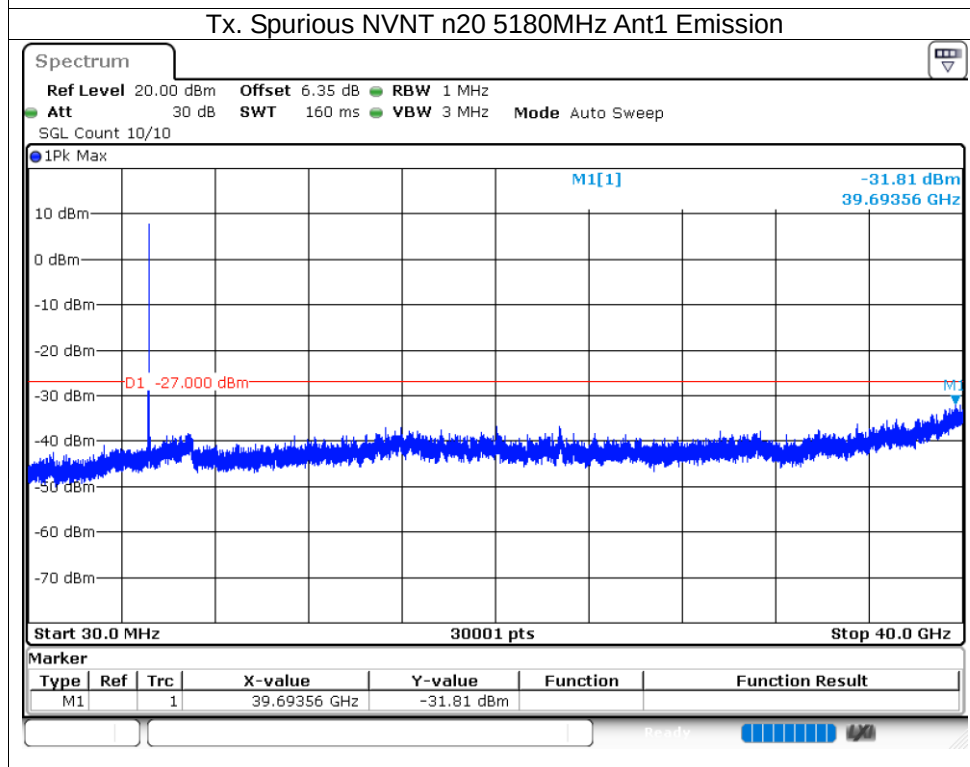
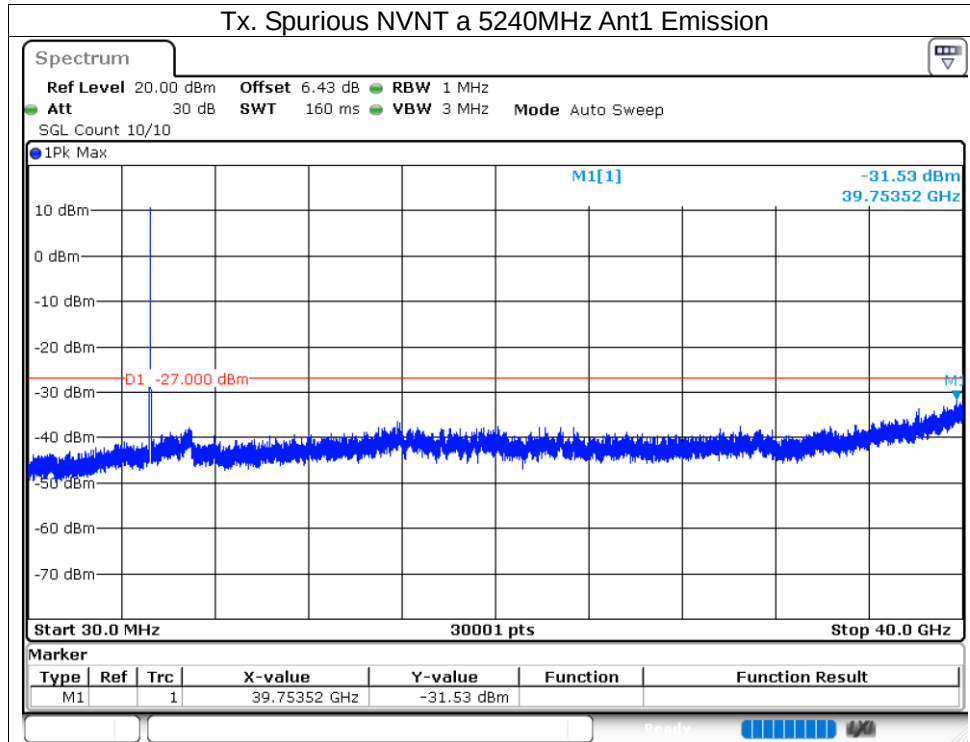


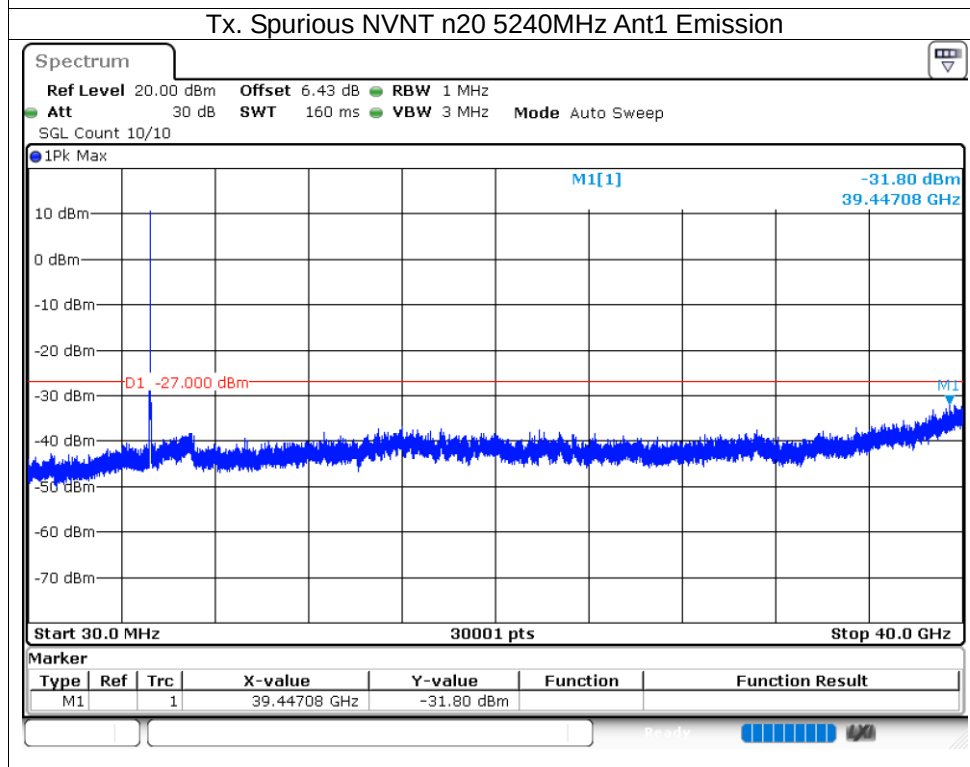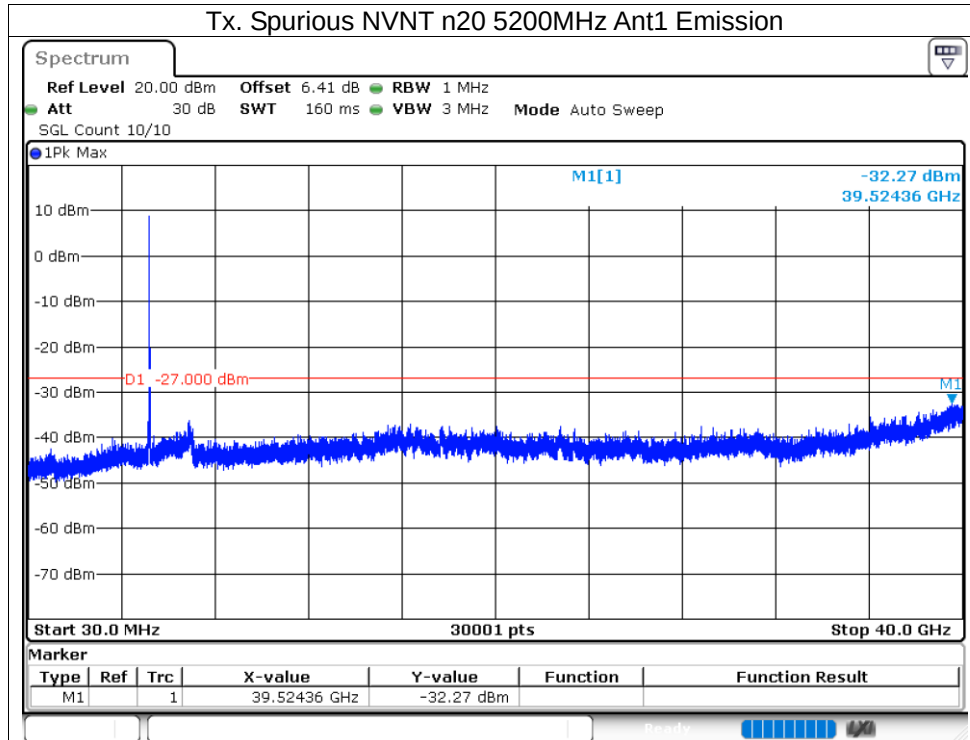

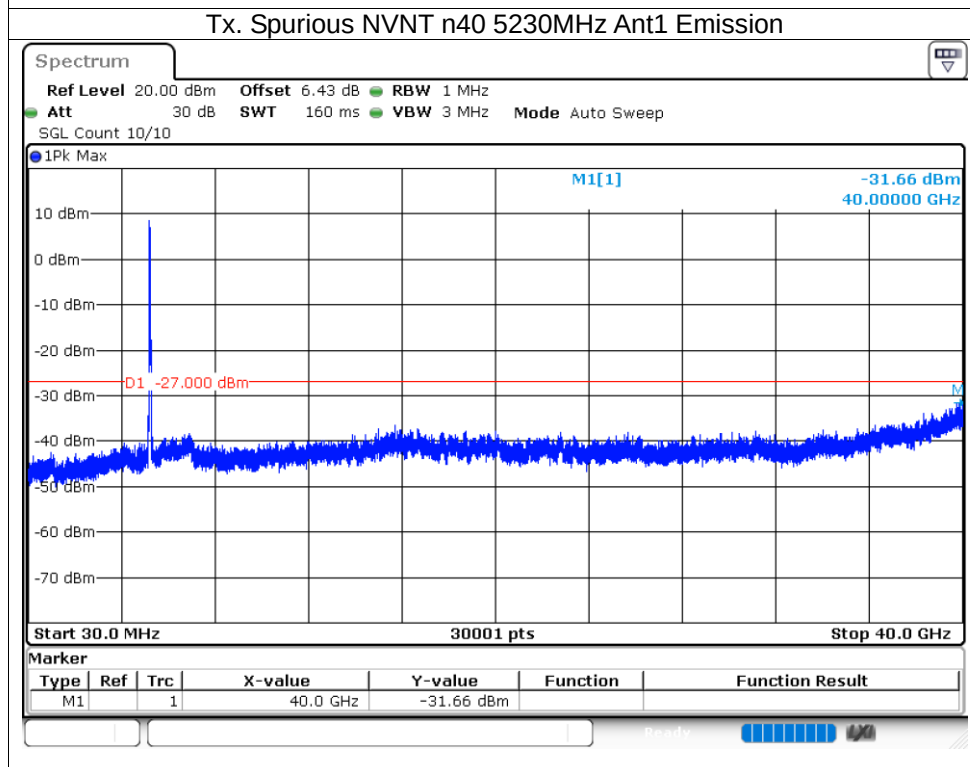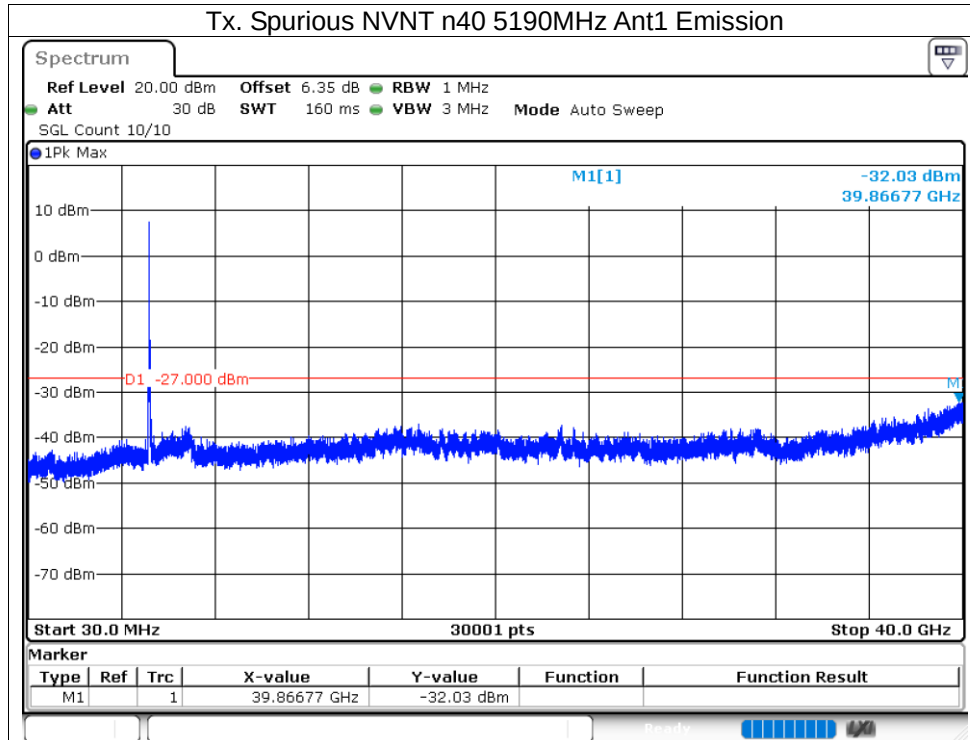

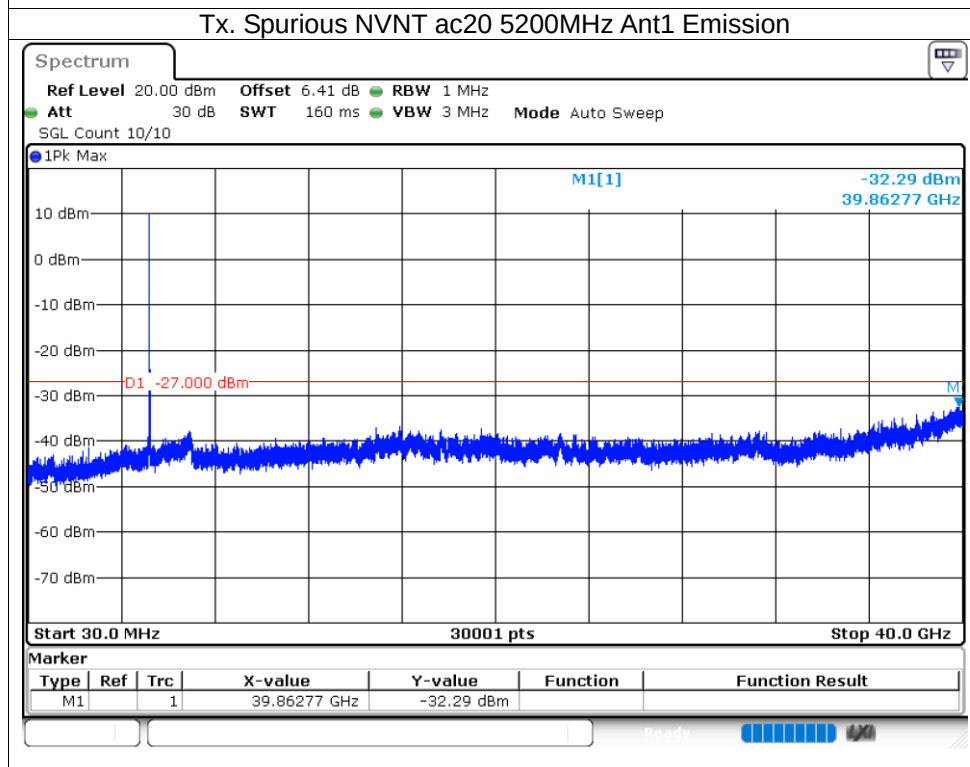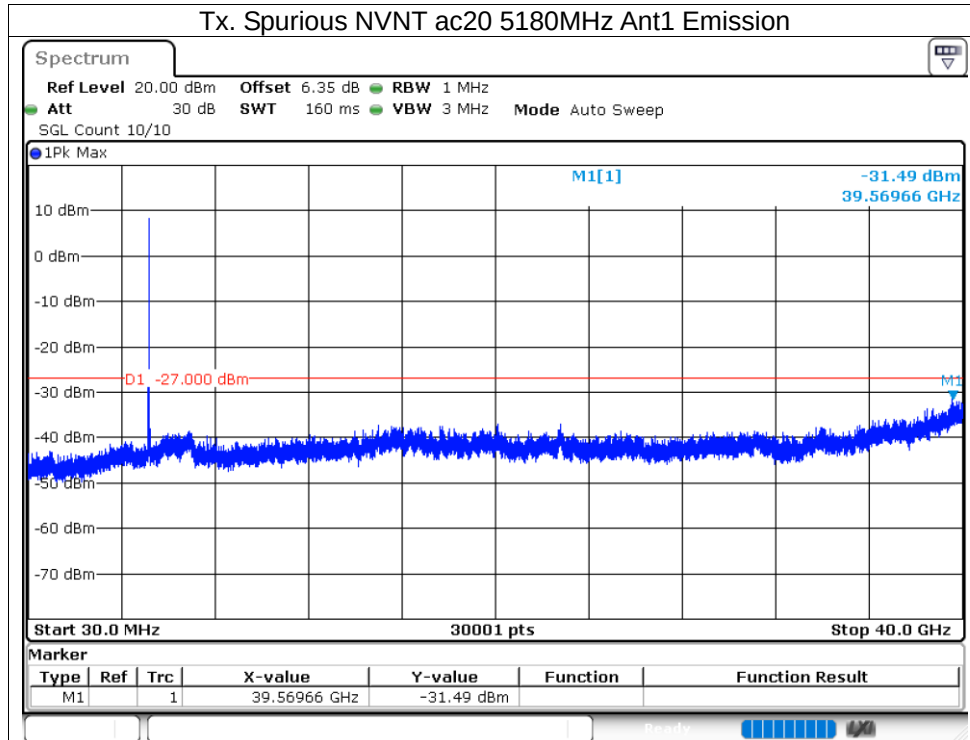

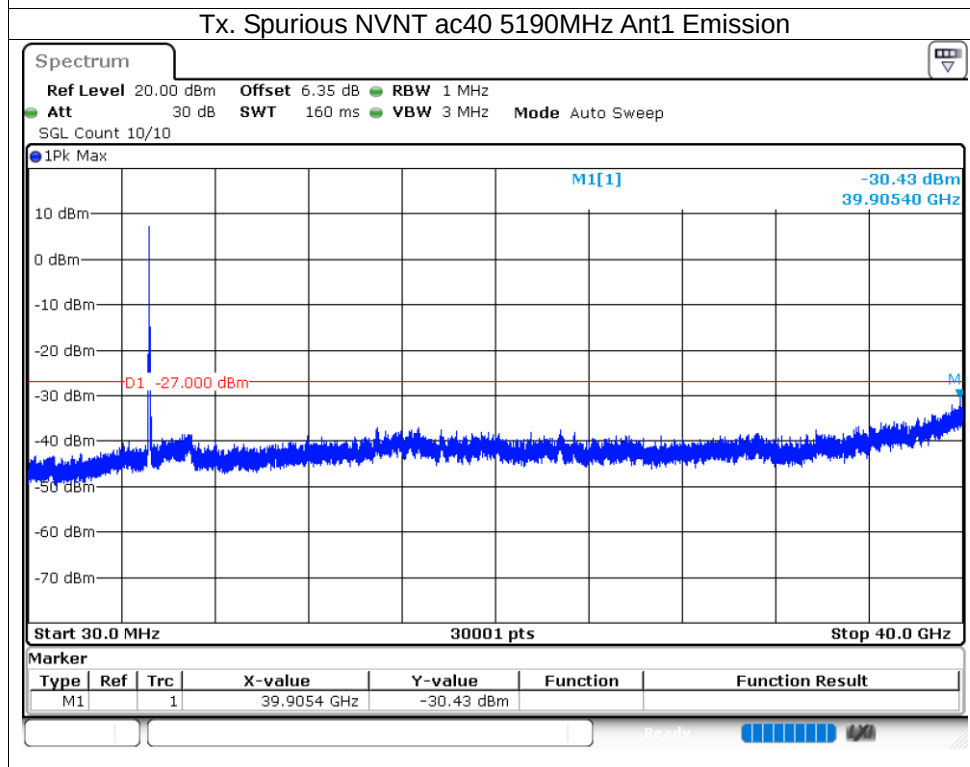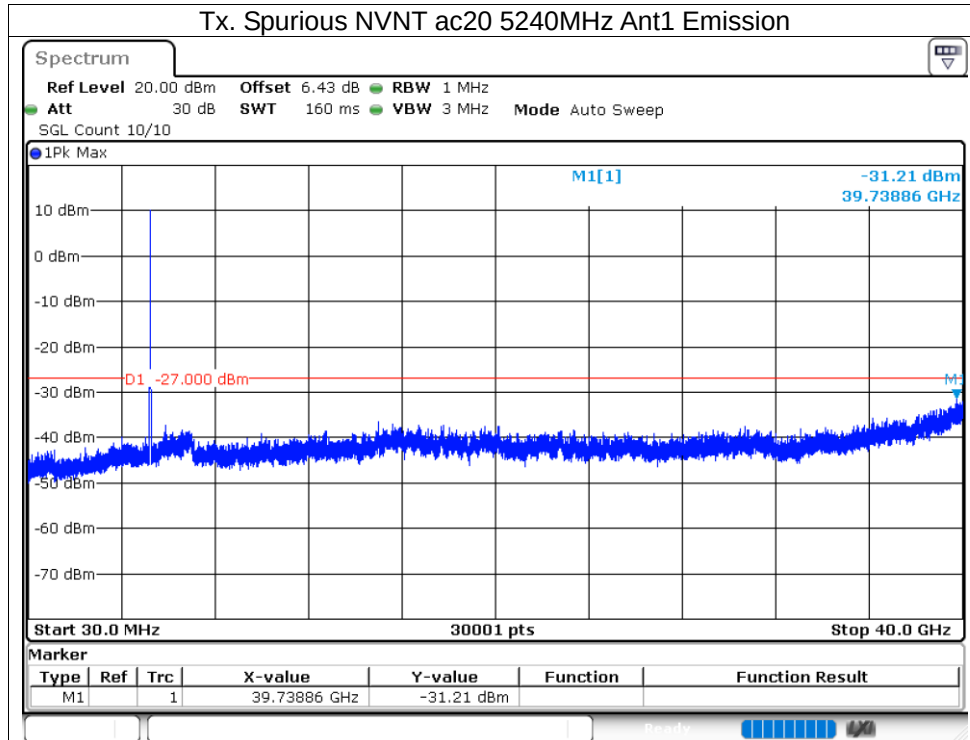

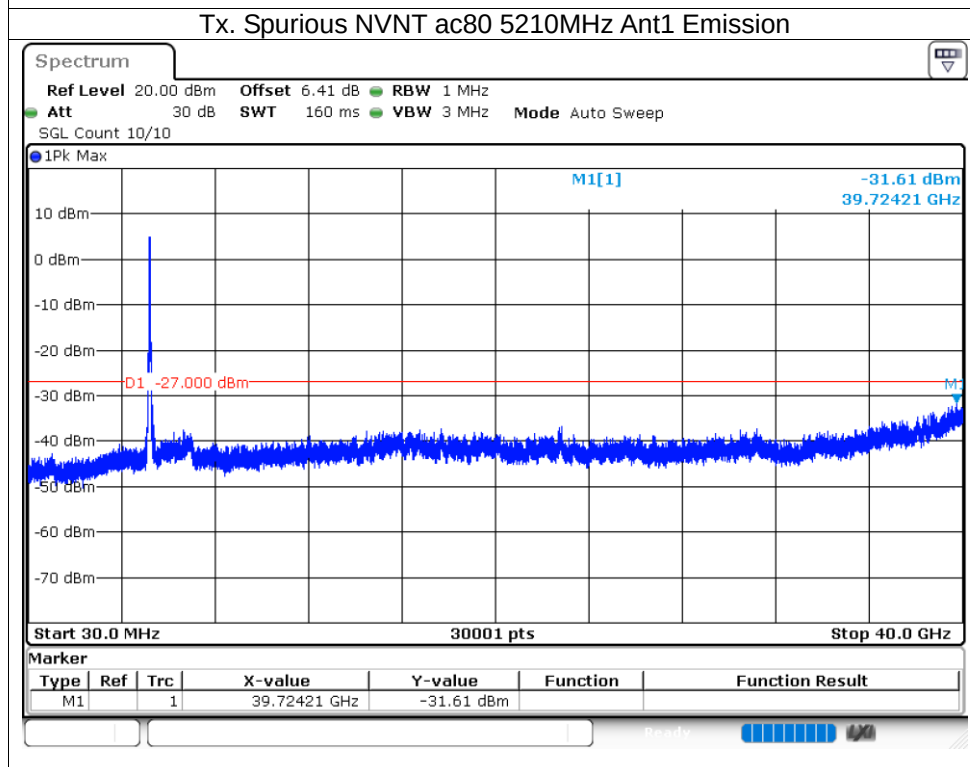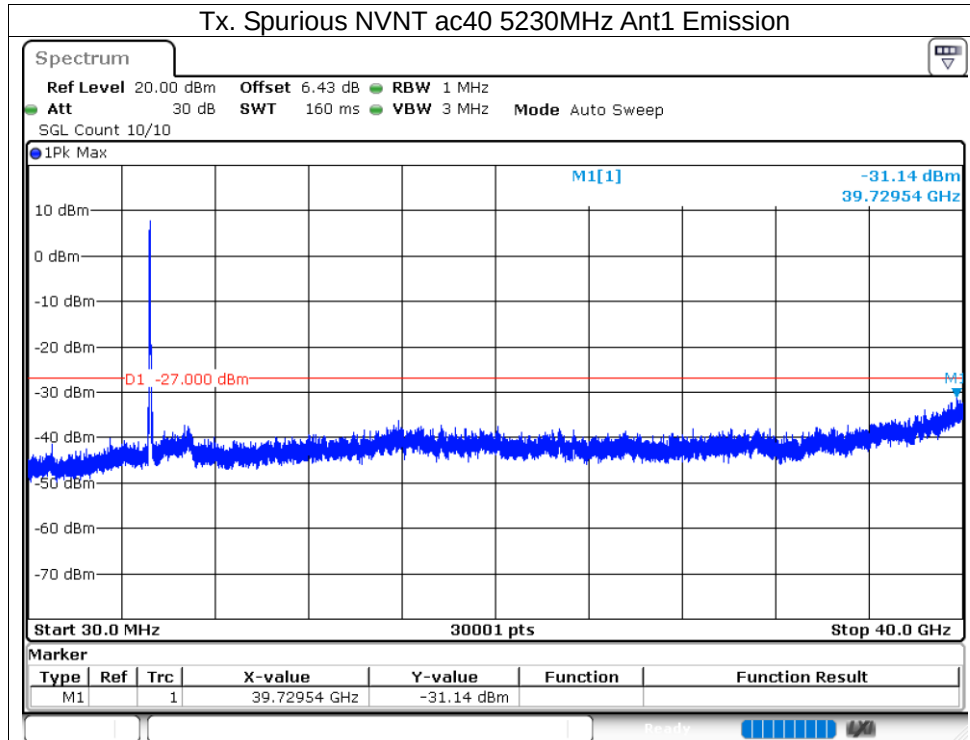

END OF REPORT