

Case No. : <u>GTS20250922004-2-10</u>
Ambient Condition: <u>23</u> °C, <u>53</u> %RH
According Standard: ■Part15C
Test Date: <u>2026.1.17-2026.4.14</u> Test Engineer: <u>Evan ouyang</u>

Appendix B.1: DTS Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.668	2401.668	2402.336	0.5	PASS
		2440	0.692	2439.652	2440.344	0.5	PASS
		2480	0.696	2479.656	2480.352	0.5	PASS

Appendix B.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.0273	2401.4911	2402.5184	---	---
		2440	1.0320	2439.4872	2440.5192	---	---
		2480	1.0306	2479.4864	2480.5170	---	---

Test Graphs

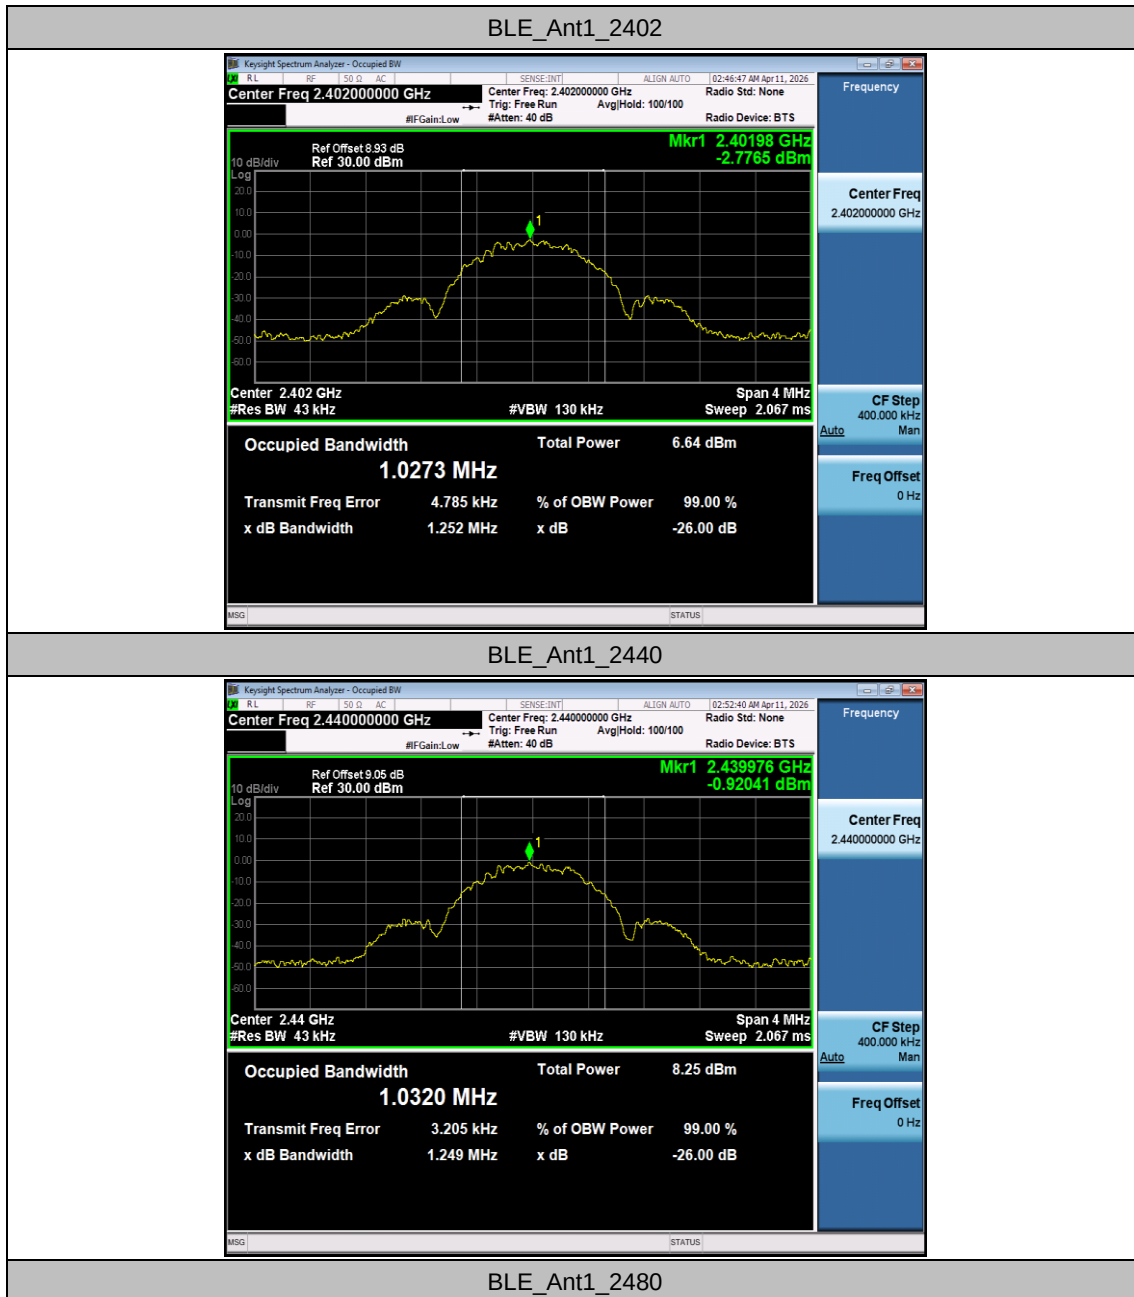



Appendix B.3: Maximum conducted output power

Test Result Peak


TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	1.47	≤30	PASS
		2440	3.25	≤30	PASS
		2480	1.46	≤30	PASS

Appendix B.4: Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-16.15	≤8.00	PASS
		2440	-14.19	≤8.00	PASS
		2480	-16.08	≤8.00	PASS

Test Graphs

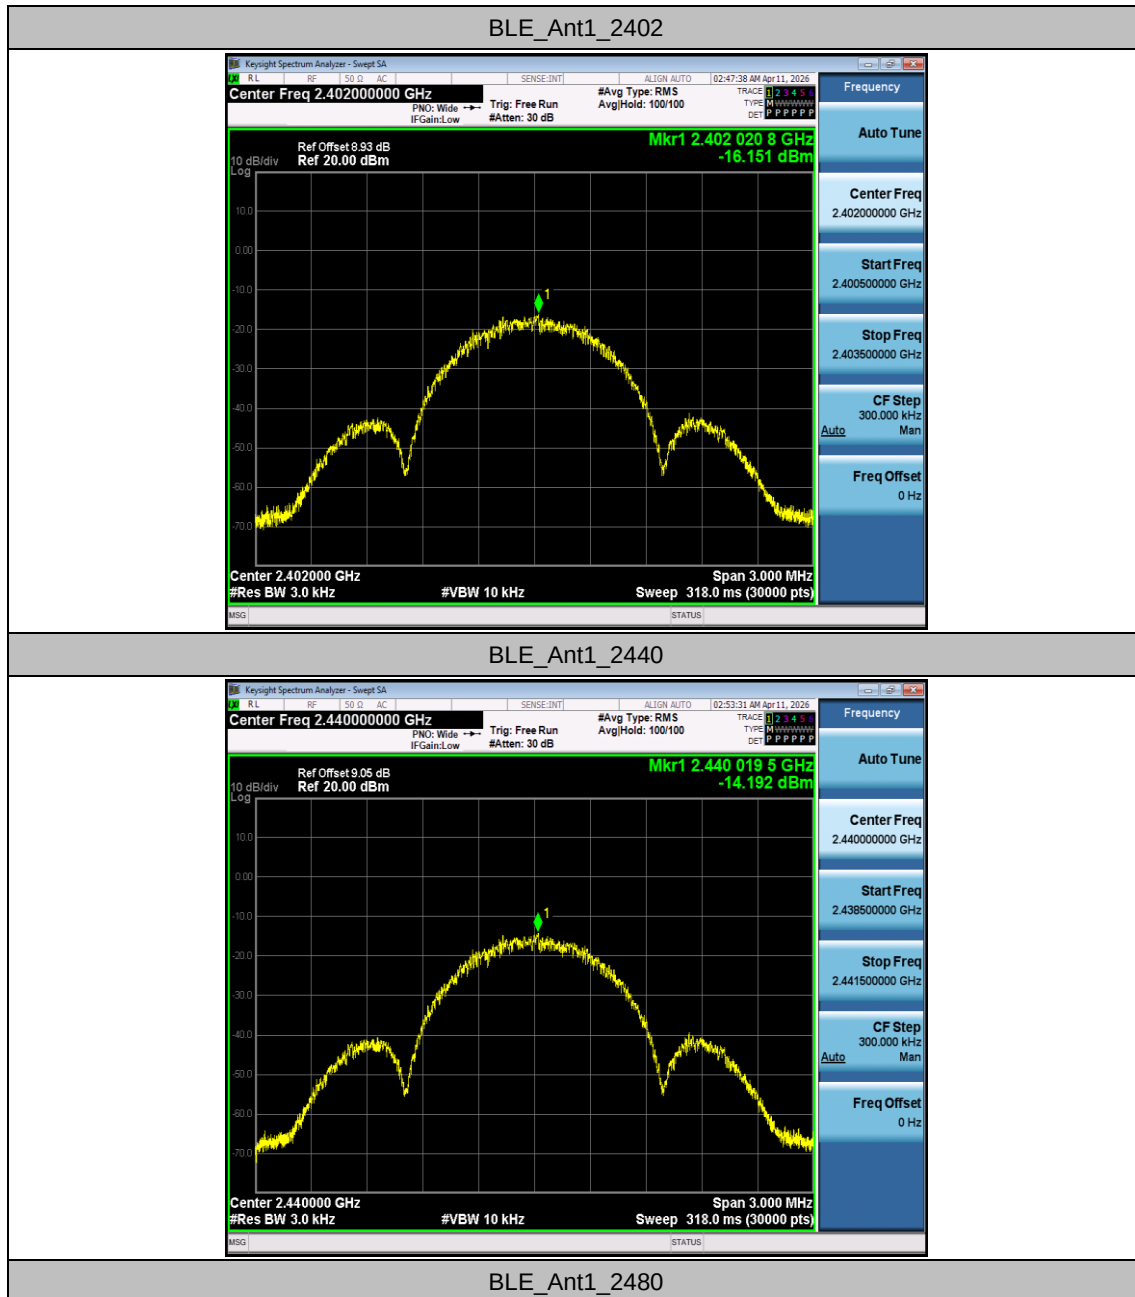




Appendix B.5:Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	-0.74	-49.75	≤ -20.74	PASS
		High	2480	-0.27	-48.52	≤ -20.27	PASS

Test Graphs

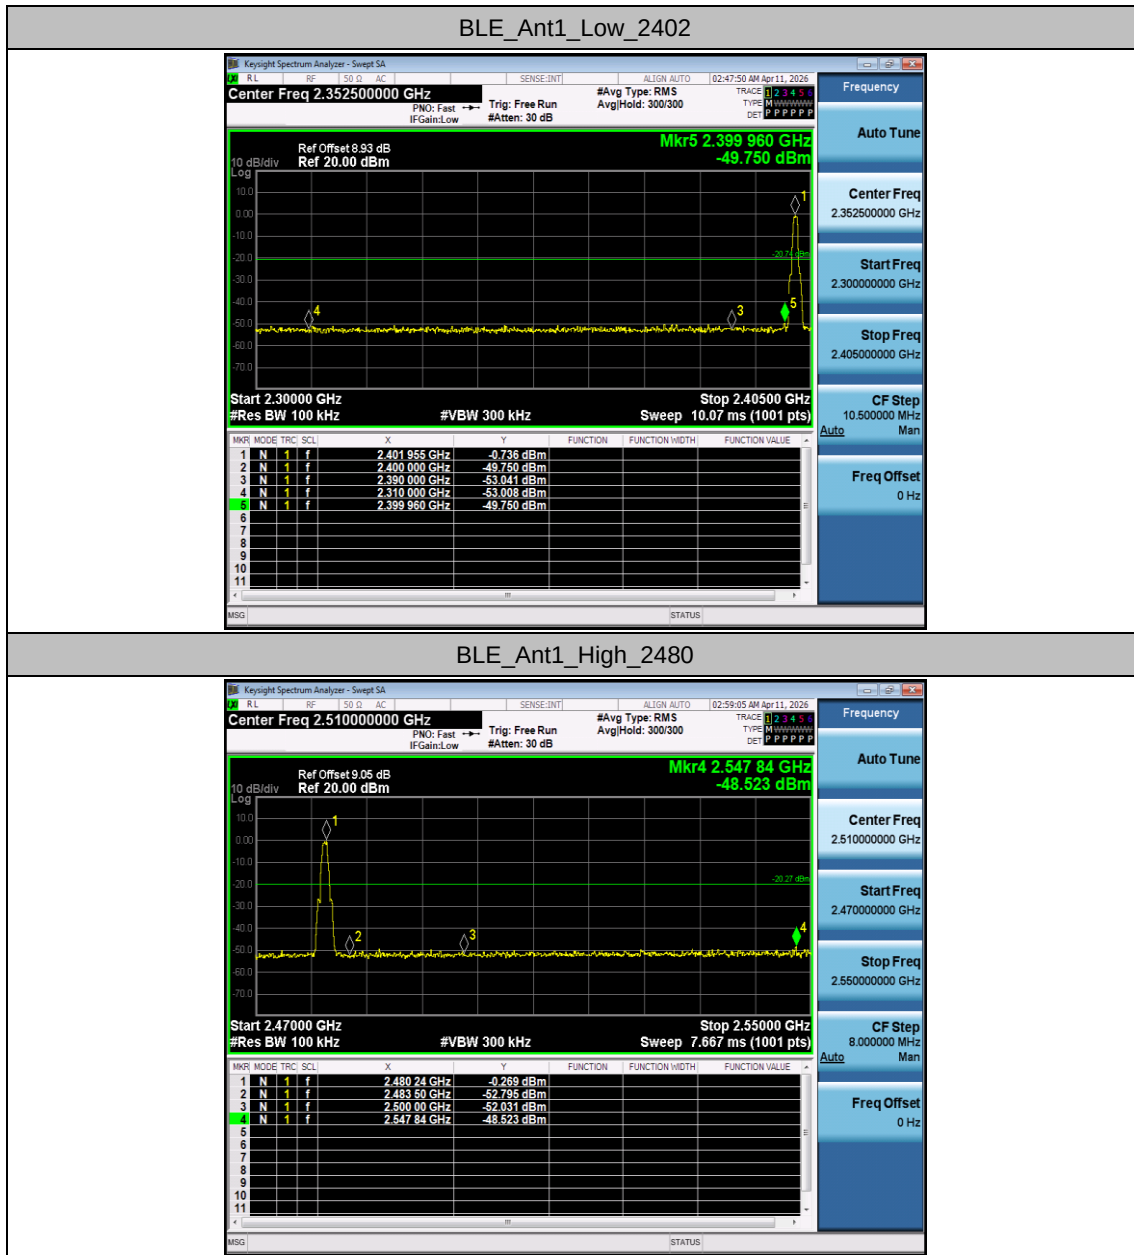



Appendix B.6:Conducted Spurious Emission

Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	-0.31	-0.31	---	PASS
			30~1000	-0.31	-60.71	≤-20.31	PASS
			1000~26500	-0.31	-47.69	≤-20.31	PASS
		2440	Reference	1.57	1.57	---	PASS
			30~1000	1.57	-60.84	≤-18.43	PASS
			1000~26500	1.57	-47.98	≤-18.43	PASS
		2480	Reference	-0.26	-0.26	---	PASS
			30~1000	-0.26	-60.39	≤-20.26	PASS
			1000~26500	-0.26	-47.51	≤-20.26	PASS

Test Graphs

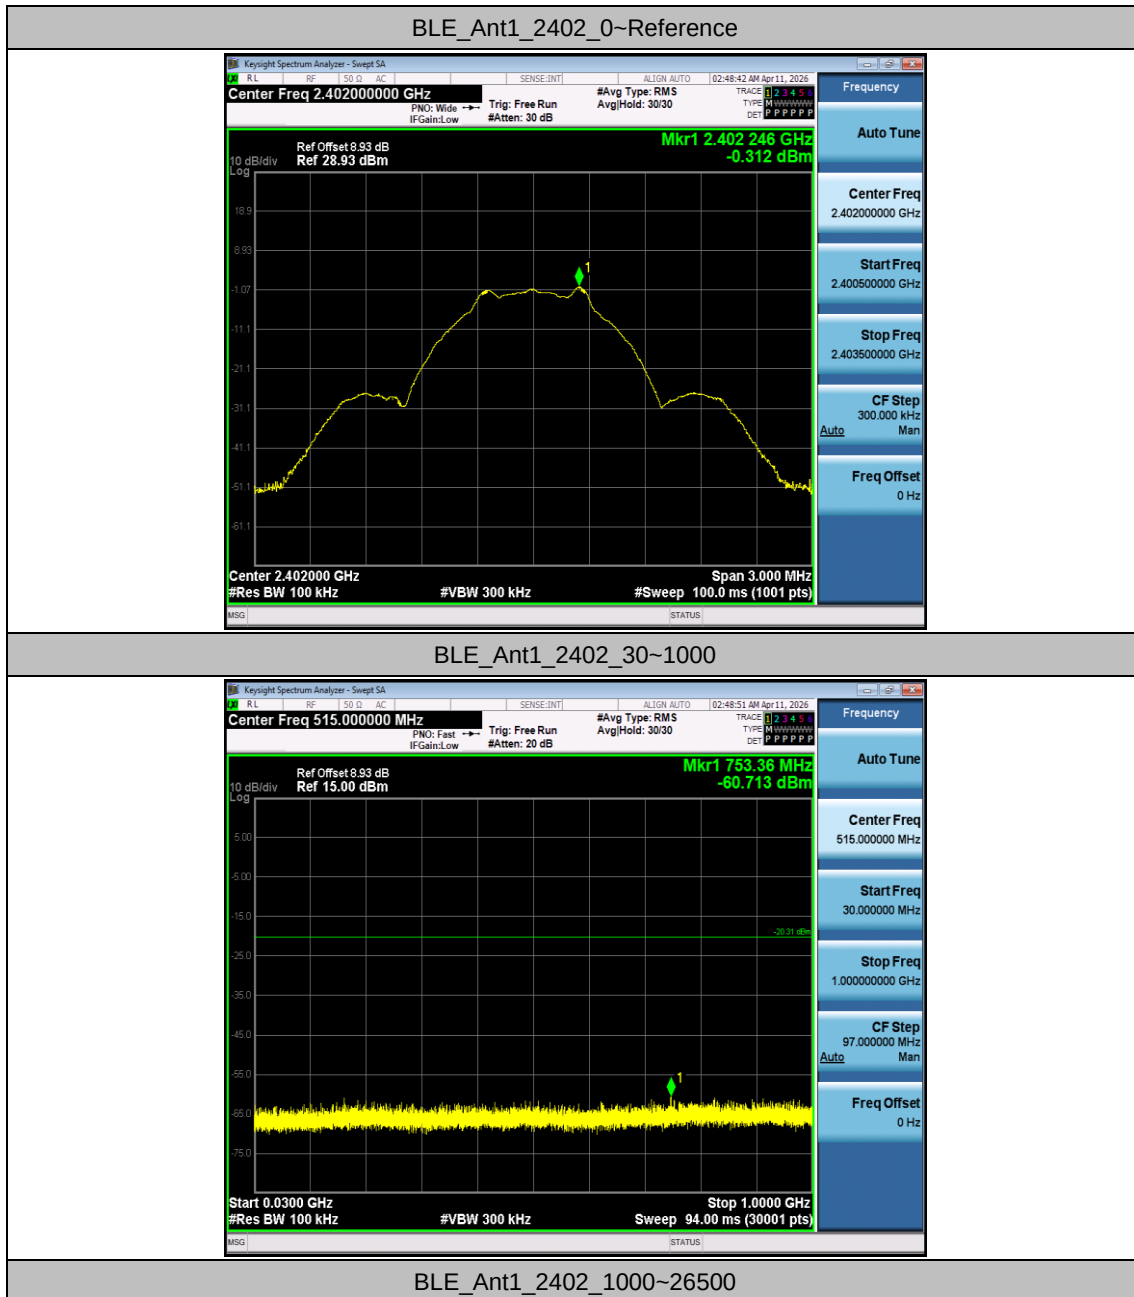


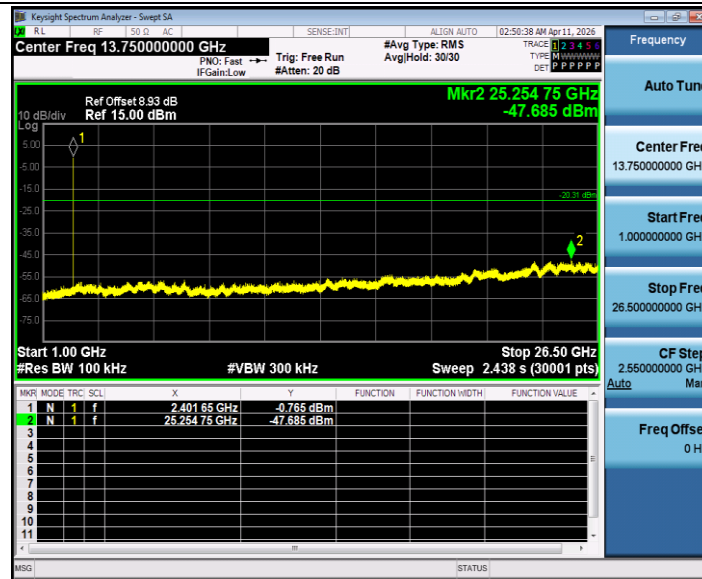

BLE_Ant1_2440_0~Reference

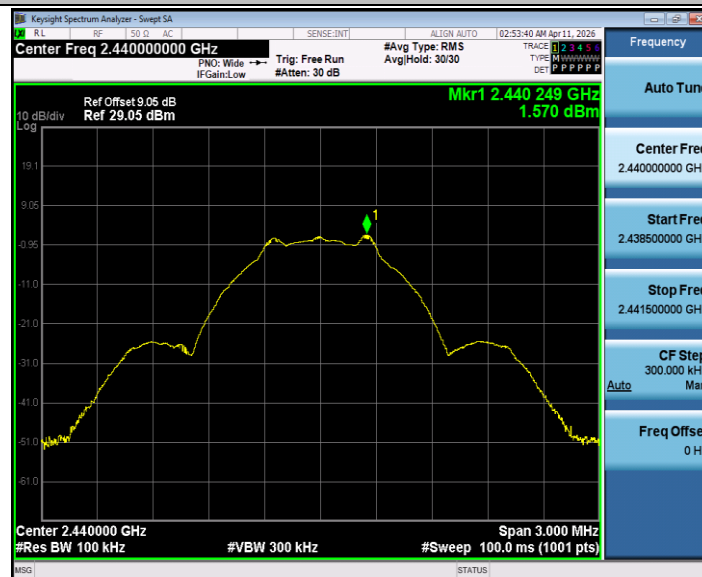

BLE_Ant1_2440_30~1000

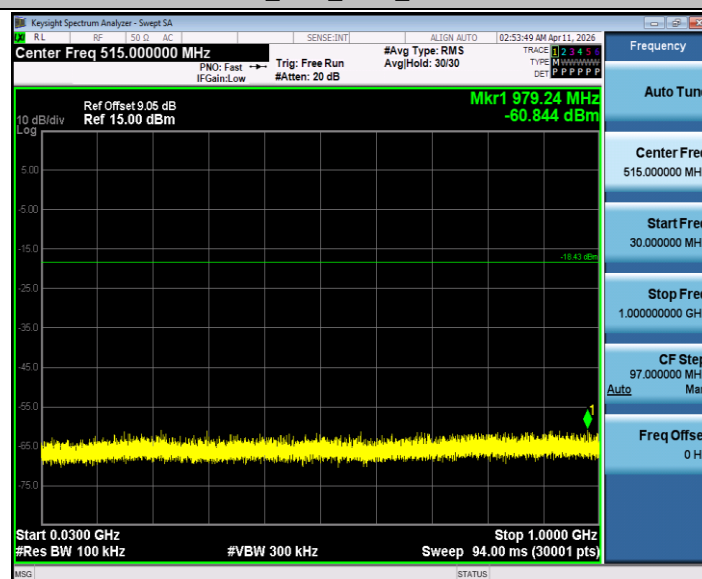



BLE_Ant1_2480_0~Reference

Frequency

Auto Tune


Center Freq
2.480000000 GHzStart Freq
2.478500000 GHzStop Freq
2.481500000 GHzCF Step
300.000 kHz

Auto

Man

Freq Offset
0 Hz

BLE_Ant1_2480_30~1000

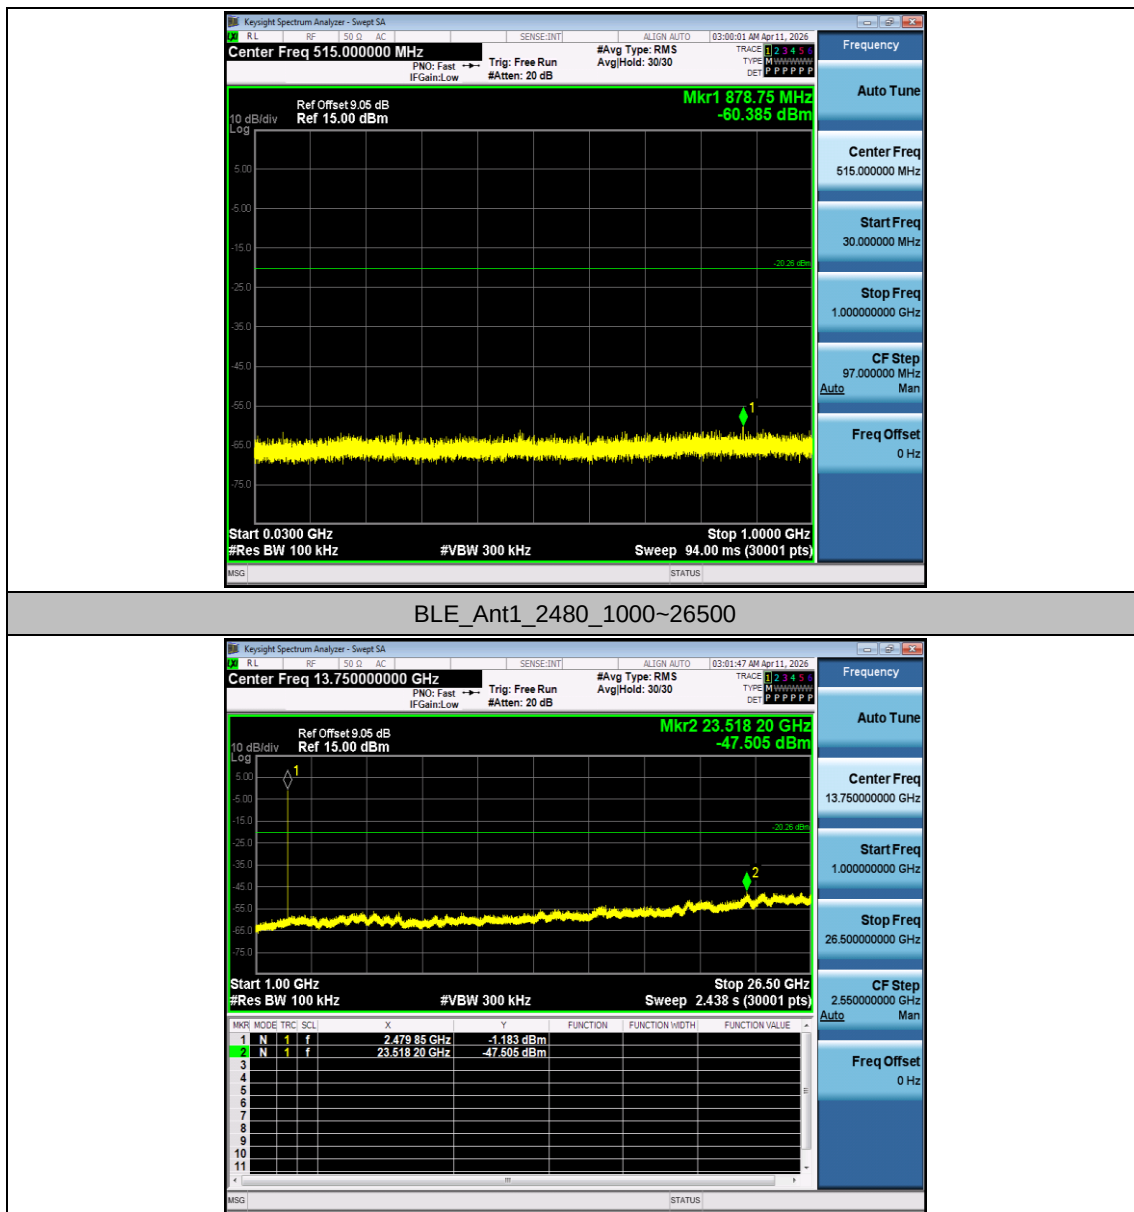


Appendix B.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant1	2402	2.13	2.50	0.8520	85.20	0.70	0.47
		2440	2.13	2.50	0.8520	85.20	0.70	0.47
		2480	2.12	2.50	0.8480	84.80	0.72	0.47


Test Graphs

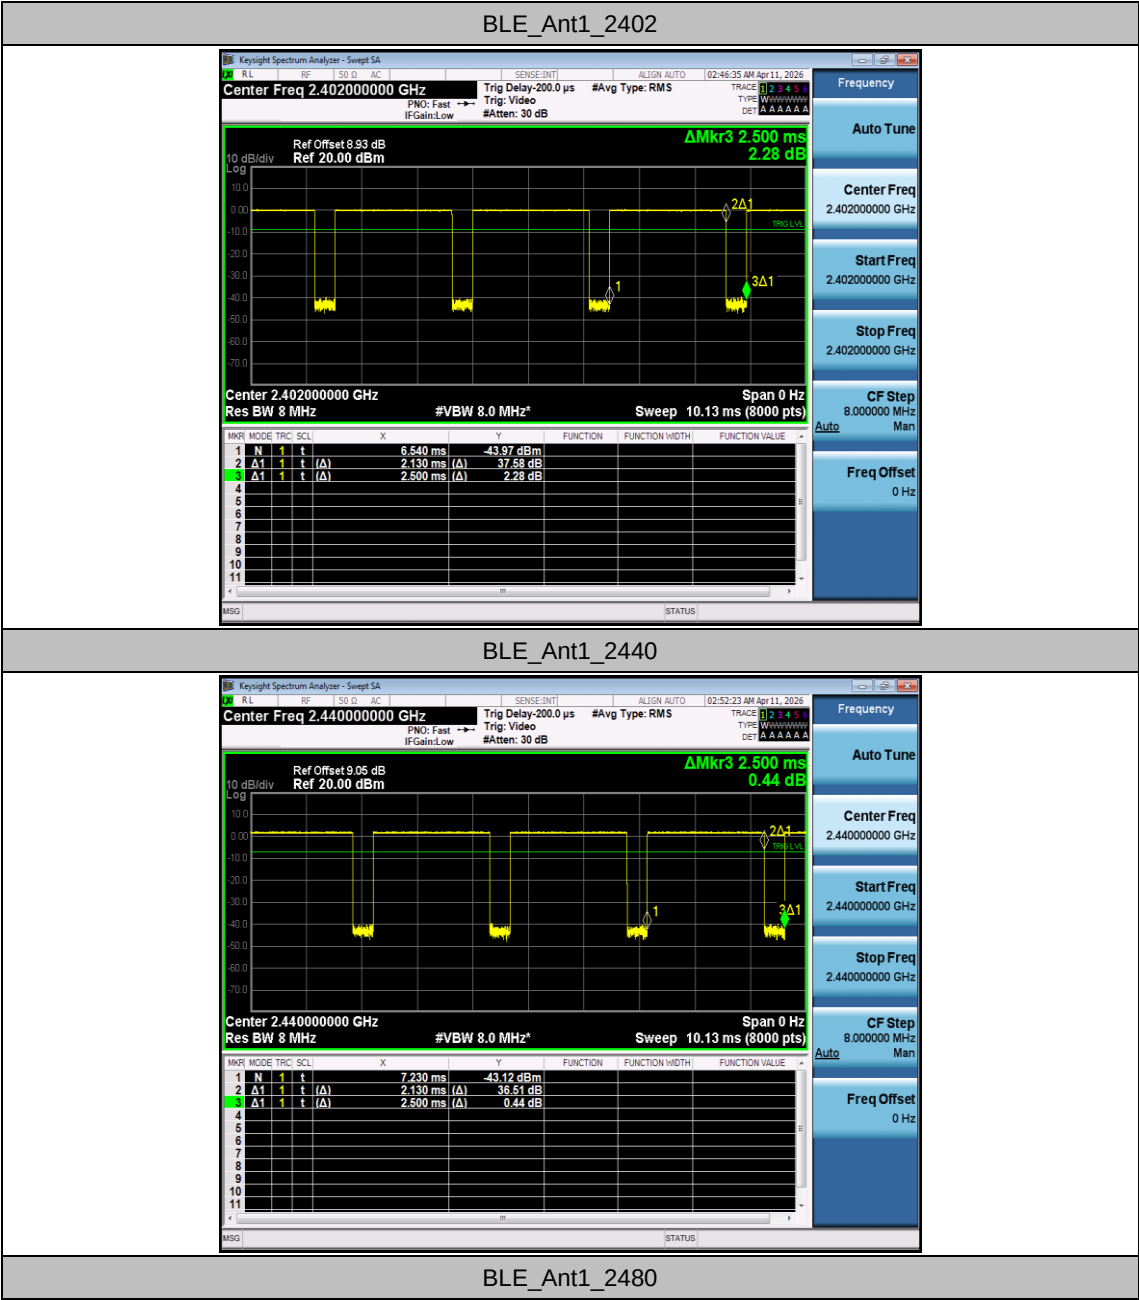

BLE_Ant1_2440

Frequency
Auto Tune
Center Freq 2.440000000 GHz
Start Freq 2.440000000 GHz
Stop Freq 2.440000000 GHz
CF Step 8.000000 MHz
Freq Offset 0 Hz

BLE_Ant1_2480

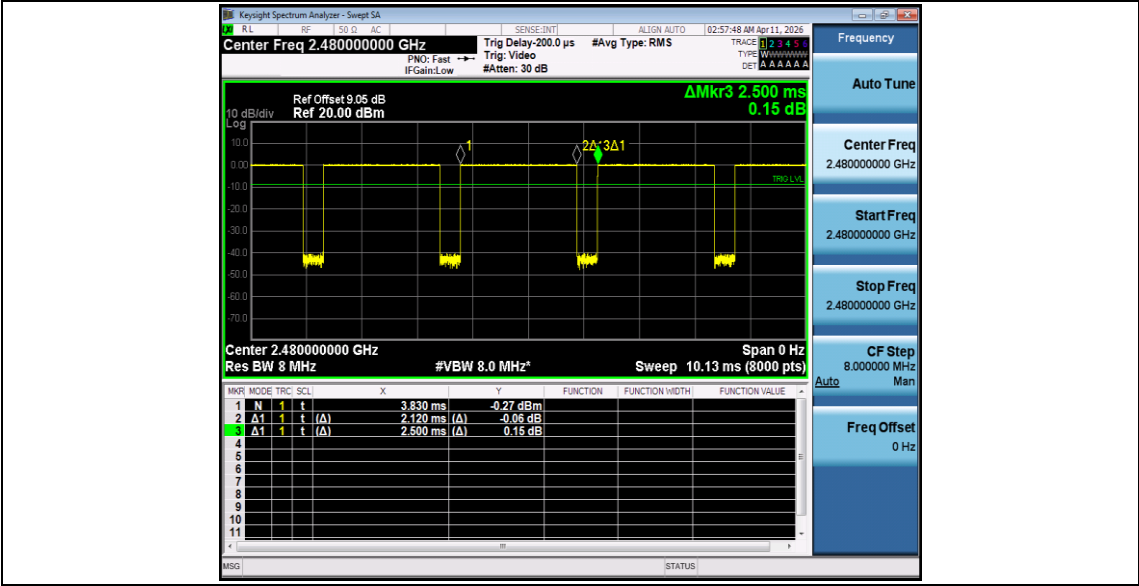

Appendix B.8:Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq (MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.48	≤-41.20	45.72	≤54	PASS
				AV	2389.775	-48.99	≤-41.20	46.21	≤54	PASS
				AV	2390.000	-49.12	≤-41.20	46.08	≤54	PASS
				Peak	2310.000	-42.72	≤-21.20	52.48	≤74	PASS
				Peak	2366.465	-38.98	≤-21.20	56.22	≤74	PASS
				Peak	2390.000	-41.57	≤-21.20	53.63	≤74	PASS
		High	2480	AV	2483.500	-48.18	≤-41.20	47.02	≤54	PASS
				AV	2483.520	-48.18	≤-41.20	47.02	≤54	PASS
				AV	2500.000	-48.56	≤-41.20	46.64	≤54	PASS
				Peak	2483.500	-41.95	≤-21.20	53.25	≤74	PASS
				Peak	2492.160	-38.14	≤-21.20	57.06	≤74	PASS
				Peak	2500.000	-41.51	≤-21.20	53.69	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

