


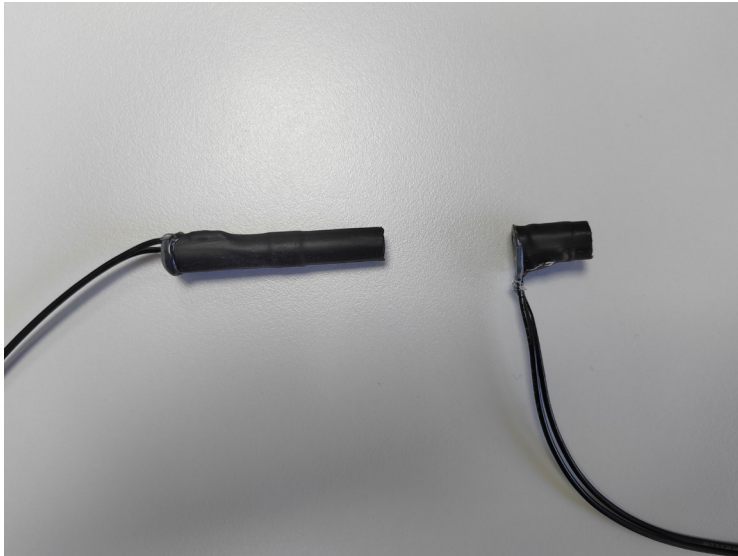


Technische Daten / RFID-Antenne 60 mm

Artikel-Nummer	30005725
Antennentyp	Stabantenne
Ausführung	Lang
Induktivität	47 $\mu\text{H} \pm 1 \mu\text{H}$
Anzahl Windungen	28
Abmessungen	Ø10 mm x 60 mm
Q-Faktor	18
Ferrit-Material	A2G
Material Wickeldraht	Kupferlackdraht Cu pur isoliert 0,23mm AWG32
Material Anschlussleitung	Cu-2-Draht AWG24

Technische Daten / RFID-Antenne 20 mm

Artikel-Nummer	30005723
Antennentyp	Stabantenne
Ausführung	Kurz
Induktivität	47 $\mu\text{H} \pm 1 \mu\text{H}$
Anzahl Windungen	28
Abmessungen	Ø10 mm x 20 mm
Q-Faktor	18
Ferrit-Material	A2G
Material Wickeldraht	Kupferlackdraht Cu pur isoliert 0,23mm AWG32
Material Anschlussleitung	Cu-2-Draht AWG24

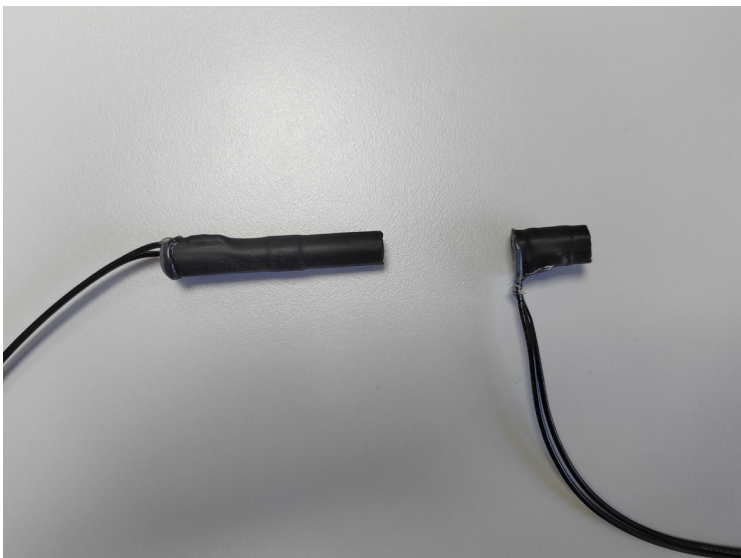

Technical specifications / RFID antenna 60 mm	
Item number	30005725
Antenna type	Rod antenna
Design	Long
Inductance	47 $\mu\text{H} \pm 1 \mu\text{H}$
Number of turns	28
Dimensions	Ø10 mm x 60 mm
Q factor	18
Ferrite material	A2G
Winding wire material	Enameled copper wire, pure copper, insulated, 0.23 mm, AWG32
Connection cable material	Cu-2 wire, AWG24

Technische Daten / RFID-Antenne 20 mm	
Item number	30005723
Antenna type	Rod antenna
Design	Short
Inductance	47 $\mu\text{H} \pm 1 \mu\text{H}$
Number of turns	28
Dimensions	Ø10 mm x 20 mm
Q factor	18
Ferrite material	A2G
Winding wire material	Enameled copper wire, pure copper, insulated, 0.23 mm, AWG32
Connection cable material	Cu-2 wire, AWG24