

Annex E – Spurious Emissions 15.209


Note: below measurements are in units of dBuV/m at 3meters. These measurements are performed conducted in lieu of radiated as permitted by ANSI C63.10-2020. The following formula was used in making such conversions:


Above 1GHz: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{m}]) + 104.77$, where E is field strength and d is distance at which the field strength limit is specified in the applicable requirements. $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3 \text{ m}$. Straight conversion between $E[\text{dB}\mu\text{V}/\text{m}]$ and $\text{EIRP}[\text{dBm}] = 107$. Thus offset for dBuV/m at 3meters is $95.2-107+\text{antenna gain}$.

Note: additional factors added to offset to consider attenuator + cable loss.

Naming Convention

Radio (BLE)_Channel (Low Ch, Mid Ch, High Ch)_Frequency (MHz)_Rate/Mode(Mbit)_Measurement (15.209)_Range (MHz, Lower Band Edge, Upper Band Edge, Peak, Avg)

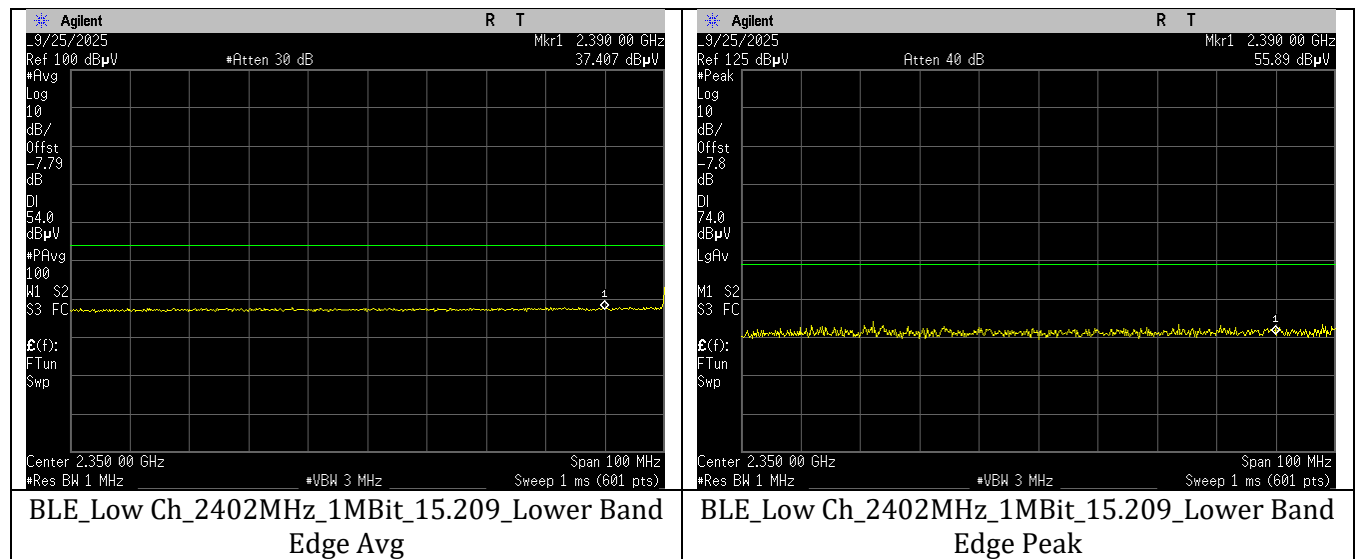

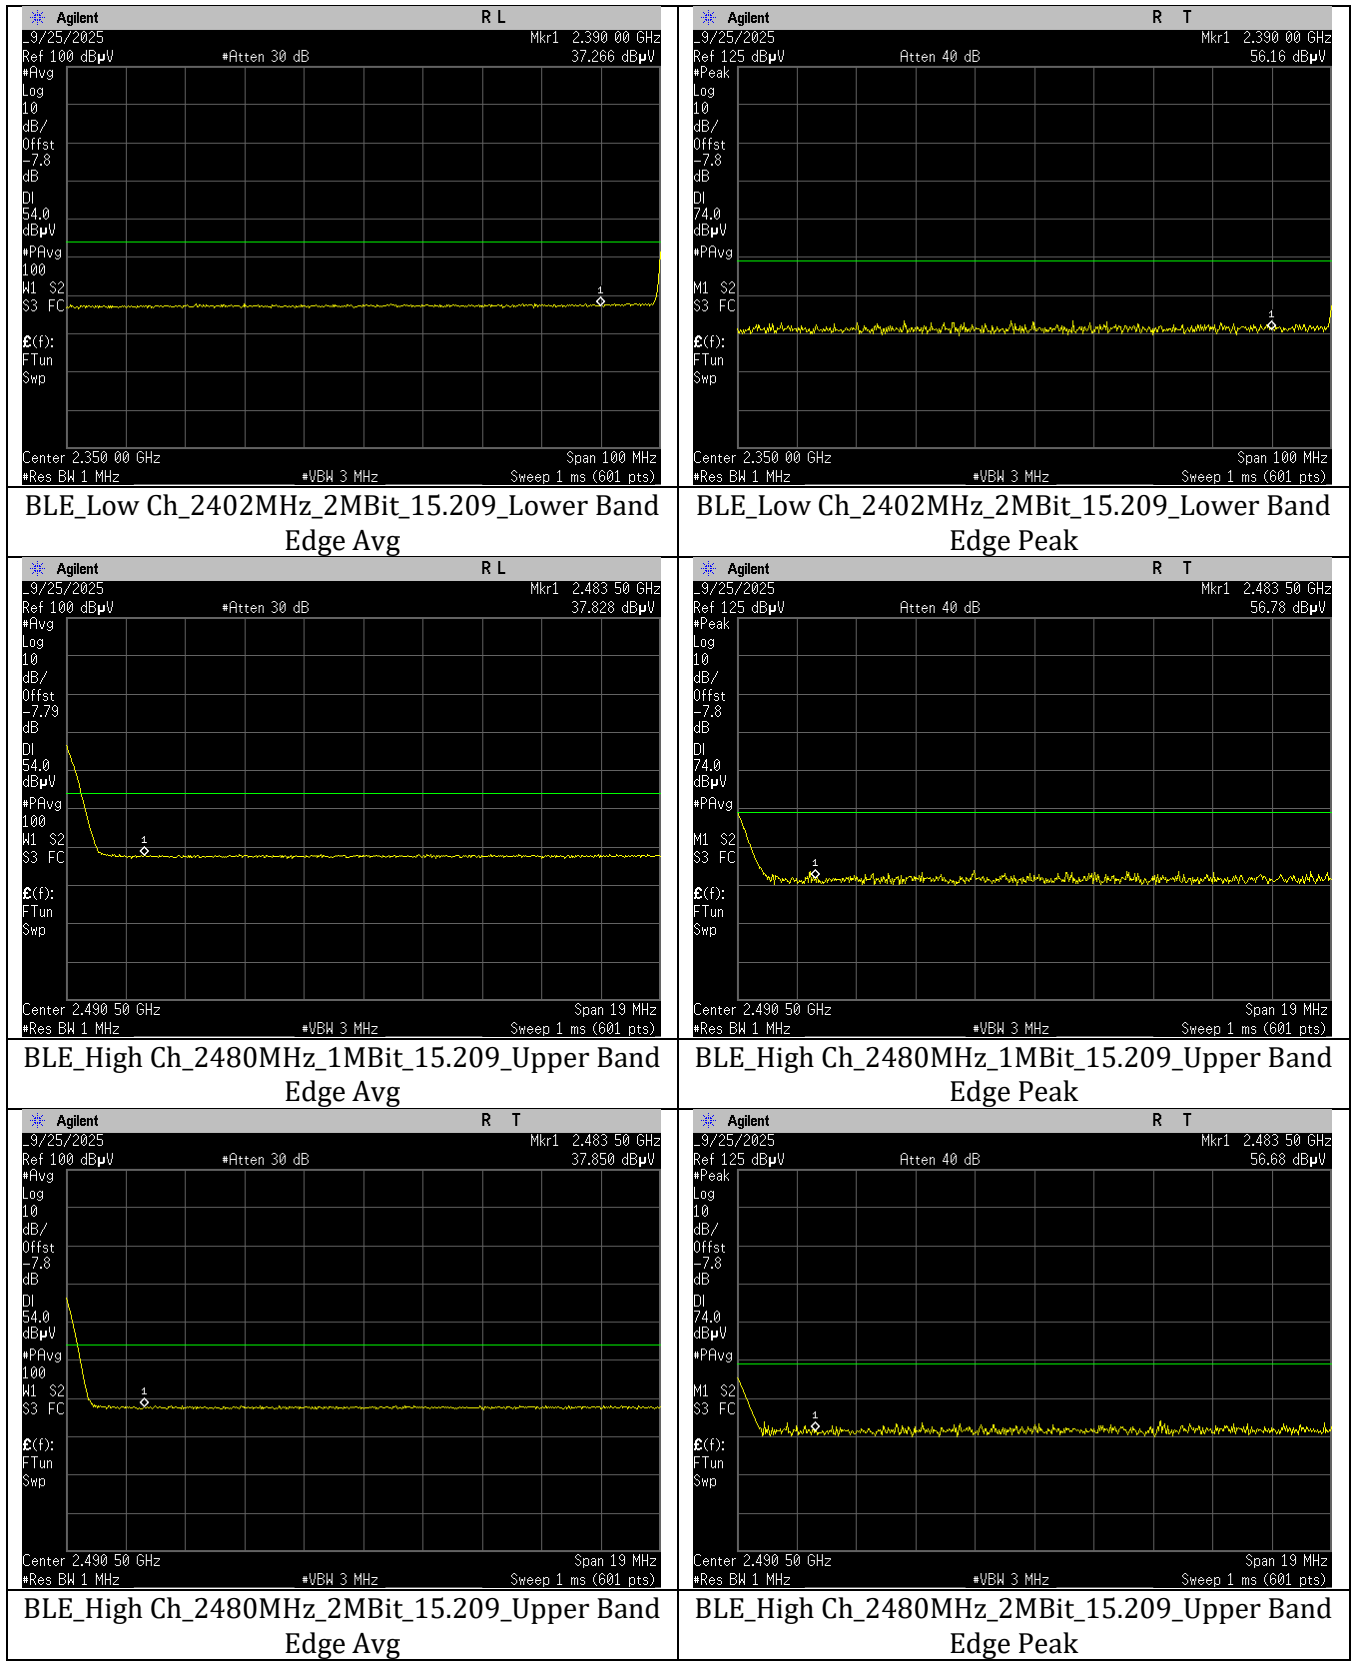

The below table applies an additional Duty Cycle Correction Factor (DCCF) to the above Average Band Edge measurements in order to accurately compare to the appropriate limit.

Radio	Frequency (MHz)	Configuration	BE (dBuV/m @3m)	BE Final (dBuV/m @3m)	Limit (dBuV/m @3m)	Margin (dB)
2.4 GHz BLE	2402	1 Mbps	37.407	39.520	54	-14.480
	2480		37.828	39.941	54	-14.059
	2402	2 Mbps	37.266	42.093	54	-11.907
	2480		37.850	42.677	54	-11.323

Note: BE = Corrected Band Edge average measurement prior to applying DCCF.

Note: BE Final [dBuV/m@3m] = BE + DCCF