

Sigenenergy Technology Co., Ltd.

TEST REPORT

SCOPE OF WORK

FCC TESTING— Sigen EVAC 11.5 WI TS WH, Sigen EVAC AA BB CC DD EE
("AA" can be 7.7, 9.6 or 11.5, "BB" can be BI or WI, "CC" can be T1 or TS,
"DD" can be N6, N14 or No Suffix, "EE" can be WH, GR, BK or RD)

REPORT NUMBER

260706078SZN-001

ISSUE DATE

07 July 2026

PAGES

23

DOCUMENT CONTROL NUMBER

FCC ID 225_C

© 2017 INTERTEK



Sigenergy Technology Co., Ltd.

Application for Certification

FCC ID: 2BSKV-EVAC666

EV AC charger

Model: Sigen EVAC 11.5 WI TS WH, Sigen EVAC AA BB CC DD EE
("AA" can be 7.7, 9.6 or 11.5, "BB" can be BI or WI, "CC" can be T1 or TS,
"DD" can be N6, N14 or No Suffix, "EE" can be WH, GR, BK or RD)

13.56MHz Transceiver

Report No.: 260706078SZN-001

We hereby certify that the sample of the above item is considered to comply with the
requirements of FCC Part 15, Subpart C for Intentional Radiator,
mention 47 CFR [10-1-24]

Prepared and Checked by:

Approved by:



Draven Li
Sr. Project Engineer



Johnny Wang
Project Engineer
Date: 07 July 2026

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community GuanHu Subdistrict, LongHua District, Shenzhen, People's Republic of China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:) Original Grant ☒ Class II Change ☐

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-24 Edition] provision.

Report prepared by:

Draven Li
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community
GuanHu Subdistrict, LongHua District, Shenzhen, People's Republic of
China
Tel /Fax: 86-755-8601 6288/86-755-8601 6751

Table of Contents

1.0 Summary of Test Result	4
2.0 General Description	5
2.1 Product Description	5
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology	6
2.4 Test Facility	6
3.0 System Test Configuration	7
3.1 Justification	7
3.2 EUT Exercising Software	7
3.3 Special Accessories	7
3.4 Equipment Modification	7
3.5 Measurement Uncertainty	8
3.6 Support Equipment List and Description	8
4.0 Emission Results	9
4.1 Radiated Test Results	9
4.1.1 Field Strength Calculation	10
4.1.2 Radiated Emission Configuration Photograph	11
4.1.3 Radiated Emissions	11
4.2 Conducted Emission at Mains Terminal	15
4.2.1 Conducted Emission Configuration Photograph	15
4.2.2 Conducted Emissions	15
4.3 Frequency Stability	18
5.0 Equipment Photographs	19
6.0 Product Labelling	19
7.0 Technical Specifications	19
8.0 Instruction Manual	19
9.0 Miscellaneous Information	20
9.1 Bandedge Plot	20
9.2 20dB Bandwidth	21
9.3 Discussion of Pulse Desensitization	22
9.4 Emissions Test Procedures	22
10.0 Test Equipment List	23

1.0 Summary of Test Result

Applicant: Sigenergy Technology Co., Ltd.

Applicant Address: Building12-2, 678 Yunqiao Road, China (Shanghai) Pilot Free Trade Zone, Pudong New Area, Shanghai, China

Manufacturer: Sigenergy Technology Co., Ltd.

Manufacturer Address: Building12-2, 678 Yunqiao Road, China (Shanghai) Pilot Free Trade Zone, Pudong New Area, Shanghai, China

MODEL: Sigen EVAC 11.5 WI TS WH, Sigen EVAC AA BB CC DD EE
 (“AA” can be 7.7, 9.6 or 11.5, “BB” can be BI or WI, “CC” can be T1 or TS,
 “DD” can be N6, N14 or No Suffix, “EE” can be WH, GR, BK or RD)

FCC ID: 2BSKV-EVAC666

Test Specification	Reference	Results
Transmitter Radiated Emission	15.225(a)(b)(c) &15.209 &15.205	Pass
Band edge		
Frequency Stability	15.225(e)	Pass
20dB Bandwidth	15.215(c)	Pass
AC Conducted Emission	FCC 15.207	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a EV AC charger operating at 13.56 MHz. The EUT can be powered by 208V/240V~, 60Hz. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Modulation Type: OOK

Test sample S/N: Z260706078SZN-001

Model naming rules and Model differences as follows:

Model: Sigen EVAC AA BB CC DD EE
"AA" means Power Range and can be 7.7, 9.6 or 11.5. "7.7" means 7.68kW, "9.6" means 9.6kW, "11.5" means 11.5kW.
"BB" means Communication and Charge Function and can be BI or WI. "BI" means RFID + Ethernet + Basic Charge Function "WI" means Ethernet + WIFI + Basic Charge Function + Smart Charge Function + DLM Charge Function
"CC" means Output Plug Type and can be T1 or TS. "T1" means SAE J1772 plug with cable "TS" means Tesla plug with cable
"DD" means Input Method and can be N6, N14 or No Suffix "N6" means Plug-in with NEMA 6-50 "N14" means Plug-in with NEMA 14-50 "No Suffix" means blank
"EE" means Color and can be WH, GR, BK or RD "WH" means White "GR" means Grey "BK" means Black "RD" means Red

Model	Sigen EVAC 7.7 series	Sigen EVAC 9.6 series	Sigen EVAC 11.5 series
Input Method	Field Wring or cord set plug	Field Wring or cord set plug	Field Wring
Nominal input voltage	208Vac or 240Vac	208Vac or 240Vac	208Vac or 240Vac
Nominal input frequency (Hz)	60Hz	60Hz	60Hz
Max. continuous input current (A)	32A	40A	48A
Output voltage (Vac)	208Vac or 240Vac	208Vac or 240Vac	208Vac or 240Vac
Max. continuous output current (A)	32A	40A	48A
Max. continuous output power (kW)	7.68kW	9.6kW	11.5kW
Overcurrent protection associated with the branch circuit for field installation	40A, 2P	50A, 2P	60A, 2P

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of the EV AC charger.

2.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2020). Radiated emission measurement was performed in Semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-anechoic chamber used to collect the radiated data is **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community GuanHu Subdistrict, LongHua District, Shenzhen, People's Republic of China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2020).

The EUT was powered by 240V~, 60Hz during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the bottom of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The EUT was operated standalone and placed in the central of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

There was no special software to exercise the device.

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Sigenergy Technology Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Longhua Branch.

3.5 Test Ambient Condition

Temp.: 23.0°C

R.H.: 55.0%;

Air Pressure: 101 kPa

3.6 Measurement Uncertainty


When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Measurement Uncertainty	Uncertainty
Occupied Channel Bandwidth	±3.46%
Frequency Stability	+/-0.64KHz
Conducted Unwanted Emission	±0.55dB
Radiated emission (Up to 1GHz)	±4.8dB
AC Conducted emission	±3.2 dB
Temperature	±1°C
Humidity	±5%

3.7 Support Equipment List and Description

Description	Manufacturer	Model No.
NFC card (Provided by applicant)	Sigenergy Technology Co., Ltd.	/

3.8 Block Diagram Showing the Configuration of System Tested

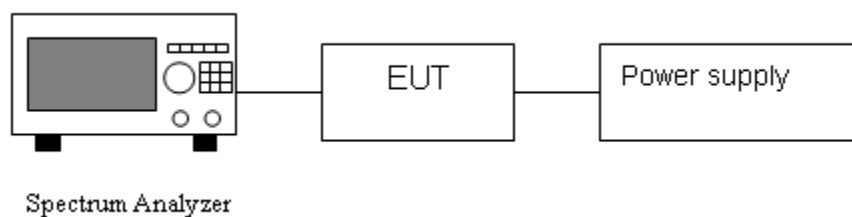


4.0 Emission Results


Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included. The Diagram below shows the test setup, which is utilized to make these measurements.

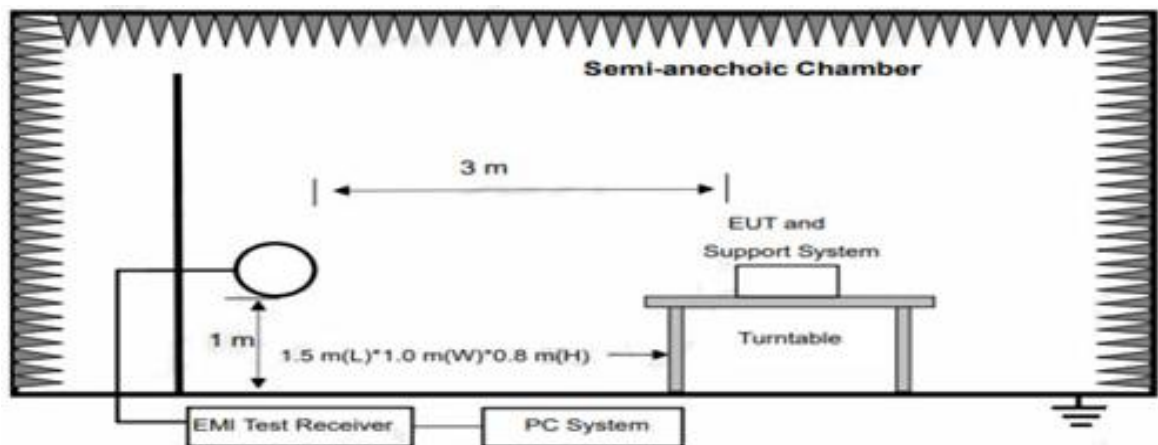

Test set-up of radiated disturbance (9KHz to 30MHz)

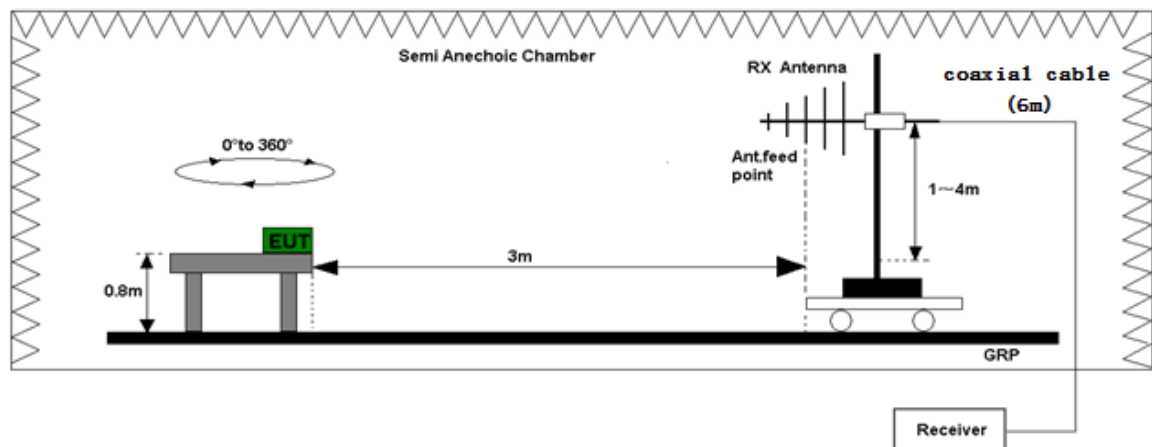

Test set-up of radiated disturbance (Up to 1GHz)

Radiated emission measurements were performed from 9kHz to tenth harmonic or 40GHz. The EUT for testing is arranged on a styrene turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB/m
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB/m} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \text{ } \mu\text{V/m}$$

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
244.079000 MHz

Judgement: Passed by 3.6 dB

TEST PERSONNEL:

Sign on file

Draven Li, Sr. Project Engineer
Typed/Printed Name

06 July 2026
Date

Applicant: Sigenergy Technology Co., Ltd.

Date of Test: 06 July 2026

Worst Case Operating Mode:


Worst Case Test Voltage: AC 240V/60Hz

Model: Sigen EVAC 11.5 WI TS WH

Transmitting

Fundamental & Spurious Emission Below 30MHz

FCC Part 15C NFC 9K-30M(dBuV)

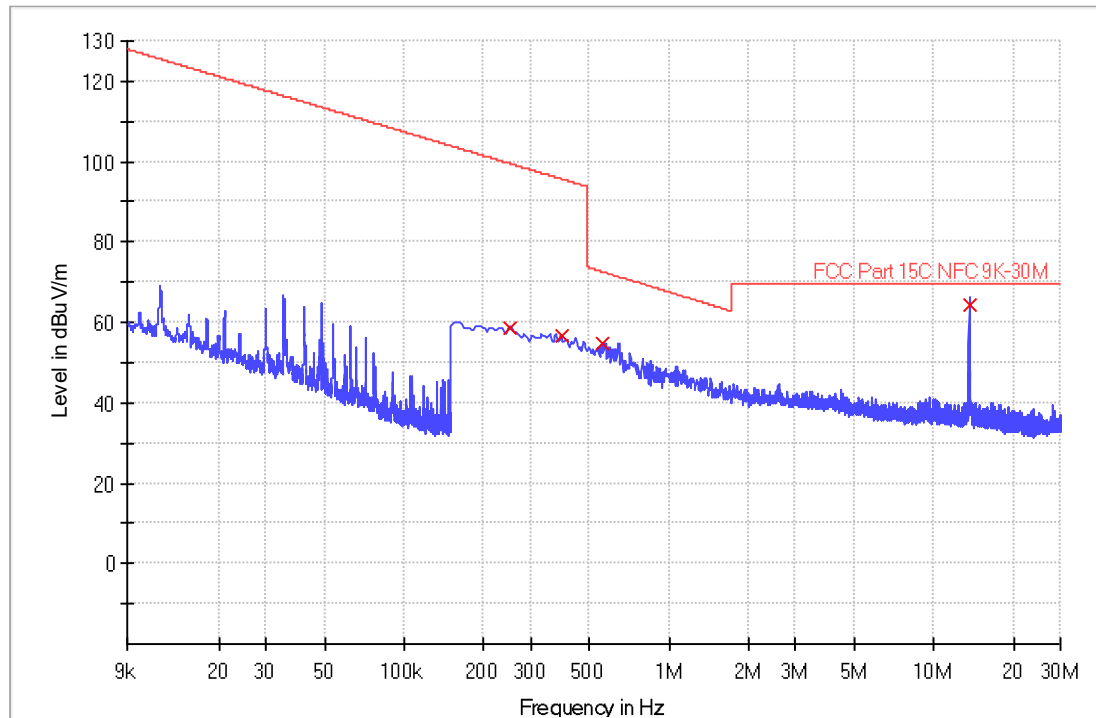

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	13.560000	50.6	0	13.8	64.4	124.0	-59.6
Horizontal	0.250744	41.7	0	16.8	58.5	99.5	-41.0
Horizontal	0.392531	40.1	0	16.5	56.6	95.7	-39.1
Horizontal	0.556706	38.8	0	16.2	55.0	72.7	-17.7

Notes:

1. The specified limits of frequency band 9~90 KHz, 110~490 KHz are in average and measurements are made with peak detectors. Quasi-Peak detector is used for other frequency band.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Loop antenna is used for the emission under 30MHz.
5. Horizontal and Vertical polarization were tested and only the worst-case data is shown.

Applicant: Sigenergy Technology Co., Ltd.

Date of Test: 06 July 2026

Worst Case Operating Mode:


Worst Case Test Voltage: AC 240V/60Hz

Model: Sigen EVAC 11.5 WI TS WH

Transmitting

Radiated Emissions (30MHz – 1000MHz)

ANT Polarity: Horizontal

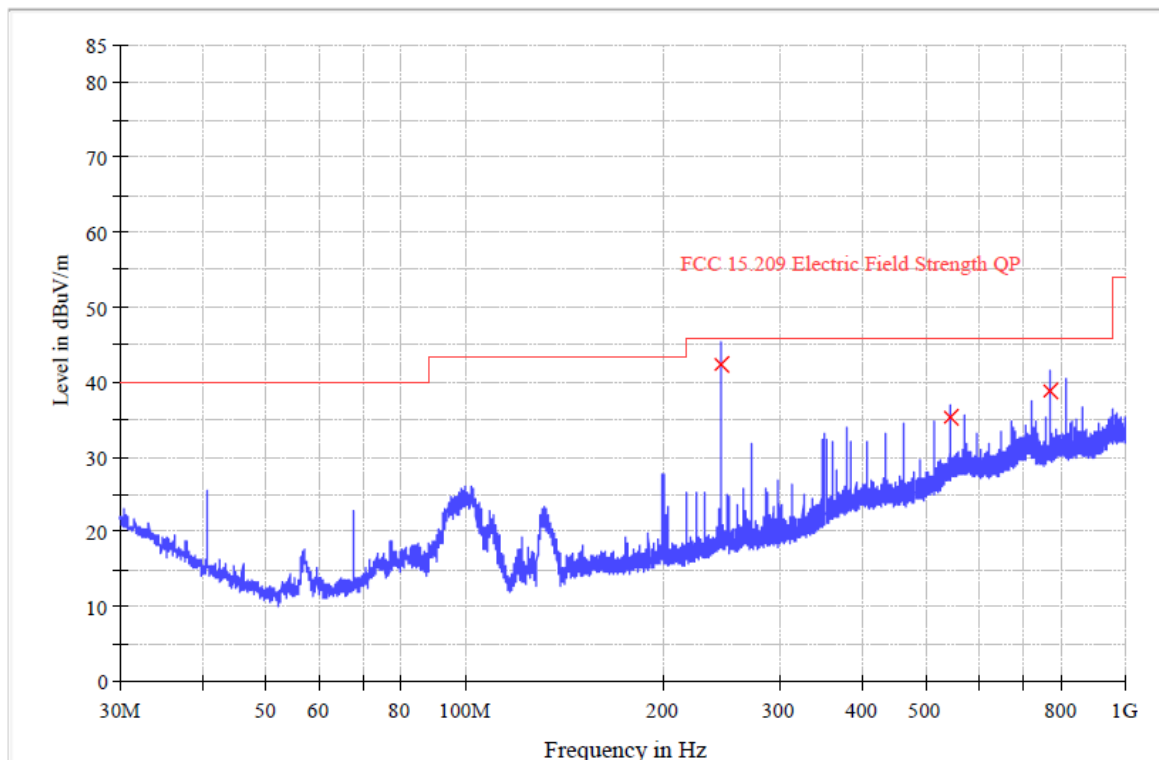

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
244.079000	42.4	1000.0	120.000	H	19.4	3.6	46.0
542.418667	35.3	1000.0	120.000	H	28.7	10.7	46.0
768.008333	38.9	1000.0	120.000	H	31.4	7.1	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Limit Line(dBμV/m) – Level (dBμV/m)

Applicant: Sigenergy Technology Co., Ltd.

Date of Test: 06 July 2026

Worst Case Operating Mode:


Worst Case Test Voltage: AC 240V/60Hz

Model: Sigen EVAC 11.5 WI TS WH

Transmitting

Radiated Emissions (30MHz – 1000MHz)

ANT Polarity: Vertical

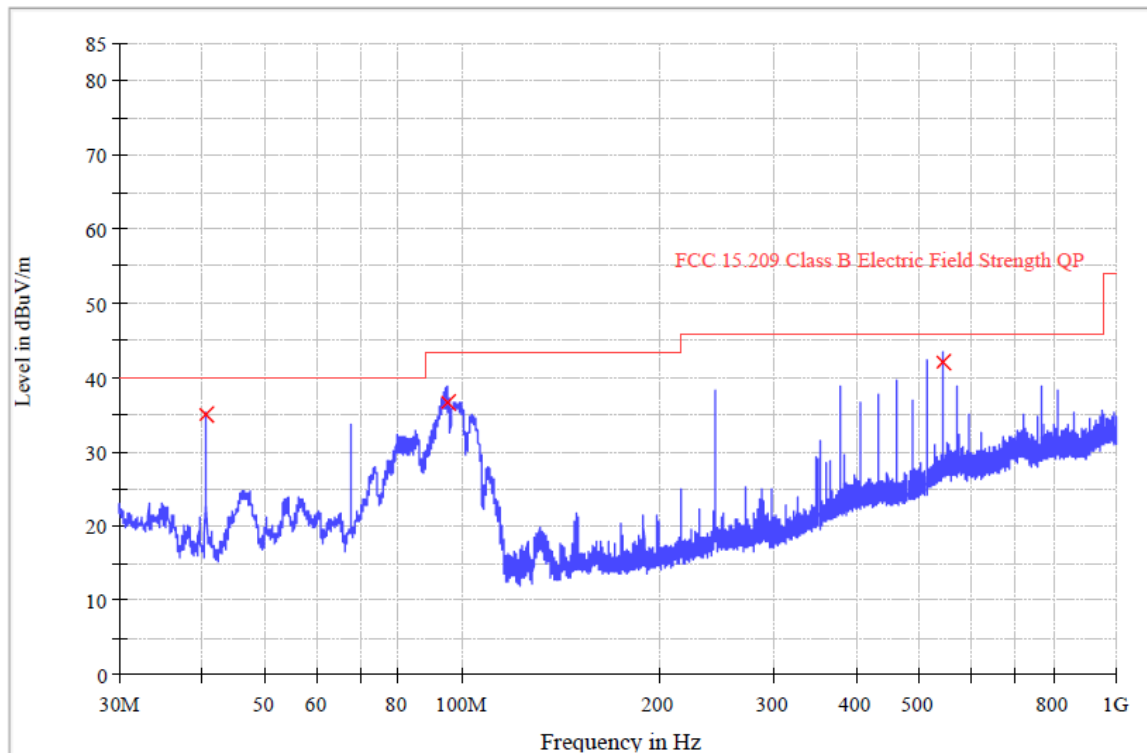

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
40.670000	34.9	1000.0	120.000	V	16.5	5.1	40.0
94.860667	36.7	1000.0	120.000	V	14.2	6.8	43.5
542.418667	42.1	1000.0	120.000	V	28.7	3.9	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)

4.2 Conducted Emission at Mains Terminal

4.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

4.2.2 Conducted Emissions

Worst Case Conducted Configuration

at 0.582000 MHz

Judgement: Passed by 17.5 dB margin

TEST PERSONNEL:

Sign on file

Draven Li, Sr. Project Engineer

Typed/Printed Name

06 July 2026

Date

Applicant: Sigenergy Technology Co., Ltd.

Date of Test: 06 July 2026

Worst Case Operating Mode:

Worst Case Test Voltage: AC 240V/60Hz


Phase: Live

Model: Sigen EVAC 11.5 WI TS WH

Transmitting

Conducted Emission Test - FCC

Conducted Emission Test - FCC Part 15

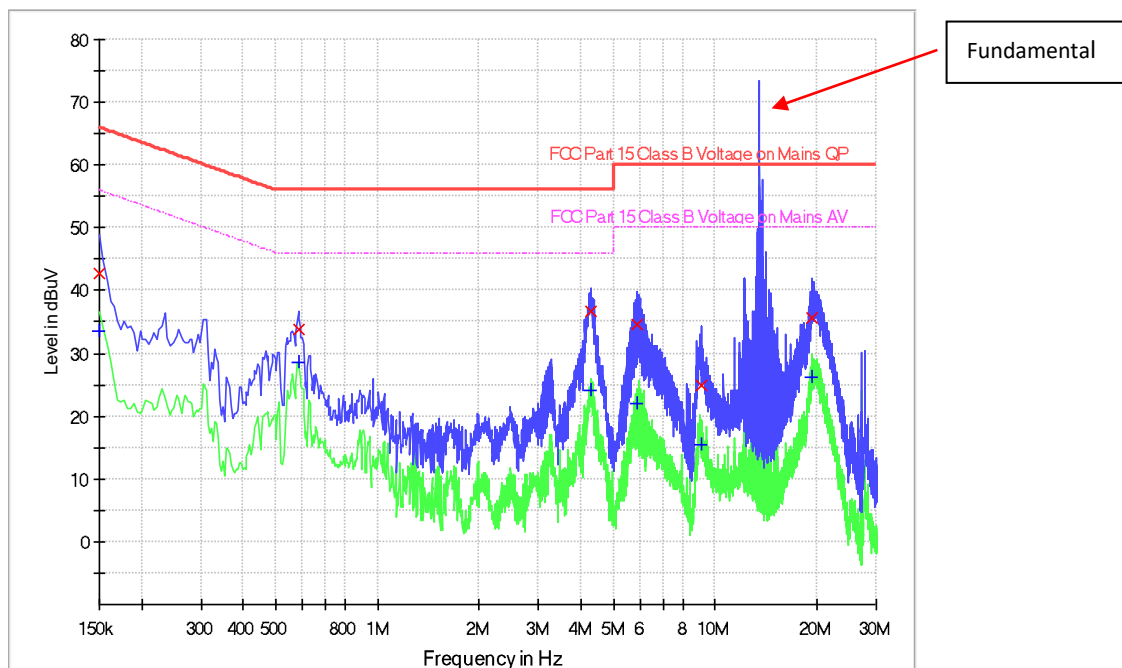

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	42.8	9.000	L1	9.6	23.2	66.0
0.582000	33.7	9.000	L1	9.6	22.3	56.0
4.274000	36.6	9.000	L1	9.7	19.4	56.0
5.866000	34.5	9.000	L1	9.7	25.5	60.0
9.114000	24.9	9.000	L1	9.8	35.1	60.0
19.250000	35.6	9.000	L1	10.1	24.4	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	33.5	9.000	L1	9.6	22.5	56.0
0.582000	28.5	9.000	L1	9.6	17.5	46.0
4.274000	24.2	9.000	L1	9.7	21.8	46.0
5.866000	22.1	9.000	L1	9.7	27.9	50.0
9.114000	15.5	9.000	L1	9.8	34.5	50.0
19.250000	26.2	9.000	L1	10.1	23.8	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – Level (dBuV)

Applicant: Sigenergy Technology Co., Ltd.

Date of Test: 06 July 2026

Worst Case Operating Mode:

Worst Case Test Voltage: AC 240V/60Hz


Phase: Neutral

Model: Sigen EVAC 11.5 WI TS WH

Transmitting

Conducted Emission Test - FCC

Conducted Emission Test - FCC Part 15

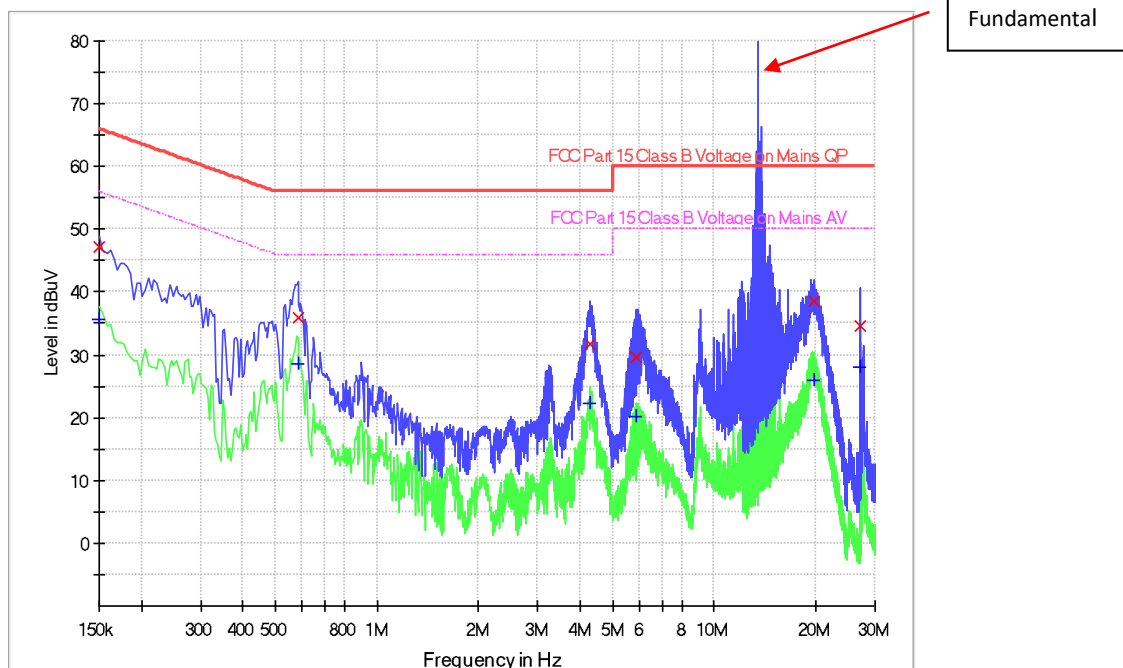

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.1	9.000	N	9.9	18.9	66.0
0.582000	35.8	9.000	N	9.5	20.2	56.0
4.282000	31.8	9.000	N	9.5	24.2	56.0
5.898000	29.7	9.000	N	9.6	30.3	60.0
19.710000	38.7	9.000	N	10.2	21.3	60.0
27.122000	34.7	9.000	N	10.8	25.3	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	35.7	9.000	N	9.9	20.3	56.0
0.582000	28.5	9.000	N	9.5	17.5	46.0
4.282000	22.3	9.000	N	9.5	23.7	46.0
5.898000	20.2	9.000	N	9.6	29.8	50.0
19.710000	25.9	9.000	N	10.2	24.1	50.0
27.122000	28.0	9.000	N	10.8	22.0	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – Level (dBuV)

4.3 Frequency Stability

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C.

The carrier frequency stability shall not exceed ± 100 ppm

Measurement Result:

Voltage (%)	Power	Temperature (°C)	Frequency (MHz)	Limit	Result
100	240Vac	-20	13.560000	± 100 ppm	Pass
		-10	13.560000		Pass
		0	13.560000		Pass
		10	13.560000		Pass
		20	13.560000		Pass
		30	13.560000		Pass
		40	13.560000		Pass
		50	13.560000		Pass

Temperature (°C)	Power	Voltage (%)	Frequency (MHz)	Limit	Result
20	240Vac	85	13.560000	± 100 ppm	Pass
		90	13.560000		Pass
		95	13.560000		Pass
		100	13.560000		Pass
		105	13.560000		Pass
		110	13.560000		Pass
		115	13.560000		Pass

Note: The device is deemed to comply with requirement of FCC Part 15.225(e).

5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.


9.0 Miscellaneous Information

This miscellaneous information includes details of the measured band edge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Band edge Plot

The test plots are attached as below. From the plot, the field strength of any emissions is below the limit of 90.5dBuV/m in the range of outside of (13.410–13.553 MHz and 13.567–13.710 MHz) and the limit of 80.5dBuV/m in the frequency range of (13.110-13.410MHz and 13.710-14.010MHz). Therefore, they meet the requirement of Section 15.225(b), (c).


FCC Part 15C NFC13.11M-14.01M(dBuV)

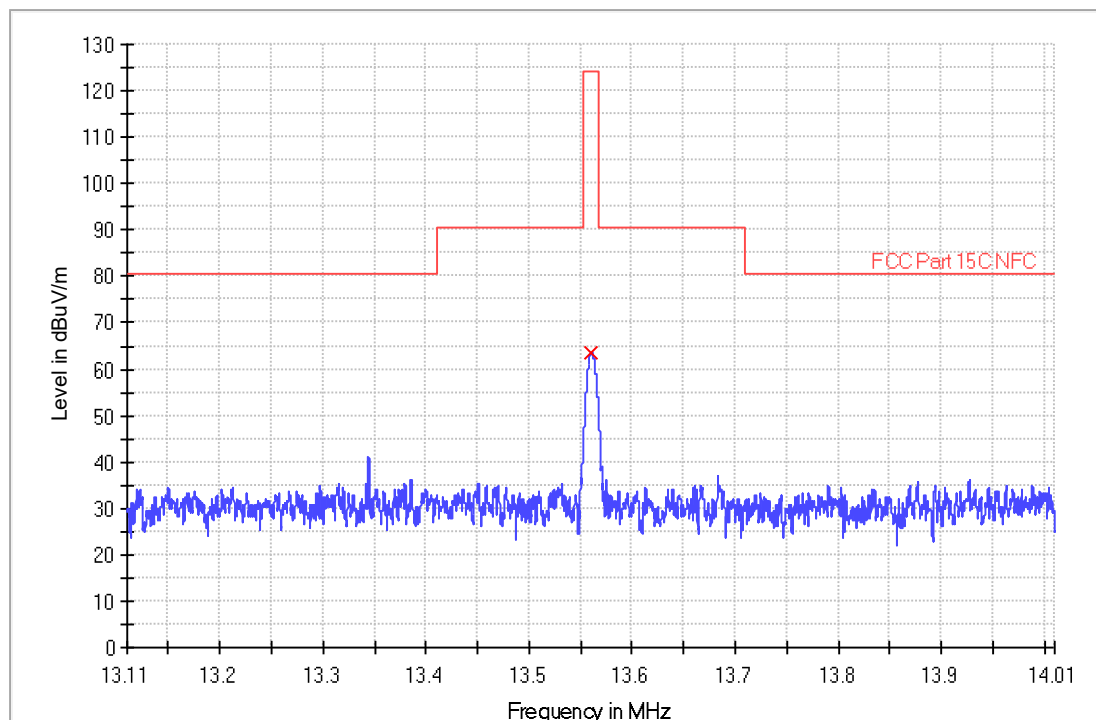

9.2 20dB Bandwidth


Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (13.110-14.010MHz) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

Block Diagram:

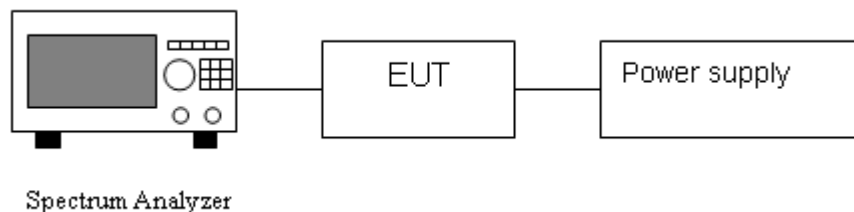

Test Procedure

Pursuant to ANSI C63.10-2020 - Section 6.9.2

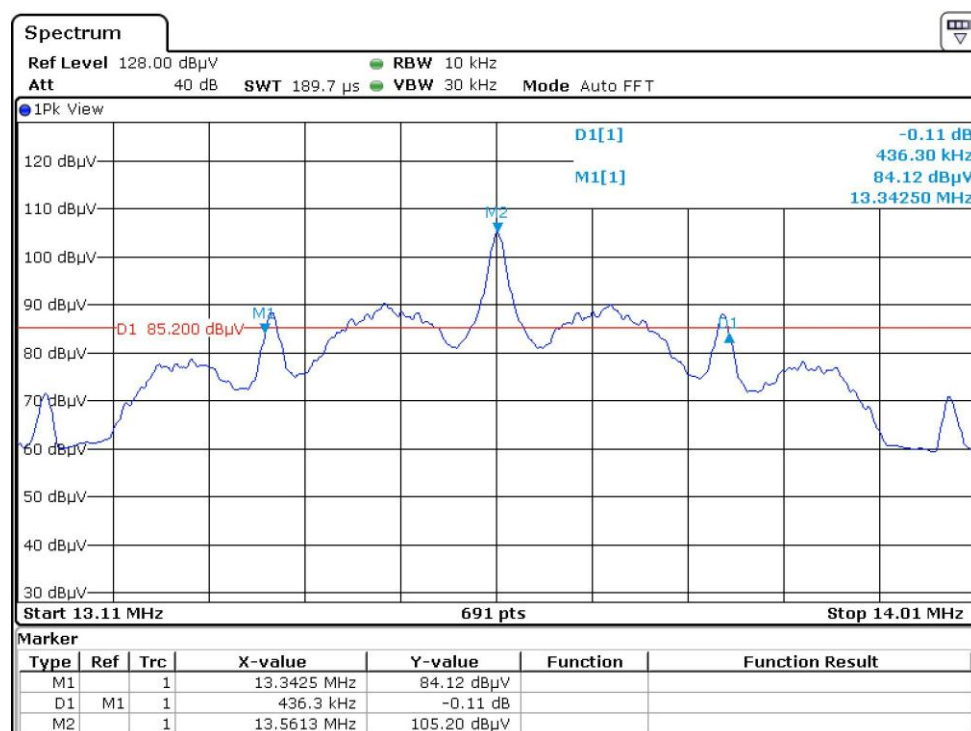

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

9.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2020.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz up to the 1GHz.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Section 9.3).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-13	BiConiLog Antenna	ETS	3142E	00166158	29-May-2025	29-May-2028
SZ185-03	EMI Receiver	R&S	ESR7	101975	10-Apr-2026	10-Apr-2027
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	05-May-2024	05-May-2027
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	12-Dec-2021	12-Dec-2026
SZ016-12	Temperature & Humidity Chamber	Terchy	MHK-120NK	AB0105	01-Dec-2025	01-Dec-2026
SZ062-23	RF Cable	RADIAL	SF104PE	--	15-Sep-2025	15-Sep-2026
SZ062-34	RF Cable	RADIAL	A50-3.5M3.5M-1M	--	15-Sep-2025	15-Sep-2026
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	04-Jun-2026	04-Jun-2027
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	27-Oct-2025	27-Oct-2026
SZ188-03	Shielding Room	ETS	RFD-100	4100	20-Dec-2022	20-Dec-2027
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	13-Apr-2026	13-Apr-2027