

**TEST REPORT**  
**FCC CFR Title 47 Part 2, Part 90R**

Report Reference No.....: HK2509225394-7E  
FCC ID.....: 2BSMX-GUARDBOXAIR  
Compiled by  
( position+printed name+signature)...: Testing Engineer Len Liao  
Supervised by  
( position+printed name+signature)...: Technical Manager Sliver Wan  
Approved by  
( position+printed name+signature)...: Authorized Signatory Jason Zhou

*Len Liao*

*Sliver Wan*

*Jason Zhou*



Date of issue.....: Sept. 29, 2025

**Testing Laboratory Name** .....: **Shenzhen HUAKE Testing Technology Co., Ltd.**

Address .....: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,  
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,  
China

**Applicant's name** .....: **DH Vision Inc**

Address .....: 1743 Dorsey Road Suite 110 Hanover, Maryland, 21076, United  
States

**Test specification** .....

Standard .....: **FCC CFR Title 47 Part 2, Part 90R**

TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

**Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: GuardBox

Trade Mark .....: N/A

**Manufacturer** .....: **SENKUN GLOBAL CO., LTD.**

Model/Type reference.....: GuardBox Air

Listed Models .....: N/A

Modulation Type .....: QPSK, 16QAM

Rating .....: DC12-48V from DC Power

Hardware version .....: V1.4

Software version .....: V1.0

Result.....: **PASS**

## TEST REPORT

|                         |                        |                |
|-------------------------|------------------------|----------------|
| <b>Test Report No.:</b> | <b>HK2509225394-7E</b> | Sept. 29, 2025 |
|                         |                        | Date of issue  |

Equipment under Test : GuardBox

Model /Type : GuardBox Air

Listed Models : N/A

**Applicant** : **DH Vision Inc**

Address : 1743 Dorsey Road Suite 110 Hanover, Maryland, 21076, United States

**Manufacturer** : **SENKUN GLOBAL CO., LTD.**

Address : Rm. 7, 10F., No. 500, Shizheng Rd., Xitun Dist., Taichung City 407621, Taiwan (R.O.C.)

|                    |             |
|--------------------|-------------|
| <b>Test Result</b> | <b>Pass</b> |
|--------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|          |                                                            |                  |
|----------|------------------------------------------------------------|------------------|
| <b>1</b> | <b><u>Summary</u></b>                                      | <b><u>5</u></b>  |
| 1.1      | Test Standards                                             | 5                |
| 1.2      | Test Description                                           | 5                |
| 1.3      | Information of the Test Laboratory                         | 6                |
| 1.4      | Statement of the measurement uncertainty                   | 6                |
| <b>2</b> | <b><u>General Information</u></b>                          | <b><u>7</u></b>  |
| 2.1      | General Remarks                                            | 7                |
| 2.2      | Product Description                                        | 7                |
| 2.3      | Equipment under Test                                       | 7                |
| 2.4      | Test Frequency List                                        | 7                |
| 2.5      | Environmental Conditions                                   | 8                |
| 2.6      | Description of Test Modes                                  | 8                |
| 2.7      | Equipments Used during the Test                            | 9                |
| 2.8      | Modifications                                              | 9                |
| <b>3</b> | <b><u>Test Conditions and Results</u></b>                  | <b><u>10</u></b> |
| 3.1      | Output Power                                               | 10               |
| 3.2      | Peak-to-Average Ratio (PAR)                                | 14               |
| 3.3      | Occupied Bandwidth and Emission Bandwidth                  | 17               |
| 3.4      | Band Edge compliance                                       | 20               |
| 3.5      | Spurious Emission                                          | 23               |
| 3.6      | Frequency Stability under Temperature & Voltage Variations | 31               |
| <b>4</b> | <b><u>Test Setup Photos of the EUT</u></b>                 | <b><u>33</u></b> |
| <b>5</b> | <b><u>Photos of the EUT</u></b>                            | <b><u>35</u></b> |

**\*\* Modified History \*\***

| Revision     | Description                 | Issued Date    | Remark     |
|--------------|-----------------------------|----------------|------------|
| Revision 1.0 | Initial Test Report Release | Sept. 29, 2025 | Jason Zhou |
|              |                             |                |            |
|              |                             |                |            |

## 1 Summary

### 1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 90](#): Private Land Mobile Radio Services (Subpart R—Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands).

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): Frequency Allocation and Radio Treaty Matters; General Rules and Regulations.

### 1.2 Test Description

| Test Item                                                                                                                                                                                                                                       | Section in CFR 47          | Result |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------|
| RF Output Power                                                                                                                                                                                                                                 | Part 2.1046<br>90.542      | Pass   |
| Peak-to-Average Ratio                                                                                                                                                                                                                           | KDB 971168 D01(5.7)        | Pass   |
| 99% & -26 dB Occupied Bandwidth                                                                                                                                                                                                                 | Part 2.1049                | Pass   |
| Spurious Emissions at Antenna Terminal                                                                                                                                                                                                          | Part 90.543(e)             | Pass   |
| Out of Band Emission, Band Edge                                                                                                                                                                                                                 | Part 2.1051<br>Part 90.543 | Pass   |
| Frequency Stability                                                                                                                                                                                                                             | Part 2.1055                | Pass   |
| <b>Note:</b><br>1. Pass: Test item meets the requirement.<br>2. Fail: Test item does not meet the requirement.<br>3. N/A: Test case does not apply to the test object.<br>4. The test result judgment is decided by the limit of test standard. |                            |        |

### 1.3 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 1.4 Statement of the measurement uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10dB                  |       |
| Radiated Emission     | Above 1GHz | 4.32dB                  |       |
| Conducted Disturbance | 0.15~30MHz | 3.20dB                  |       |

## 2 General Information

### 2.1 General Remarks

|                                |   |                |
|--------------------------------|---|----------------|
| Date of receipt of test sample | : | Sept. 22, 2025 |
|                                |   |                |
| Testing commenced on           | : | Sept. 22, 2025 |
|                                |   |                |
| Testing concluded on           | : | Sept. 29, 2025 |

### 2.2 Product Description

|                                                                                                                                                                                                                                                                                                                      |                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Name of EUT                                                                                                                                                                                                                                                                                                          | GuardBox                            |
| Model/Type reference:                                                                                                                                                                                                                                                                                                | GuardBox Air                        |
| List Model:                                                                                                                                                                                                                                                                                                          | N/A                                 |
| Model Difference:                                                                                                                                                                                                                                                                                                    | N/A                                 |
| Power supply:                                                                                                                                                                                                                                                                                                        | DC12-48V from DC Power              |
| Adapter Information                                                                                                                                                                                                                                                                                                  | N/A                                 |
| Modulation Type                                                                                                                                                                                                                                                                                                      | QPSK,16QAM                          |
| Antenna Type                                                                                                                                                                                                                                                                                                         | External Antenna                    |
| Antenna gain                                                                                                                                                                                                                                                                                                         | -1.91dBi                            |
| Operation Frequency Band                                                                                                                                                                                                                                                                                             | LTE Band 14                         |
| Operation frequency                                                                                                                                                                                                                                                                                                  | LTE Band 14: 788~798 MHz            |
| LTE Release                                                                                                                                                                                                                                                                                                          | R8                                  |
| Extreme temp. Tolerance                                                                                                                                                                                                                                                                                              | -30°C to +50°C                      |
| Extreme vol. Limits                                                                                                                                                                                                                                                                                                  | 10.2VDC to 13.8VDC (nominal: 12VDC) |
| Note:<br>1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.<br>2. Antenna gain Refer to the antenna specifications.<br>3. The cable loss data is obtained from the supplier.<br>4. The test results in the report only apply to the tested sample. |                                     |

### 2.3 Equipment under Test

#### Power supply system utilised

|                      |   |                                                        |                                 |
|----------------------|---|--------------------------------------------------------|---------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V/ 60 Hz                      | <input type="radio"/> 115V/60Hz |
|                      |   | <input checked="" type="radio"/> 12 V DC               | <input type="radio"/> 24 V DC   |
|                      |   | <input type="radio"/> Other (specified in blank below) |                                 |

### 2.4 Test Frequency List

| TX Channel Bandwidth | Frequency (MHz) | Channel |
|----------------------|-----------------|---------|
| 5 MHz                | 790.5           | 23305   |
|                      | 793             | 23330   |
|                      | 795.5           | 23355   |
| 10 MHz               | /               | /       |
|                      | 793             | 23330   |
|                      | /               | /       |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

## 2.5 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

## 2.6 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.



## 2.7 Equipments Used during the Test

| Item | Test Equipment                  | Manufacturer    | Model No.             | Serial No. | Calibration Date | Calibration Due Date |
|------|---------------------------------|-----------------|-----------------------|------------|------------------|----------------------|
| 1    | L.I.S.N.                        | R&S             | ENV216                | HKE-002    | 2025/02/19       | 2026/02/18           |
| 2    | L.I.S.N.                        | R&S             | ENV216                | HKE-059    | 2025/02/19       | 2026/02/18           |
| 3    | EMI Test Receiver               | R&S             | ESR                   | HKE-005    | 2025/02/19       | 2026/02/18           |
| 4    | Spectrum analyzer               | Agilent         | N9020A                | HKE-117    | 2025/02/19       | 2026/02/18           |
| 5    | Spectrum analyzer               | R&S             | FSV3044               | HKE-126    | 2025/02/19       | 2026/02/18           |
| 6    | Preamplifier                    | EMCI            | EMC051845S            | HKE-006    | 2025/02/19       | 2026/02/18           |
| 7    | Preamplifier                    | Schwarzbeck     | BBV 9743              | HKE-016    | 2025/02/19       | 2026/02/18           |
| 8    | Preamplifier                    | A.H. Systems    | SAS-574               | HKE-182    | 2025/02/19       | 2026/02/18           |
| 9    | 6dB Attenuator                  | Pasternack      | 6db                   | HKE-184    | 2025/02/19       | 2026/02/18           |
| 10   | EMI Test Receiver               | Rohde & Schwarz | ESR-7                 | HKE-010    | 2025/02/19       | 2026/02/18           |
| 11   | Broadband Antenna               | Schwarzbeck     | VULB9168              | HKE-167    | 2024/02/21       | 2026/02/20           |
| 12   | Loop Antenna                    | COM-POWER       | AL-130R               | HKE-014    | 2024/02/21       | 2026/02/20           |
| 13   | Horn Antenna                    | Schwarzbeck     | 9120D                 | HKE-013    | 2024/02/21       | 2026/02/20           |
| 14   | EMI Test Software               | Tonscend        | JS32-CE 2.5.0.6       | HKE-081    | /                | /                    |
| 15   | EMI Test Software               | Tonscend        | JS32-RE 5.0.0         | HKE-082    | /                | /                    |
| 16   | RF Automatic control unit       | Tonscend        | JS0806-1              | HKE-096    | 2025/02/19       | 2026/02/18           |
| 17   | High pass filter unit           | Tonscend        | JS0806-F              | HKE-055    | 2025/02/19       | 2026/02/18           |
| 18   | Wireless Communication Test Set | R&S             | CMU200                | HKE-026    | 2025/02/19       | 2026/02/18           |
| 19   | Wireless Communication Test Set | R&S             | CMW500                | HKE-027    | 2025/02/19       | 2026/02/18           |
| 20   | High-low temperature chamber    | Guangke         | HT-80L                | HKE-118    | 2025/06/09       | 2026/06/08           |
| 21   | Temperature and humidity meter  | Boyang          | HTC-1                 | HKE-075    | 2025/06/09       | 2026/06/08           |
| 22   | RF Test Software                | Tonscend        | JS1120 Version 3.5.39 | HKE-183    | /                | /                    |
| 23   | RSE Test Software               | Tonscend        | JS36-RSE 5.0.0        | HKE-184    | /                | /                    |

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 3 Test Conditions and Results


#### 3.1 Output Power

##### LIMIT


According to Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts. 90.542(7) Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

##### TEST CONFIGURATION

###### Conducted Power Measurement

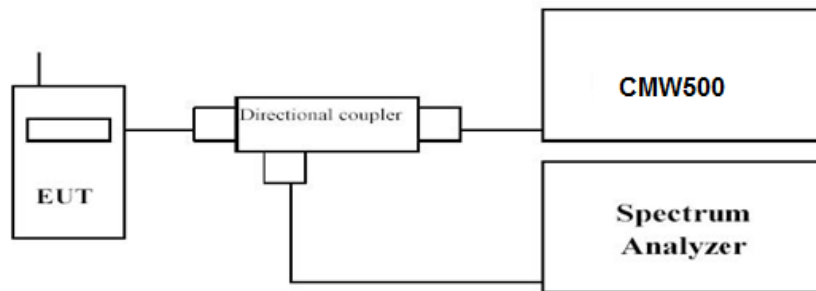

###### Radiated Power Measurement

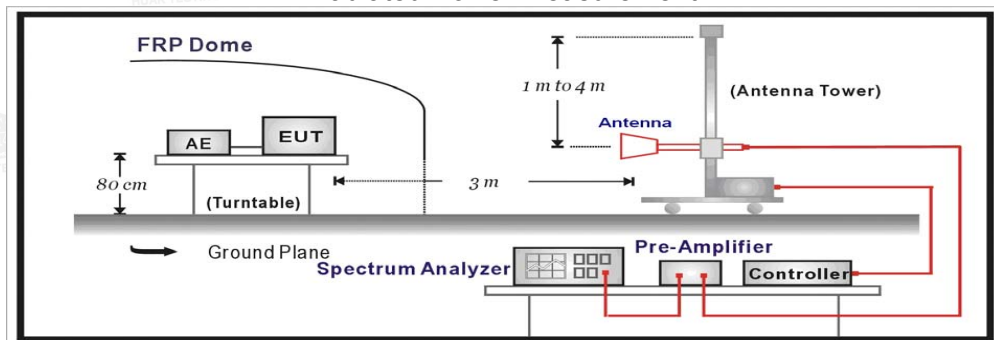

##### TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E.

###### Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

###### Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.



- f. The transmitter shall then be rotated through  $360^\circ$  in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

## TEST RESULTS

### Conducted Measurement:

| Band   | Bandwidth | Modulation | Channel | RB Configuration | Result(dBm) | Verdict |
|--------|-----------|------------|---------|------------------|-------------|---------|
| Band14 | 5MHz      | QPSK       | 23305   | 1RB#0            | 23.78       | PASS    |
| Band14 | 5MHz      | QPSK       | 23305   | 1RB#12           | 24.13       | PASS    |
| Band14 | 5MHz      | QPSK       | 23305   | 1RB#24           | 23.72       | PASS    |
| Band14 | 5MHz      | QPSK       | 23305   | 12RB#13          | 22.98       | PASS    |
| Band14 | 5MHz      | QPSK       | 23305   | 12RB#0           | 22.93       | PASS    |
| Band14 | 5MHz      | QPSK       | 23305   | 12RB#6           | 22.80       | PASS    |
| Band14 | 5MHz      | QPSK       | 23305   | 25RB#0           | 22.92       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 1RB#0            | 23.93       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 1RB#12           | 24.05       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 1RB#24           | 23.95       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 12RB#6           | 22.94       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 12RB#0           | 22.92       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 12RB#13          | 22.82       | PASS    |
| Band14 | 5MHz      | QPSK       | 23330   | 25RB#0           | 22.84       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 1RB#24           | 23.87       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 1RB#12           | 24.33       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 1RB#0            | 23.75       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 12RB#6           | 22.88       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 12RB#0           | 22.98       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 12RB#13          | 22.87       | PASS    |
| Band14 | 5MHz      | QPSK       | 23355   | 25RB#0           | 22.87       | PASS    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

|        |       |       |       |         |       |      |
|--------|-------|-------|-------|---------|-------|------|
| Band14 | 5MHz  | 16QAM | 23305 | 1RB#0   | 22.81 | PASS |
| Band14 | 5MHz  | 16QAM | 23305 | 1RB#12  | 22.91 | PASS |
| Band14 | 5MHz  | 16QAM | 23305 | 1RB#24  | 23.00 | PASS |
| Band14 | 5MHz  | 16QAM | 23305 | 12RB#0  | 21.96 | PASS |
| Band14 | 5MHz  | 16QAM | 23305 | 12RB#13 | 21.89 | PASS |
| Band14 | 5MHz  | 16QAM | 23305 | 12RB#6  | 21.75 | PASS |
| Band14 | 5MHz  | 16QAM | 23305 | 25RB#0  | 21.91 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 1RB#0   | 23.13 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 1RB#12  | 23.04 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 1RB#24  | 23.06 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 12RB#0  | 21.82 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 12RB#13 | 21.94 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 12RB#6  | 21.81 | PASS |
| Band14 | 5MHz  | 16QAM | 23330 | 25RB#0  | 21.83 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 1RB#12  | 23.07 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 1RB#0   | 23.33 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 1RB#24  | 23.14 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 12RB#13 | 21.85 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 12RB#6  | 21.90 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 12RB#0  | 21.86 | PASS |
| Band14 | 5MHz  | 16QAM | 23355 | 25RB#0  | 21.83 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 1RB#0   | 23.81 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 1RB#49  | 23.86 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 1RB#24  | 23.77 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 25RB#0  | 22.88 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 25RB#25 | 22.88 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 25RB#12 | 22.81 | PASS |
| Band14 | 10MHz | QPSK  | 23330 | 50RB#0  | 22.79 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 1RB#49  | 22.77 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 1RB#24  | 22.99 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 1RB#0   | 22.92 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 25RB#12 | 21.87 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 25RB#0  | 21.77 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 25RB#25 | 21.75 | PASS |
| Band14 | 10MHz | 16QAM | 23330 | 50RB#0  | 21.80 | PASS |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Radiated Measurement:**

**Remark:**

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 14; recorded worst case for each Channel Bandwidth of LTE FDD Band 14.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$ ,  $EIRP = ERP + 2.15$

**LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|------------|-----------|-------------|-------------|--------------|
| 790.5           | -18.15                 | 3.06                 | 9.68                            | 34.8            | 23.27      | 21.12     | 34.77       | 13.65       | V            |
| 793.0           | -17.57                 | 3.17                 | 9.68                            | 34.8            | 23.74      | 21.59     | 34.77       | 13.18       | V            |
| 795.5           | -16.53                 | 3.22                 | 9.75                            | 34.8            | 24.8       | 22.65     | 34.77       | 12.12       | V            |
| 790.5           | -18.65                 | 3.06                 | 9.68                            | 34.8            | 22.77      | 20.62     | 34.77       | 14.15       | H            |
| 793.0           | -17.35                 | 3.17                 | 9.68                            | 34.8            | 23.96      | 21.81     | 34.77       | 12.96       | H            |
| 795.5           | -17.26                 | 3.22                 | 9.75                            | 34.8            | 24.07      | 21.92     | 34.77       | 12.85       | H            |

**LTE FDD Band 14\_Channel Bandwidth 10MHz\_QPSK**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|------------|-----------|-------------|-------------|--------------|
| 793.0           | -15.92                 | 3.22                 | 9.75                            | 34.8            | 25.41      | 23.26     | 34.77       | 11.51       | V            |
| 793.0           | -17.59                 | 3.06                 | 9.68                            | 34.8            | 23.83      | 21.68     | 34.77       | 13.09       | H            |

**LTE FDD Band 14\_Channel Bandwidth 5MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|------------|-----------|-------------|-------------|--------------|
| 790.5           | -18.39                 | 3.06                 | 9.68                            | 34.8            | 23.03      | 20.88     | 34.77       | 13.89       | V            |
| 793.0           | -17.82                 | 3.17                 | 9.68                            | 34.8            | 23.49      | 21.34     | 34.77       | 13.43       | V            |
| 795.5           | -16.99                 | 3.22                 | 9.75                            | 34.8            | 24.34      | 22.19     | 34.77       | 12.58       | V            |
| 790.5           | -18.67                 | 3.06                 | 9.68                            | 34.8            | 22.75      | 20.60     | 34.77       | 14.17       | H            |
| 793.0           | -17.37                 | 3.17                 | 9.68                            | 34.8            | 23.94      | 21.79     | 34.77       | 12.98       | H            |
| 795.5           | -17.84                 | 3.22                 | 9.75                            | 34.8            | 23.49      | 21.34     | 34.77       | 13.43       | H            |

**LTE FDD Band 14\_Channel Bandwidth 10MHz\_16QAM**


| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|------------|-----------|-------------|-------------|--------------|
| 793.0           | -15.75                 | 3.22                 | 9.75                            | 34.8            | 25.58      | 23.43     | 34.77       | 11.34       | V            |
| 793.0           | -17.97                 | 3.06                 | 9.68                            | 34.8            | 23.45      | 21.30     | 34.77       | 13.47       | H            |

## 3.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

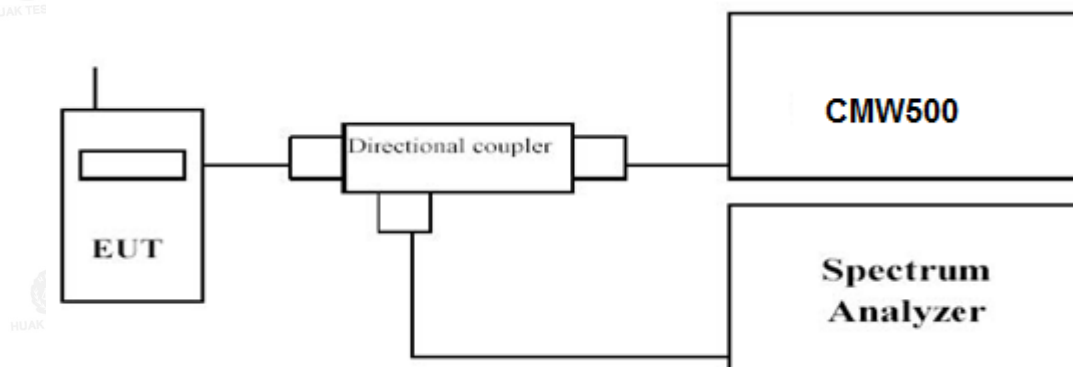

### TEST PROCEDURE


1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 14; recorded worst case for each Channel Bandwidth of LTE Band 14.

| LTE Band 14          |                 |                |           |       |
|----------------------|-----------------|----------------|-----------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | PAPR (dB) |       |
|                      |                 |                | QPSK      | 16QAM |
| 5 MHz                | 790.5           | 1RB#0          | 4.22      | 5.16  |
|                      | 793             |                | 4.24      | 6.89  |
|                      | 795.5           |                | 4.13      | 6.99  |
| 10 MHz               | 793             | 1RB#0          | 4.16      | 5.87  |

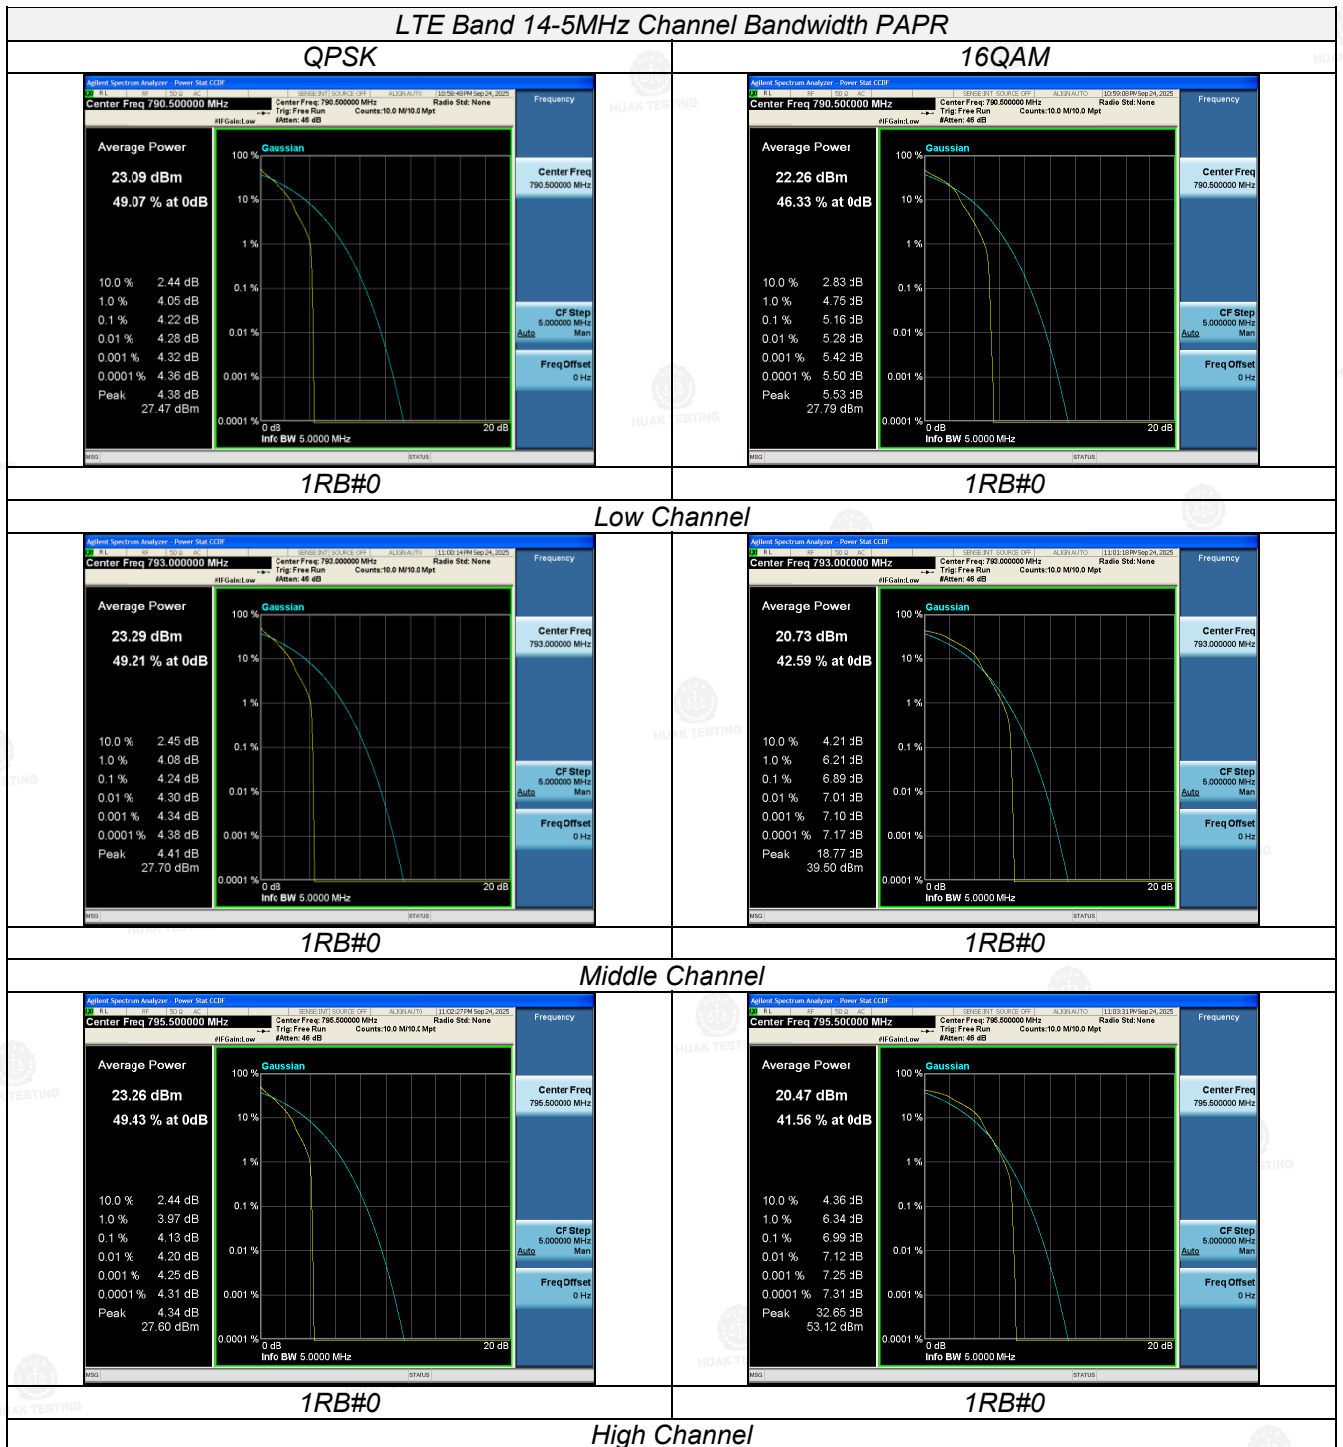

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

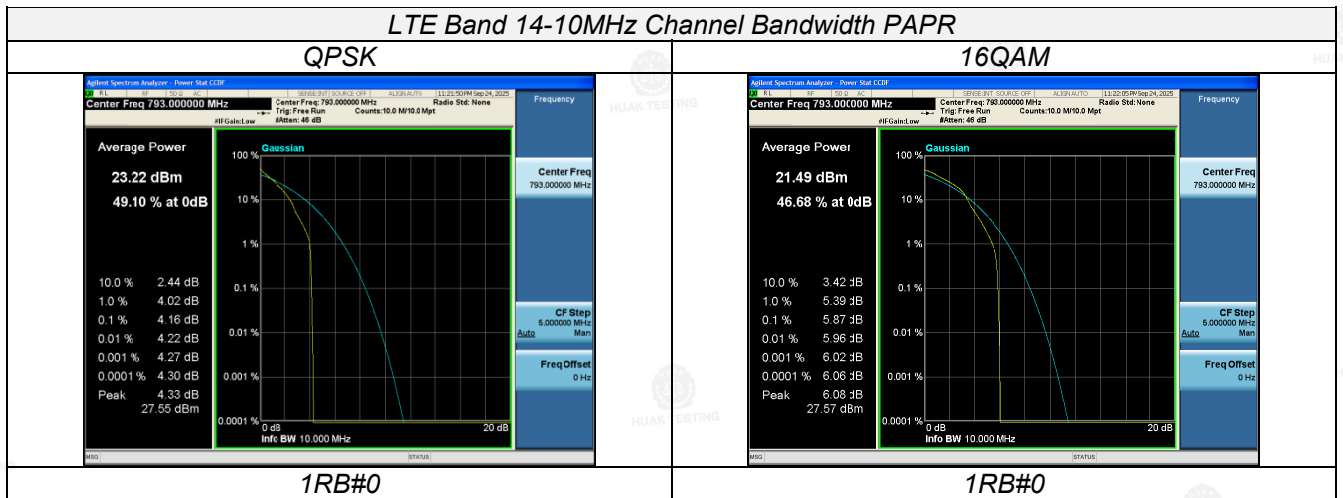

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


### 3.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

No specific occupied bandwidth requirements in part 2.1049.

Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

#### TEST CONFIGURATION

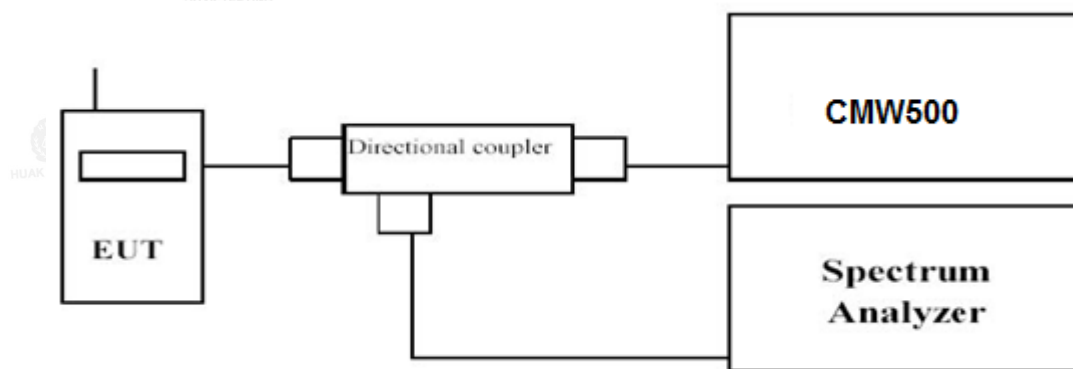

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW≥3 times RBW.


-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

Remark:



1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 14; recorded worst case for each Channel Bandwidth of LTE Band 14.

| LTE Band 14          |                |                 |                                 |       |                              |        |
|----------------------|----------------|-----------------|---------------------------------|-------|------------------------------|--------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | -26dBc Emission bandwidth (MHz) |       | 99% Occupied bandwidth (MHz) |        |
|                      |                |                 | QPSK                            | 16QAM | QPSK                         | 16QAM  |
| 5 MHz                | 25RB#0         | 790.5           | 4.992                           | 5.036 | 4.5127                       | 4.5102 |
|                      |                | 793             | 5.024                           | 4.998 | 4.5092                       | 4.5057 |
|                      |                | 795.5           | 4.998                           | 4.972 | 4.5078                       | 4.4959 |
| 10 MHz               | 50RB#0         | 793             | 9.883                           | 9.803 | 8.9571                       | 8.9488 |

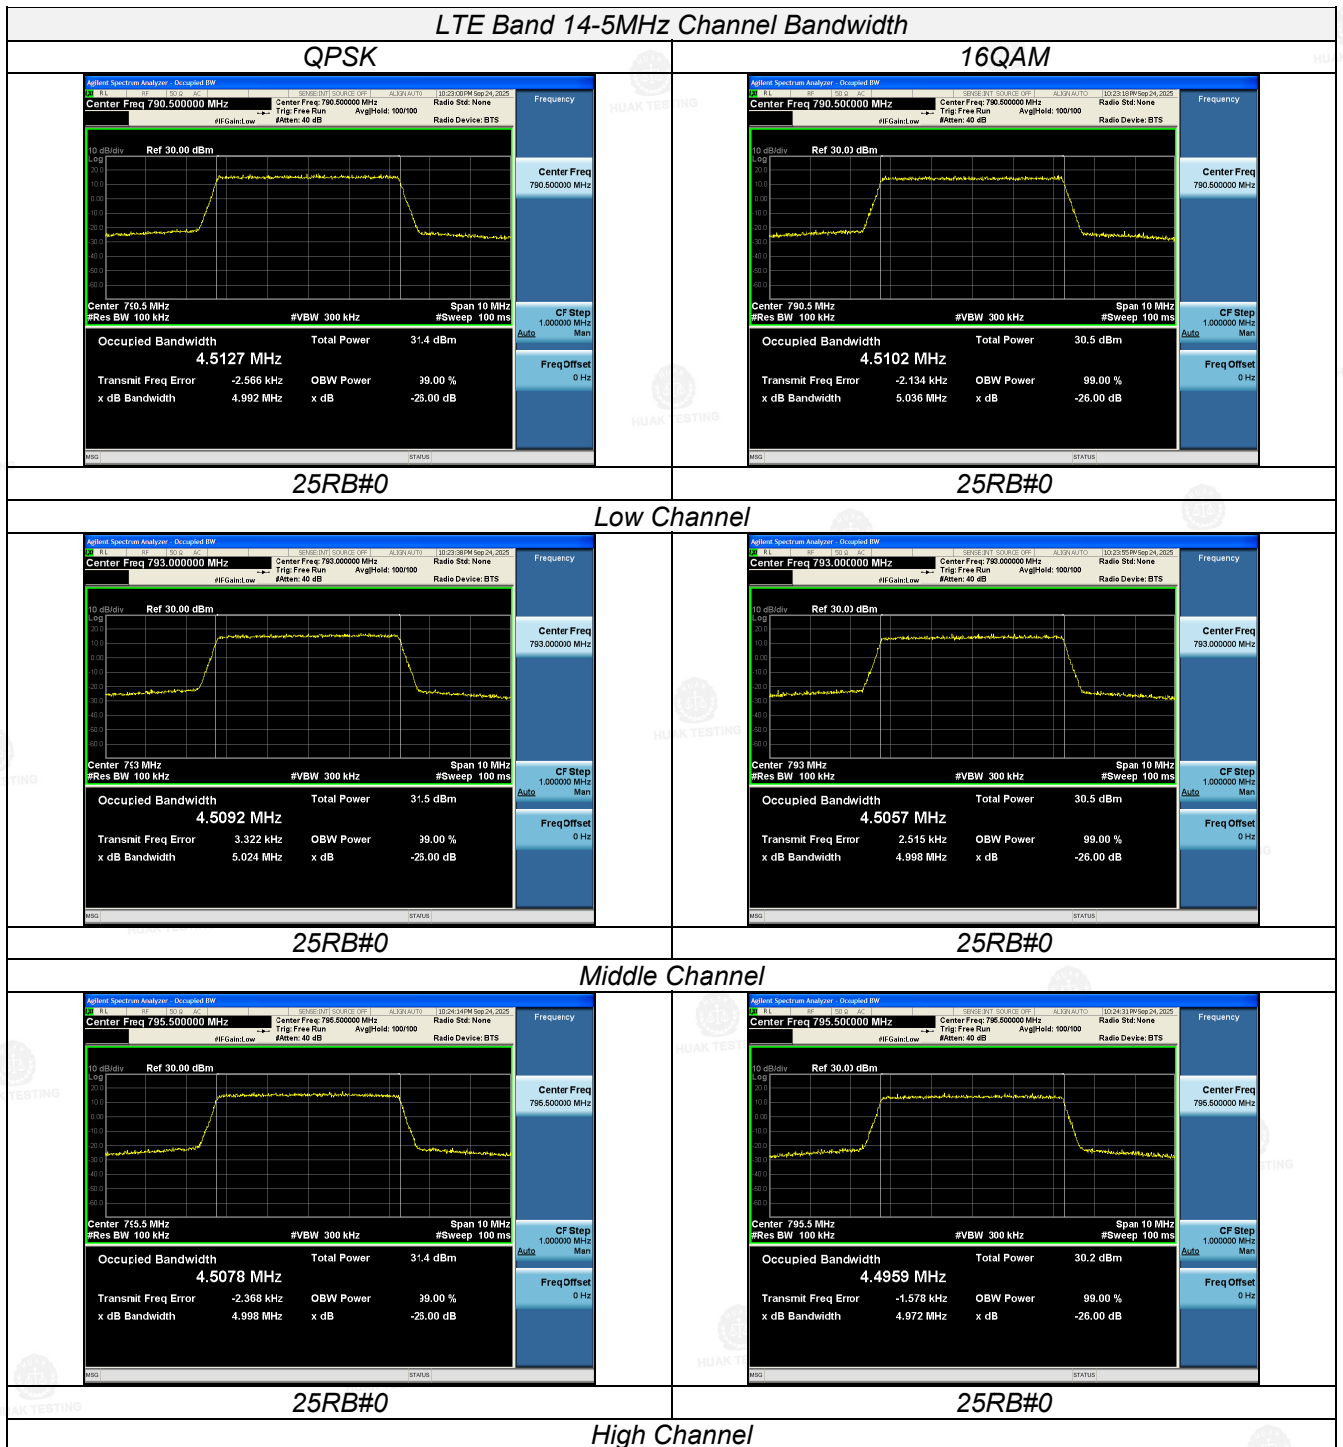

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
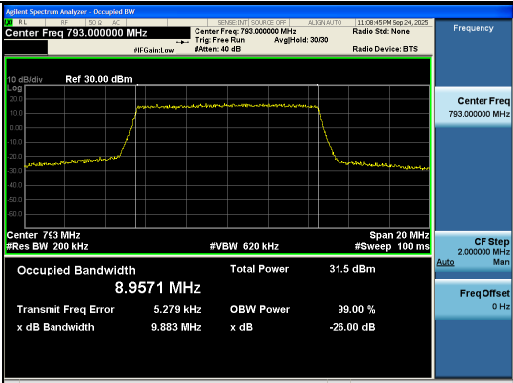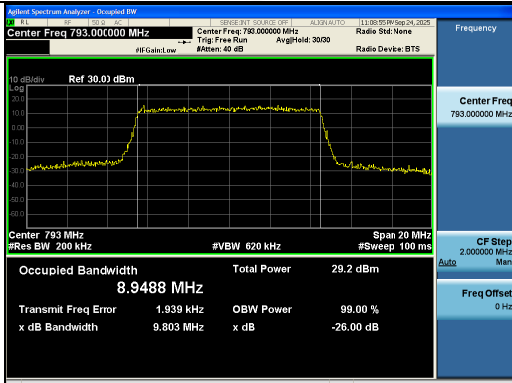
| LTE Band 14-10MHz Channel Bandwidth                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QPSK                                                                                                                                                                                                                                                                                                     | 16QAM                                                                                                                                                                                                                                                                                                     |
|  <p>Center Freq 793.000000 MHz</p> <p>Occupied Bandwidth 8.9571 MHz</p> <p>Total Power 31.5 dBm</p> <p>Transmit Freq Error 5.279 kHz</p> <p>OBW Power 39.00 %</p> <p>x dB Bandwidth 9.883 MHz</p> <p>x dB -23.00 dB</p> |  <p>Center Freq 793.000000 MHz</p> <p>Occupied Bandwidth 8.9488 MHz</p> <p>Total Power 29.2 dBm</p> <p>Transmit Freq Error 1.939 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.803 MHz</p> <p>x dB -26.00 dB</p> |
| 50RB#0                                                                                                                                                                                                                                                                                                   | 50RB#0                                                                                                                                                                                                                                                                                                    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 3.4 Band Edge compliance

#### LIMIT

90.543 Emission limitations (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.


(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

#### TEST CONFIGURATION

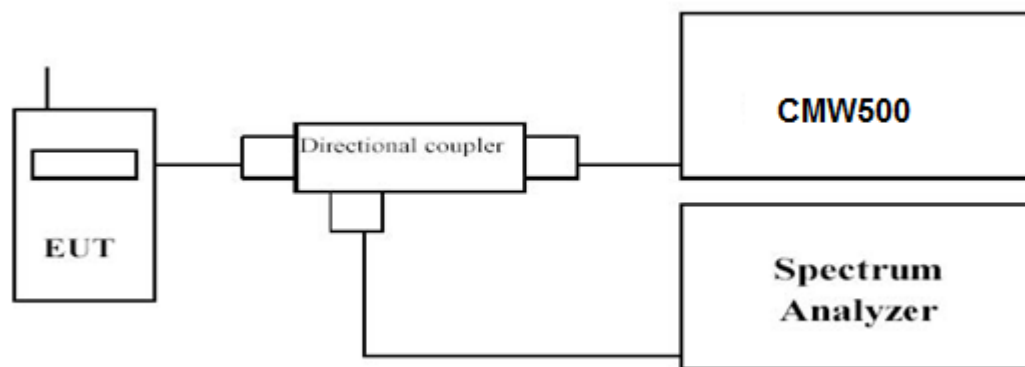

#### TEST PROCEDURE


1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum


#### TEST RESULTS

*Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 14; recorded worst case for each Channel Bandwidth of LTE Band 14.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

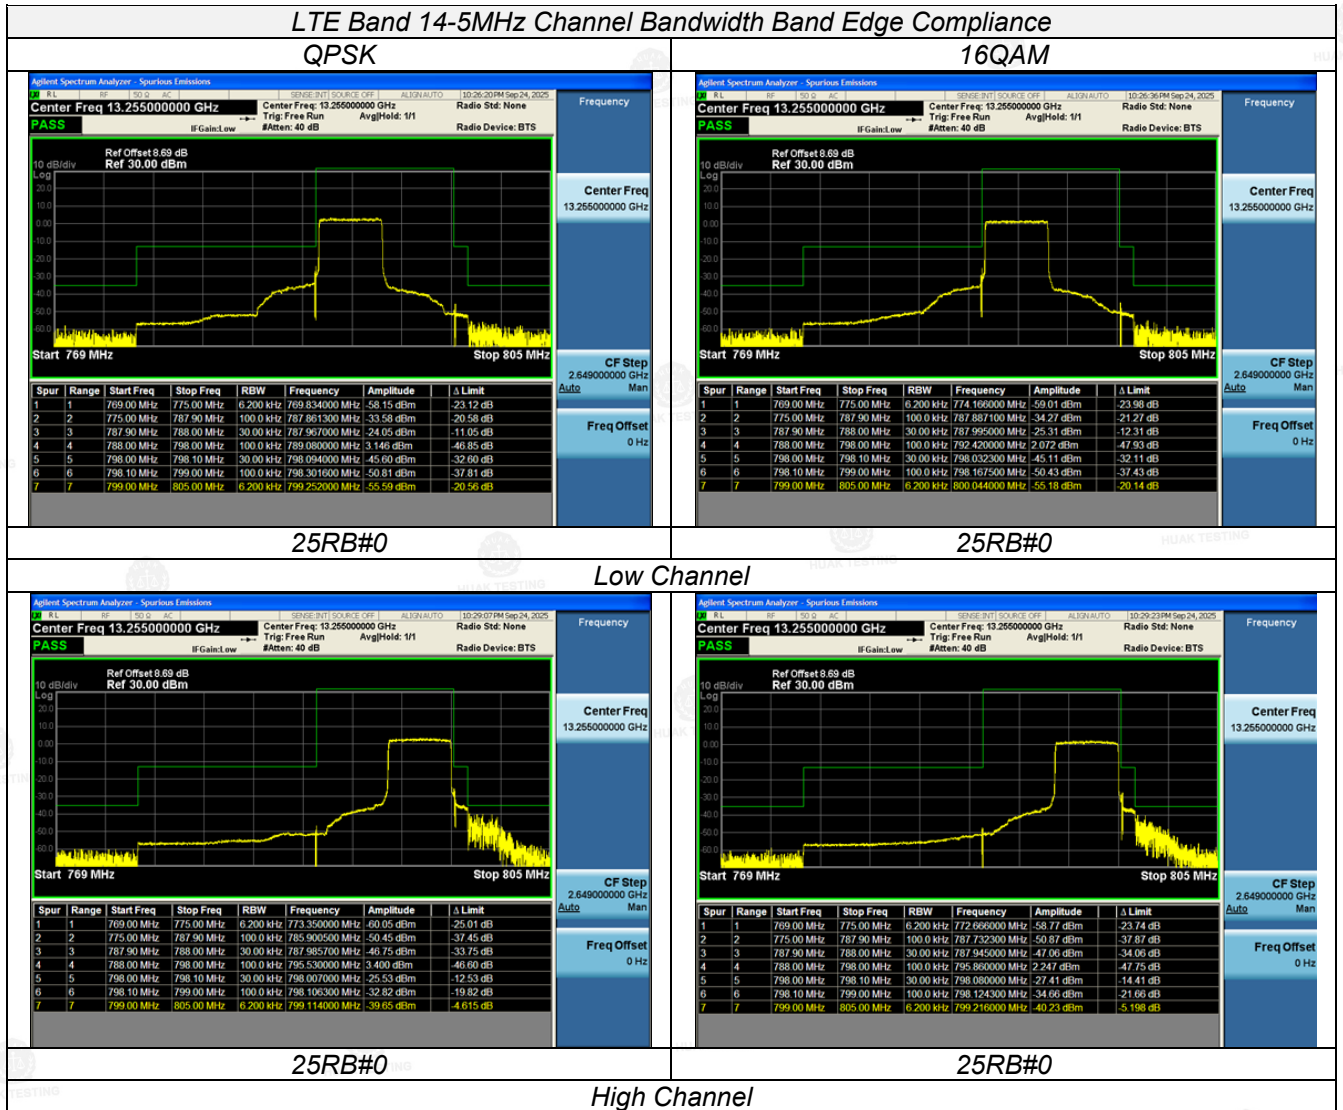

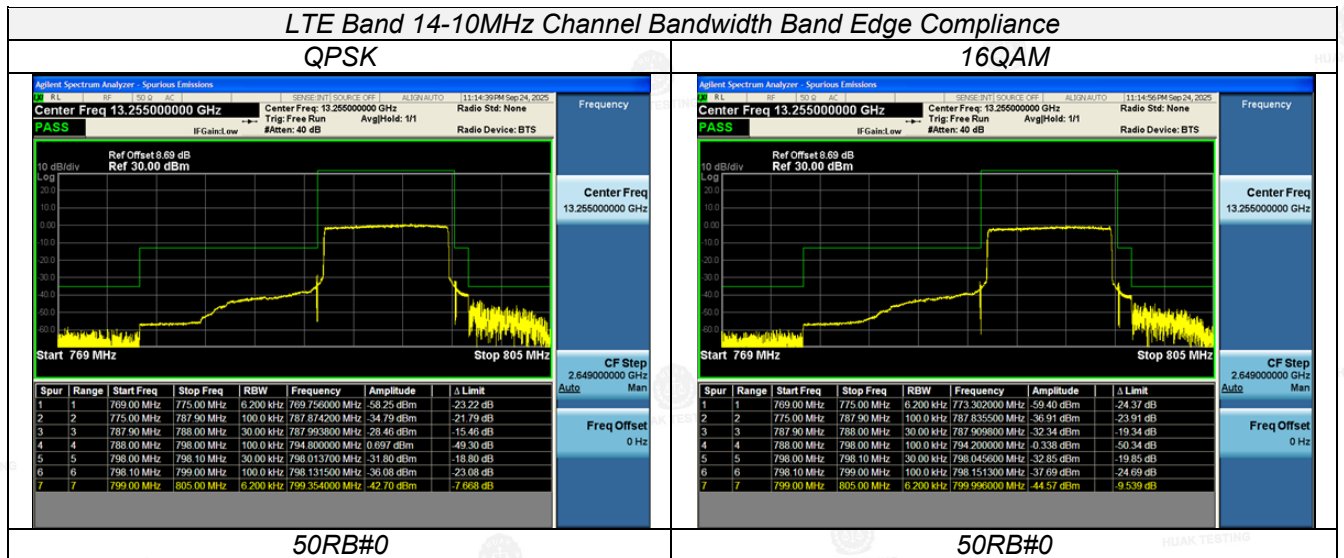

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 3.5 Spurious Emission

#### LIMIT

90.543 Emission limitations (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.


(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.


(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

#### TEST CONFIGURATION

Conducted Spurious Measurement:

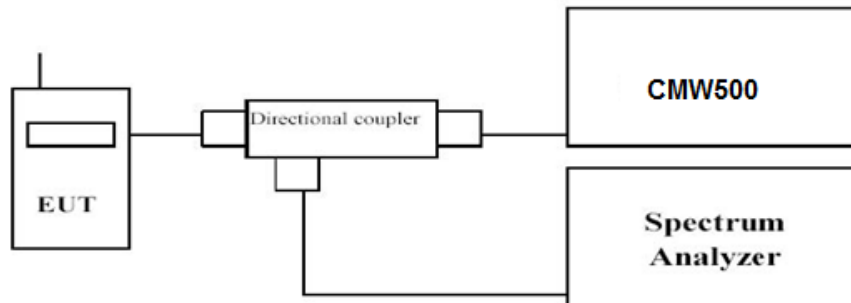

Radiated Spurious Measurement:

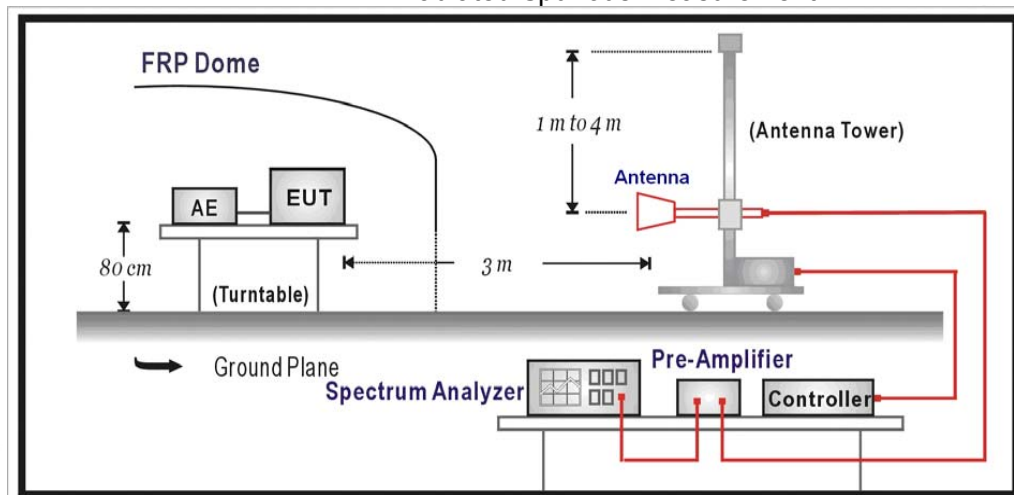

## **TEST PROCEDURE**

The EUT was setup according to ANSI/TIA-603-E.

### **Conducted Spurious Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10<sup>th</sup> harmonic.
- Please refer to following tables for test antenna conducted emissions.

| Working Frequency | Sub range (GHz)   | RBW   | VBW   | Sweep time (s) |
|-------------------|-------------------|-------|-------|----------------|
| LTE FDD Band 14   | 0.000009~0.000015 | 1KHz  | 3KHz  | Auto           |
|                   | 0.000015~0.03     | 10KHz | 30KHz | Auto           |
|                   | 0.03~26.5         | 1 MHz | 3 MHz | Auto           |

### **Radiated Spurious Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.


## **TEST RESULTS**

Remark:


- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 14; recorded worst case for each Channel Bandwidth of LTE Band 14.*

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

# Conducted Measurement:

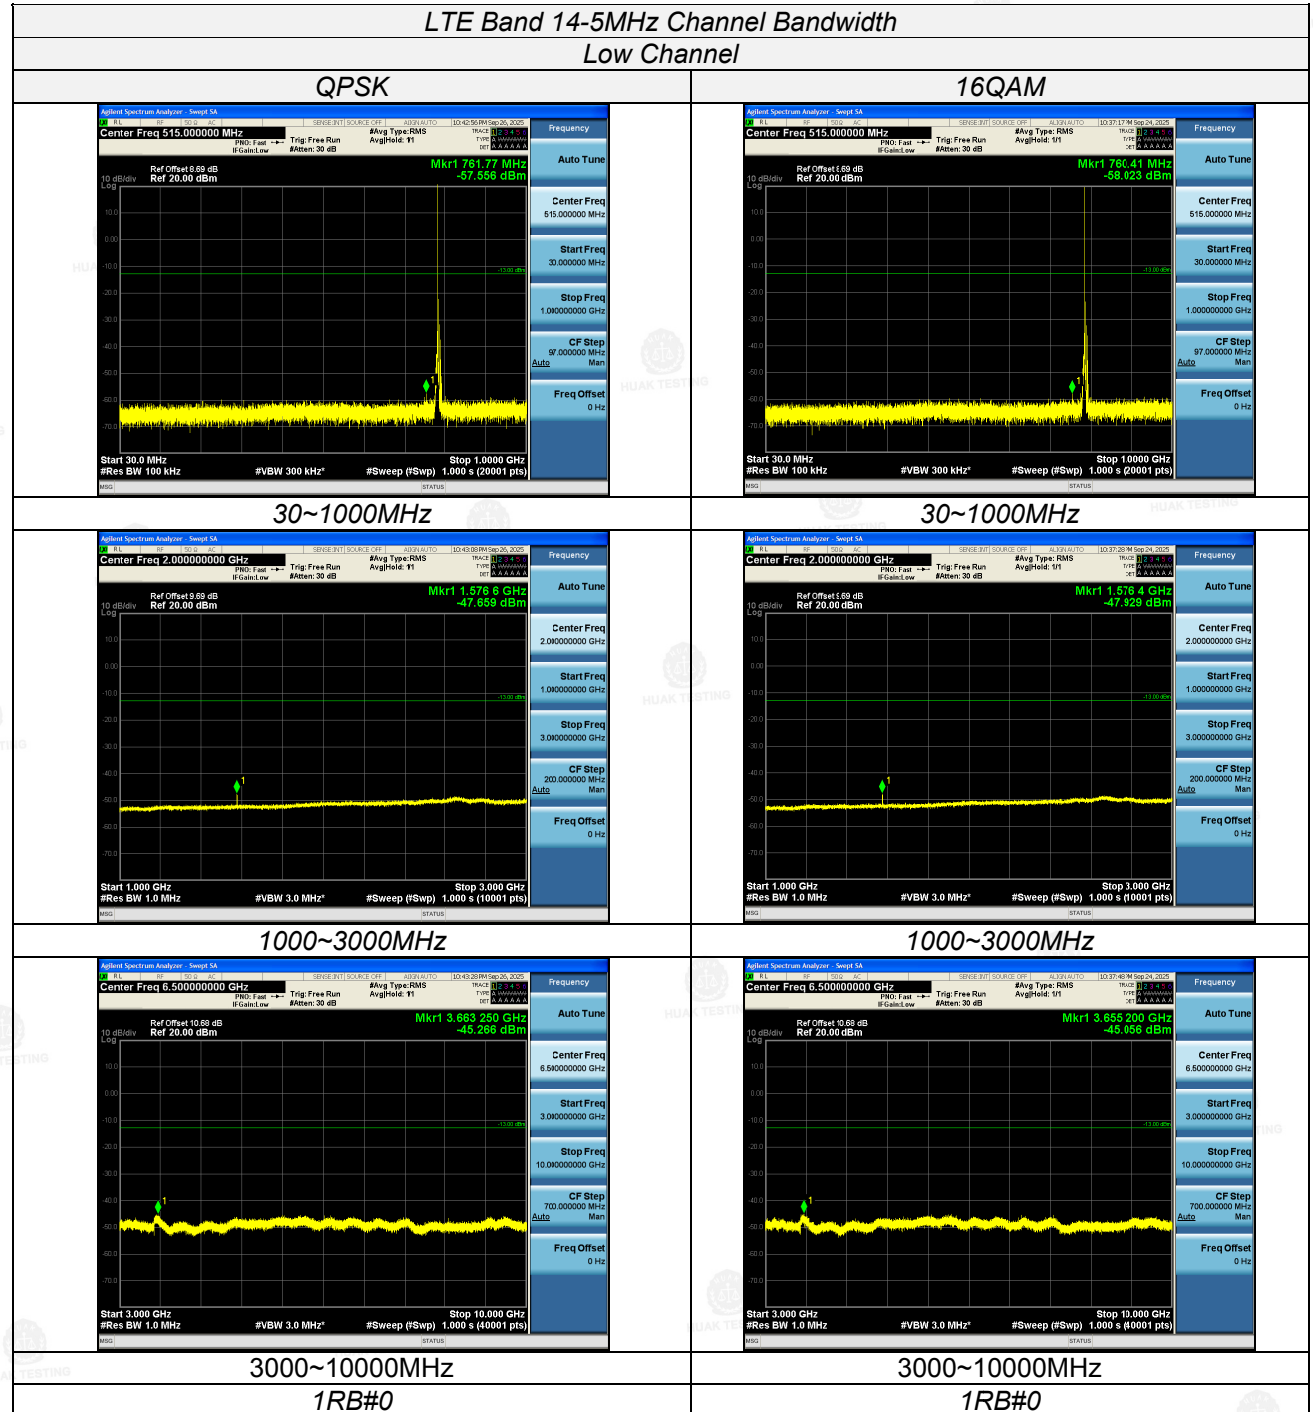


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

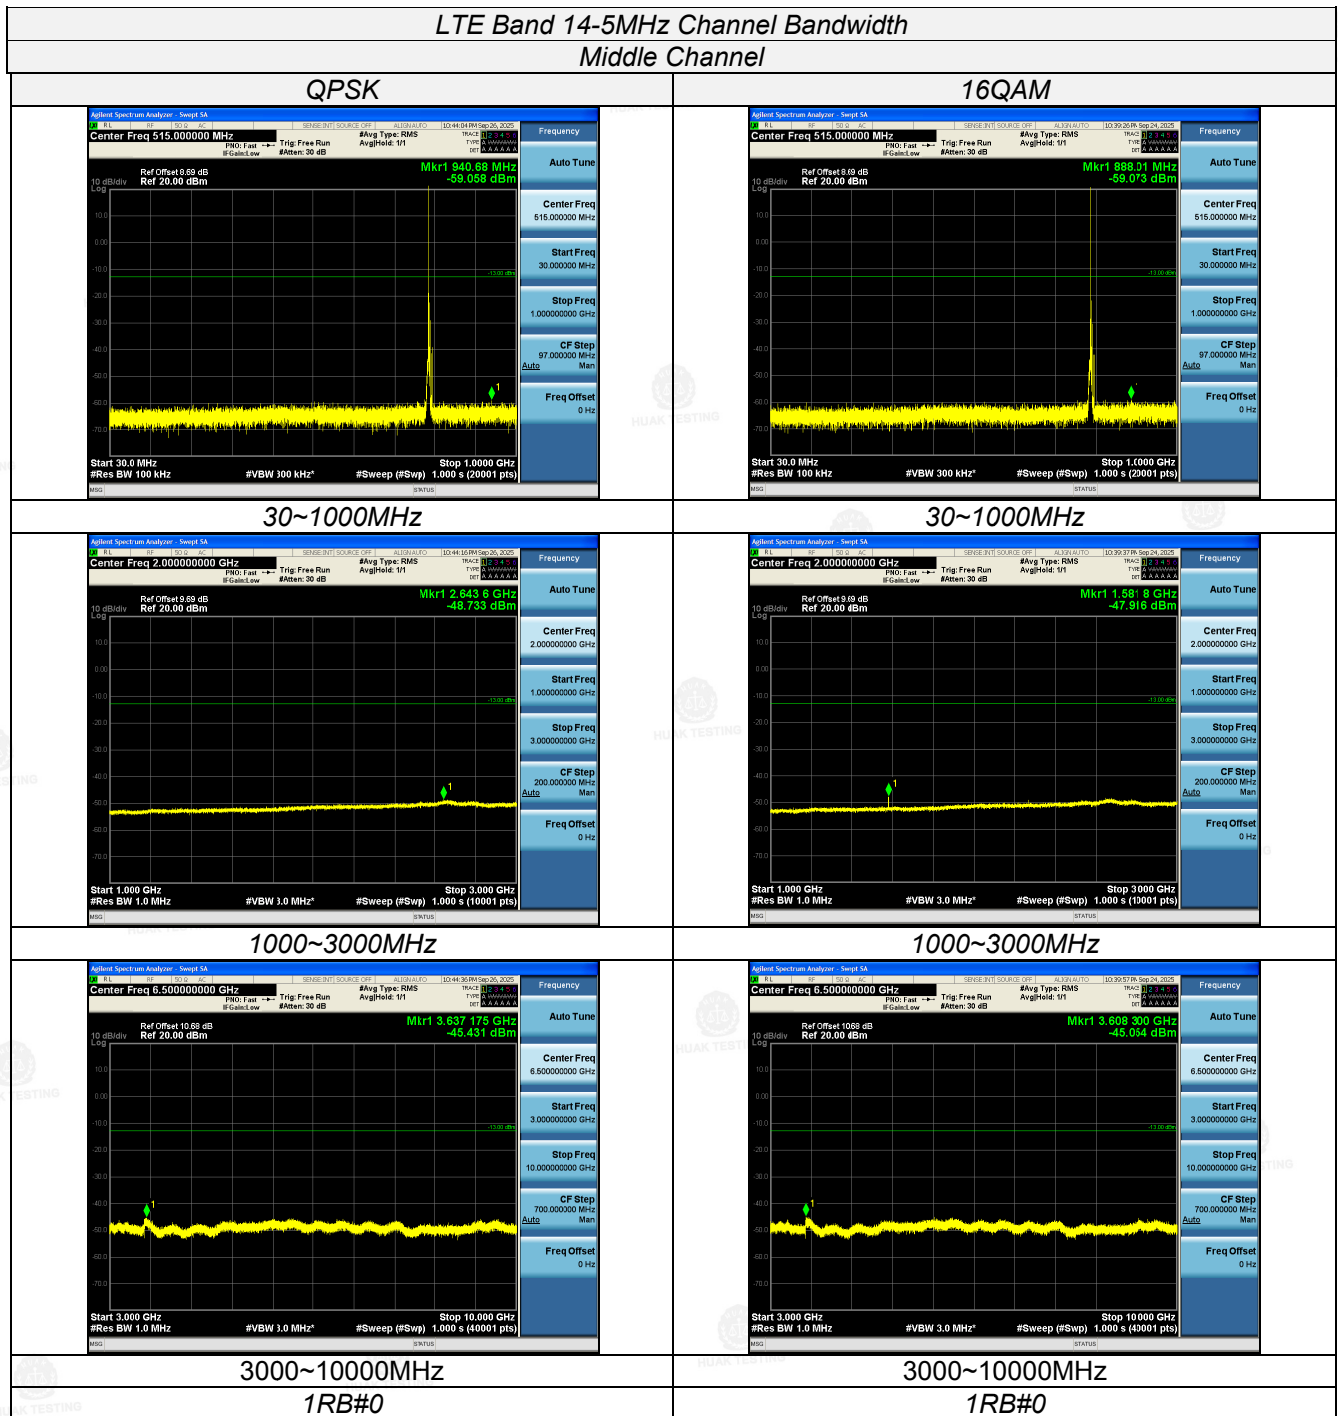


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

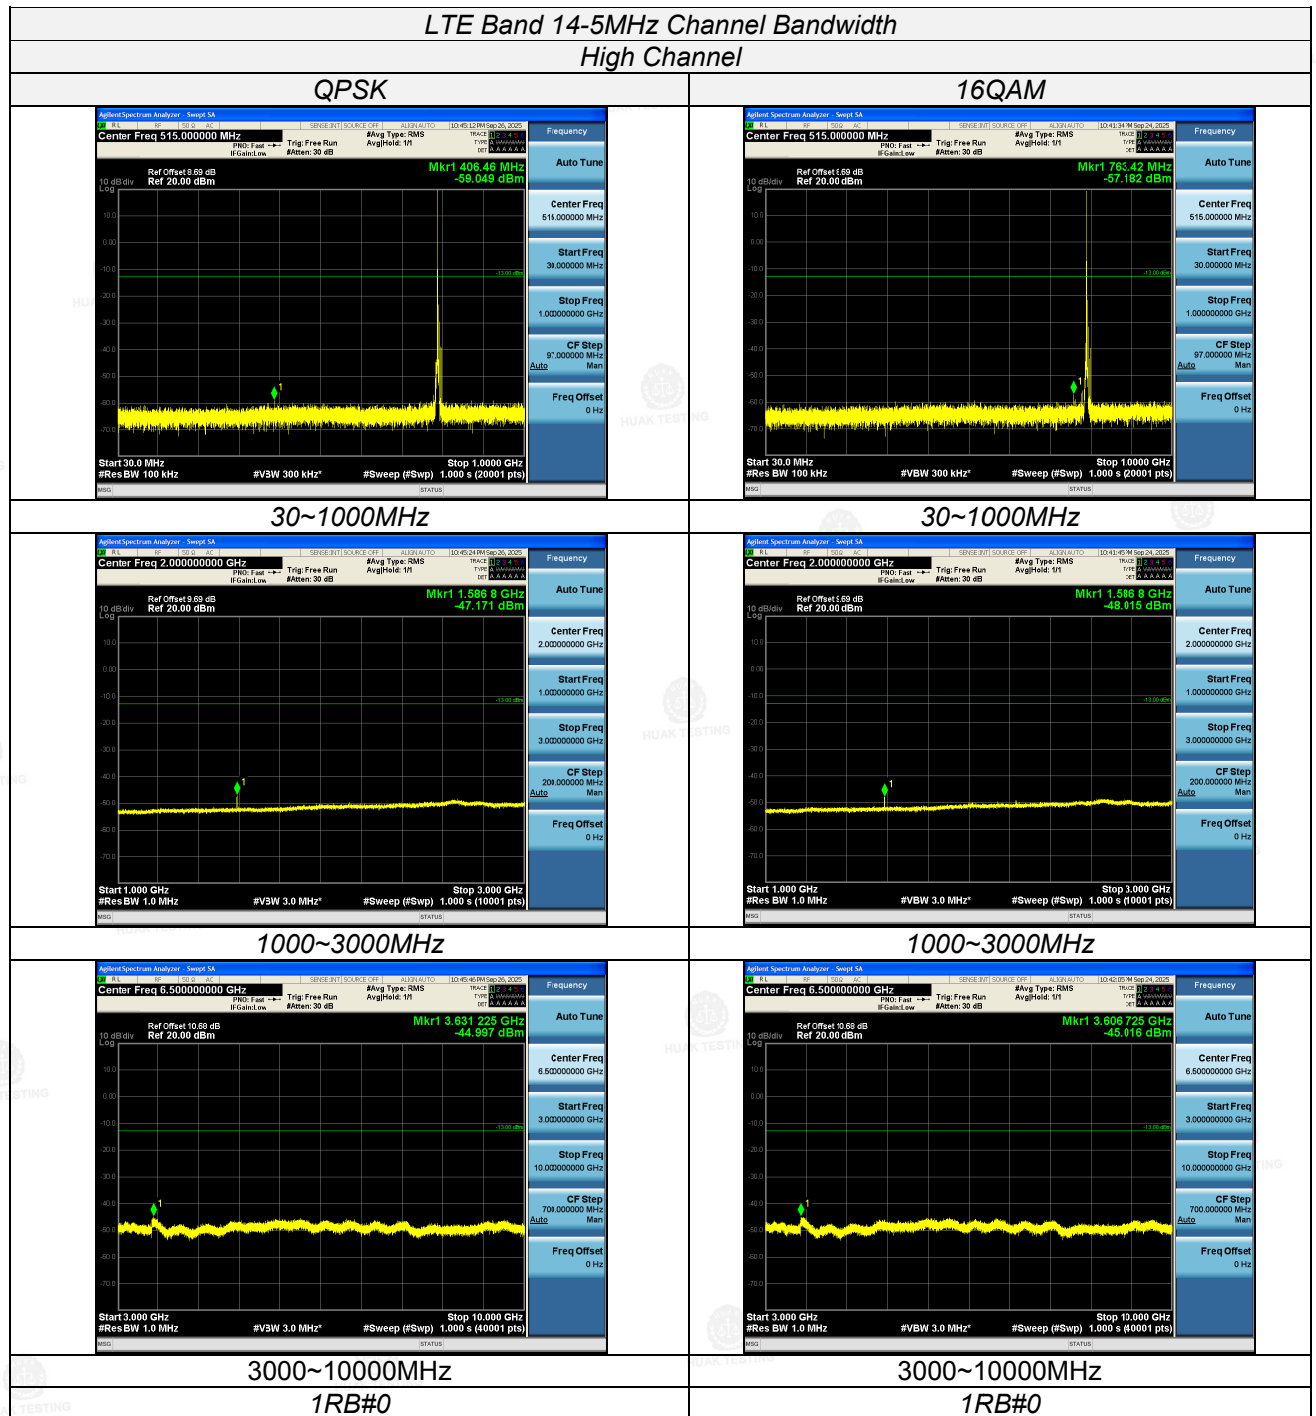

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

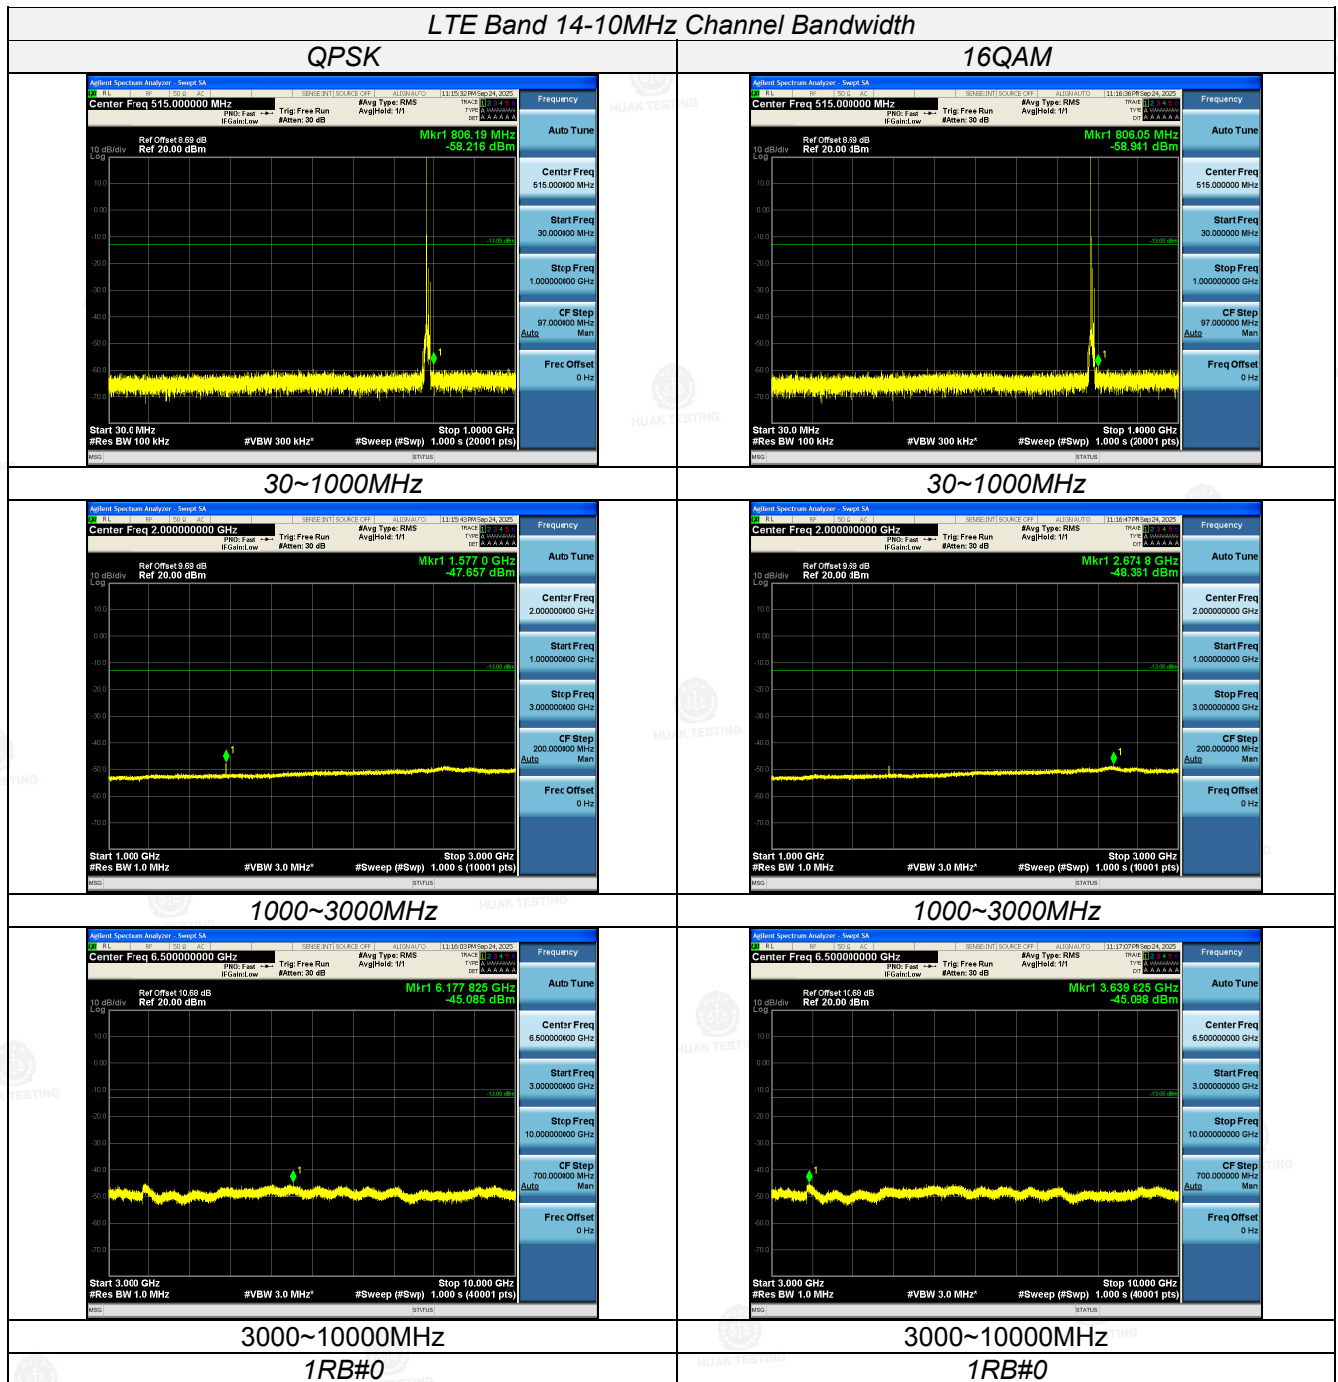

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAKE Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com  
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### Radiated Measurement:

#### Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 14; recorded worst case for each Channel Bandwidth of LTE FDD Band 14.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4.  $Margin = Limit - EIRP$ ,  $ERP = EIRP - 2.15dBi$

#### LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK\_Low Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1581            | -54.14     | 4.02     | 3        | 12.21               | -45.95    | -40.00      | 5.95        | H            |
| 2371.5          | -47.87     | 5.11     | 3        | 13.26               | -39.72    | -13.00      | 26.72       | H            |
| 1581            | -58.68     | 4.02     | 3        | 12.21               | -50.49    | -40.00      | 10.49       | V            |
| 2371.5          | -53.07     | 5.11     | 3        | 13.26               | -44.92    | -13.00      | 31.92       | V            |

#### LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1586            | -53.77     | 4.02     | 3        | 12.21               | -45.58    | -40.00      | 5.58        | H            |
| 2379            | -47.04     | 5.11     | 3        | 13.26               | -38.89    | -13.00      | 25.89       | H            |
| 1586            | -59.28     | 4.02     | 3        | 12.21               | -51.09    | -40.00      | 11.09       | V            |
| 2379            | -53.84     | 5.11     | 3        | 13.26               | -45.69    | -13.00      | 32.69       | V            |

#### LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK\_High Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1591            | -54.12     | 4.02     | 3        | 12.21               | -45.93    | -40.00      | 5.93        | H            |
| 2386.5          | -46.9      | 5.11     | 3        | 13.26               | -38.75    | -13.00      | 25.75       | H            |
| 1591            | -58.88     | 4.02     | 3        | 12.21               | -50.69    | -40.00      | 10.69       | V            |
| 2386.5          | -53.5      | 5.11     | 3        | 13.26               | -45.35    | -13.00      | 32.35       | V            |

#### LTE FDD Band 14\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1586            | -53.76     | 4.02     | 3        | 12.21               | -45.57    | -40.00      | 5.57        | H            |
| 2379            | -47.57     | 5.11     | 3        | 13.26               | -39.42    | -13.00      | 26.42       | H            |
| 1586            | -59.26     | 4.02     | 3        | 12.21               | -51.07    | -40.00      | 11.07       | V            |
| 2379            | -53.99     | 5.11     | 3        | 13.26               | -45.84    | -13.00      | 32.84       | V            |

#### LTE FDD Band 14\_Channel Bandwidth 5MHz\_16QAM\_Low Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1581            | -53.84     | 4.02     | 3        | 12.21               | -45.65    | -40.00      | 5.65        | H            |
| 2371.5          | -46.59     | 5.11     | 3        | 13.26               | -38.44    | -13.00      | 25.44       | H            |
| 1581            | -59.51     | 4.02     | 3        | 12.21               | -51.32    | -40.00      | 11.32       | V            |
| 2371.5          | -53.91     | 5.11     | 3        | 13.26               | -45.76    | -13.00      | 32.76       | V            |

LTE FDD Band 14\_Channel Bandwidth 5MHz\_16QAM\_Middle Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1586            | -53.85     | 4.02     | 3        | 12.21               | -45.66    | -40.00      | 5.66        | H            |
| 2379            | -46.71     | 5.11     | 3        | 13.26               | -38.56    | -13.00      | 25.56       | H            |
| 1586            | -58.69     | 4.02     | 3        | 12.21               | -50.5     | -40.00      | 10.50       | V            |
| 2379            | -53.54     | 5.11     | 3        | 13.26               | -45.39    | -13.00      | 32.39       | V            |

LTE FDD Band 14\_Channel Bandwidth 5MHz\_16QAM\_High Channel

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1591            | -53.48     | 4.02     | 3        | 12.21               | -45.29    | -40.00      | 5.29        | H            |
| 2386.5          | -47.2      | 5.11     | 3        | 13.26               | -39.05    | -13.00      | 26.05       | H            |
| 1591            | -58.84     | 4.02     | 3        | 12.21               | -50.65    | -40.00      | 10.65       | V            |
| 2386.5          | -54.19     | 5.11     | 3        | 13.26               | -46.04    | -13.00      | 33.04       | V            |

LTE FDD Band 14\_Channel Bandwidth 10MHz\_16QAM\_Middle Channel


| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Diatance | Ga Antenna Gain(dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|---------------------|-----------|-------------|-------------|--------------|
| 1586            | -54.23     | 4.02     | 3        | 12.21               | -46.04    | -40.00      | 6.04        | H            |
| 2379            | -46.94     | 5.11     | 3        | 13.26               | -38.79    | -13.00      | 25.79       | H            |
| 1586            | -59.05     | 4.02     | 3        | 12.21               | -50.86    | -40.00      | 10.86       | V            |
| 2379            | -53.5      | 5.11     | 3        | 13.26               | -45.35    | -13.00      | 32.35       | V            |

### 3.6 Frequency Stability under Temperature & Voltage Variations

#### LIMIT

90.539 (c) The frequency stability of mobile, portable, and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).

#### TEST CONFIGURATION

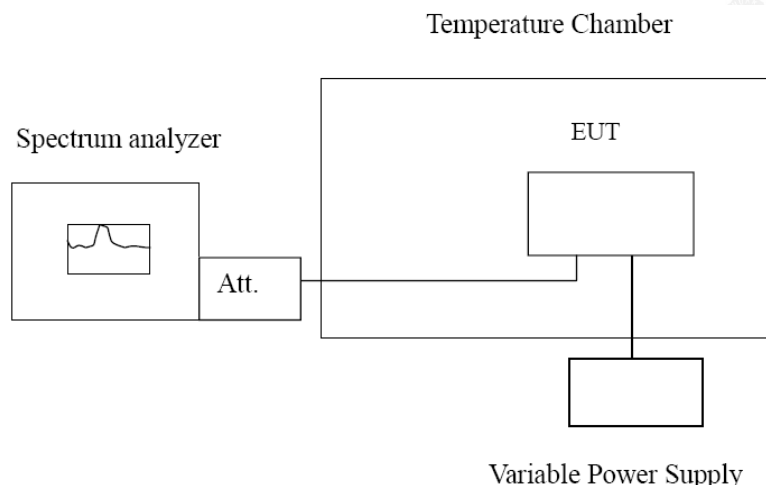

#### TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E.

##### **Frequency Stability Under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 14, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1V increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

## TEST RESULTS

*Remark:*

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 14; recorded worst case.

LTE Band 14, 10MHz bandwidth (worst case of all bandwidths)

### Frequency Error vs Voltage



| Voltage<br>(V) | Frequency error (Hz) |       | Frequency error (ppm) |           |
|----------------|----------------------|-------|-----------------------|-----------|
|                | QPSK                 | 16QAM | QPSK                  | 16QAM     |
| 10.2           | -3.58                | -3.48 | -0.004529             | -0.004402 |
| 12.0           | -4.62                | -4.45 | -0.005844             | -0.005629 |
| 13.8           | -4.94                | -4.16 | -0.006249             | -0.005262 |

### Frequency Error vs Temperature


| Temperature<br>(°C) | Frequency error (Hz) |       | Frequency error (ppm) |           |
|---------------------|----------------------|-------|-----------------------|-----------|
|                     | QPSK                 | 16QAM | QPSK                  | 16QAM     |
| -30°                | -3.36                | -3.58 | -0.004237             | -0.004515 |
| -20°                | 1.40                 | -3.43 | 0.001765              | -0.004325 |
| -10°                | -2.93                | -3.05 | -0.003695             | -0.003846 |
| 0°                  | -4.36                | -3.26 | -0.005498             | -0.004111 |
| 10°                 | -4.09                | -2.93 | -0.005158             | -0.003695 |
| 20°                 | -3.30                | -2.09 | -0.004161             | -0.002636 |
| 30°                 | -2.86                | -3.91 | -0.003607             | -0.004931 |
| 40°                 | -3.66                | -2.59 | -0.004615             | -0.003266 |
| 50°                 | 2.33                 | -2.75 | 0.002938              | -0.003468 |

## 4 Test Setup Photos of the EUT

### Radiated Emissions

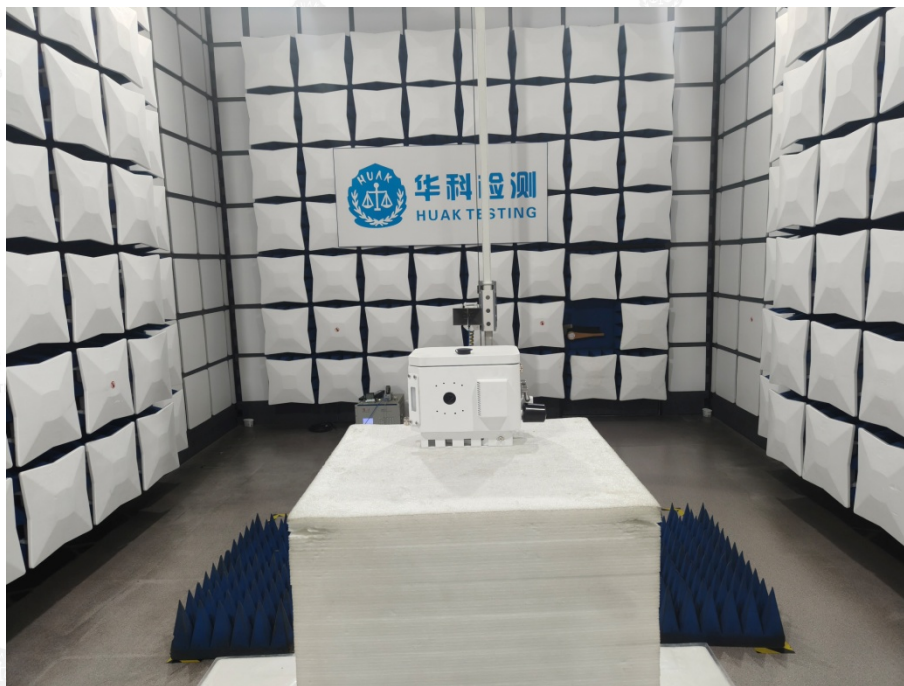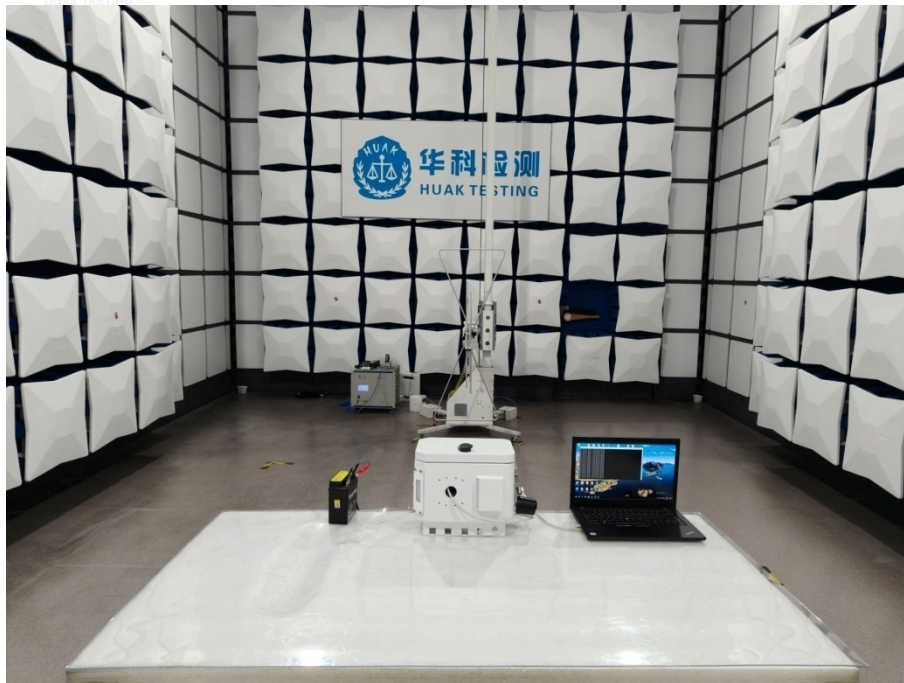

### RF Conducted Emission

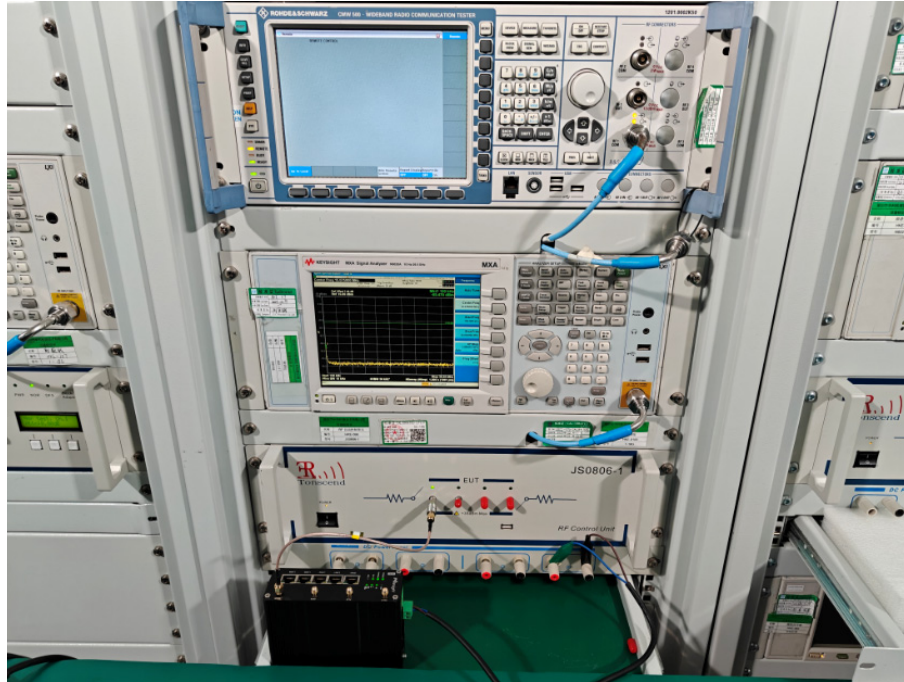

## **5 Photos of the EUT**

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

**\*\*\*\*\* End of Report \*\*\*\*\***

