

TEST REPORT

FCC Part 27

Report Reference No.: HK2509225394-9E

FCC ID.: 2BSMX-GUARDBOXAIR

Compiled by
(position+printed name+signature)... Testing Engineer Len Liao

Supervised by
(position+printed name+signature)... Technical Manager Sliver Wan

Approved by
(position+printed name+signature)... Authorized Signatory Jason Zhou

Date of issue: Sept. 29, 2025

Testing Laboratory Name: Shenzhen HUAKE Testing Technology Co., Ltd.

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name: DH Vision Inc

Address: 1743 Dorsey Road Suite 110 Hanover, Maryland, 21076, United States

Test specification :

Standard : FCC Part 27

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : GuardBox

Trade Mark : N/A

Manufacturer: SENKUN GLOBAL CO., LTD.

Model/Type reference: GuardBox Air

Listed Models : N/A

Ratings: DC12-48V from DC Power

Modulation : QPSK, 16QAM

Hardware version : V1.4

Software version : V1.0

Frequency: LTE Band 71: 663MHz - 698 MHz

Result: **PASS**

Len Liao

Sliver Wan

Jason Zhou



TEST REPORT

Test Report No.:	HK2509225394-9E	Sept. 29, 2025
		Date of issue

Equipment under Test : GuardBox

Model /Type : GuardBox Air

Series Models : N/A

Applicant : **DH Vision Inc**

Address : 1743 Dorsey Road Suite 110 Hanover, Maryland, 21076, United States

Manufacturer : **SENKUN GLOBAL CO., LTD.**

Address : Rm. 7, 10F., No. 500, Shizheng Rd., Xitun Dist., Taichung City 407621, Taiwan (R.O.C.)

Test Result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	<u>Summary</u>	5
1.1	Test Standards	5
1.2	Test Description	5
1.3	Information of the Test Laboratory	6
1.4	Statement of the measurement uncertainty	6
2	<u>General Information</u>	7
2.1	Environmental conditions	7
2.2	Description of Test Modes	7
2.3	Test Frequency List	7
2.4	Equipments Used during the Test	8
2.5	Modifications	8
3	<u>Test Conditions And Results</u>	9
3.1	Output Power	9
3.2	Peak-to-Average Ratio (PAR)	14
3.3	Occupied Bandwidth and Emission Bandwidth	19
3.4	Band Edge compliance	24
3.5	Spurious Emission	29
3.6	Frequency Stability under Temperature & Voltage Variations	48
4	<u>Test Setup Photos of the EUT</u>	50
5	<u>Photos of the EUT</u>	52

**** Modified History ****

Revision	Description	Issued Date	Remark
Revision 1.0	Initial Test Report Release	Sept. 29, 2025	Jason Zhou

1 Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 27](#): Miscellaneous Wireless Communications Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): Frequency Allocation and Radio Treaty Matters; General Rules and Regulations.

[KDB971168 D01 v03r01](#): Measurement Guidance For Certification of Licensed Digital Transmitters.

1.2 Test Description

Test Item	FCC Rule No.	Result
RF Output Power	Part 2.1046 Part 27.50(c)(10)	Pass
Peak-to-Average Ratio	Part 2.1046	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(g)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(g)	Pass
Out of Band Emission, Band Edge	Part 2.1051 Part 27.53(g)	Pass
Frequency Stability	Part 2.1055 Part 27.54	Pass
Note: 1. Pass: Test item meets the requirement. 2. Fail: Test item does not meet the requirement. 3. N/A: Test case does not apply to the test object. 4. The test result judgment is decided by the limit of test standard.		

1.3 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

1.4 Statement of the measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	
Radiated Emission	Above 1GHz	4.32dB	
Conducted Disturbance	0.15~30MHz	3.20dB	

2 General Information

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

2.3 Test Frequency List

TX Channel Bandwidth	Frequency(MHz)	Channel
5 MHz	665.5	133147
	680.5	133297
	695.5	133447
10 MHz	668	133172
	680.5	133297
	693	133422
15 MHz	670.5	133197
	680.5	133297
	690.5	133397
20 MHz	673	133222
	680.5	133297
	688	133372



2.4 Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2025/02/19	2026/02/18
2	L.I.S.N.	R&S	ENV216	HKE-059	2025/02/19	2026/02/18
3	EMI Test Receiver	R&S	ESR	HKE-005	2025/02/19	2026/02/18
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2025/02/19	2026/02/18
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2025/02/19	2026/02/18
6	Preamplifier	EMCI	EMC051845S	HKE-006	2025/02/19	2026/02/18
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2025/02/19	2026/02/18
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2025/02/19	2026/02/18
9	6dB Attenuator	Pasternack	6db	HKE-184	2025/02/19	2026/02/18
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2025/02/19	2026/02/18
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2025/02/19	2026/02/18
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2025/02/19	2026/02/18
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2025/02/19	2026/02/18
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2025/02/19	2026/02/18
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2025/06/09	2026/06/08
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2025/06/09	2026/06/08
22	RF Test Software	Tonscend	JS1120 Version 3.5.39	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

2.5 Modifications

No modifications were implemented to meet testing criteria.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3 Test Conditions And Results


3.1 Output Power

LIMIT


Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are FCC limited to 3 watts ERP."IC limited to 5 watts ERP."

TEST CONFIGURATION

Conducted Power Measurement

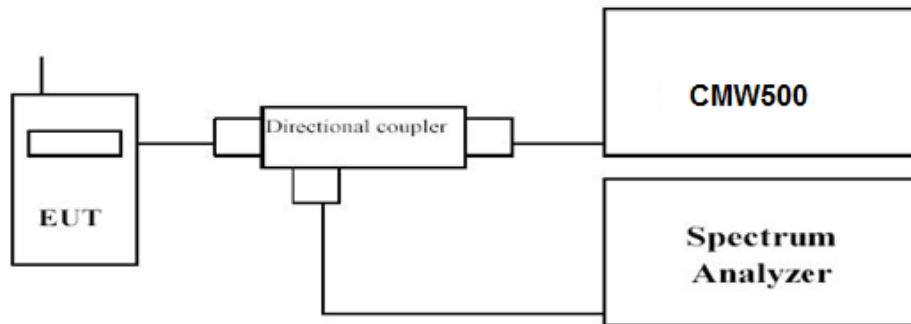

Radiated Power Measurement

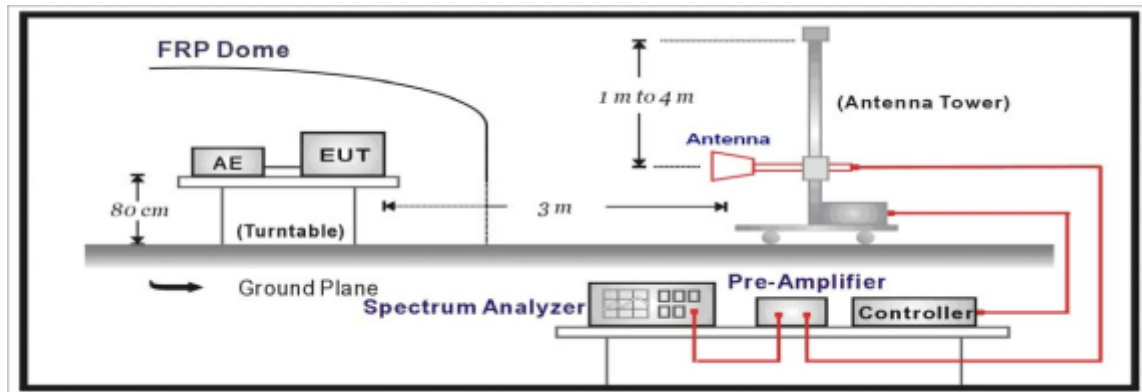

TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E.

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

LTE FDD Band 71				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
5 MHz	1 RB low	665.5	23.75	23.03
		680.5	23.98	23.07
		695.5	23.59	22.82
	1 RB high	665.5	22.74	21.90
		680.5	22.84	21.84
		695.5	22.80	21.78
	50% RB mid	665.5	22.81	21.75
		680.5	23.52	22.96
		695.5	23.61	22.88
	100% RB	665.5	23.46	22.60
		680.5	22.57	21.58
		695.5	22.61	21.73
10 MHz	1 RB low	668	23.80	22.68
		680.5	23.87	22.82
		693	23.67	22.62
	1 RB high	668	22.75	21.83
		680.5	22.84	21.78
		693	22.63	21.61
	50% RB mid	668	22.74	21.80
		680.5	23.59	22.49
		693	23.61	22.53
	100% RB	668	23.58	22.64
		680.5	22.65	21.60
		693	22.60	21.65
15 MHz	1 RB low	670.5	23.85	22.72
		680.5	23.54	22.46
		690.5	23.72	22.75
	1 RB high	670.5	22.81	22.80
		680.5	22.62	21.65
		690.5	22.72	22.81
	50% RB mid	670.5	22.66	21.74
		680.5	23.59	22.42
		690.5	23.49	22.47
	100% RB	670.5	23.62	22.37
		680.5	23.57	22.73
		690.5	22.60	21.57
20 MHz	1 RB low	673	23.76	22.94
		680.5	23.68	22.75
		688	23.62	22.69
	1 RB high	673	22.76	21.76
		680.5	22.71	21.68
		688	22.79	21.70
	50% RB mid	673	22.65	21.70
		680.5	23.51	22.63
		688	23.65	22.72
	100% RB	673	23.62	22.64
		680.5	22.58	21.59
		688	22.62	21.57

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.

LTE FDD Band 71_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
665.5	-16.20	2.38	8.23	2.15	36.70	24.20	34.77	V
680.5	-15.93	2.40	8.29	2.15	36.70	24.51	34.77	V
695.5	-16.66	2.43	8.28	2.15	36.70	23.74	34.77	V
665.5	-16.04	2.38	8.23	2.15	36.70	24.36	34.77	H
680.5	-16.78	2.40	8.29	2.15	36.70	23.66	34.77	H
695.5	-16.31	2.43	8.28	2.15	36.70	24.09	34.77	H

LTE FDD Band 71_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
668	-16.57	2.38	8.23	2.15	36.70	23.83	34.77	V
680.5	-15.73	2.40	8.29	2.15	36.70	24.71	34.77	V
693	-16.67	2.43	8.28	2.15	36.70	23.73	34.77	V
668	-16.23	2.38	8.23	2.15	36.70	24.17	34.77	H
680.5	-16.75	2.40	8.29	2.15	36.70	23.69	34.77	H
693	-17.08	2.43	8.28	2.15	36.70	23.32	34.77	H

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
670.5	-16.29	2.38	8.23	2.15	36.70	24.11	34.77	V
680.5	-15.92	2.40	8.29	2.15	36.70	24.52	34.77	V
690.5	-16.99	2.43	8.28	2.15	36.70	23.41	34.77	V
670.5	-16.29	2.38	8.23	2.15	36.70	24.11	34.77	H
680.5	-16.15	2.40	8.29	2.15	36.70	24.29	34.77	H
690.5	-16.69	2.43	8.28	2.15	36.70	23.71	34.77	H

LTE FDD Band 71_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
673	-16.47	2.38	8.23	2.15	36.70	23.93	34.77	V
680.5	-15.84	2.40	8.29	2.15	36.70	24.60	34.77	V
688	-16.38	2.43	8.28	2.15	36.70	24.02	34.77	V
673	-15.63	2.38	8.23	2.15	36.70	24.77	34.77	H
680.5	-16.82	2.40	8.29	2.15	36.70	23.62	34.77	H
688	-16.58	2.43	8.28	2.15	36.70	23.82	34.77	H

*LTE FDD Band 71_Channel Bandwidth 5MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
665.5	-16.17	2.38	8.23	2.15	36.70	24.23	34.77	V
680.5	-16.76	2.40	8.29	2.15	36.70	23.68	34.77	V
695.5	-16.65	2.43	8.28	2.15	36.70	23.75	34.77	V
665.5	-16.53	2.38	8.23	2.15	36.70	23.87	34.77	H
680.5	-16.55	2.40	8.29	2.15	36.70	23.89	34.77	H
695.5	-17.53	2.43	8.28	2.15	36.70	22.87	34.77	H

LTE FDD Band 71_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
668	-16.73	2.38	8.23	2.15	36.70	23.67	34.77	V
680.5	-15.77	2.40	8.29	2.15	36.70	24.67	34.77	V
693	-16.42	2.43	8.28	2.15	36.70	23.98	34.77	V
668	-16.30	2.38	8.23	2.15	36.70	24.10	34.77	H
680.5	-16.00	2.40	8.29	2.15	36.70	24.44	34.77	H
693	-16.25	2.43	8.28	2.15	36.70	24.15	34.77	H

LTE FDD Band 71_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
670.5	-15.86	2.38	8.23	2.15	36.70	24.54	34.77	V
680.5	-16.39	2.40	8.29	2.15	36.70	24.05	34.77	V
690.5	-16.87	2.43	8.28	2.15	36.70	23.53	34.77	V
670.5	-16.18	2.38	8.23	2.15	36.70	24.22	34.77	H
680.5	-16.59	2.40	8.29	2.15	36.70	23.85	34.77	H
690.5	-16.92	2.43	8.28	2.15	36.70	23.48	34.77	H

LTE FDD Band 71_Channel Bandwidth 20MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Polarization
673	-15.79	2.38	8.23	2.15	36.70	24.61	34.77	V
680.5	-15.61	2.40	8.29	2.15	36.70	24.83	34.77	V
688	-17.09	2.43	8.28	2.15	36.70	23.31	34.77	V
673	-16.53	2.38	8.23	2.15	36.70	23.87	34.77	H
680.5	-15.90	2.40	8.29	2.15	36.70	24.54	34.77	H
688	-16.77	2.43	8.28	2.15	36.70	23.63	34.77	H

3.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

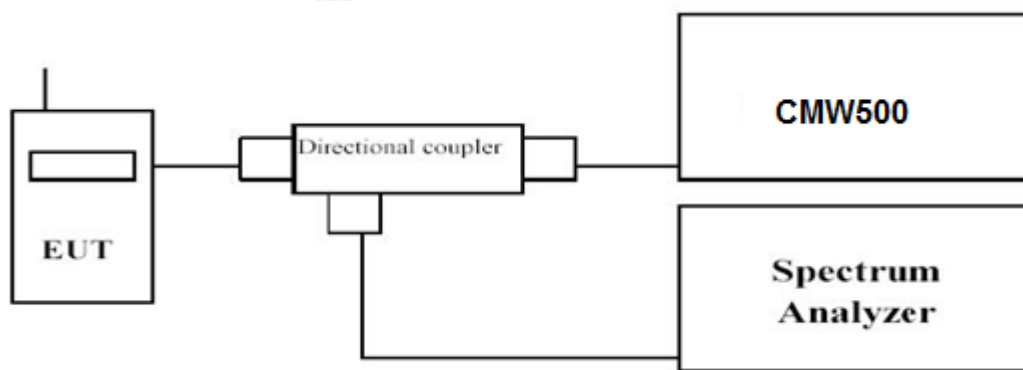

TEST PROCEDURE


1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.


TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.

LTE FDD Band 71				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5MHz	665.5	1RB#0	3.87	4.74
	680.5		4.21	5.18
	695.5		8.42	5.20
10MHz	668	1RB#0	3.81	4.71
	680.5		4.07	5.05
	693		8.15	5.09
15MHz	670.5	1RB#0	3.83	9.82
	680.5		3.84	4.80
	690.5		5.13	5.22
20MHz	673	1RB#0	3.88	4.82
	680.5		3.85	4.76
	688		4.25	5.16

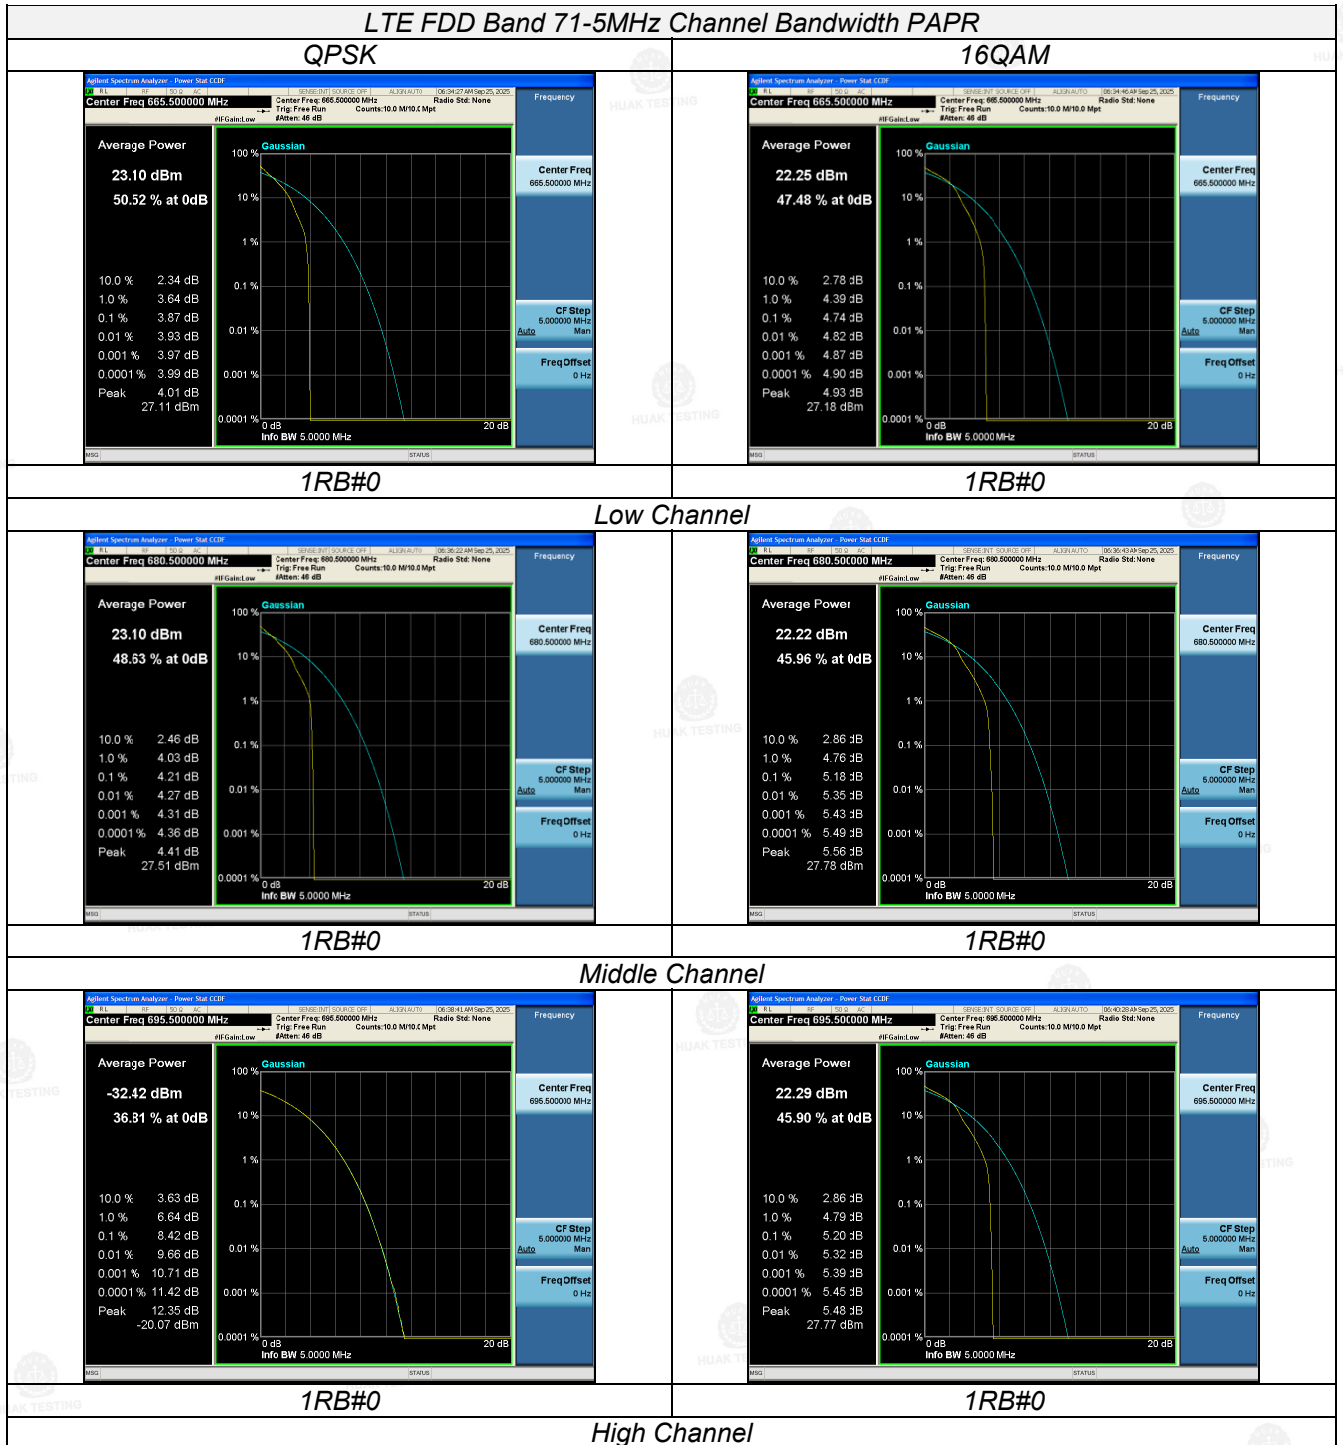

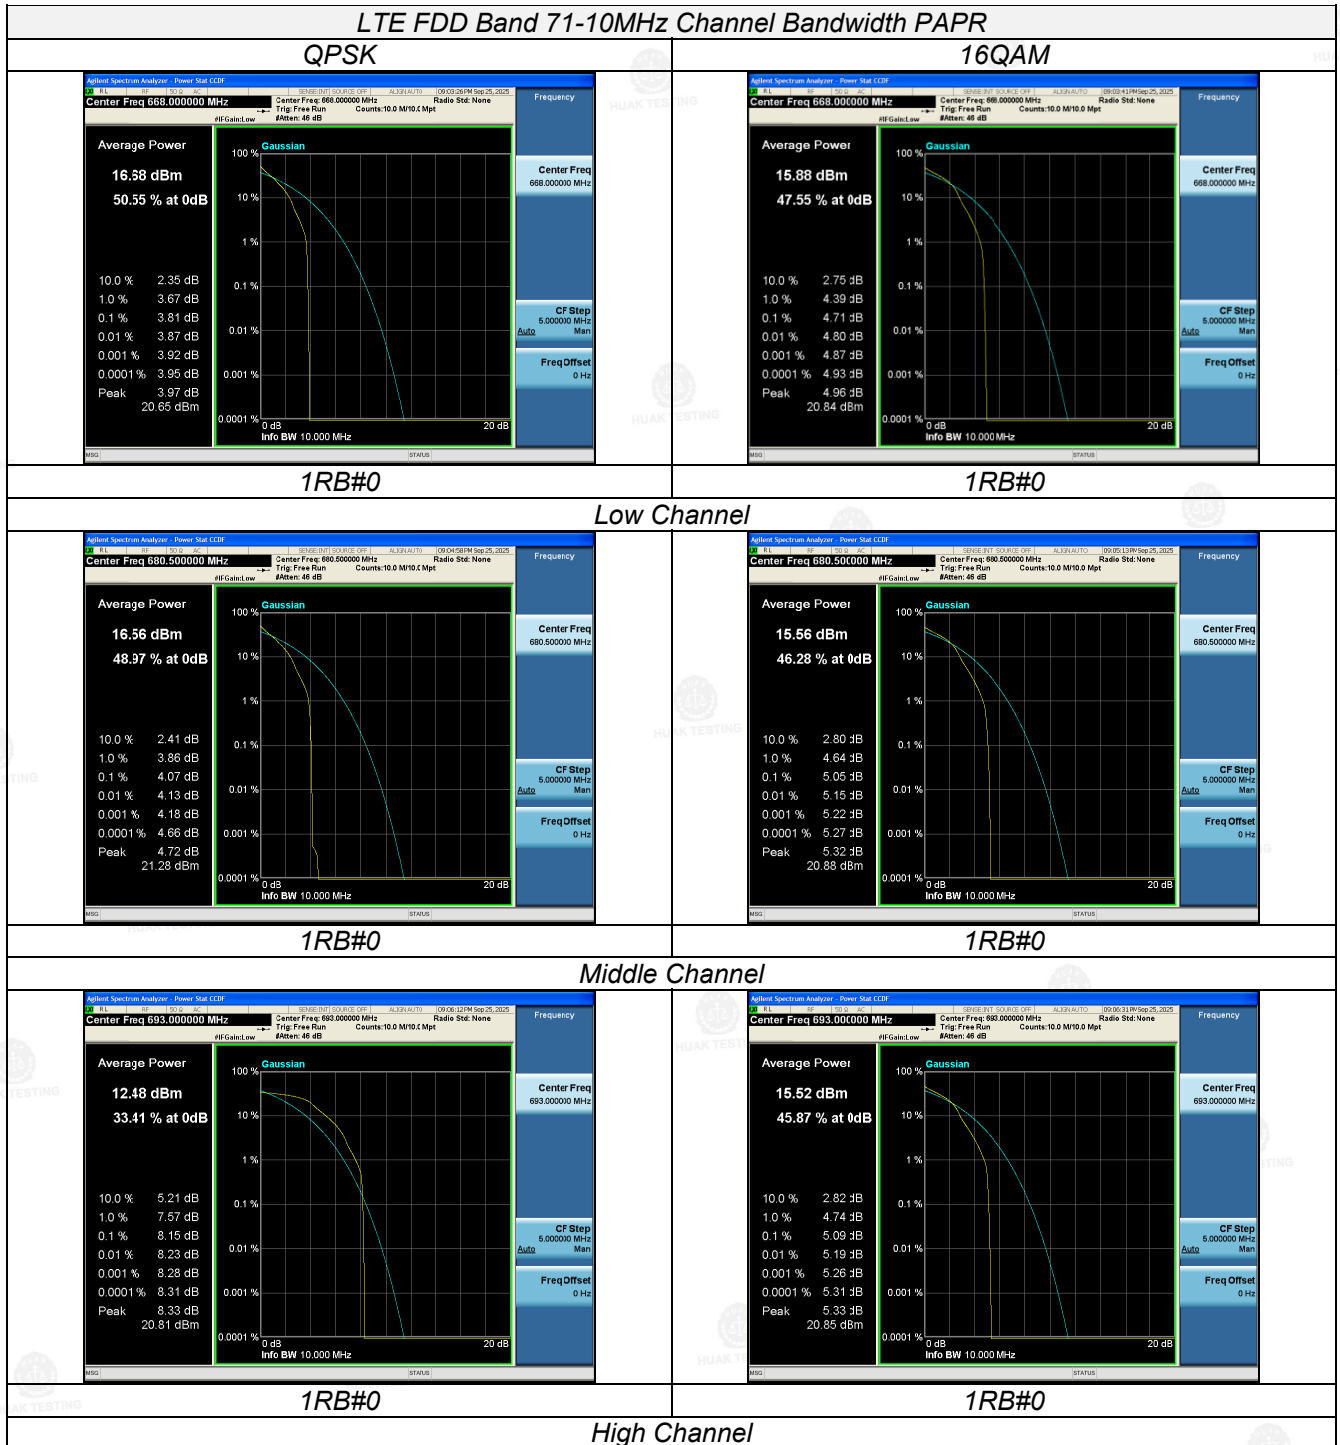


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

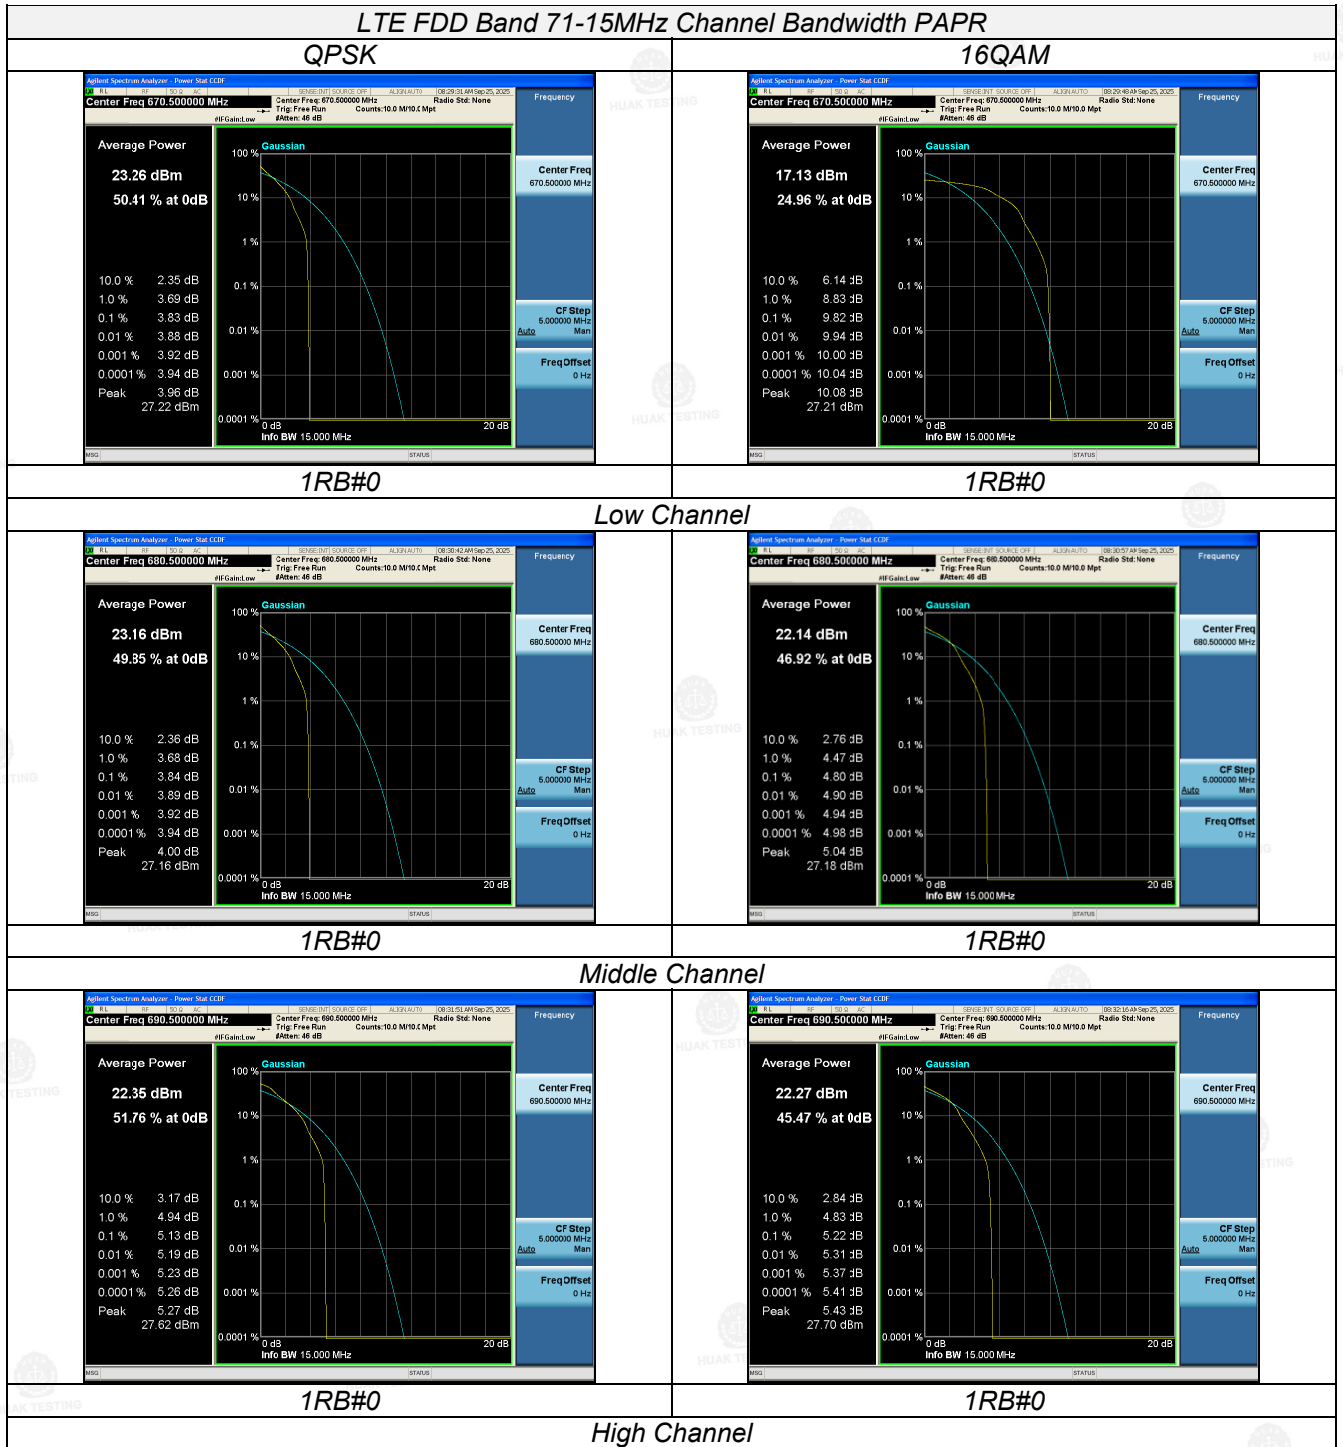

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

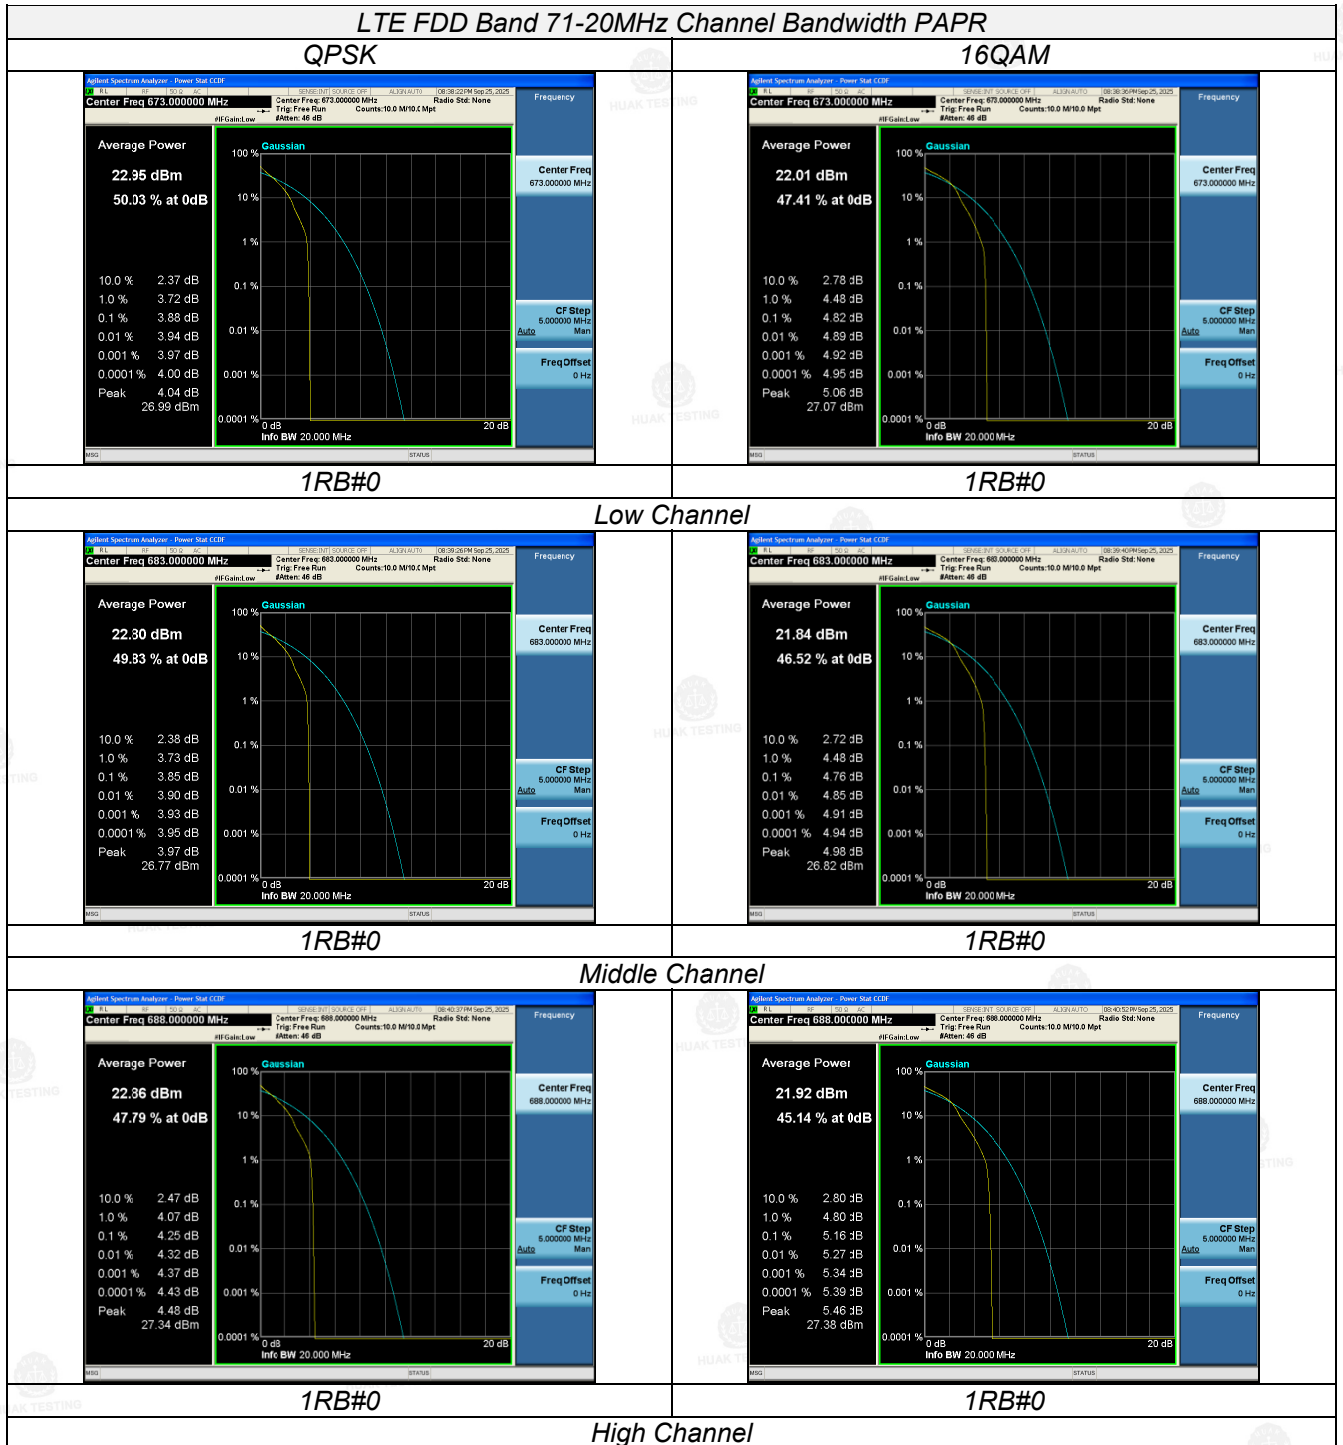

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




3.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

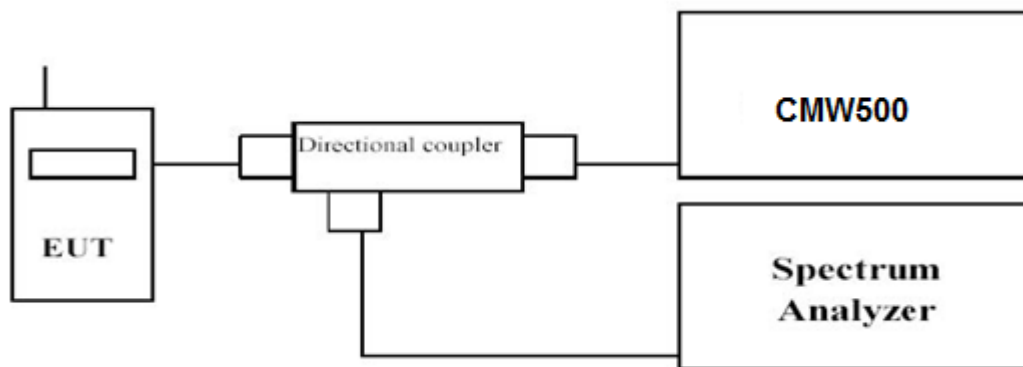

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.


-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.

LTE FDD Band 71						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5MHz	25RB#0	665.5	5.015	5.012	4.5166	4.5035
		680.5	5.029	5.007	4.5073	4.5021
		695.5	4.997	4.999	4.5061	4.5022
10MHz	50RB#0	668	9.832	9.880	8.9494	8.9497
		680.5	9.931	9.842	8.9747	8.9830
		693	9.882	9.922	8.9760	8.9787
15MHz	75RB#0	670.5	14.71	14.61	13.401	13.414
		680.5	14.72	14.81	13.447	13.467
		690.5	14.70	14.69	13.471	13.416
20MHz	100RB#0	673	19.40	19.46	17.814	17.830
		680.5	19.42	19.44	17.915	17.841
		688	19.40	19.36	17.908	17.837

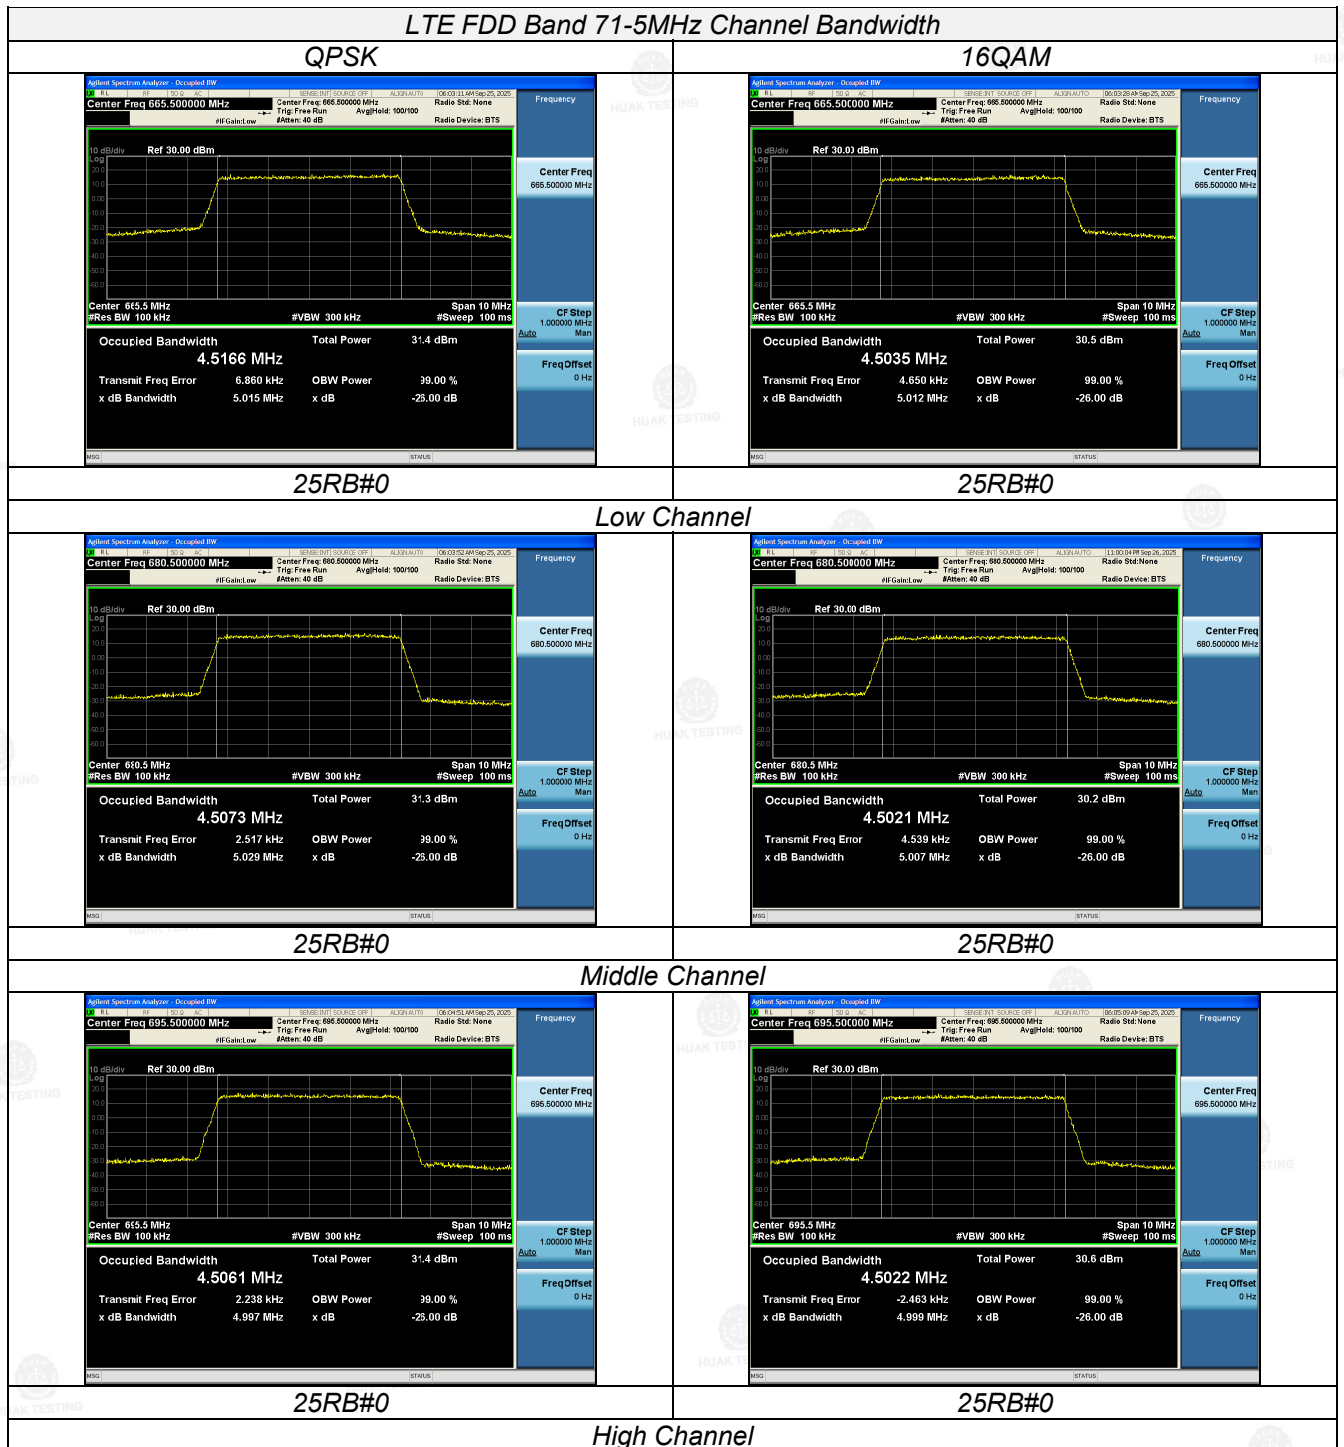


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

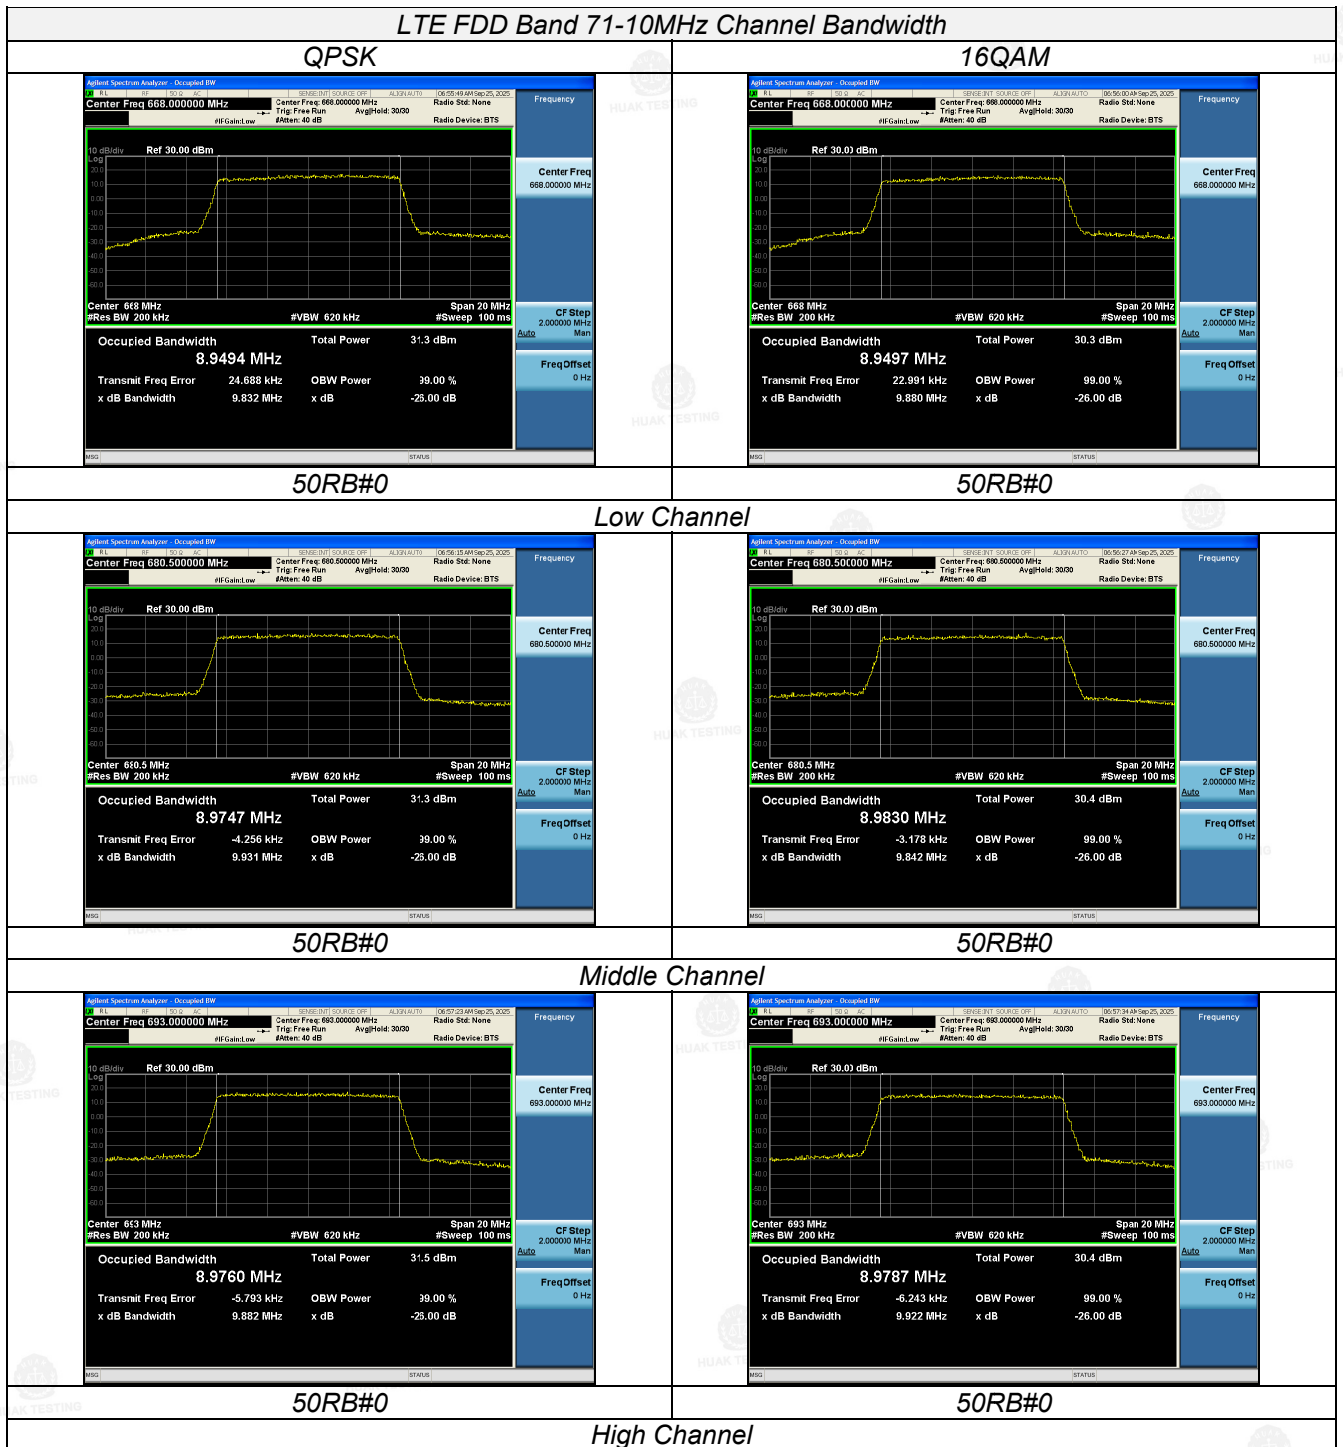

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

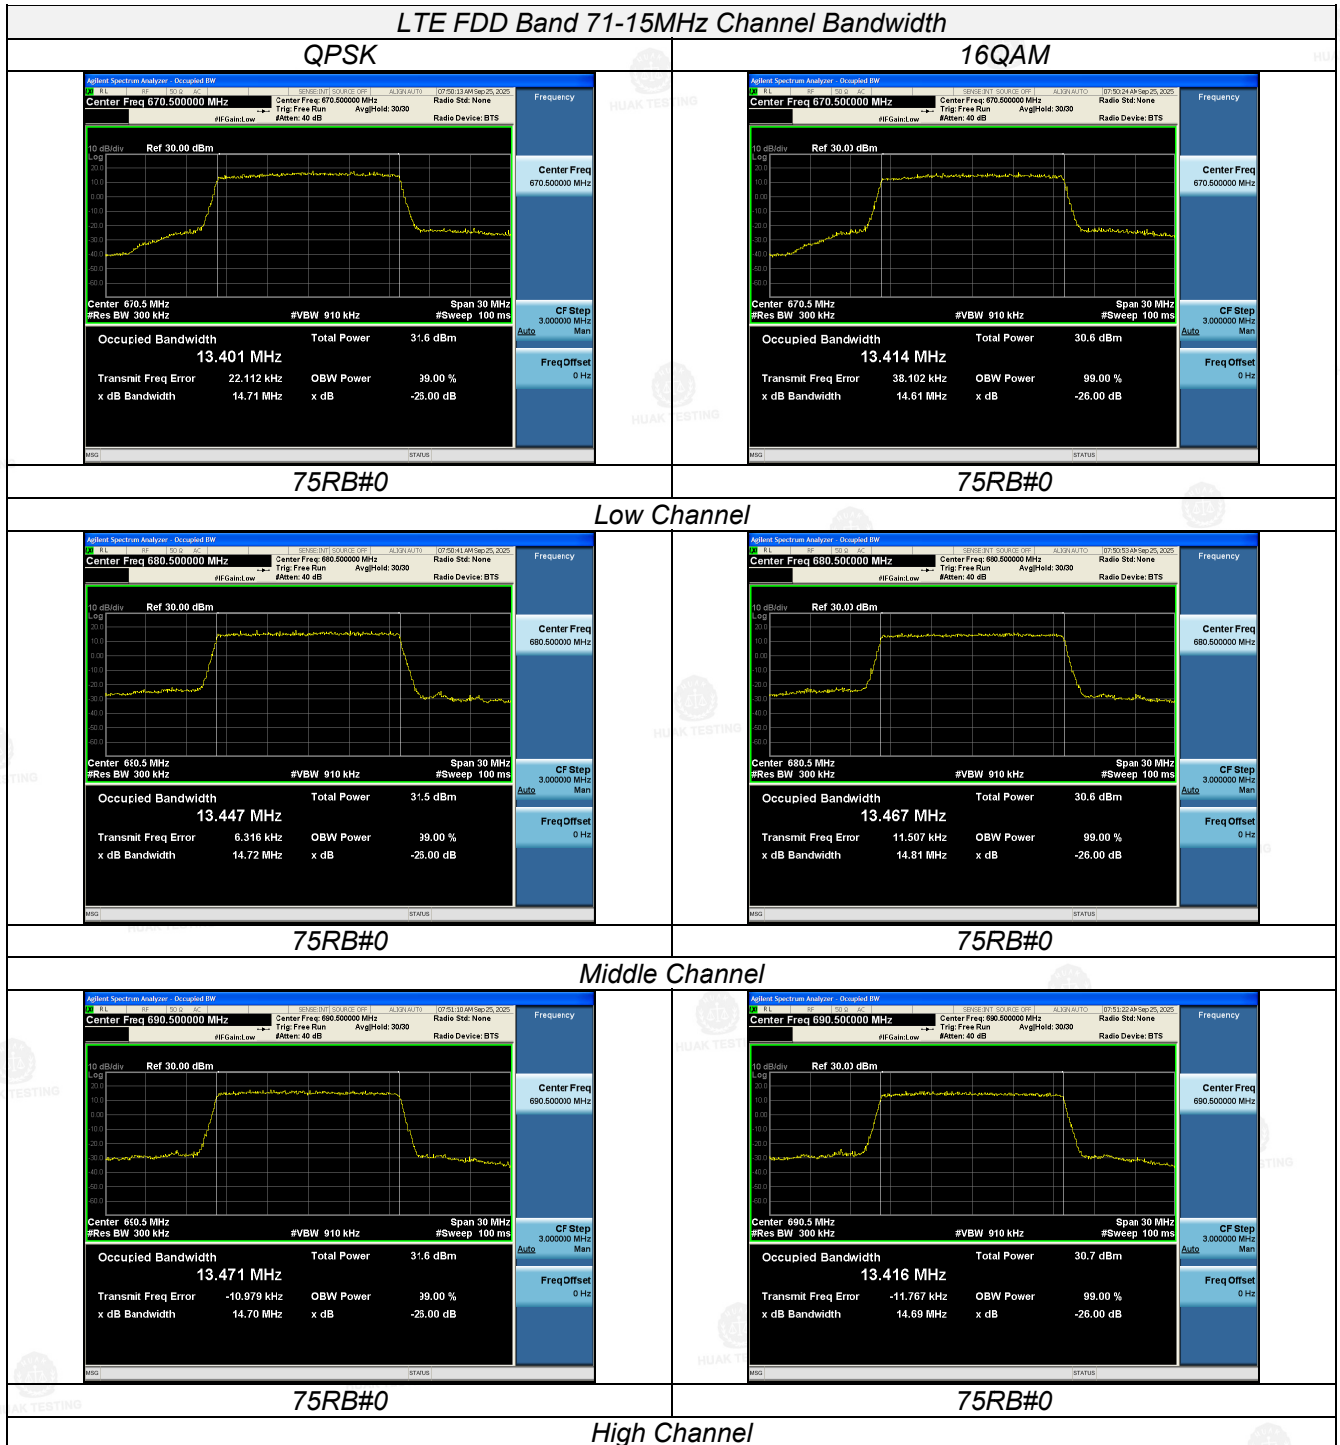

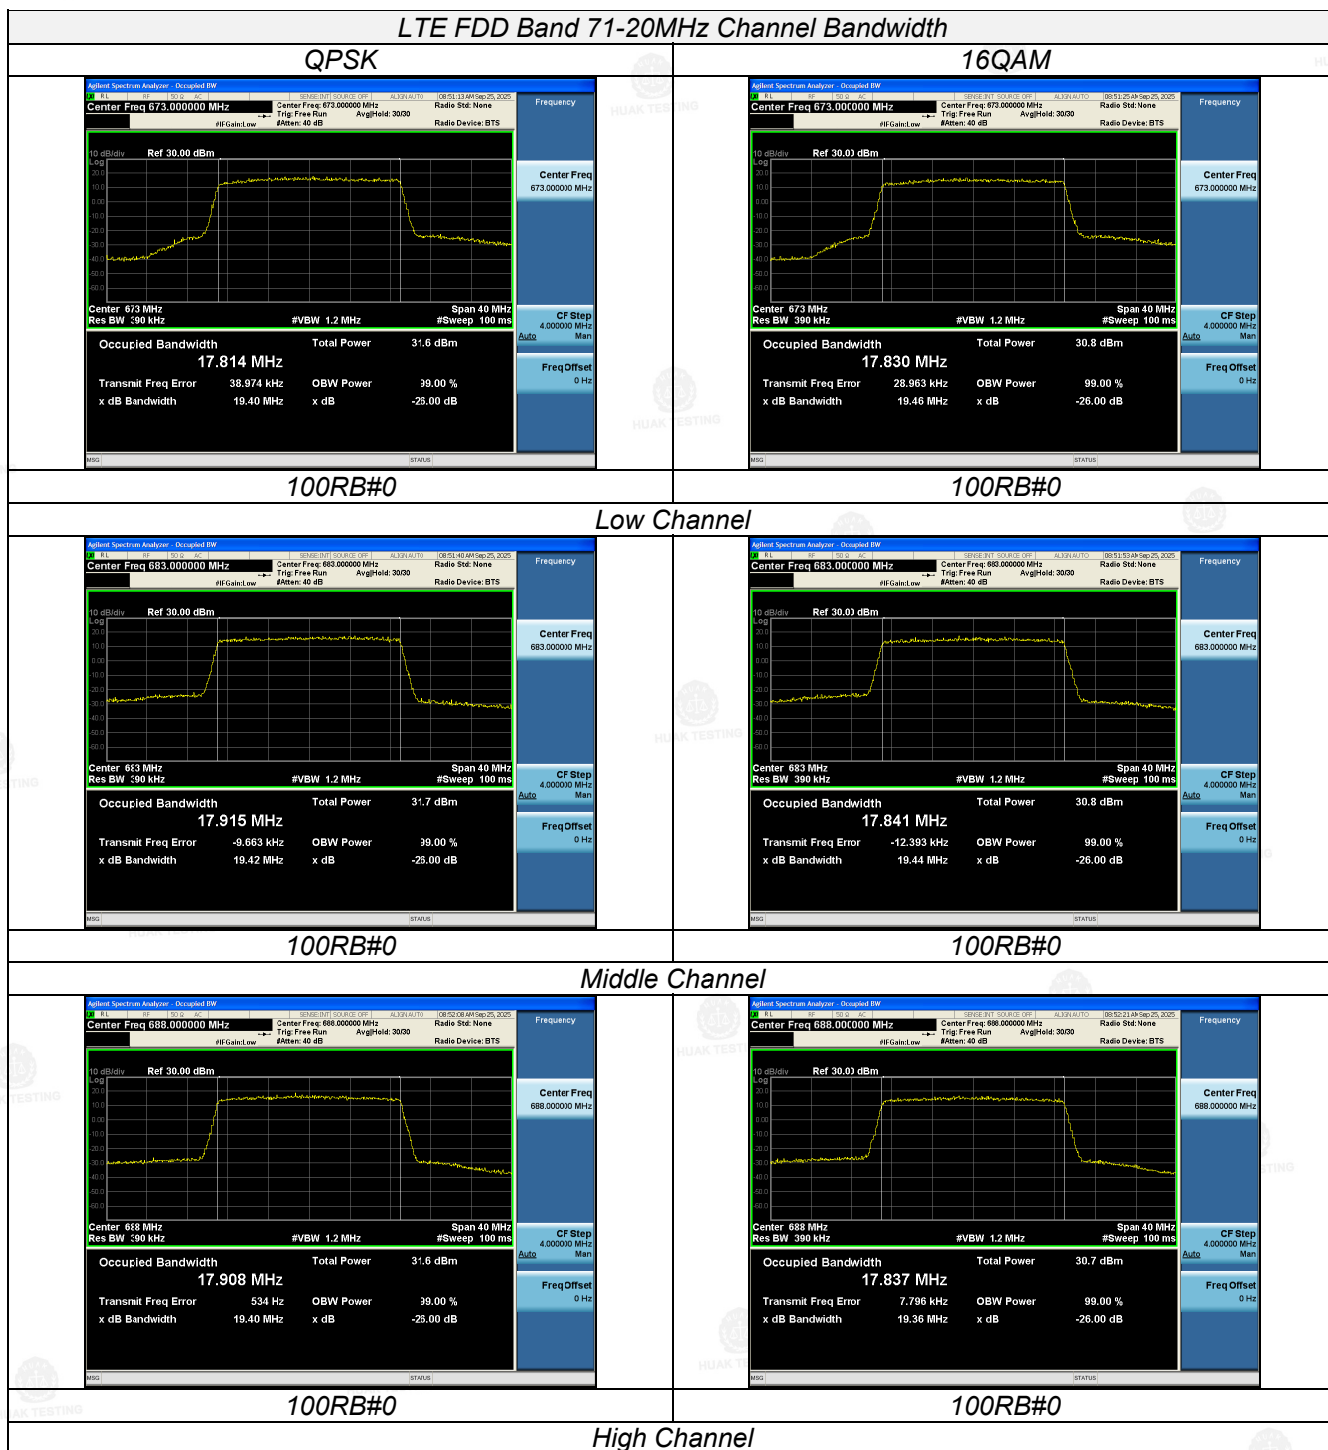


3.4 Band Edge compliance

LIMIT

that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

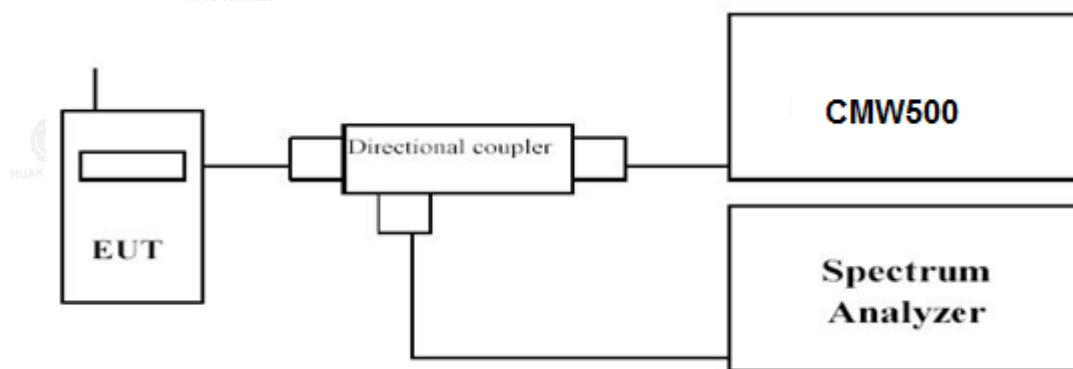


TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.

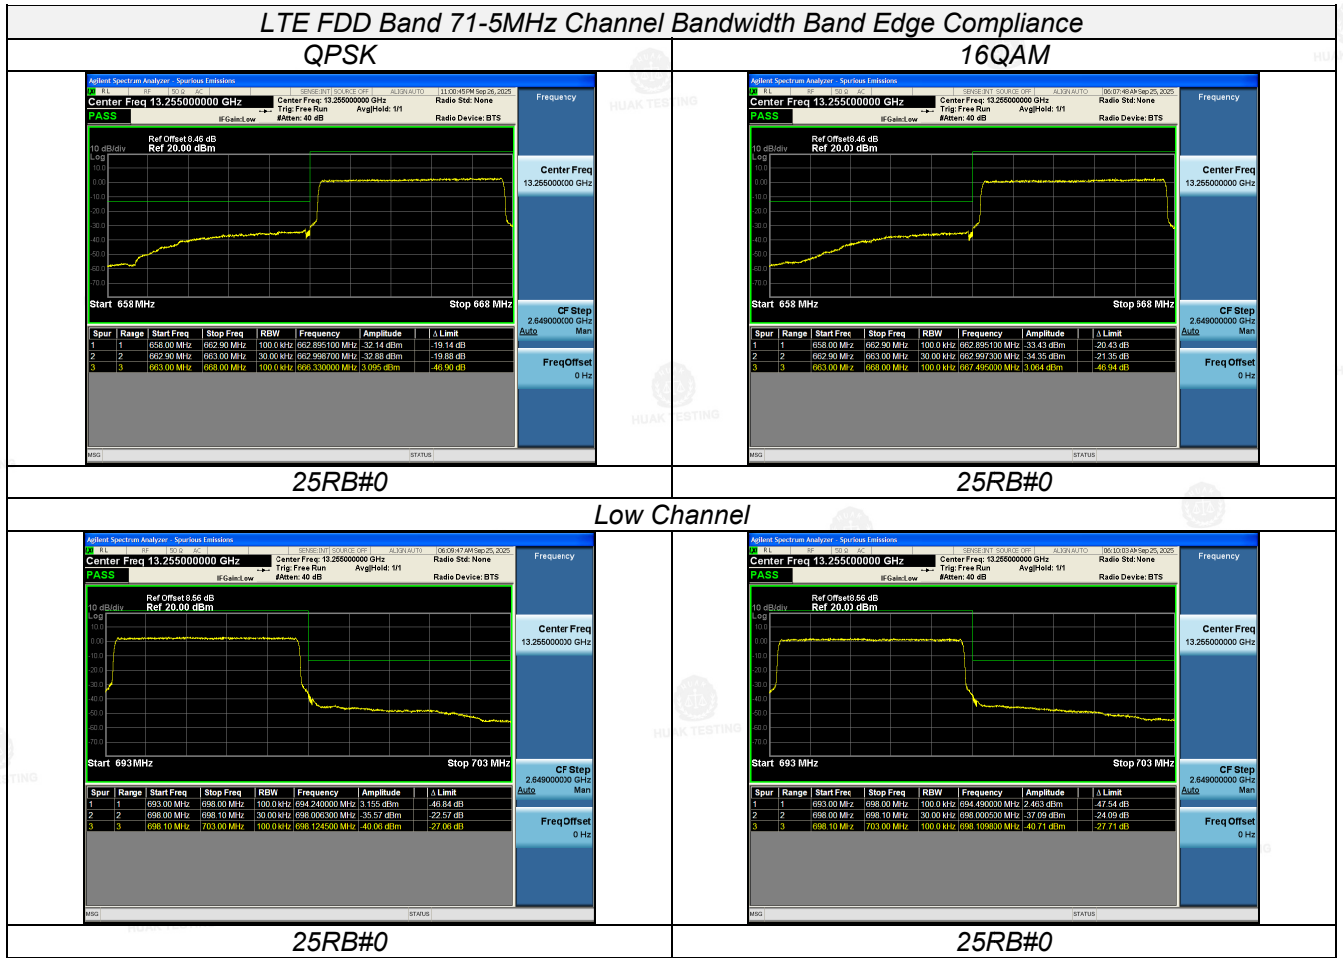


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

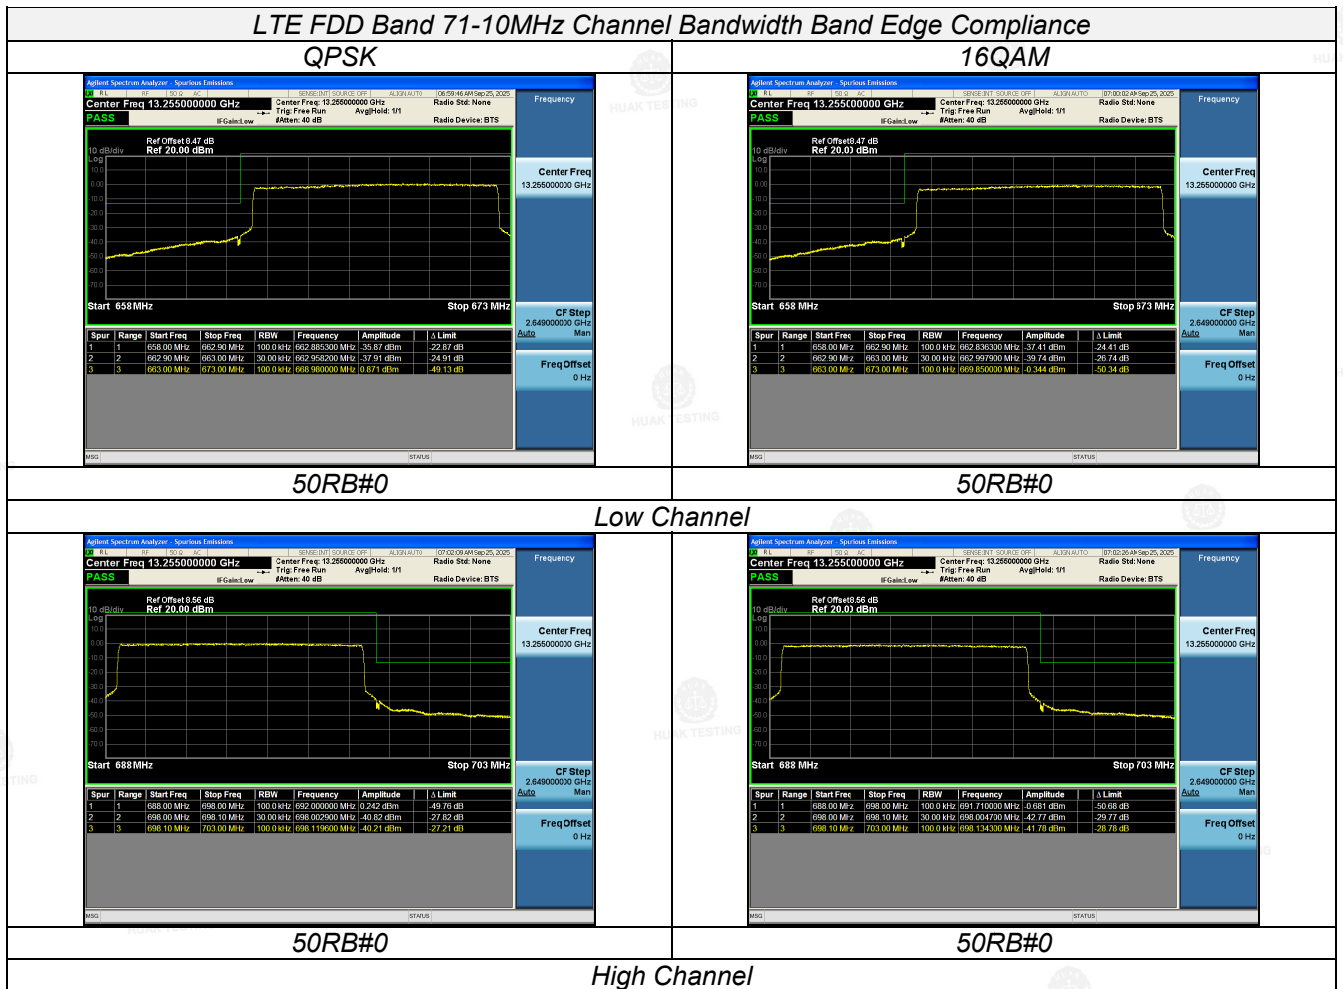


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

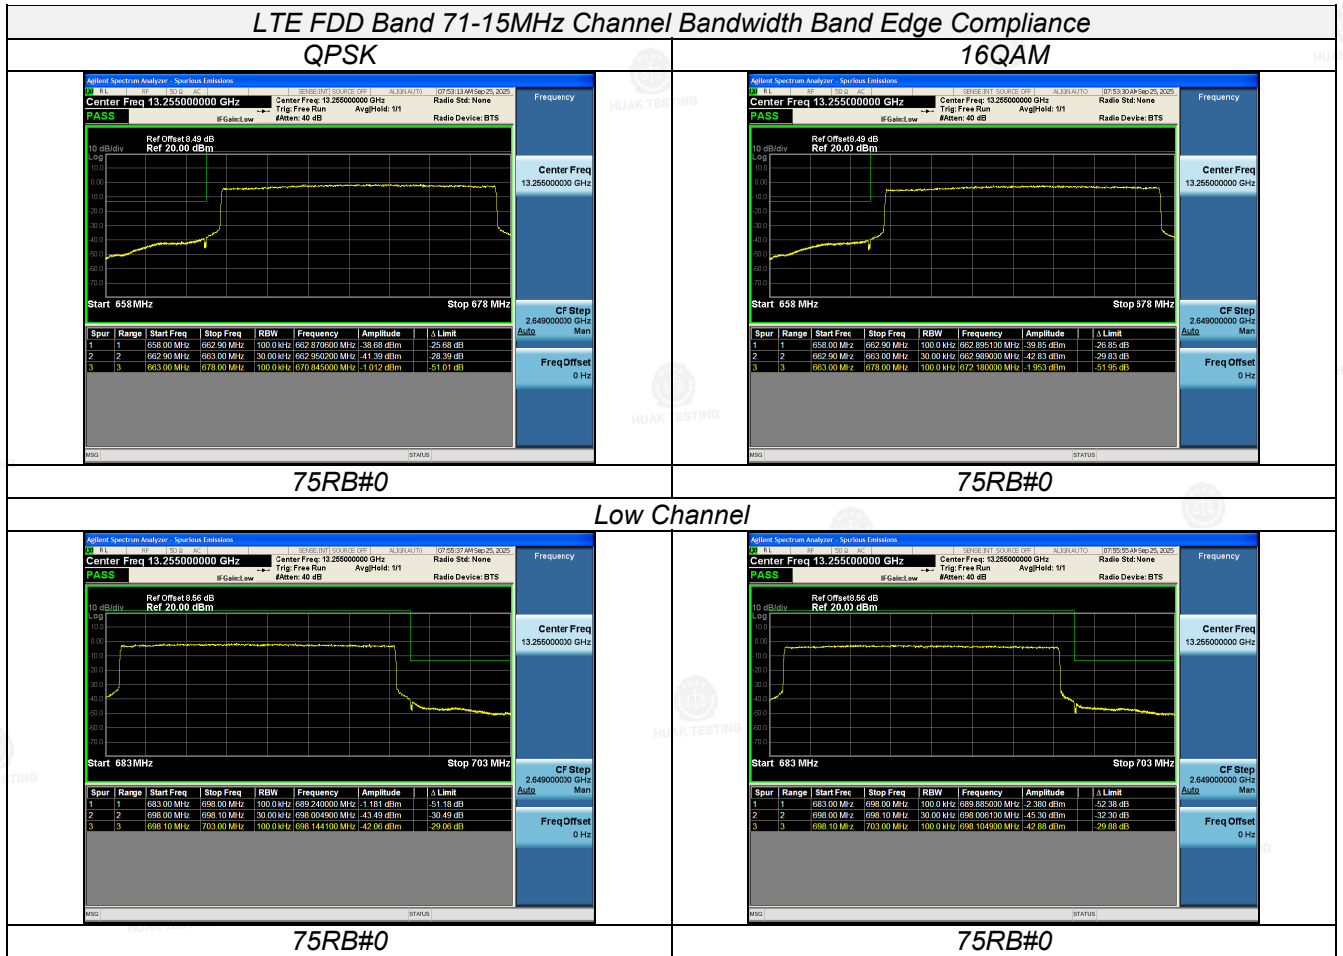

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

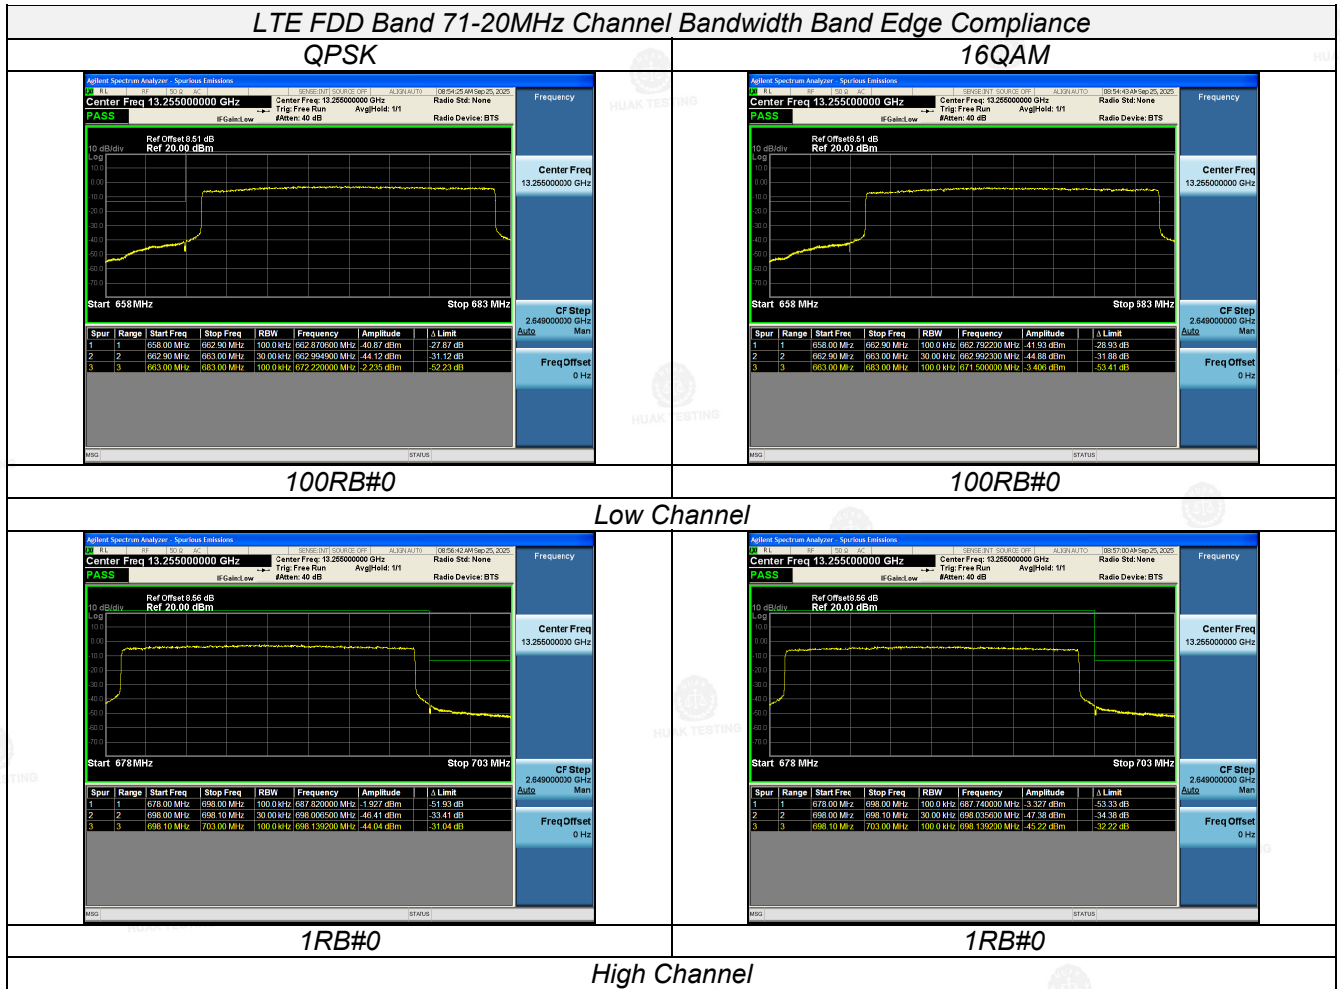

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.5 Spurious Emission


LIMIT

that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

Conducted Spurious Measurement:

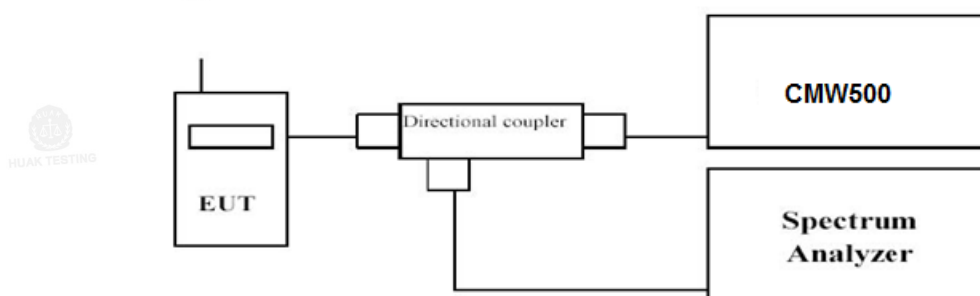

Radiated Spurious Measurement:

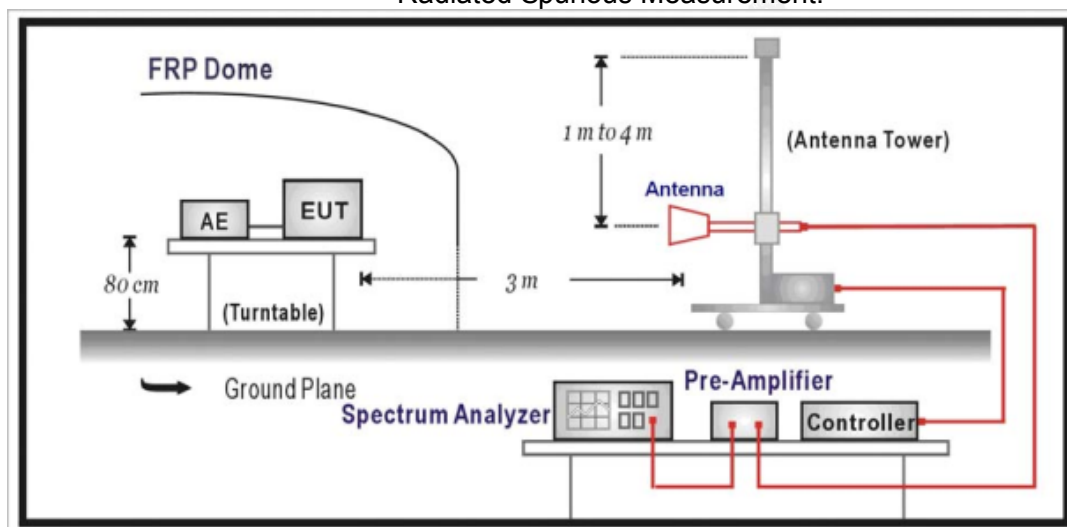

TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E.

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10^{th} harmonic.
- Please refer to following tables for test antenna conducted emissions.

9.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 71	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~1	100KHz	300KHz	Auto
	1~26.5	1 MHz	3 MHz	Auto

Radiated Spurious Measurement:


- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.

TEST RESULTS


Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.


Conducted Measurement:

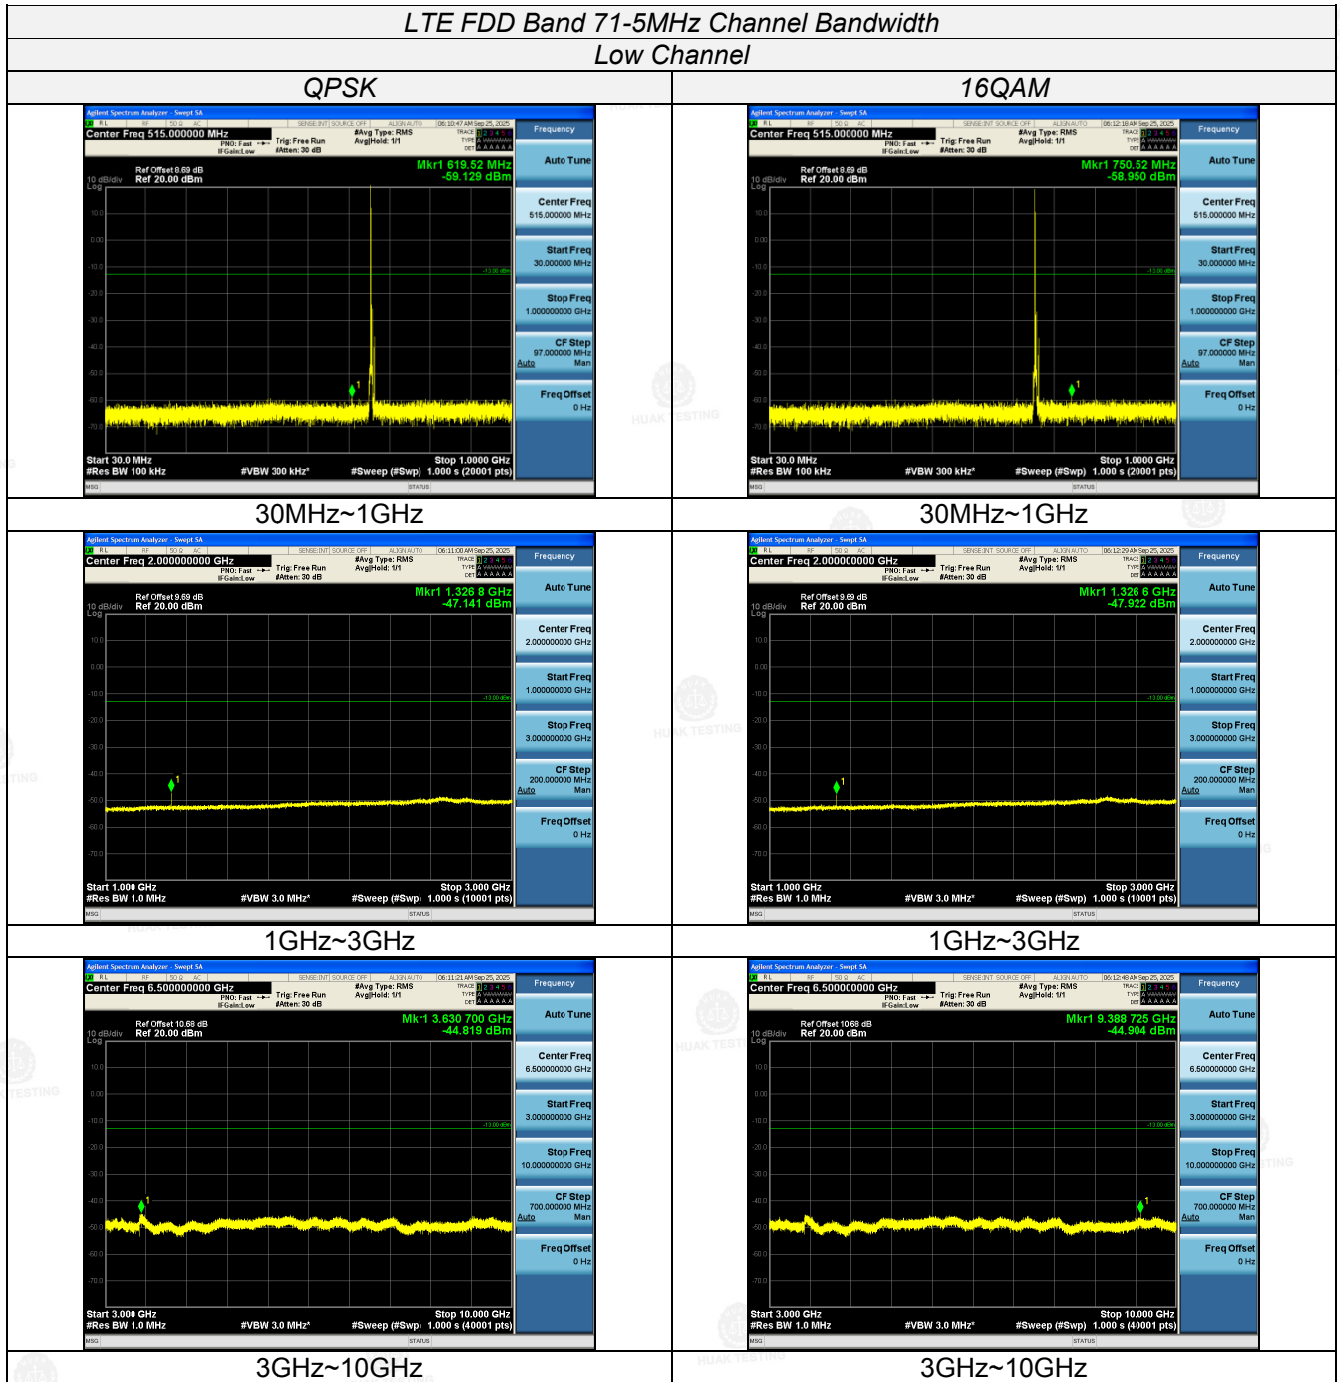


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

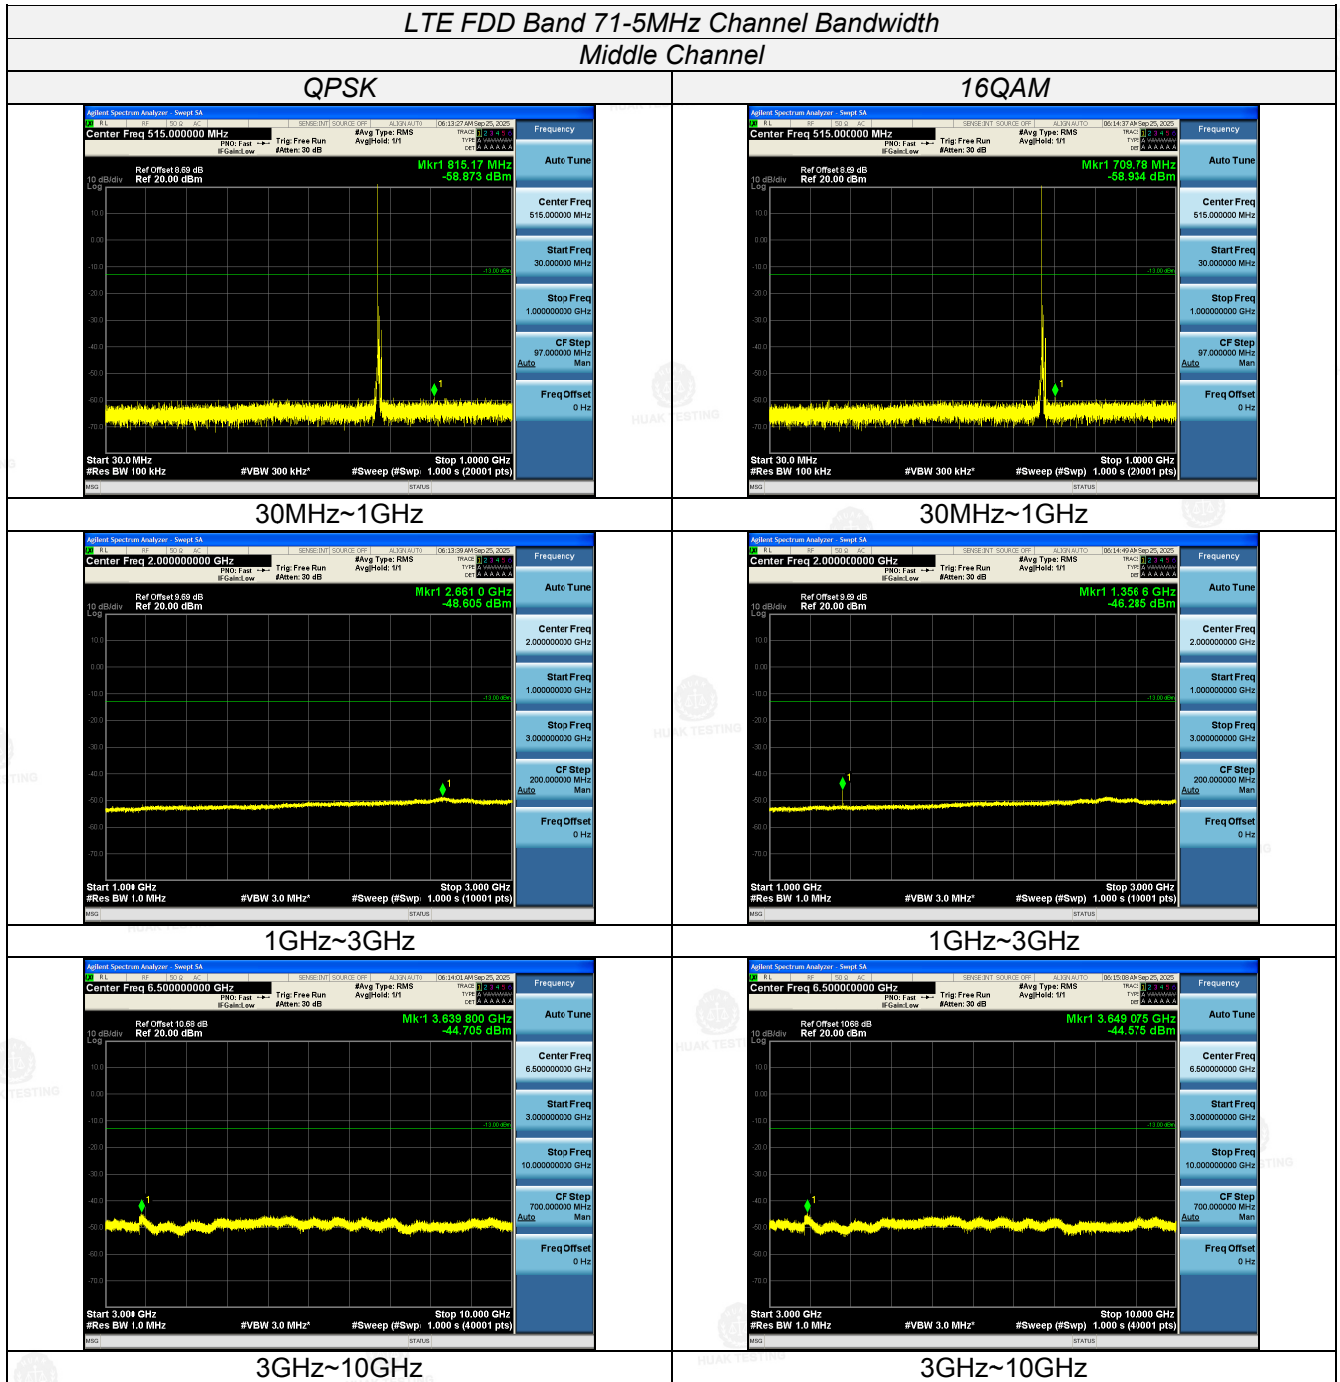


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

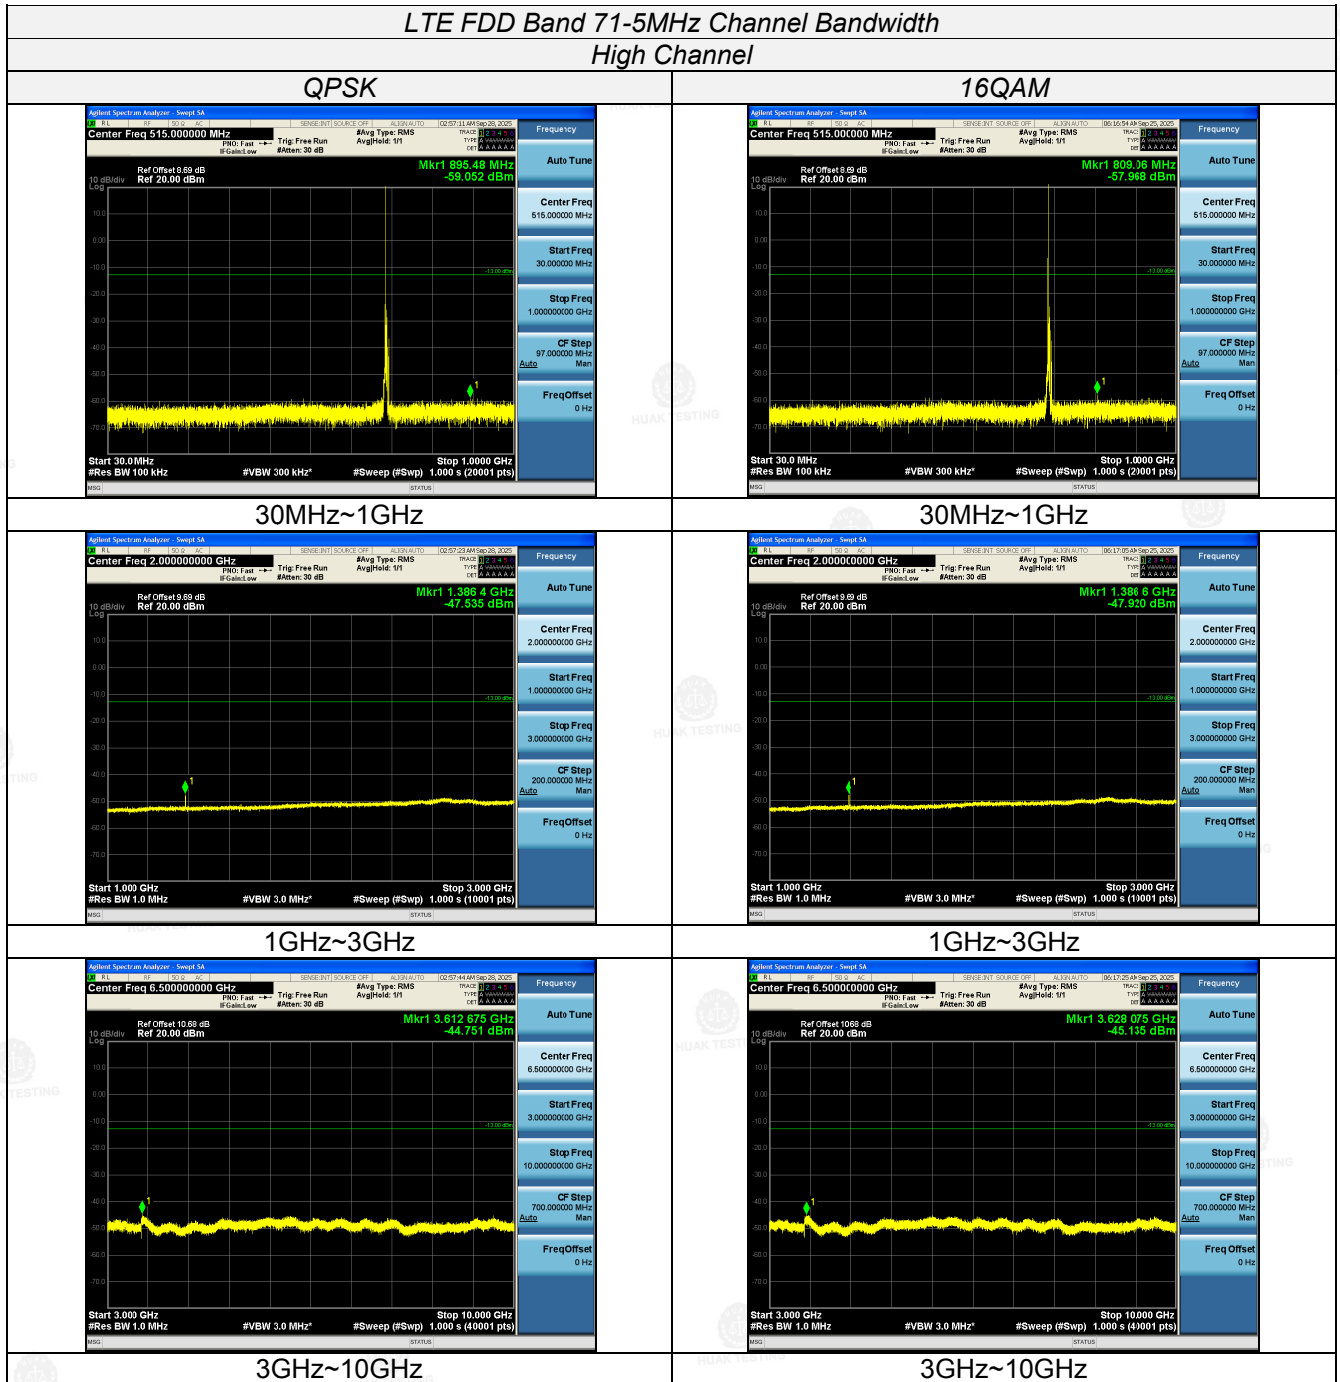


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

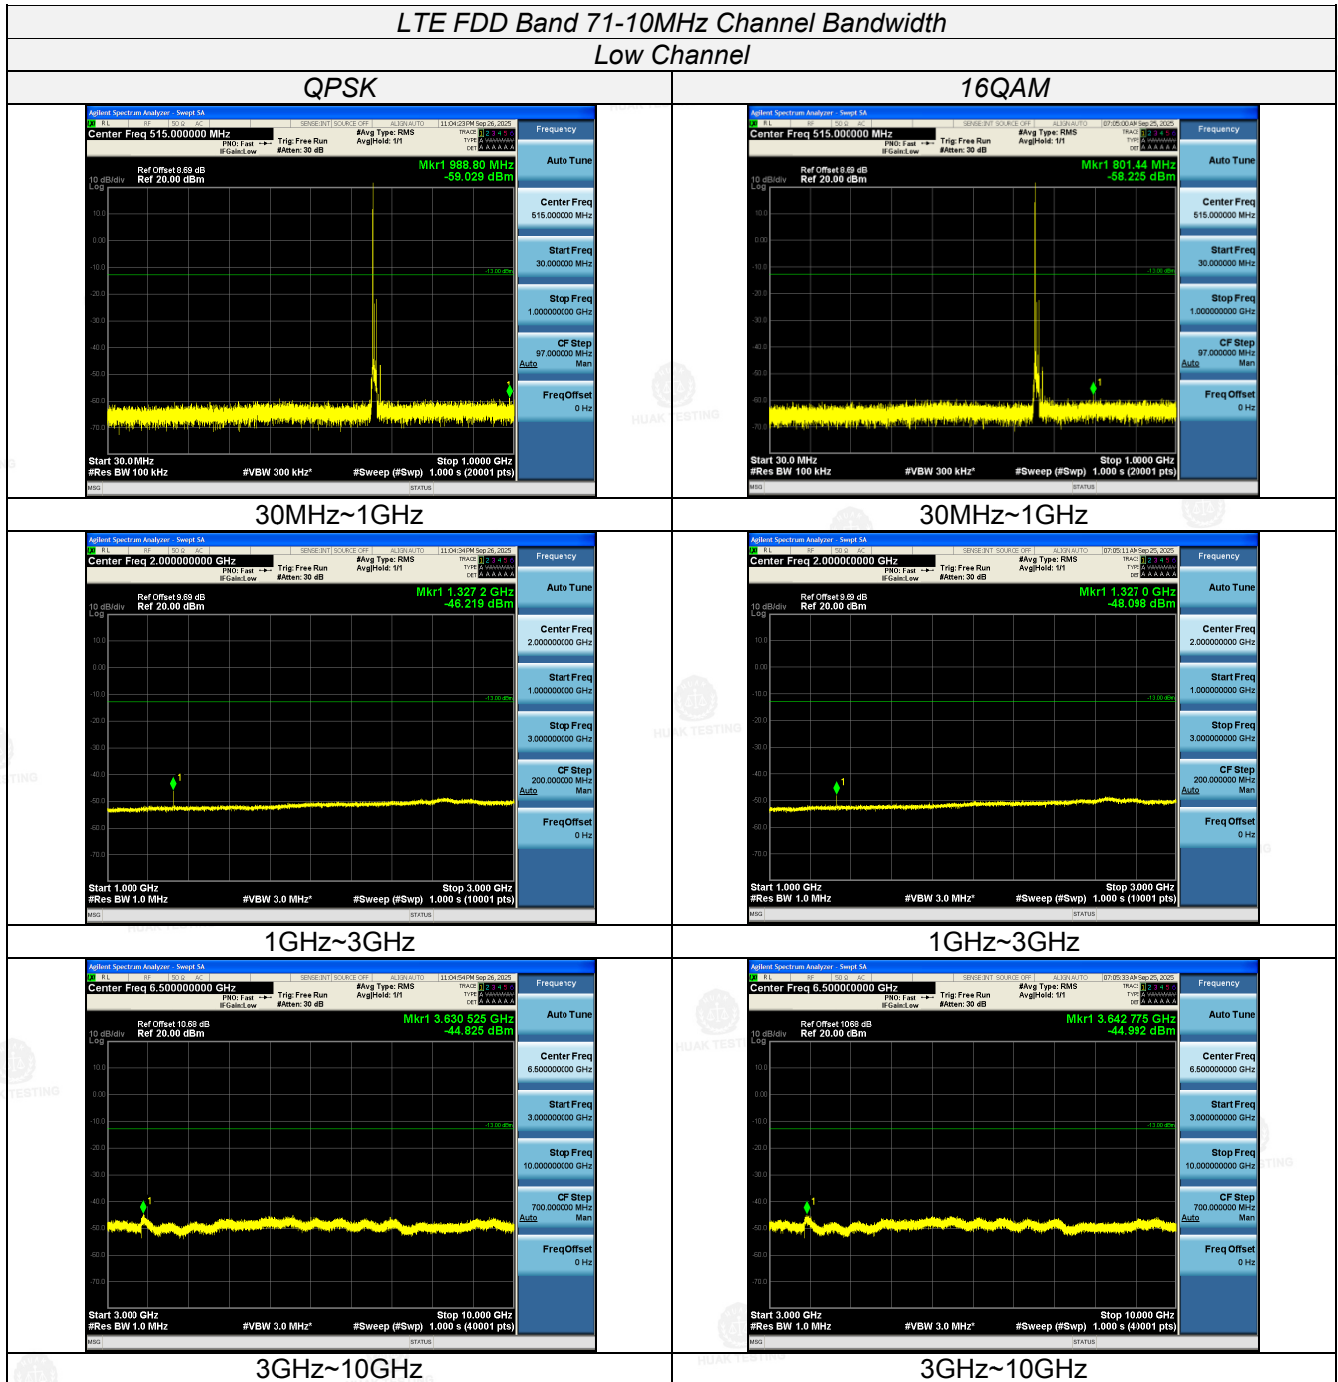


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

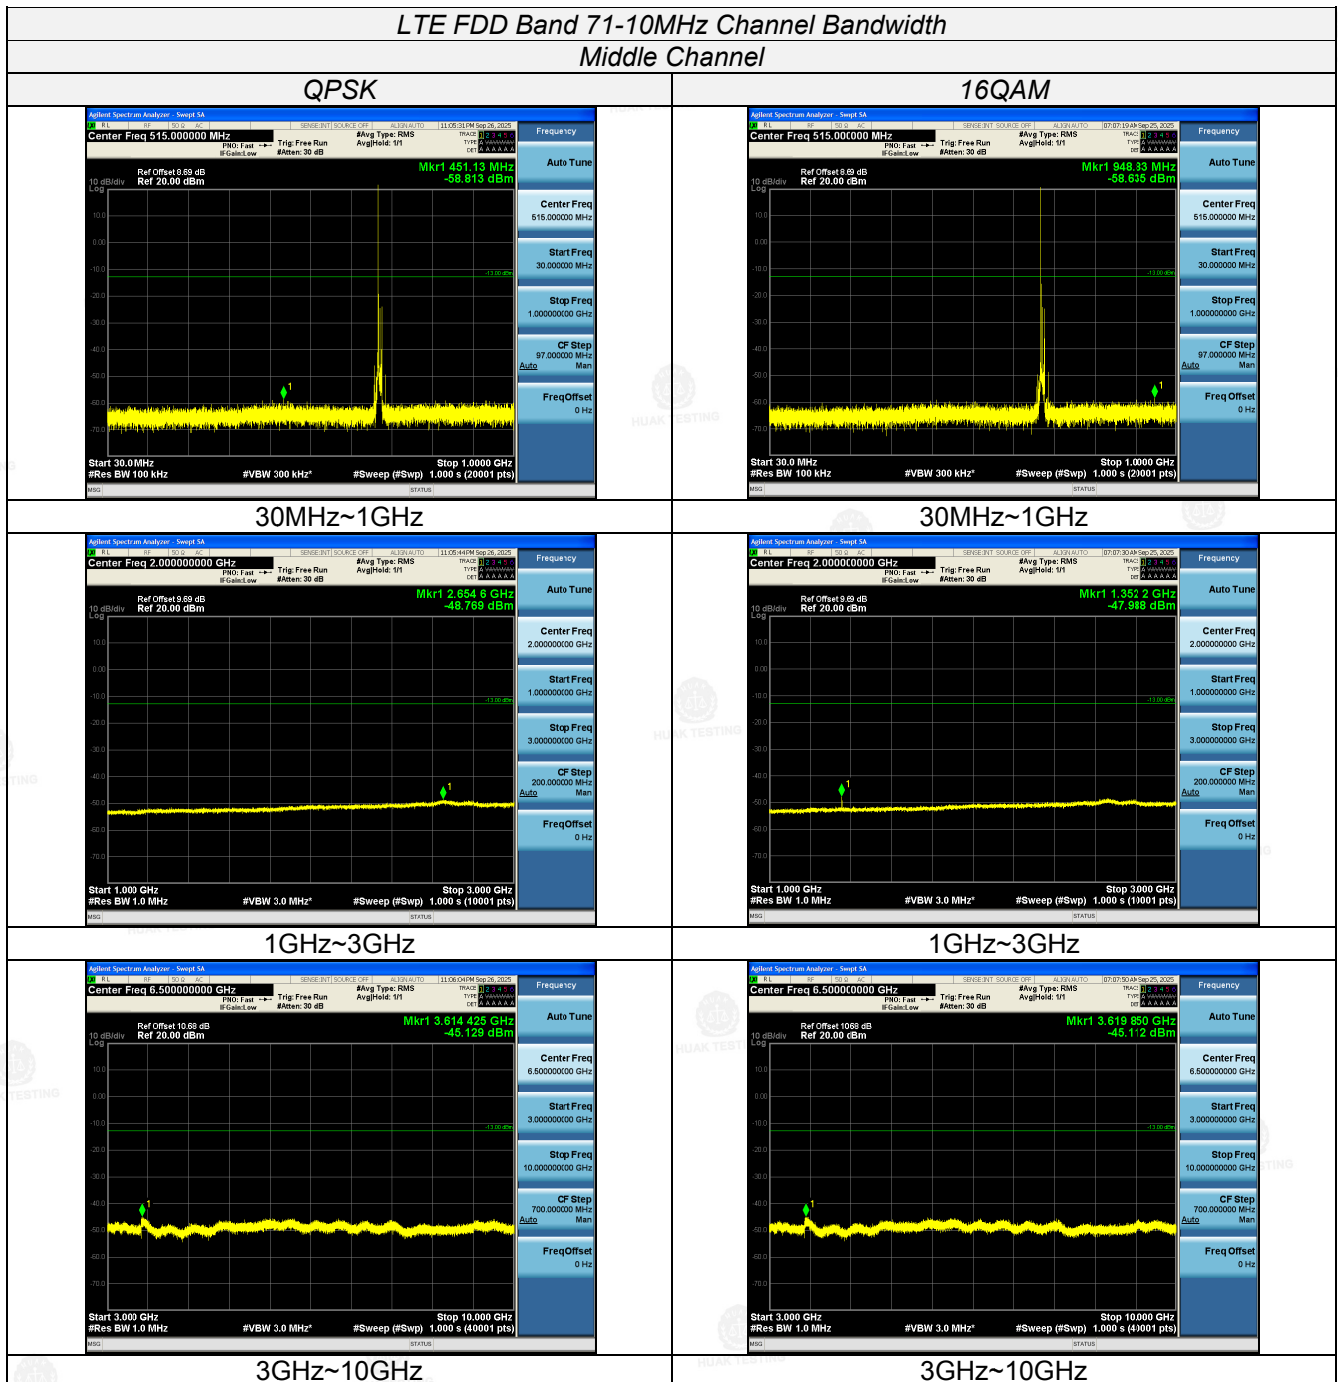


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

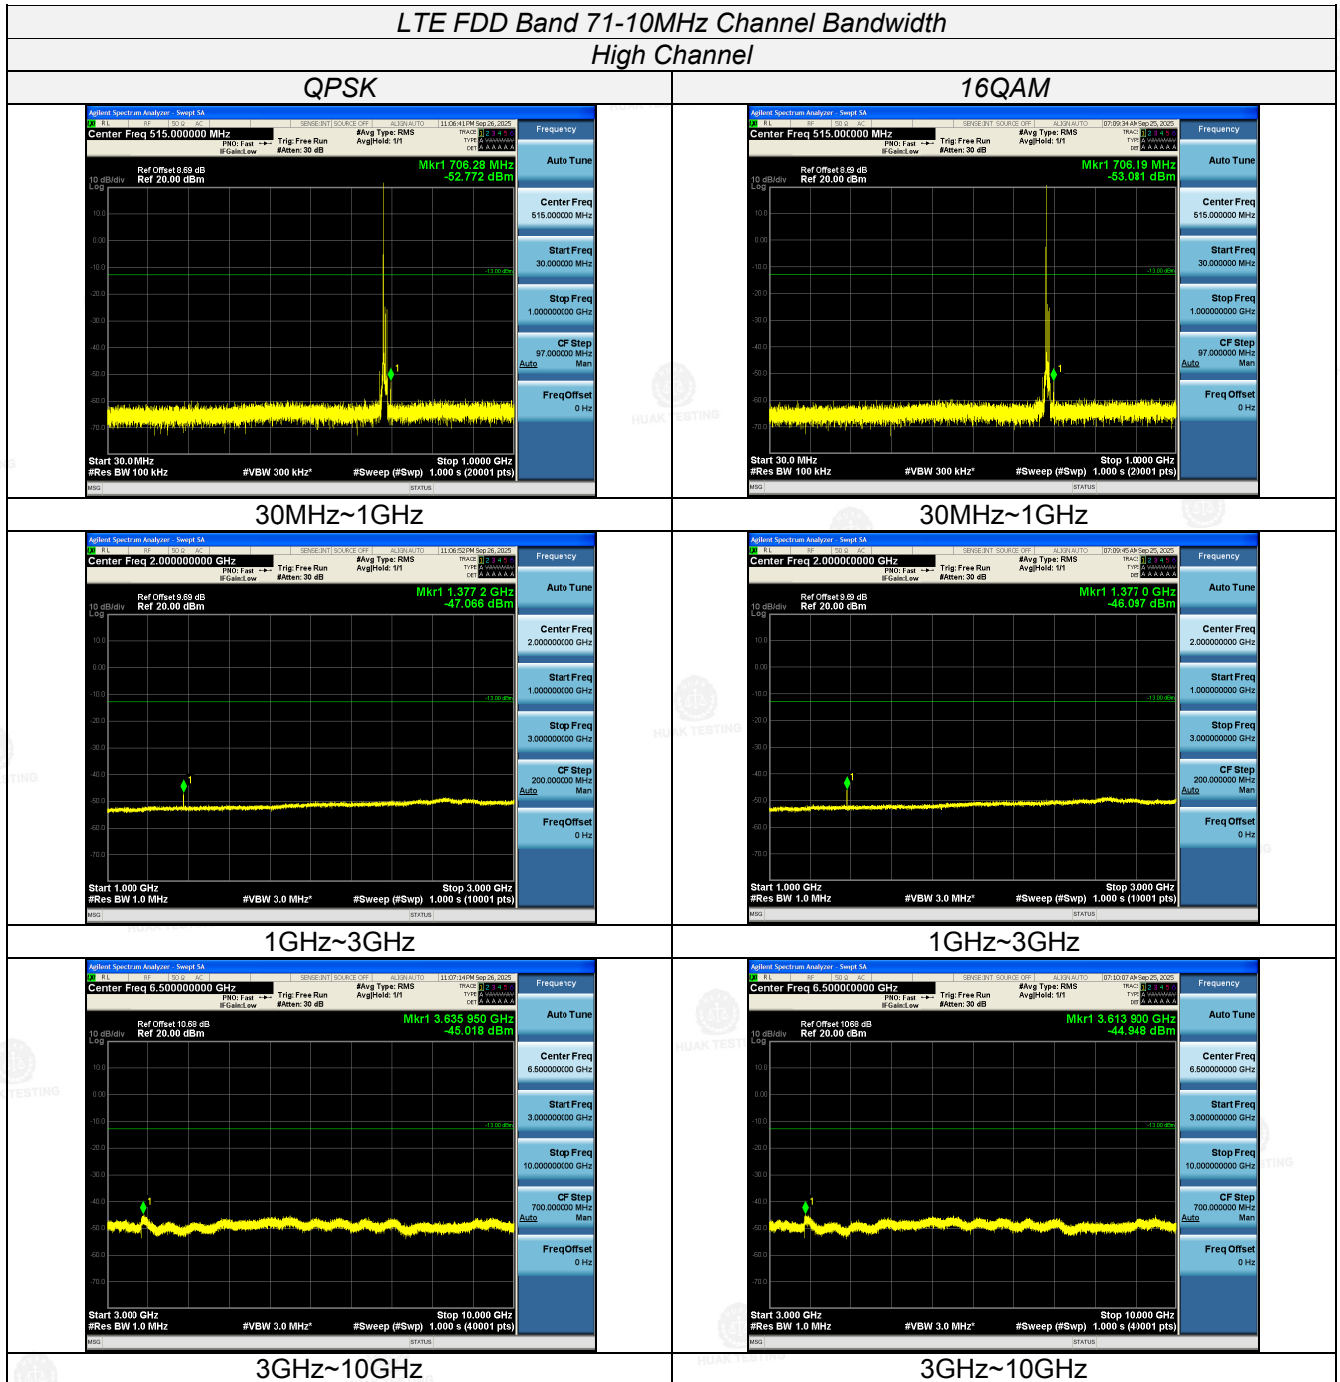


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

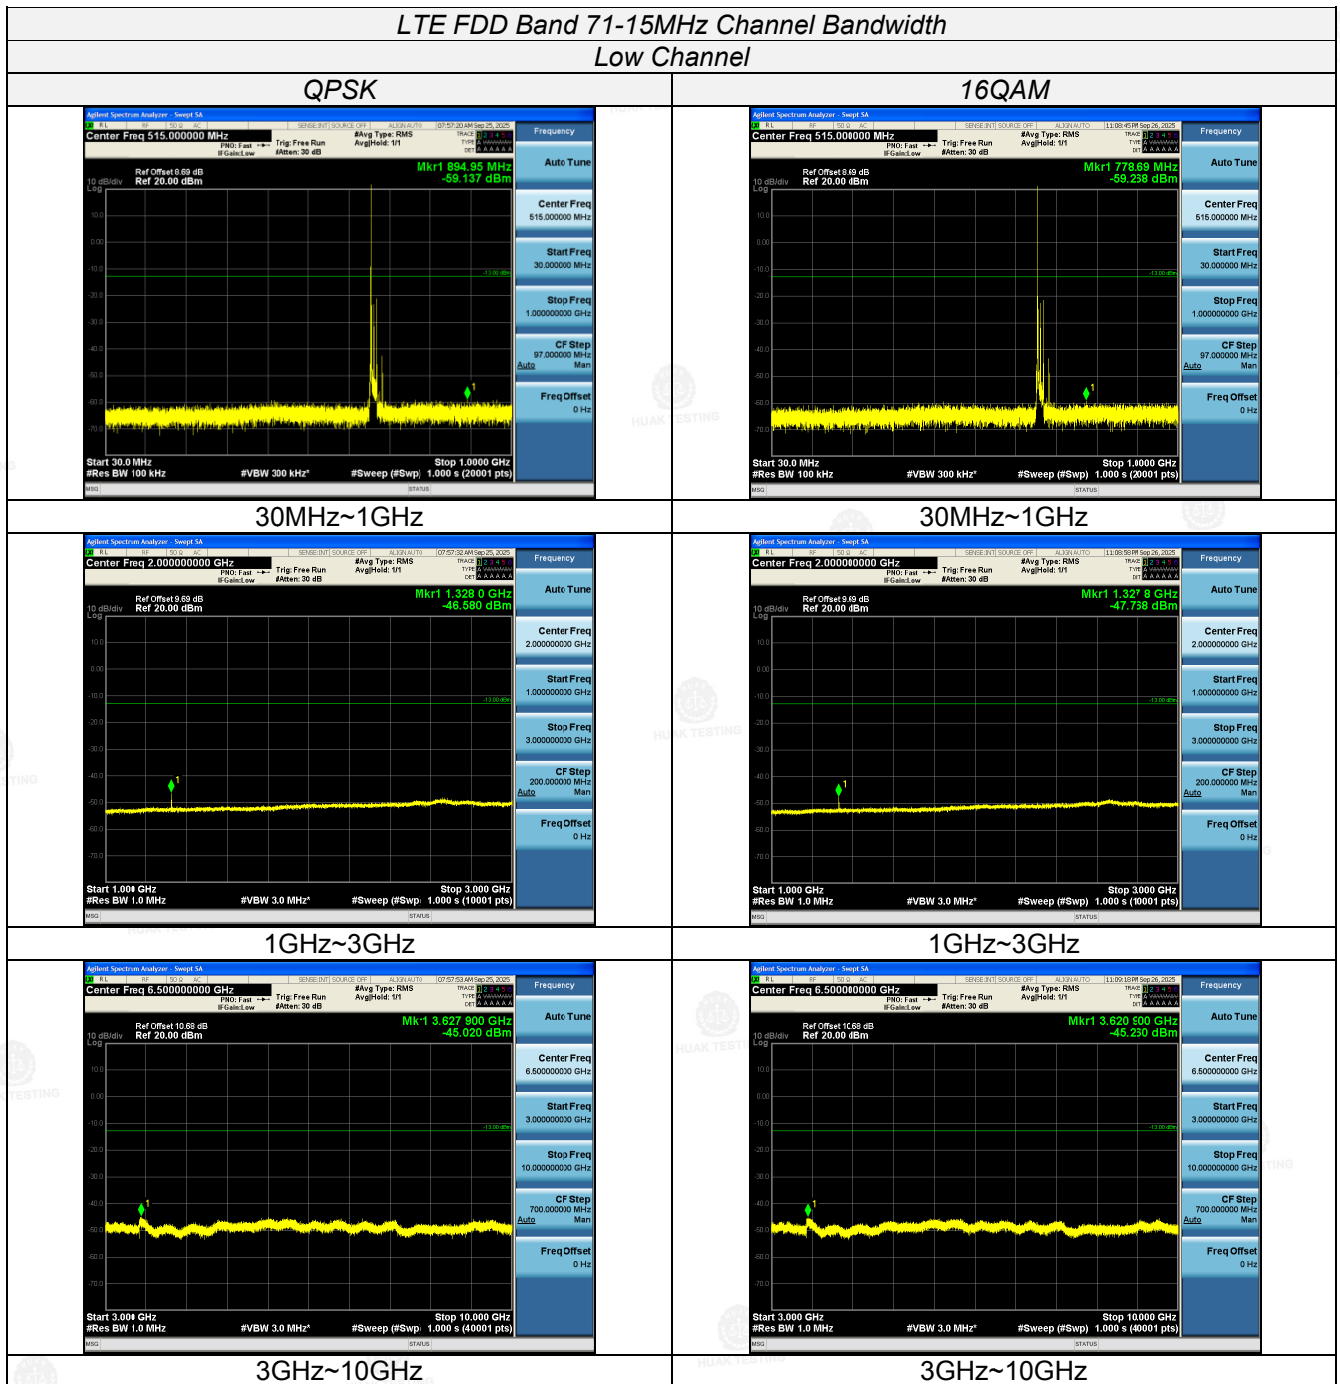


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

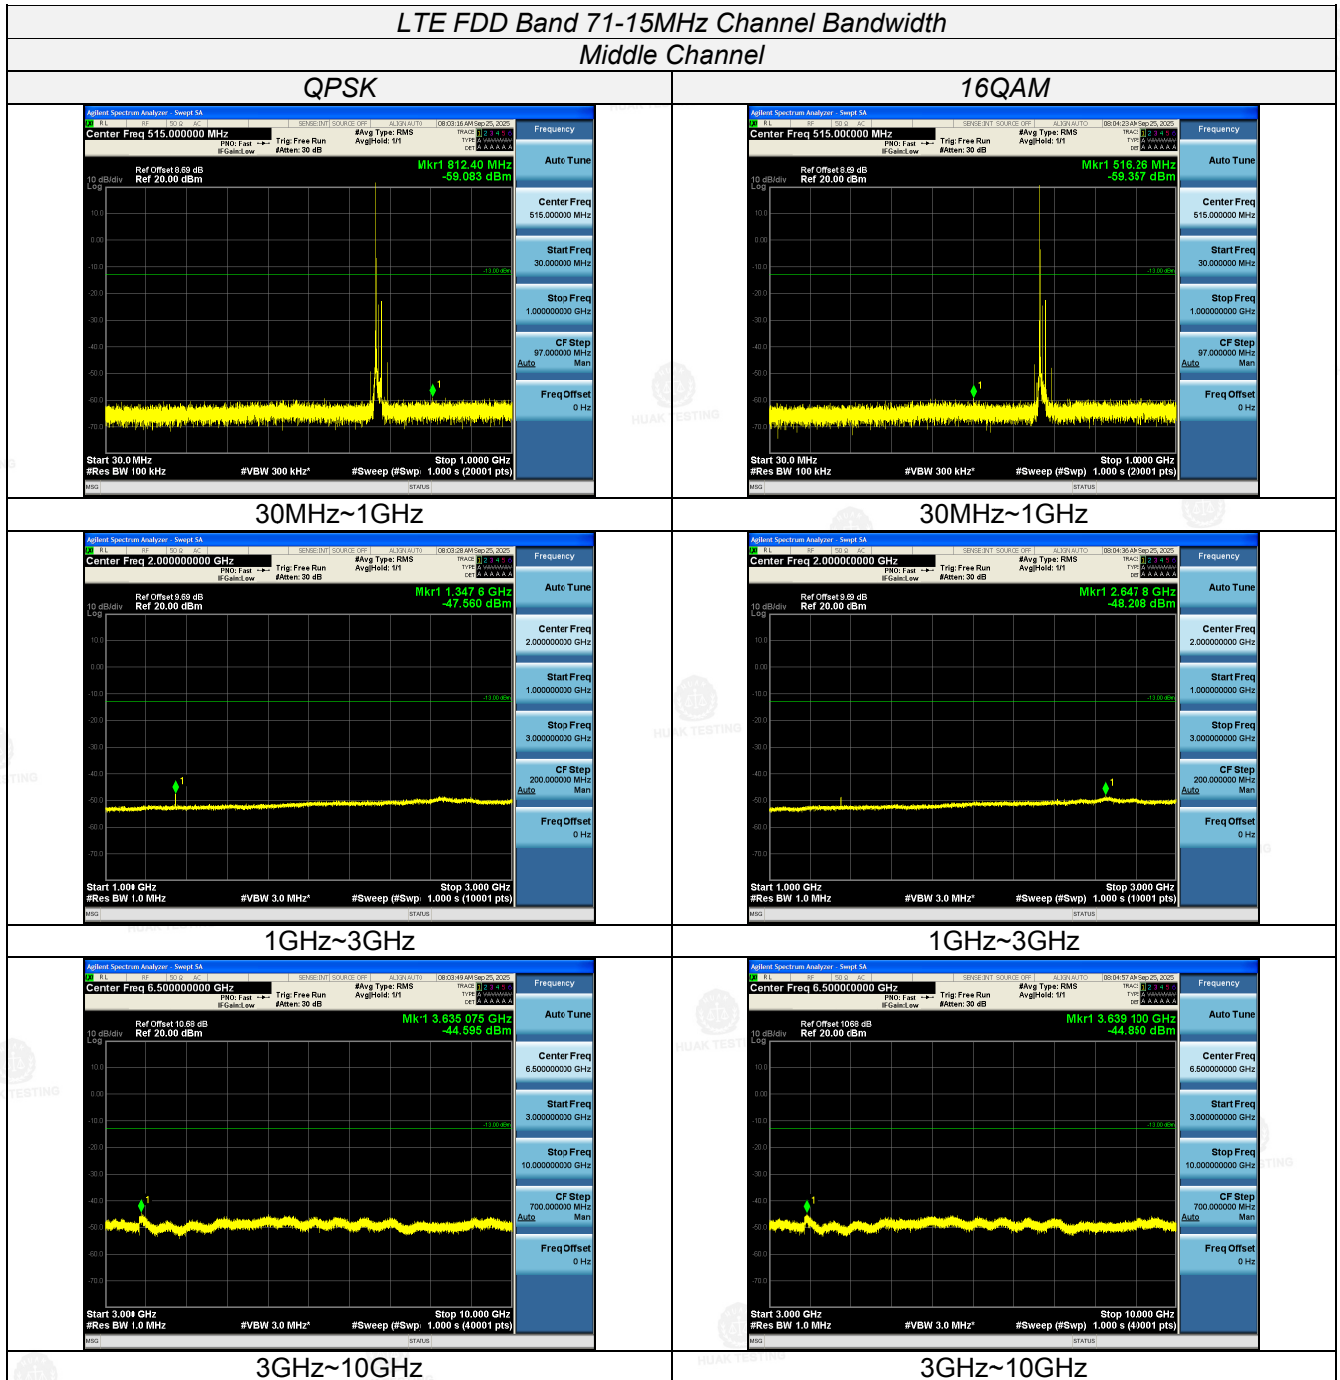

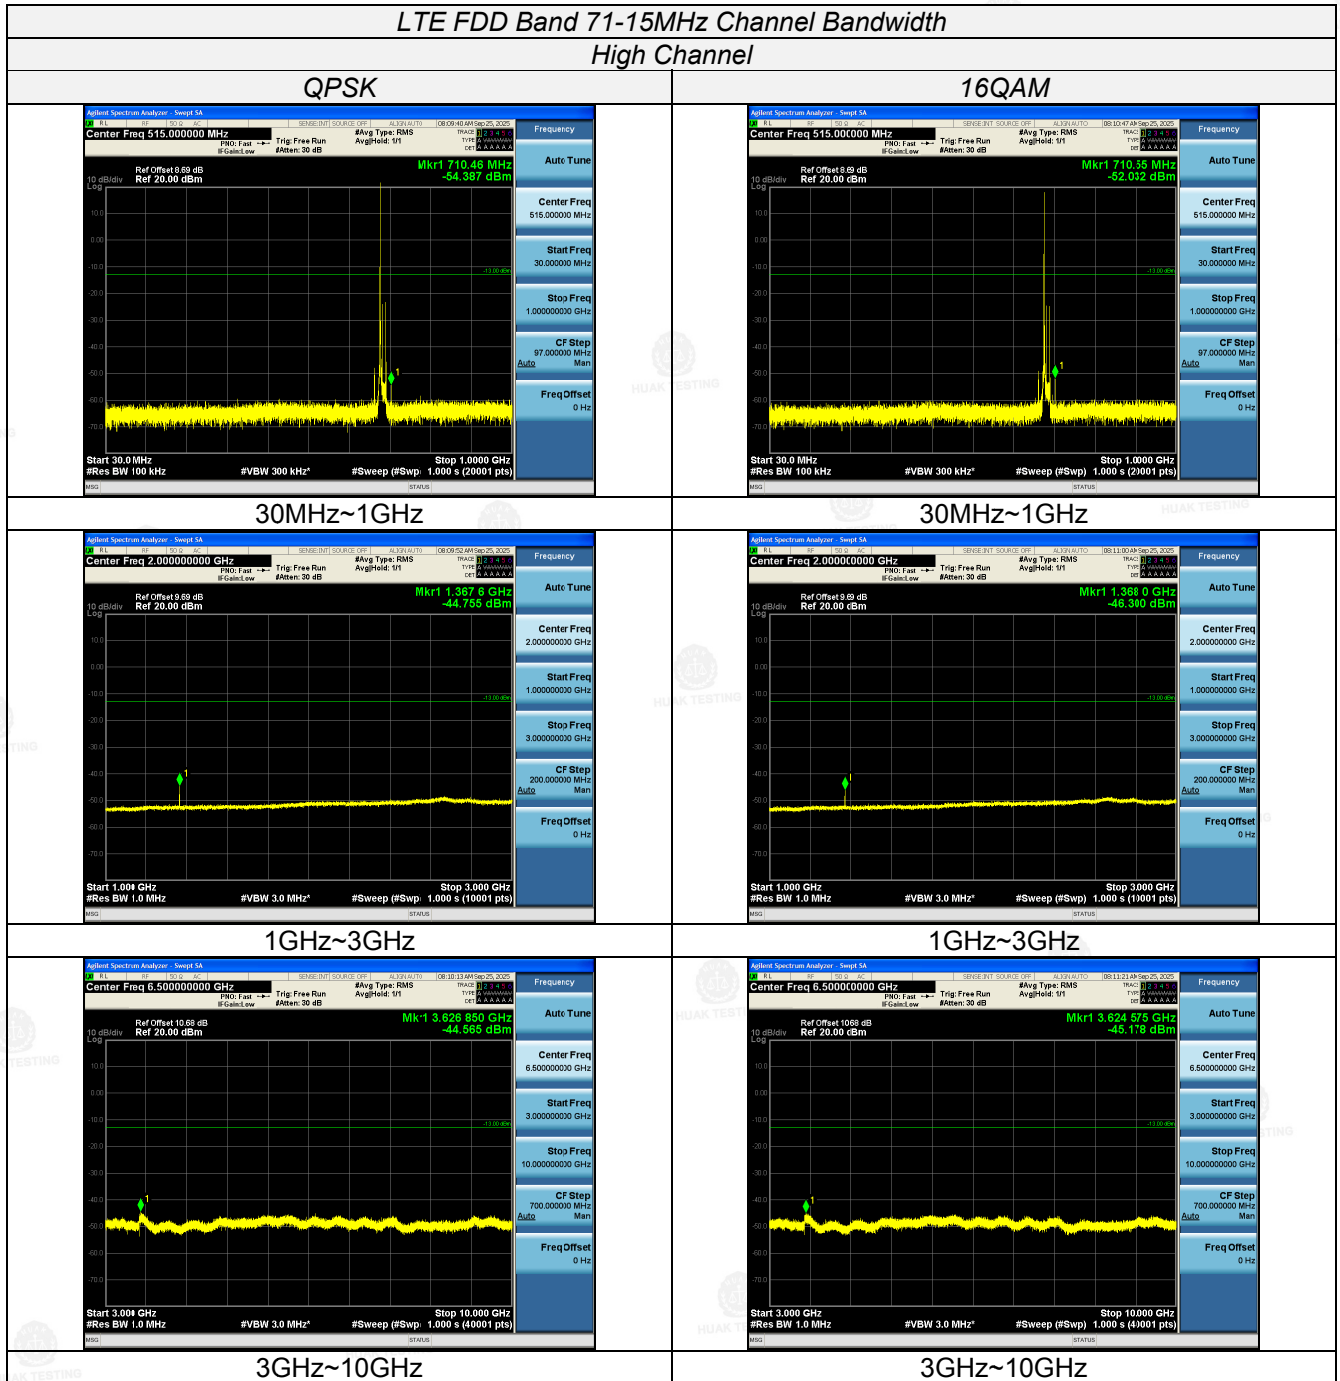


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

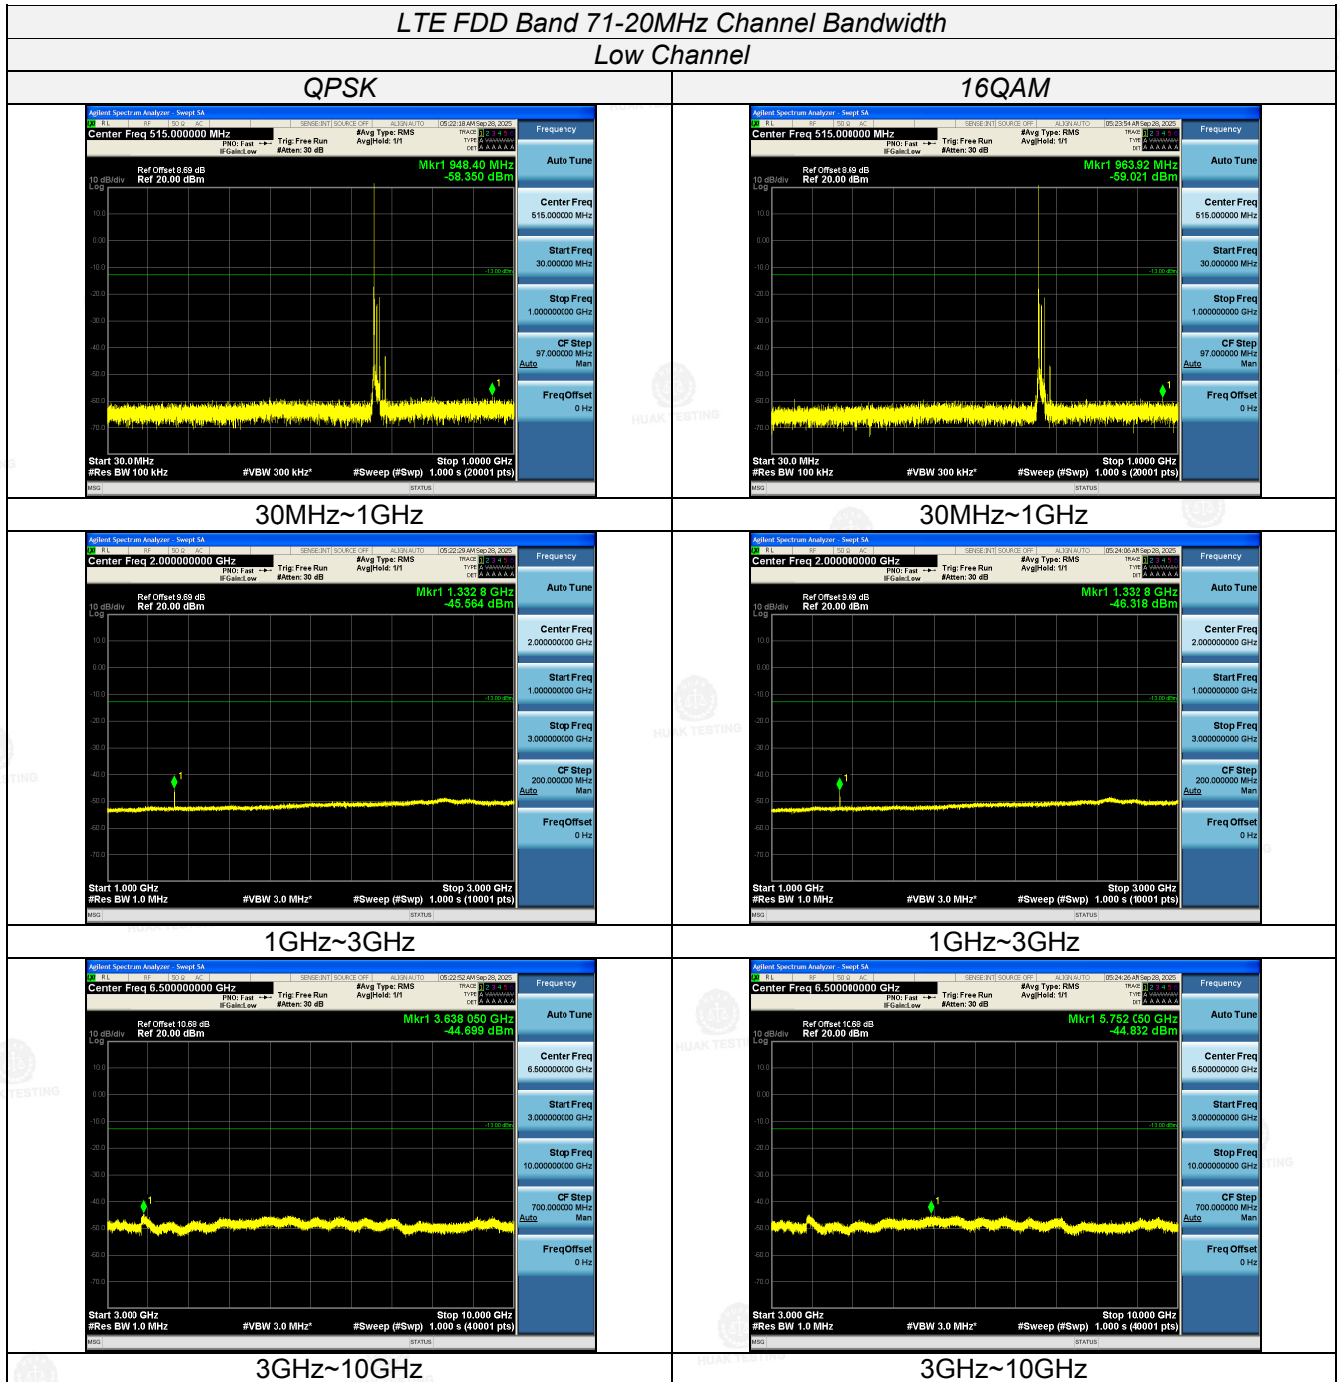


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

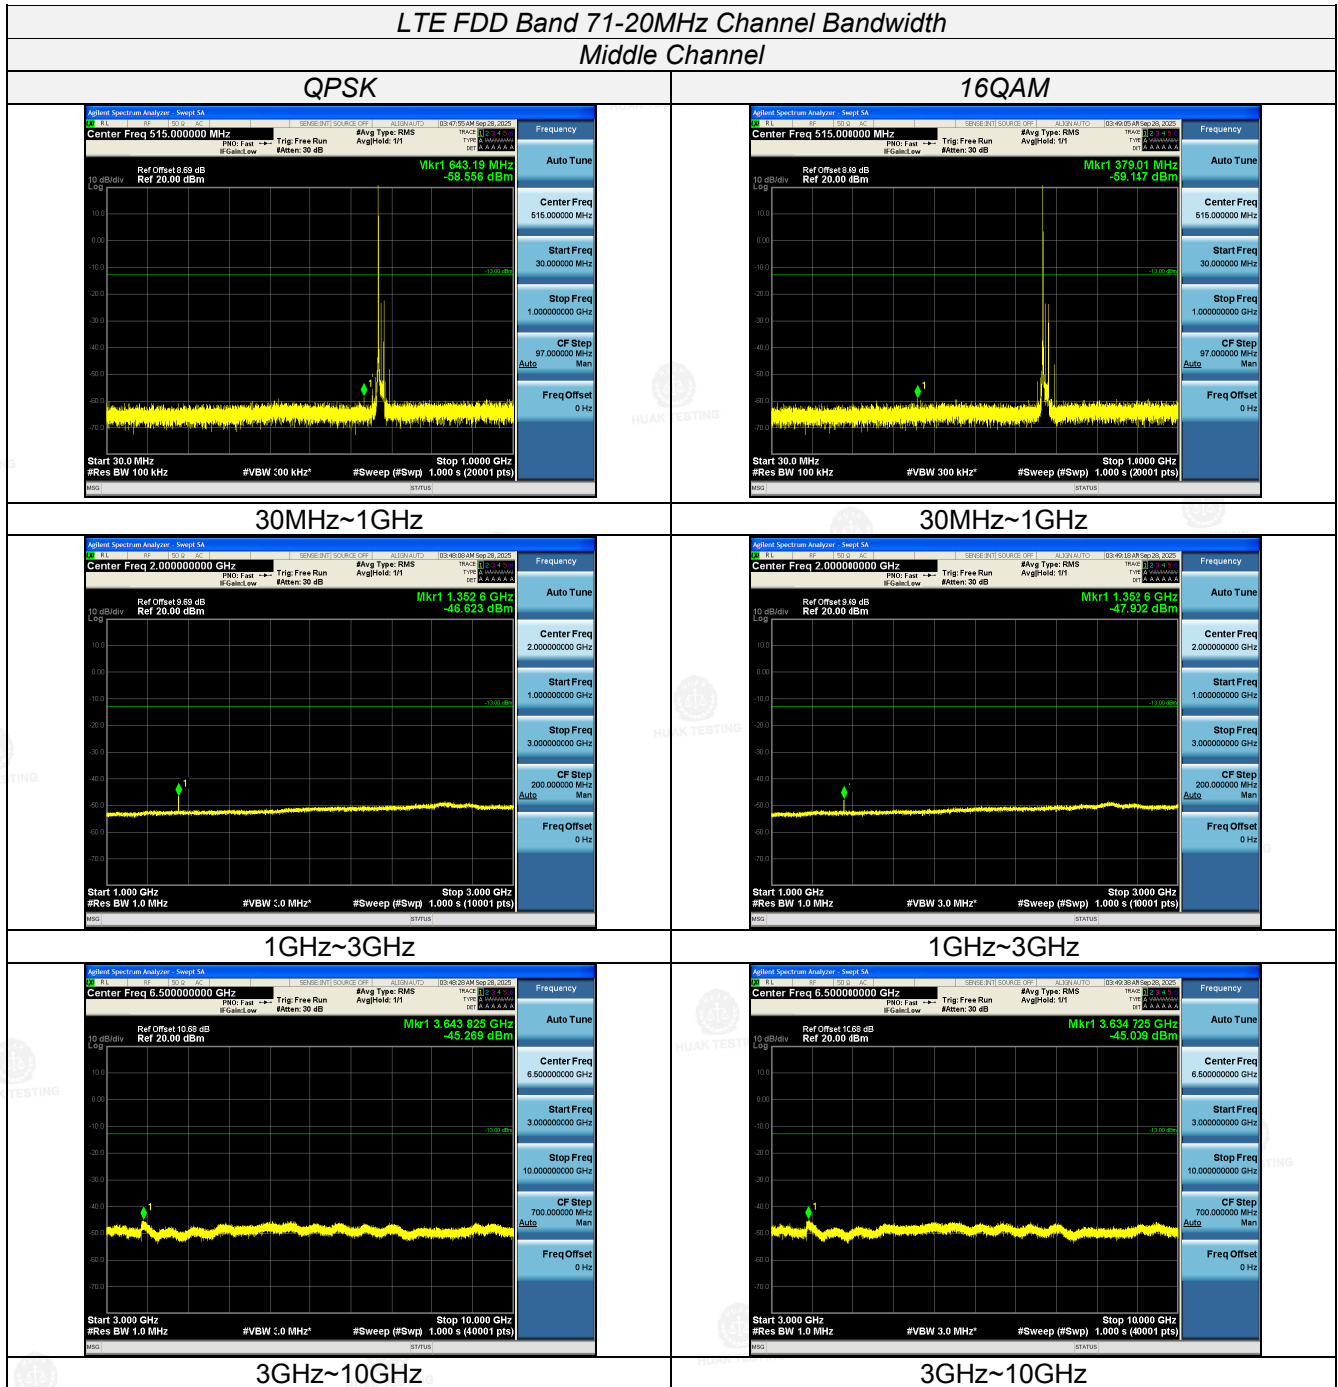

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

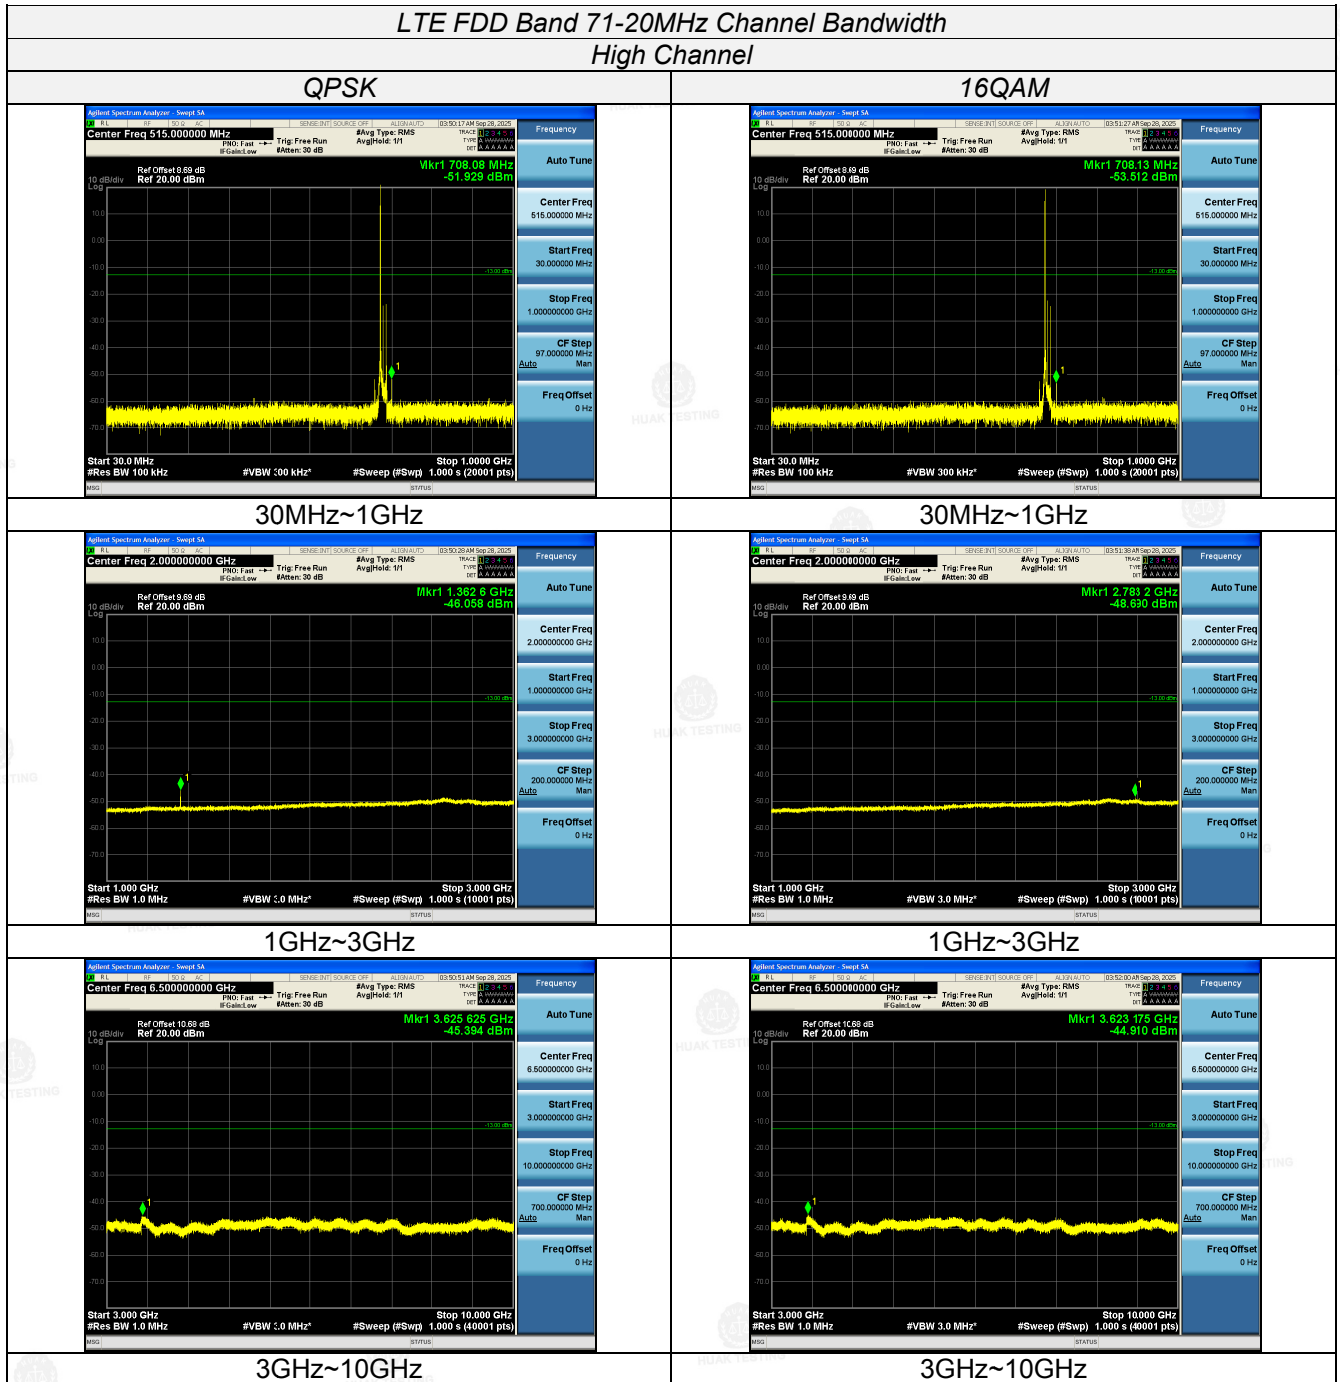

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Radiated Measurement:***Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 71_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1331	-36.10	2.86	3.00	7.25	-33.86	-13.00	20.86	H
1996.5	-43.66	2.94	3.00	9.53	-39.22	-13.00	26.22	H
1331	-43.48	2.86	3.00	7.25	-41.24	-13.00	28.24	V
1996.5	-47.03	2.94	3.00	9.53	-42.59	-13.00	29.59	V

LTE FDD Band 71_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-35.65	2.86	3.00	7.25	-33.41	-13.00	20.41	H
2041.5	-43.64	2.94	3.00	9.53	-39.20	-13.00	26.20	H
1361	-43.98	2.86	3.00	7.25	-41.74	-13.00	28.74	V
2041.5	-47.37	2.94	3.00	9.53	-42.93	-13.00	29.93	V

LTE FDD Band 71_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1391	-36.33	2.86	3.00	7.25	-34.09	-13.00	21.09	H
2086.5	-43.35	2.94	3.00	9.53	-38.91	-13.00	25.91	H
1391	-44.14	2.86	3.00	7.25	-41.90	-13.00	28.90	V
2086.5	-46.82	2.94	3.00	9.53	-42.38	-13.00	29.38	V

LTE FDD Band 71_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1336	-35.64	2.86	3.00	7.25	-33.40	-13.00	20.40	H
2004	-43.62	2.94	3.00	9.53	-39.18	-13.00	26.18	H
1336	-43.59	2.86	3.00	7.25	-41.35	-13.00	28.35	V
2004	-47.32	2.94	3.00	9.53	-42.88	-13.00	29.88	V

LTE FDD Band 71_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-36.22	2.86	3.00	7.25	-33.98	-13.00	20.98	H
2041.5	-43.97	2.94	3.00	9.53	-39.53	-13.00	26.53	H
1361	-43.84	2.86	3.00	7.25	-41.60	-13.00	28.60	V
2041.5	-47.53	2.94	3.00	9.53	-43.09	-13.00	30.09	V

*LTE FDD Band 71_Channel Bandwidth 10MHz_QPSK_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1386	-36.32	2.86	3.00	7.25	-34.08	-13.00	21.08	H
2079	-43.97	2.94	3.00	9.53	-39.53	-13.00	26.53	H
1386	-43.94	2.86	3.00	7.25	-41.70	-13.00	28.70	V
2079	-47.25	2.94	3.00	9.53	-42.81	-13.00	29.81	V

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1341	-35.78	2.86	3.00	7.25	-33.54	-13.00	20.54	H
2011.5	-43.45	2.94	3.00	9.53	-39.01	-13.00	26.01	H
1341	-43.31	2.86	3.00	7.25	-41.07	-13.00	28.07	V
2011.5	-47.21	2.94	3.00	9.53	-42.77	-13.00	29.77	V

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-35.94	2.86	3.00	7.25	-33.70	-13.00	20.70	H
2041.5	-43.44	2.94	3.00	9.53	-39.00	-13.00	26.00	H
1361	-43.96	2.86	3.00	7.25	-41.72	-13.00	28.72	V
2041.5	-47.10	2.94	3.00	9.53	-42.66	-13.00	29.66	V

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1381	-35.77	2.86	3.00	7.25	-33.53	-13.00	20.53	H
2071.5	-44.07	2.94	3.00	9.53	-39.63	-13.00	26.63	H
1381	-43.41	2.86	3.00	7.25	-41.17	-13.00	28.17	V
2071.5	-46.85	2.94	3.00	9.53	-42.41	-13.00	29.41	V

LTE FDD Band 71_Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1346	-35.61	2.86	3.00	7.25	-33.37	-13.00	20.37	H
2019	-44.12	2.94	3.00	9.53	-39.68	-13.00	26.68	H
1346	-43.97	2.86	3.00	7.25	-41.73	-13.00	28.73	V
2019	-47.28	2.94	3.00	9.53	-42.84	-13.00	29.84	V

LTE FDD Band 71_Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-36.22	2.86	3.00	7.25	-33.98	-13.00	20.98	H
2041.5	-43.47	2.94	3.00	9.53	-39.03	-13.00	26.03	H
1361	-43.26	2.86	3.00	7.25	-41.02	-13.00	28.02	V
2041.5	-47.41	2.94	3.00	9.53	-42.97	-13.00	29.97	V

LTE FDD Band 71_Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1376	-35.49	2.86	3.00	7.25	-33.25	-13.00	20.25	H
2064	-43.78	2.94	3.00	9.53	-39.34	-13.00	26.34	H
1376	-44.09	2.86	3.00	7.25	-41.85	-13.00	28.85	V
2064	-47.13	2.94	3.00	9.53	-42.69	-13.00	29.69	V

LTE FDD Band 71_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1331	-35.51	2.86	3.00	7.25	-33.27	-13.00	20.27	H
1996.5	-43.84	2.94	3.00	9.53	-39.40	-13.00	26.40	H
1331	-43.74	2.86	3.00	7.25	-41.50	-13.00	28.50	V
1996.5	-47.67	2.94	3.00	9.53	-43.23	-13.00	30.23	V

LTE FDD Band 71_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-36.44	2.86	3.00	7.25	-34.20	-13.00	21.20	H
2041.5	-43.81	2.94	3.00	9.53	-39.37	-13.00	26.37	H
1361	-43.46	2.86	3.00	7.25	-41.22	-13.00	28.22	V
2041.5	-47.29	2.94	3.00	9.53	-42.85	-13.00	29.85	V

LTE FDD Band 71_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1391	-35.99	2.86	3.00	7.25	-33.75	-13.00	20.75	H
2086.5	-43.52	2.94	3.00	9.53	-39.08	-13.00	26.08	H
1391	-43.92	2.86	3.00	7.25	-41.68	-13.00	28.68	V
2086.5	-47.35	2.94	3.00	9.53	-42.91	-13.00	29.91	V

LTE FDD Band 71_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1336	-36.46	2.86	3.00	7.25	-34.22	-13.00	21.22	H
2004	-43.75	2.94	3.00	9.53	-39.31	-13.00	26.31	H
1336	-43.58	2.86	3.00	7.25	-41.34	-13.00	28.34	V
2004	-47.42	2.94	3.00	9.53	-42.98	-13.00	29.98	V

LTE FDD Band 71_Channel Bandwidth 10MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-35.56	2.86	3.00	7.25	-33.32	-13.00	20.32	H
2041.5	-43.16	2.94	3.00	9.53	-38.72	-13.00	25.72	H
1361	-43.35	2.86	3.00	7.25	-41.11	-13.00	28.11	V
2041.5	-47.24	2.94	3.00	9.53	-42.80	-13.00	29.80	V

**LTE FDD Band 71_Channel Bandwidth 10MHz_16QAM_High Channel**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1386	-36.35	2.86	3.00	7.25	-34.11	-13.00	21.11	H
2079	-43.23	2.94	3.00	9.53	-38.79	-13.00	25.79	H
1386	-43.93	2.86	3.00	7.25	-41.69	-13.00	28.69	V
2079	-47.35	2.94	3.00	9.53	-42.91	-13.00	29.91	V

LTE FDD Band 71_Channel Bandwidth 15MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1341	-35.88	2.86	3.00	7.25	-33.64	-13.00	20.64	H
2011.5	-43.58	2.94	3.00	9.53	-39.14	-13.00	26.14	H
1341	-43.56	2.86	3.00	7.25	-41.32	-13.00	28.32	V
2011.5	-47.66	2.94	3.00	9.53	-43.22	-13.00	30.22	V

LTE FDD Band 71_Channel Bandwidth 15MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-35.93	2.86	3.00	7.25	-33.69	-13.00	20.69	H
2041.5	-43.99	2.94	3.00	9.53	-39.55	-13.00	26.55	H
1361	-43.76	2.86	3.00	7.25	-41.52	-13.00	28.52	V
2041.5	-47.45	2.94	3.00	9.53	-43.01	-13.00	30.01	V

LTE FDD Band 71_Channel Bandwidth 15MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1381	-35.83	2.86	3.00	7.25	-33.59	-13.00	20.59	H
2071.5	-43.92	2.94	3.00	9.53	-39.48	-13.00	26.48	H
1381	-43.22	2.86	3.00	7.25	-40.98	-13.00	27.98	V
2071.5	-47.63	2.94	3.00	9.53	-43.19	-13.00	30.19	V

LTE FDD Band 71_Channel Bandwidth 20MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1346	-35.99	2.86	3.00	7.25	-33.75	-13.00	20.75	H
2019	-43.92	2.94	3.00	9.53	-39.48	-13.00	26.48	H
1346	-44.04	2.86	3.00	7.25	-41.80	-13.00	28.80	V
2019	-47.71	2.94	3.00	9.53	-43.27	-13.00	30.27	V

LTE FDD Band 71_Channel Bandwidth 20MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361	-36.12	2.86	3.00	7.25	-33.88	-13.00	20.88	H
2041.5	-43.57	2.94	3.00	9.53	-39.13	-13.00	26.13	H
1361	-43.61	2.86	3.00	7.25	-41.37	-13.00	28.37	V
2041.5	-47.02	2.94	3.00	9.53	-42.58	-13.00	29.58	V

LTE FDD Band 71_Channel Bandwidth 20MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1376	-36.19	2.86	3.00	7.25	-33.95	-13.00	20.95	H
2064	-44.03	2.94	3.00	9.53	-39.59	-13.00	26.59	H
1376	-44.14	2.86	3.00	7.25	-41.90	-13.00	28.90	V
2064	-47.60	2.94	3.00	9.53	-43.16	-13.00	30.16	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.




3.6 Frequency Stability under Temperature & Voltage Variations

LIMIT

the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

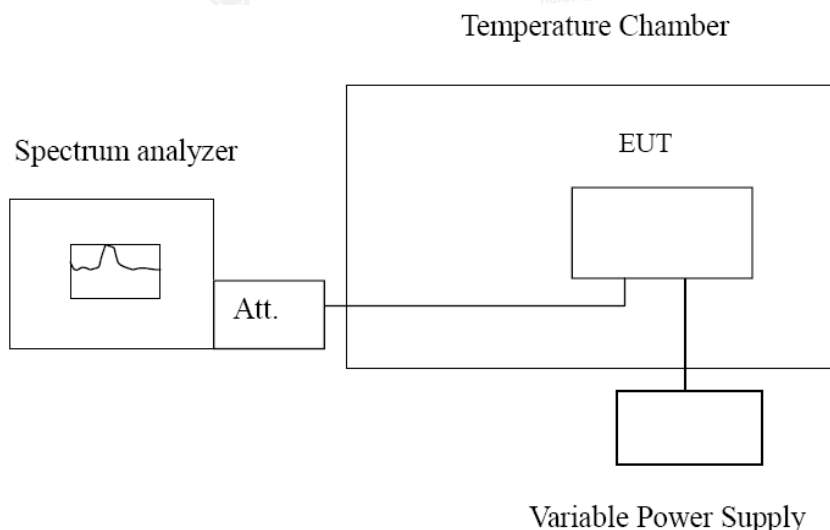

TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E.

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 12, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.



HUAKE TESTING TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case.

LTE Band 71, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage



Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.2	3.00	2.63	0.004508	0.003952
12.0	2.33	2.12	0.003501	0.003186
13.8	2.46	4.36	0.003696	0.006551

Frequency Error vs Temperature


Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	-2.57	-3.12	-0.003777	-0.004585
-20°	-4.29	-3.93	-0.006304	-0.005775
-10°	-2.40	-5.35	-0.003527	-0.007862
0°	-4.45	-3.59	-0.006539	-0.005276
10°	-4.73	-3.86	-0.006951	-0.005672
20°	-4.03	-4.43	-0.005922	-0.006510
30°	-3.09	-3.62	-0.004541	-0.005320
40°	-4.06	-4.55	-0.005966	-0.006686
50°	-3.40	-3.60	-0.004996	-0.005290

4 Test Setup Photos of the EUT

Radiated Emissions

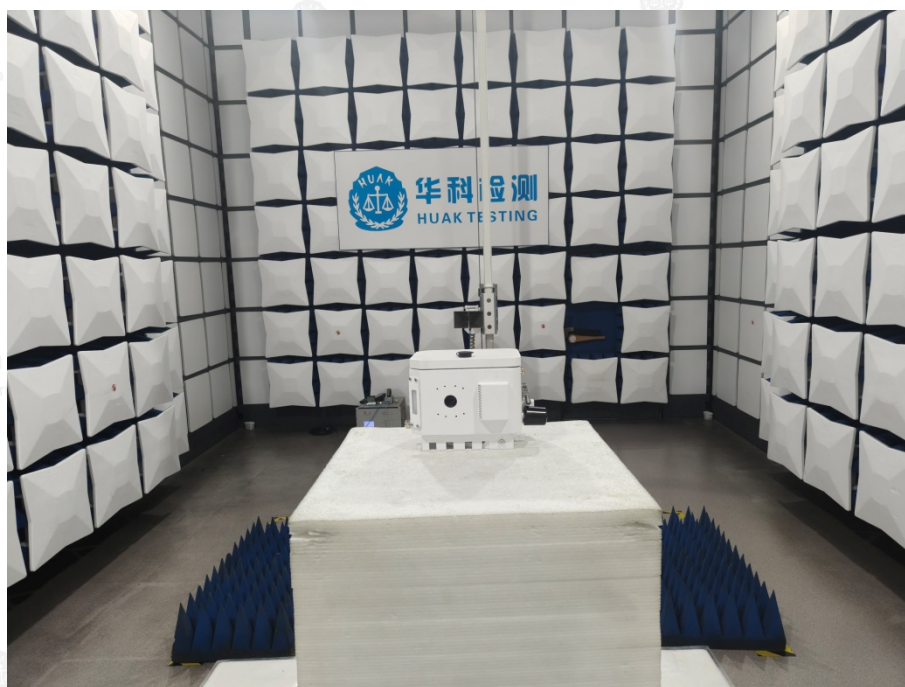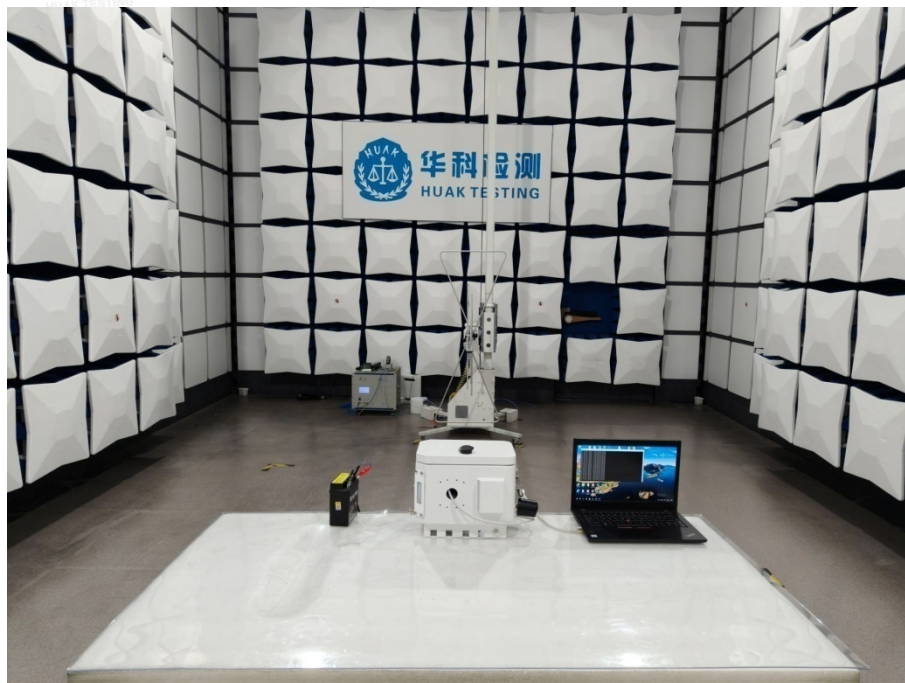

RF Conducted Emission

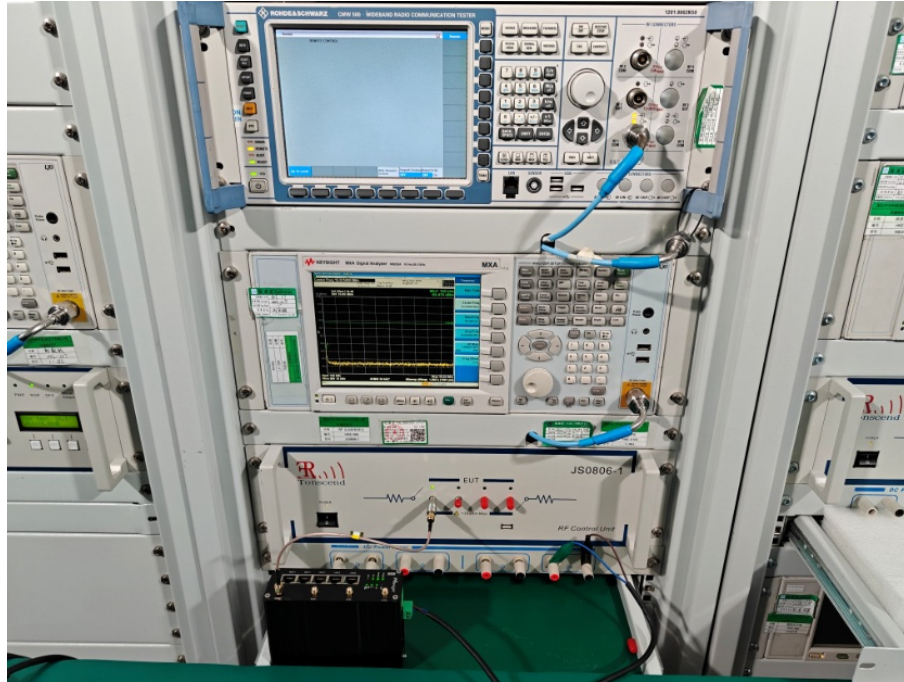

5 Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

***** End of Report *****

