


Mode:	LTE-BAND66-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

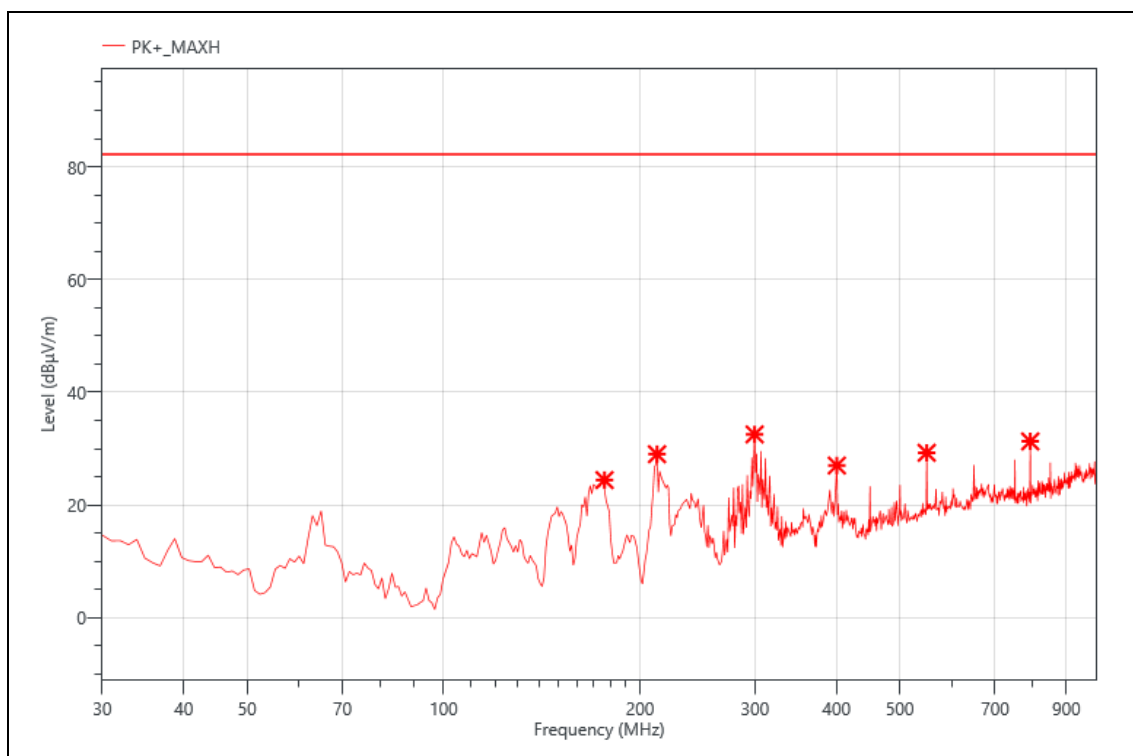


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	46.40	-21.97	24.43	82.30	57.87	PK+	V
2	212.360	50.04	-21.02	29.02	82.30	53.28	PK+	V
3	299.660	51.21	-18.68	32.53	82.30	49.77	PK+	V
4	400.540	40.56	-13.55	27.01	82.30	55.29	PK+	V
5	549.920	38.76	-9.49	29.27	82.30	53.03	PK+	V
6	792.420	37.34	-6.05	31.29	82.30	51.01	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

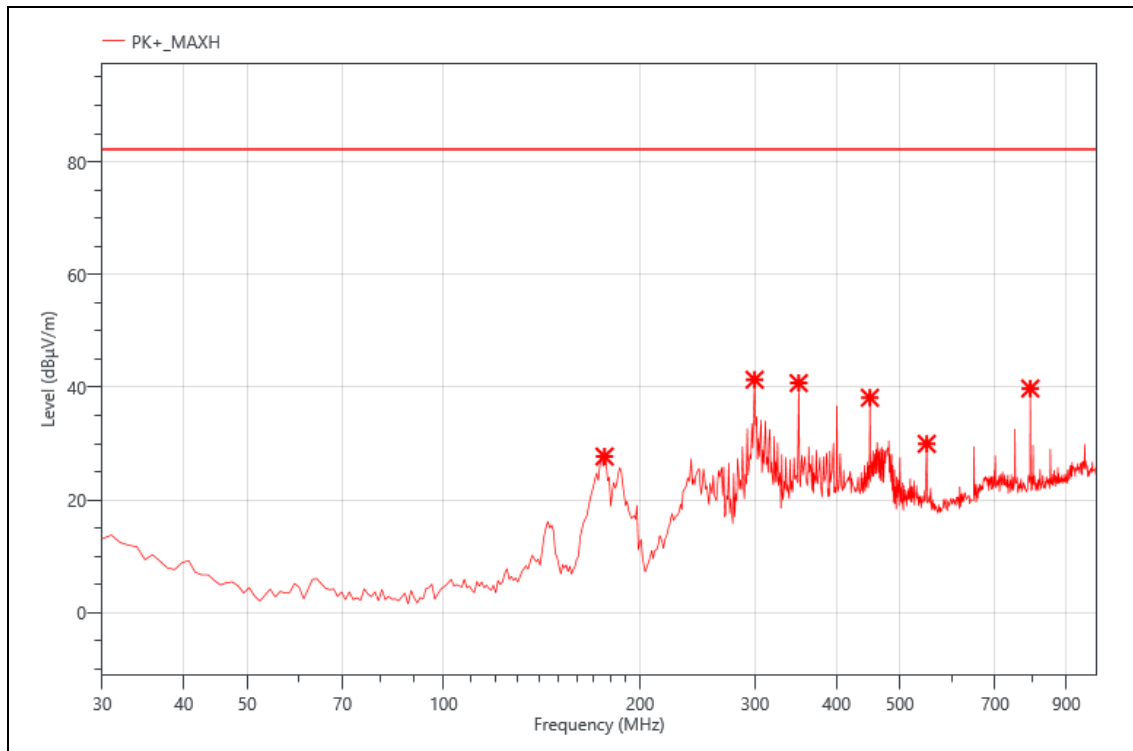


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	49.70	-21.97	27.73	82.30	54.57	PK+	H
2	299.660	60.02	-18.68	41.34	82.30	40.96	PK+	H
3	350.100	56.95	-16.2	40.75	82.30	41.55	PK+	H
4	450.010	51.82	-13.68	38.14	82.30	44.16	PK+	H
5	549.920	39.46	-9.49	29.97	82.30	52.33	PK+	H
6	792.420	45.84	-6.05	39.79	82.30	42.51	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

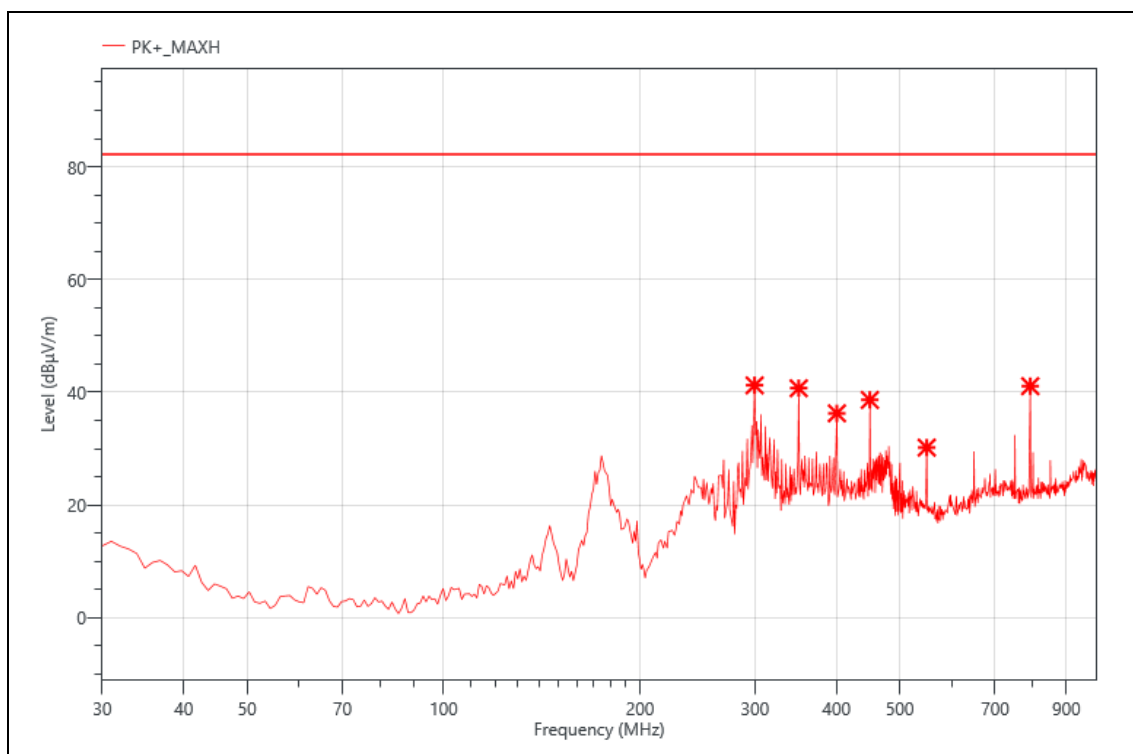


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	299.660	59.91	-18.68	41.23	82.30	41.07	PK+	H
2	350.100	56.92	-16.2	40.72	82.30	41.58	PK+	H
3	400.540	49.82	-13.55	36.27	82.30	46.03	PK+	H
4	450.010	52.32	-13.68	38.64	82.30	43.66	PK+	H
5	549.920	39.68	-9.49	30.19	82.30	52.11	PK+	H
6	792.420	47.14	-6.05	41.09	82.30	41.21	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

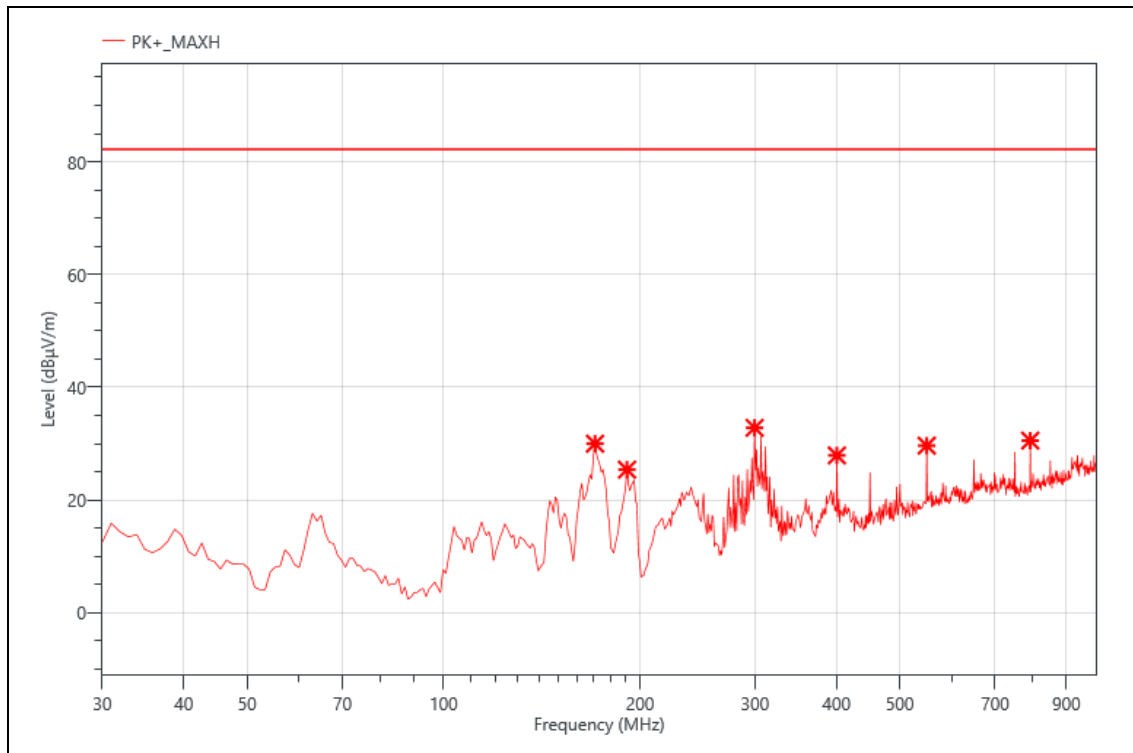


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	170.650	52.16	-22.17	29.99	82.30	52.31	PK+	V
2	191.020	48.00	-22.61	25.39	82.30	56.91	PK+	V
3	299.660	51.49	-18.68	32.81	82.30	49.49	PK+	V
4	400.540	41.46	-13.55	27.91	82.30	54.39	PK+	V
5	549.920	39.14	-9.49	29.65	82.30	52.65	PK+	V
6	792.420	36.60	-6.05	30.55	82.30	51.75	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

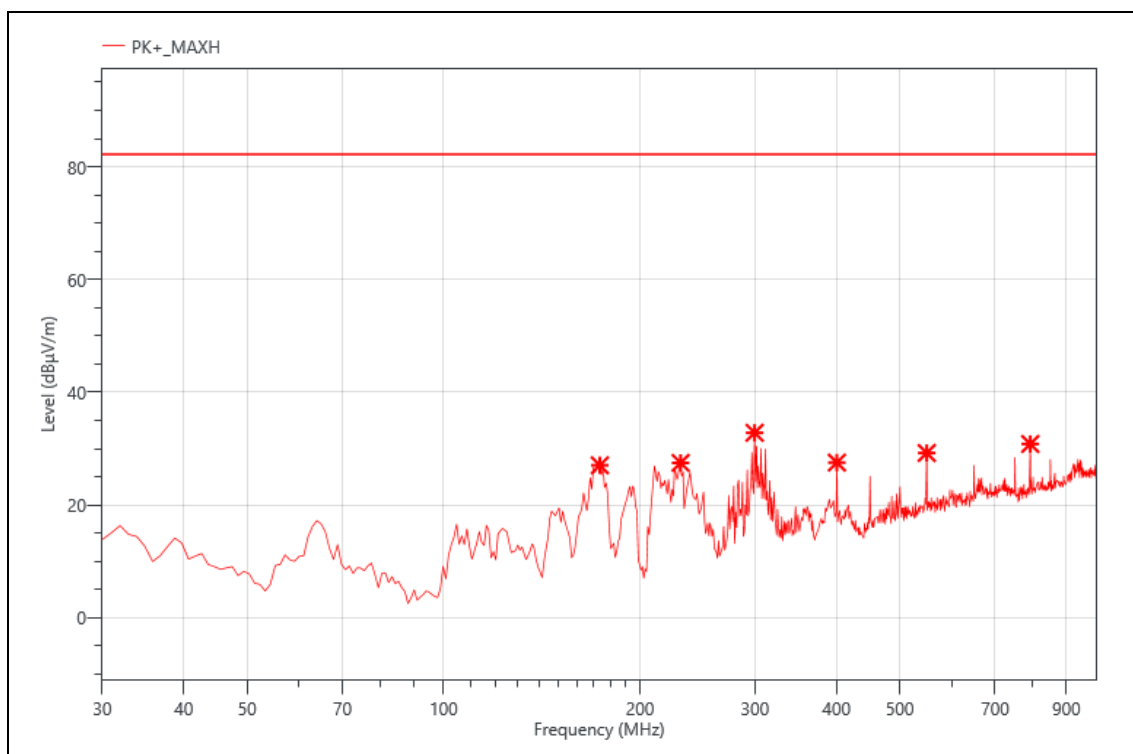


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	173.560	49.10	-22.05	27.05	82.30	55.25	PK+	V
2	230.790	47.35	-19.87	27.48	82.30	54.82	PK+	V
3	299.660	51.50	-18.68	32.82	82.30	49.48	PK+	V
4	400.540	41.08	-13.55	27.53	82.30	54.77	PK+	V
5	549.920	38.72	-9.49	29.23	82.30	53.07	PK+	V
6	792.420	36.88	-6.05	30.83	82.30	51.47	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

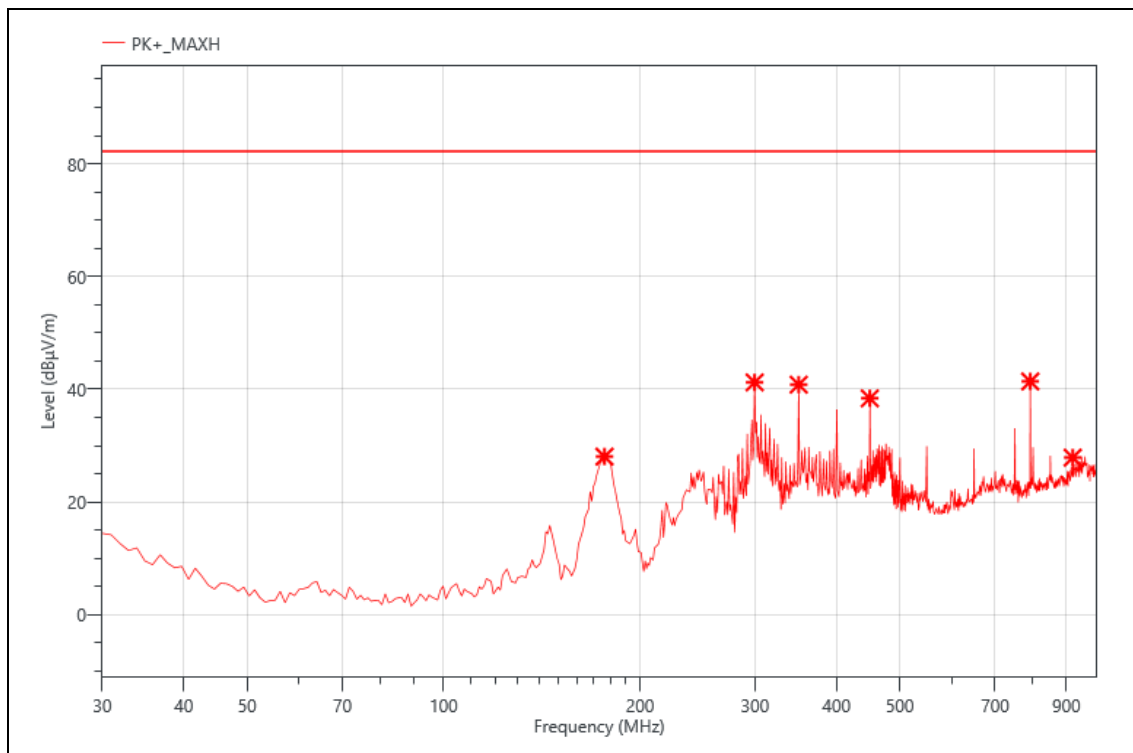


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	50.03	-21.97	28.06	82.30	54.24	PK+	H
2	299.660	59.90	-18.68	41.22	82.30	41.08	PK+	H
3	350.100	57.02	-16.2	40.82	82.30	41.48	PK+	H
4	450.010	52.07	-13.68	38.39	82.30	43.91	PK+	H
5	792.420	47.44	-6.05	41.39	82.30	40.91	PK+	H
6	920.460	30.63	-2.75	27.88	82.30	54.42	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

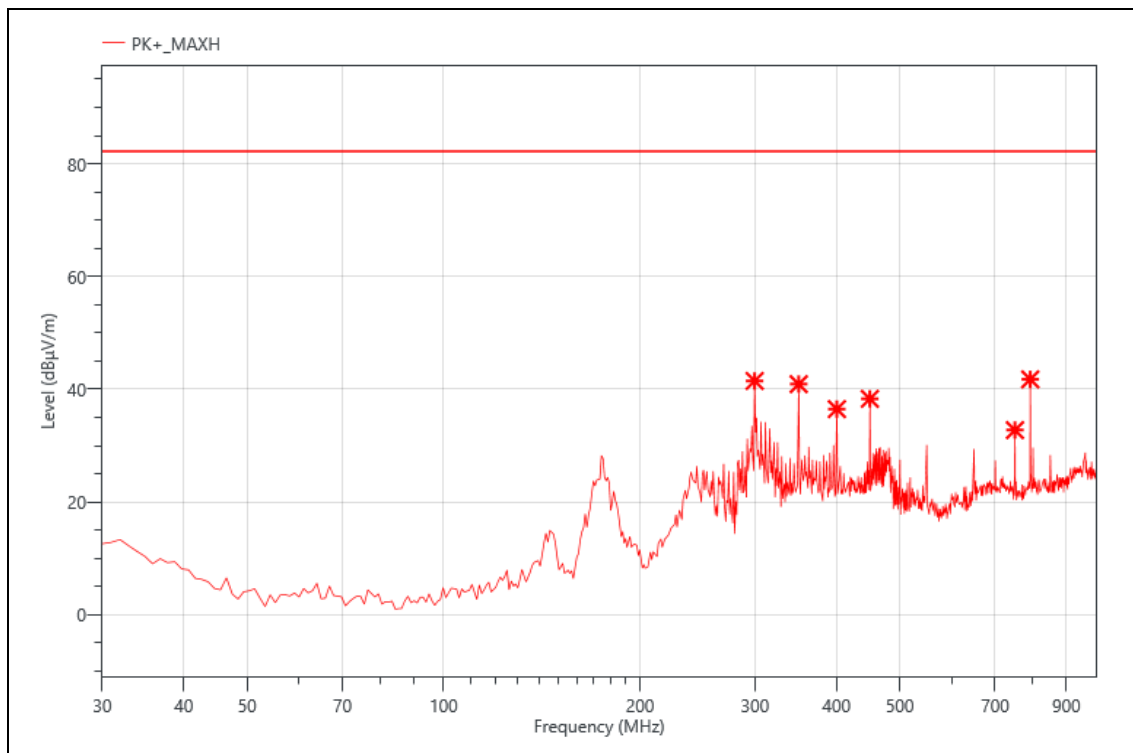


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	299.660	60.16	-18.68	41.48	82.30	40.82	PK+	H
2	350.100	57.11	-16.2	40.91	82.30	41.39	PK+	H
3	400.540	50.03	-13.55	36.48	82.30	45.82	PK+	H
4	450.010	51.98	-13.68	38.30	82.30	44.00	PK+	H
5	750.710	39.47	-6.71	32.76	82.30	49.54	PK+	H
6	792.420	47.81	-6.05	41.76	82.30	40.54	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

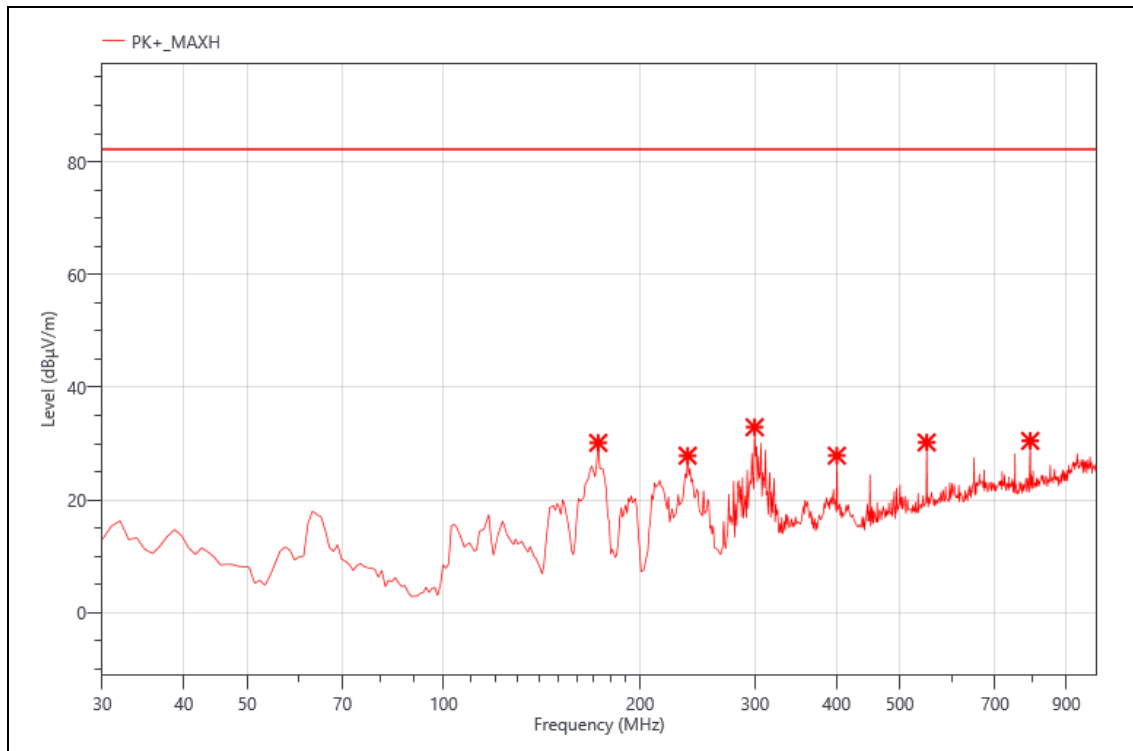


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	172.590	52.24	-22.1	30.14	82.30	52.16	PK+	V
2	236.610	47.26	-19.4	27.86	82.30	54.44	PK+	V
3	299.660	51.60	-18.68	32.92	82.30	49.38	PK+	V
4	400.540	41.42	-13.55	27.87	82.30	54.43	PK+	V
5	549.920	39.70	-9.49	30.21	82.30	52.09	PK+	V
6	792.420	36.54	-6.05	30.49	82.30	51.81	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

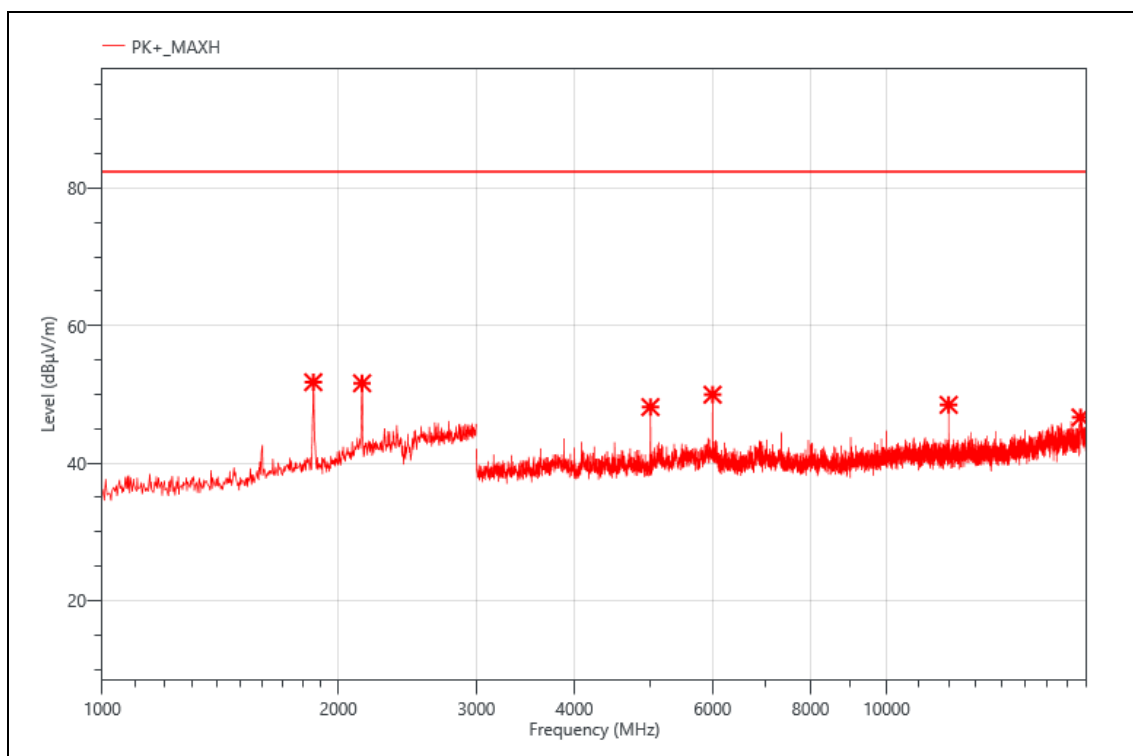


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1858.000	62.20	-10.43	51.77	82.30	30.53	PK+	V
2	2144.000	60.67	-9.05	51.62	82.30	30.68	PK+	V
3	4999.500	59.33	-11.18	48.15	82.30	34.15	PK+	V
4	6000.000	58.82	-8.87	49.95	82.30	32.35	PK+	V
5	12000.000	52.83	-4.36	48.47	82.30	33.83	PK+	V
6	17673.000	46.35	0.3	46.65	82.30	35.65	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

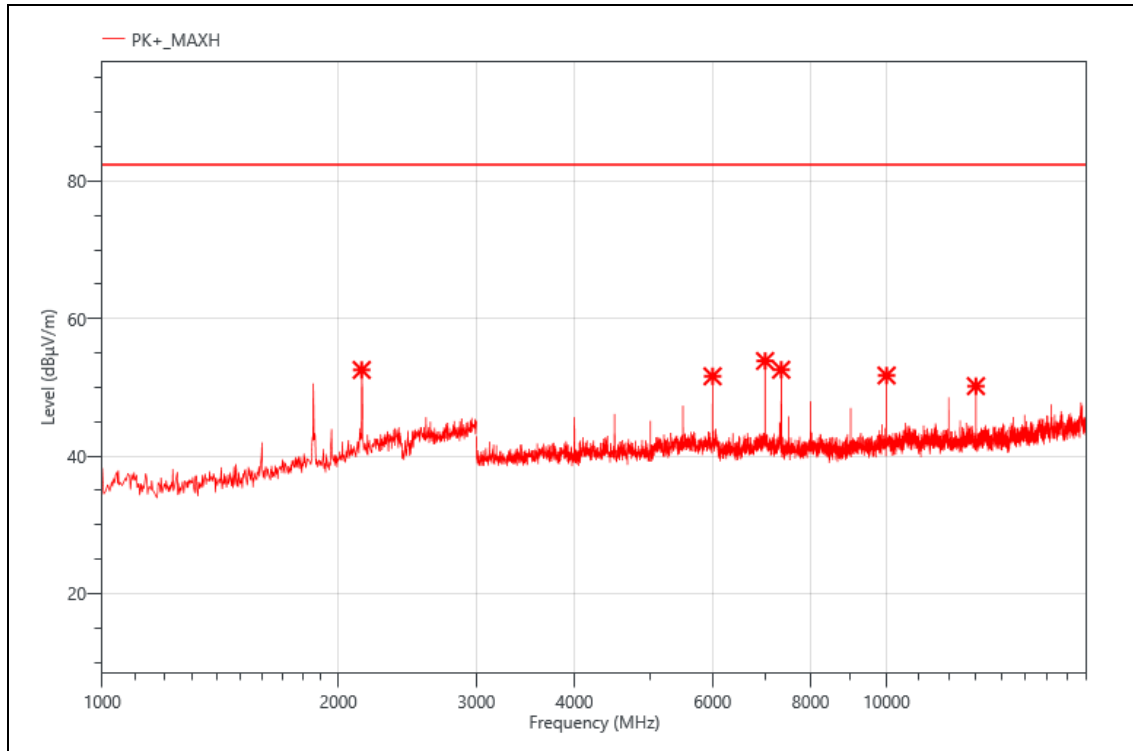


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	61.58	-9.05	52.53	82.30	29.77	PK+	H
2	6000.000	60.48	-8.87	51.61	82.30	30.69	PK+	H
3	7000.500	61.63	-7.8	53.83	82.30	28.47	PK+	H
4	7339.500	60.82	-8.26	52.56	82.30	29.74	PK+	H
5	10000.500	57.90	-6.17	51.73	82.30	30.57	PK+	H
6	13000.500	54.69	-4.51	50.18	82.30	32.12	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

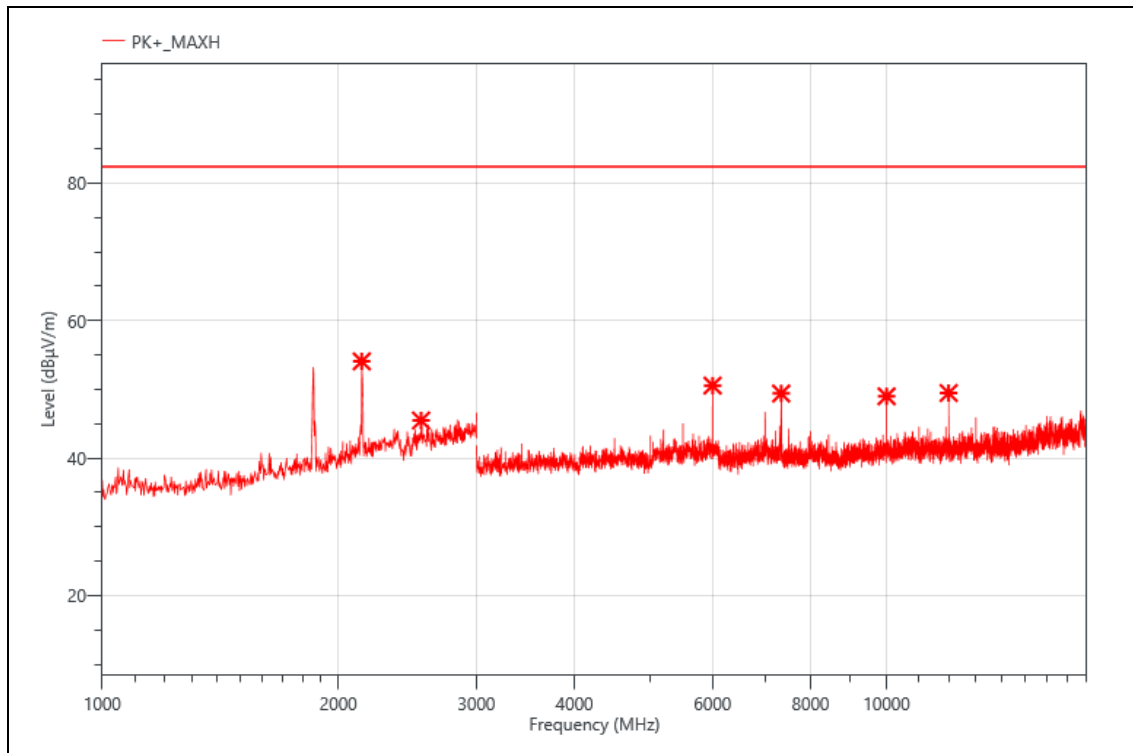


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	63.12	-9.05	54.07	82.30	28.23	PK+	H
2	2550.000	53.64	-8.17	45.47	82.30	36.83	PK+	H
3	6000.000	59.42	-8.87	50.55	82.30	31.75	PK+	H
4	7339.500	57.66	-8.26	49.40	82.30	32.90	PK+	H
5	10000.500	55.16	-6.17	48.99	82.30	33.31	PK+	H
6	12000.000	53.83	-4.36	49.47	82.30	32.83	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

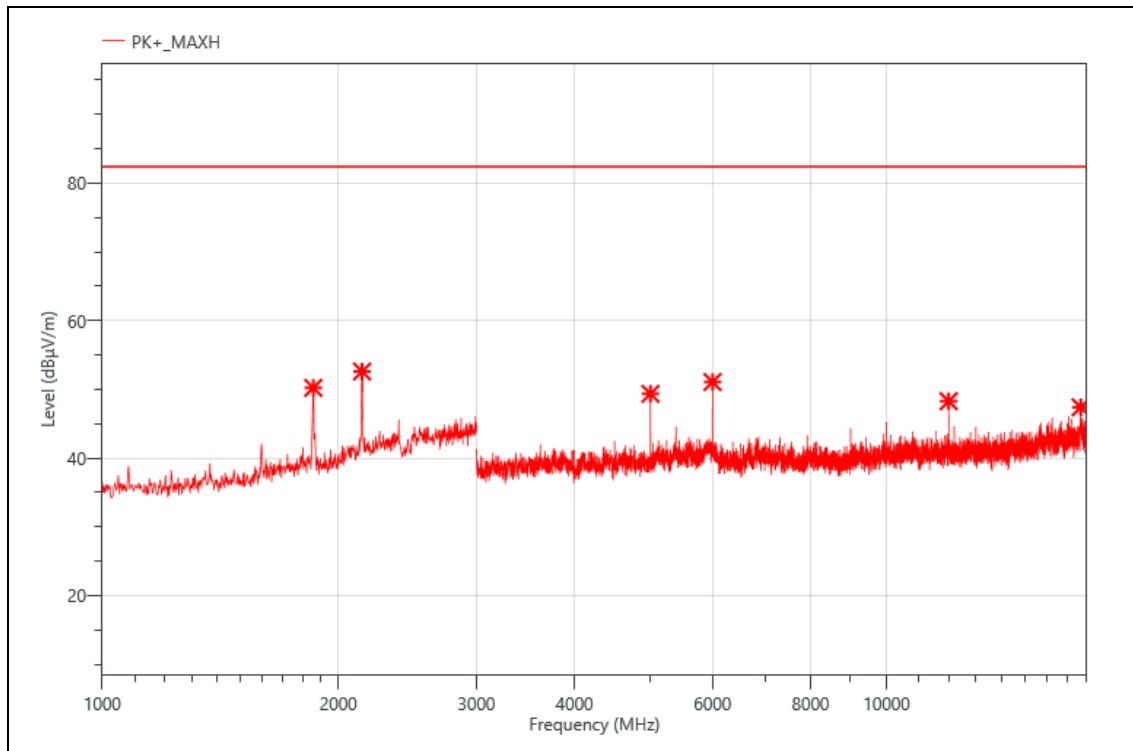


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1858.000	60.65	-10.43	50.22	82.30	32.08	PK+	V
2	2144.000	61.64	-9.05	52.59	82.30	29.71	PK+	V
3	4999.500	60.53	-11.18	49.35	82.30	32.95	PK+	V
4	6000.000	59.94	-8.87	51.07	82.30	31.23	PK+	V
5	12000.000	52.64	-4.36	48.28	82.30	34.02	PK+	V
6	17682.000	47.11	0.28	47.39	82.30	34.91	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

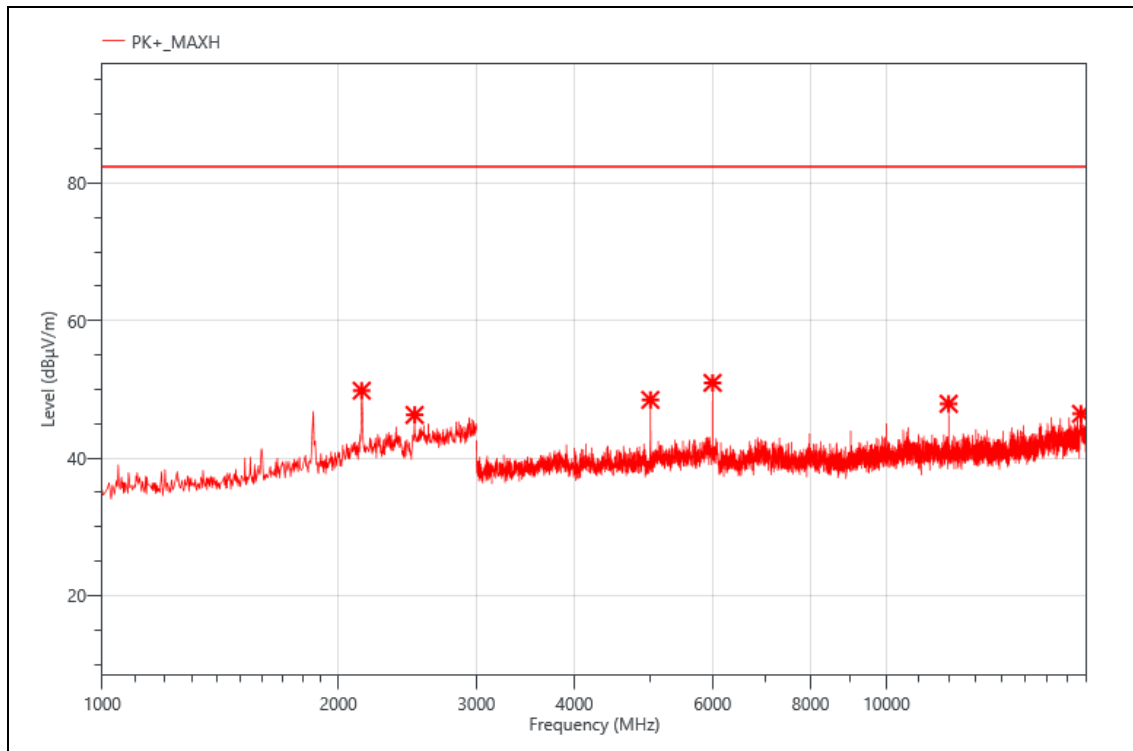


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	58.86	-9.05	49.81	82.30	32.49	PK+	V
2	2502.000	54.69	-8.41	46.28	82.30	36.02	PK+	V
3	4999.500	59.65	-11.18	48.47	82.30	33.83	PK+	V
4	6000.000	59.81	-8.87	50.94	82.30	31.36	PK+	V
5	12000.000	52.26	-4.36	47.90	82.30	34.40	PK+	V
6	17700.000	46.26	0.18	46.44	82.30	35.86	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

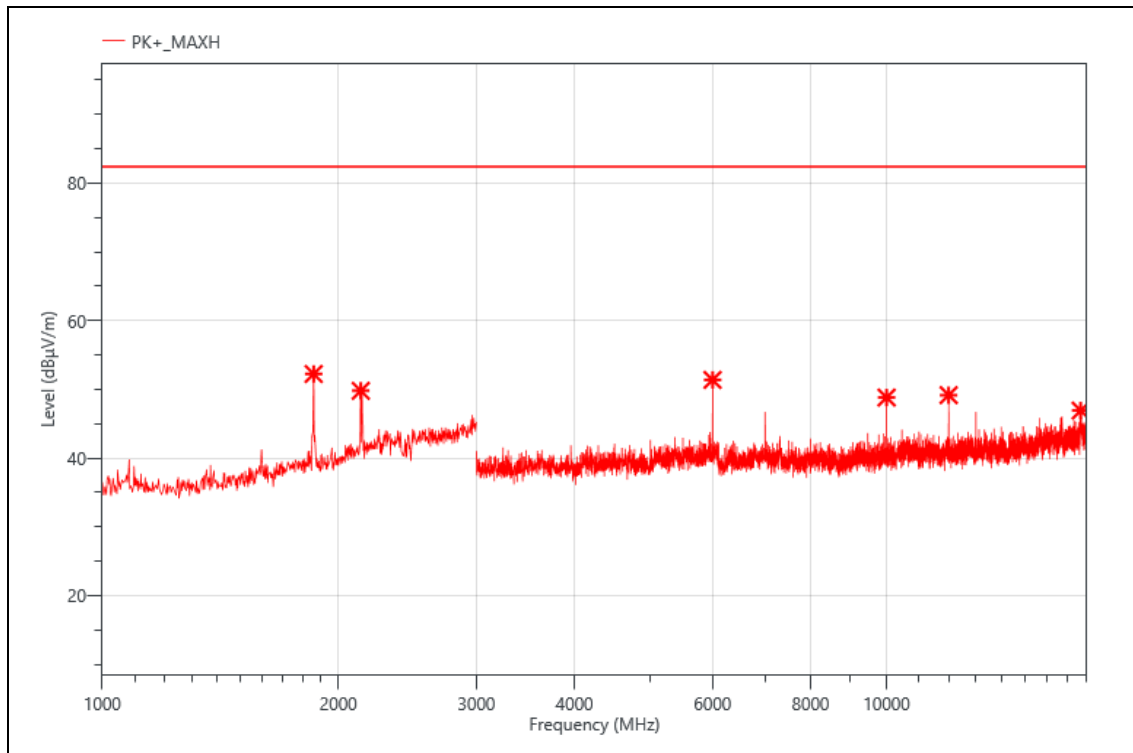


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1860.000	62.66	-10.42	52.24	82.30	30.06	PK+	H
2	2136.000	58.84	-9.05	49.79	82.30	32.51	PK+	H
3	6000.000	60.25	-8.87	51.38	82.30	30.92	PK+	H
4	10000.500	54.98	-6.17	48.81	82.30	33.49	PK+	H
5	12000.000	53.52	-4.36	49.16	82.30	33.14	PK+	H
6	17680.500	46.62	0.29	46.91	82.30	35.39	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

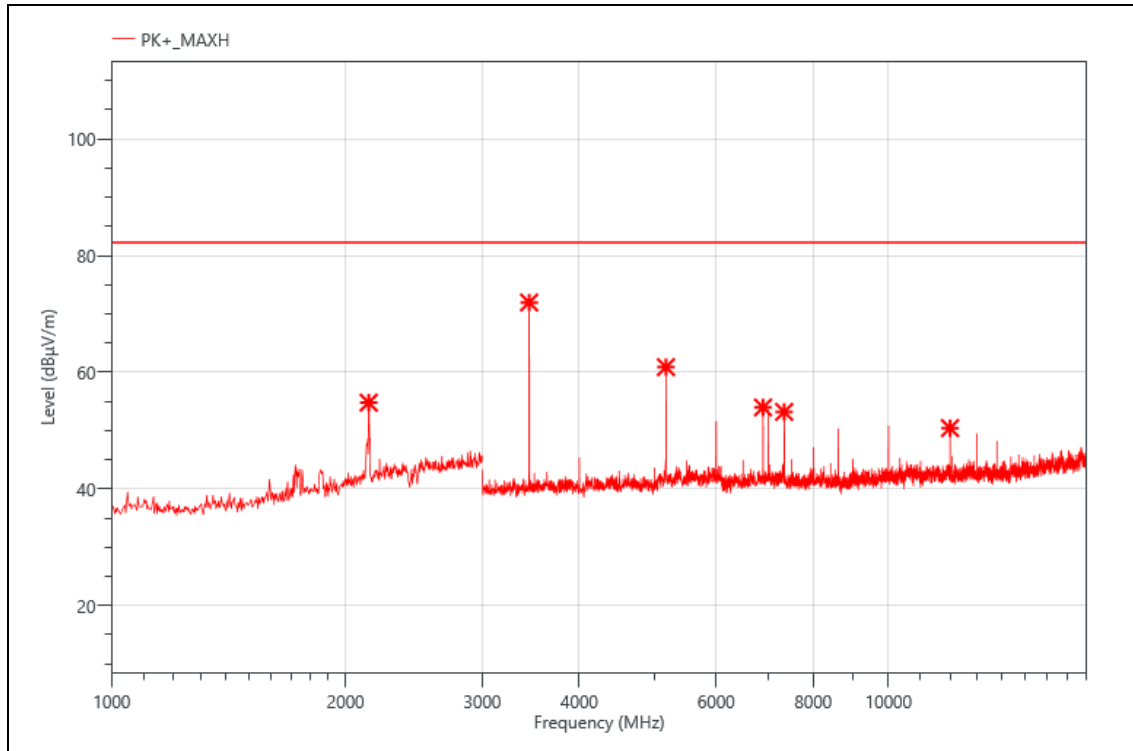


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	63.84	-9.05	54.79	82.30	27.51	PK+	H
2	3447.000	86.17	-14.21	71.96	82.30	10.34	PK+	H
3	5170.500	71.51	-10.63	60.88	82.30	21.42	PK+	H
4	6894.000	62.06	-8.09	53.97	82.30	28.33	PK+	H
5	7341.000	61.45	-8.25	53.20	82.30	29.10	PK+	H
6	12000.000	54.78	-4.36	50.42	82.30	31.88	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

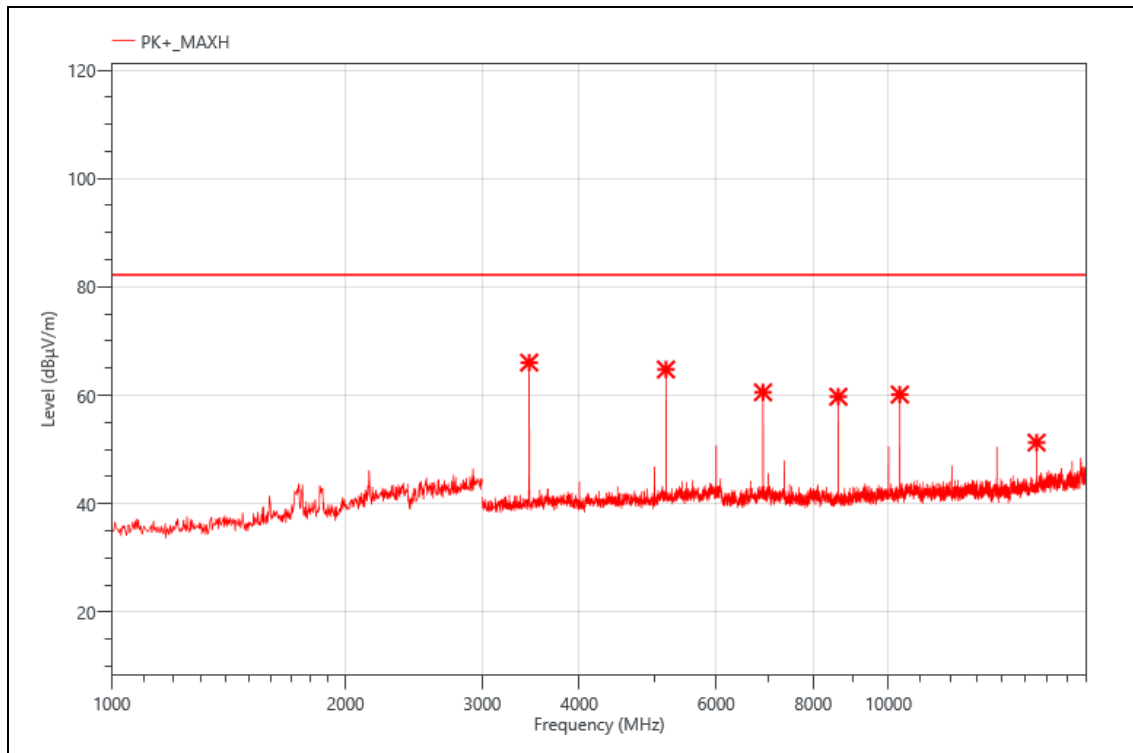


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	3447.000	80.26	-14.21	66.05	82.30	16.25	PK+	V
2	5170.500	75.40	-10.63	64.77	82.30	17.53	PK+	V
3	6894.000	68.65	-8.09	60.56	82.30	21.74	PK+	V
4	8619.000	67.87	-8.12	59.75	82.30	22.55	PK+	V
5	10341.000	65.77	-5.63	60.14	82.30	22.16	PK+	V
6	15513.000	54.08	-2.79	51.29	82.30	31.01	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

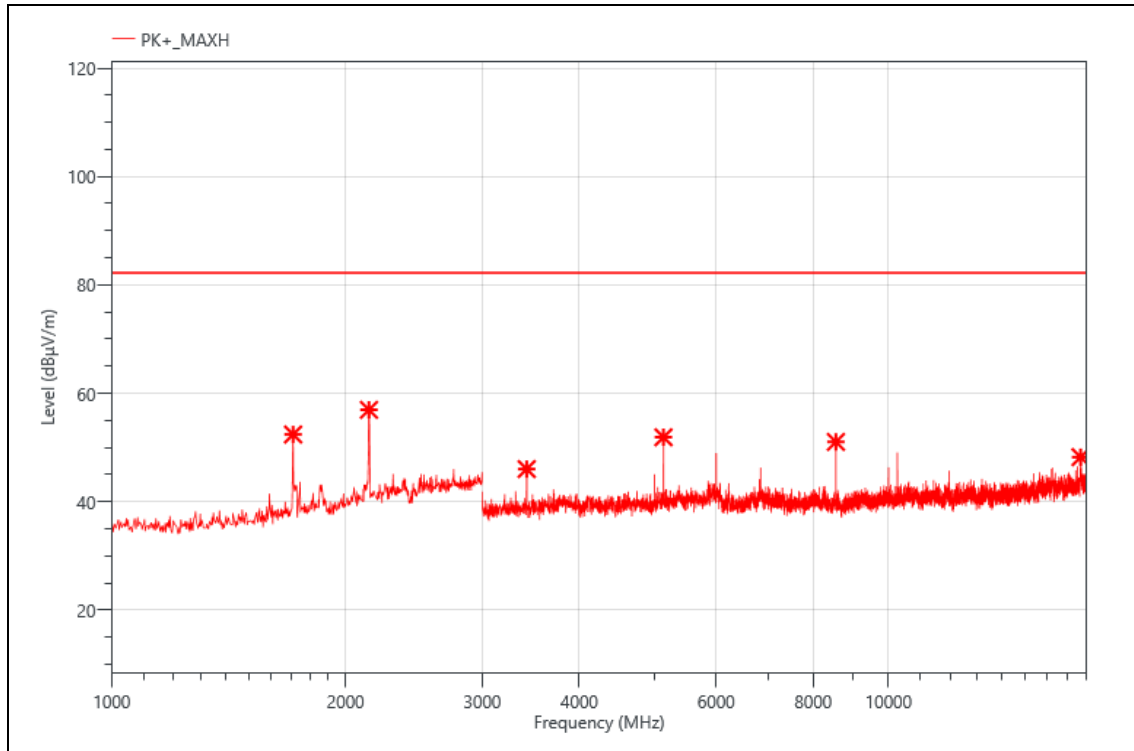


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1712.000	64.17	-11.76	52.41	82.30	29.89	PK+	V
2	2144.000	66.01	-9.05	56.96	82.30	25.34	PK+	V
3	3421.500	60.35	-14.31	46.04	82.30	36.26	PK+	V
4	5133.000	62.18	-10.28	51.90	82.30	30.40	PK+	V
5	8556.000	58.93	-7.89	51.04	82.30	31.26	PK+	V
6	17674.500	47.92	0.32	48.24	82.30	34.06	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

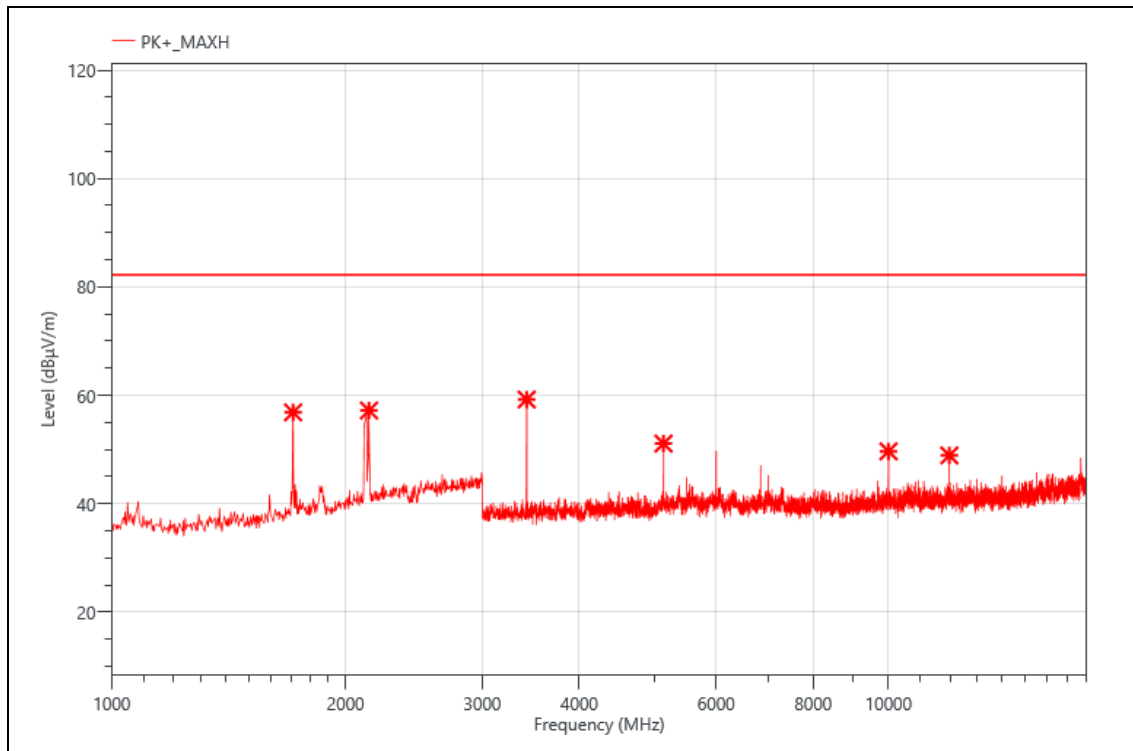


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1712.000	68.62	-11.76	56.86	82.30	25.44	PK+	H
2	2144.000	66.26	-9.05	57.21	82.30	25.09	PK+	H
3	3421.500	73.55	-14.31	59.24	82.30	23.06	PK+	H
4	5133.000	61.39	-10.28	51.11	82.30	31.19	PK+	H
5	10000.500	55.84	-6.17	49.67	82.30	32.63	PK+	H
6	11977.500	53.45	-4.53	48.92	82.30	33.38	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

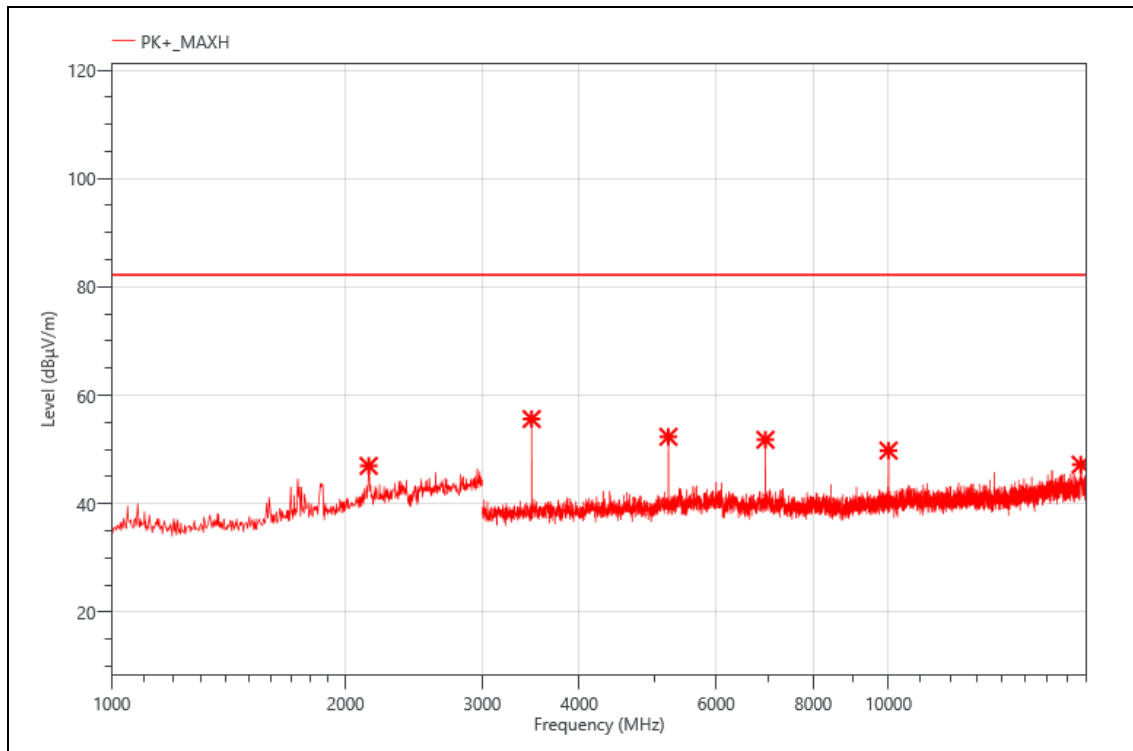


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	56.05	-9.05	47.00	82.30	35.30	PK+	H
2	3472.500	69.85	-14.21	55.64	82.30	26.66	PK+	H
3	5208.000	62.77	-10.42	52.35	82.30	29.95	PK+	H
4	6943.500	59.85	-8.04	51.81	82.30	30.49	PK+	H
5	10000.500	55.98	-6.17	49.81	82.30	32.49	PK+	H
6	17679.000	46.94	0.29	47.23	82.30	35.07	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

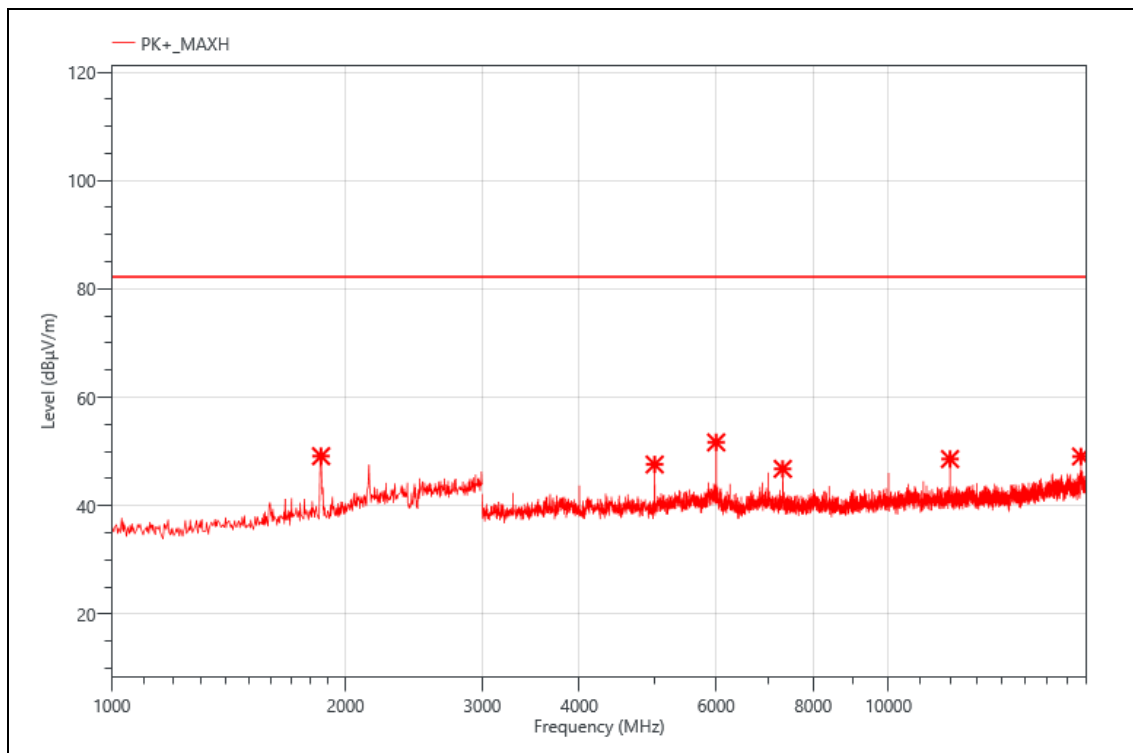

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1860.000	59.58	-10.42	49.16	82.30	33.14	PK+	V
2	4999.500	58.80	-11.18	47.62	82.30	34.68	PK+	V
3	6000.000	60.57	-8.87	51.70	82.30	30.60	PK+	V
4	7309.500	54.36	-7.55	46.81	82.30	35.49	PK+	V
5	12000.000	52.98	-4.36	48.62	82.30	33.68	PK+	V
6	17697.000	48.90	0.2	49.10	82.30	33.20	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]