


Mode:	LTE-BAND14-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

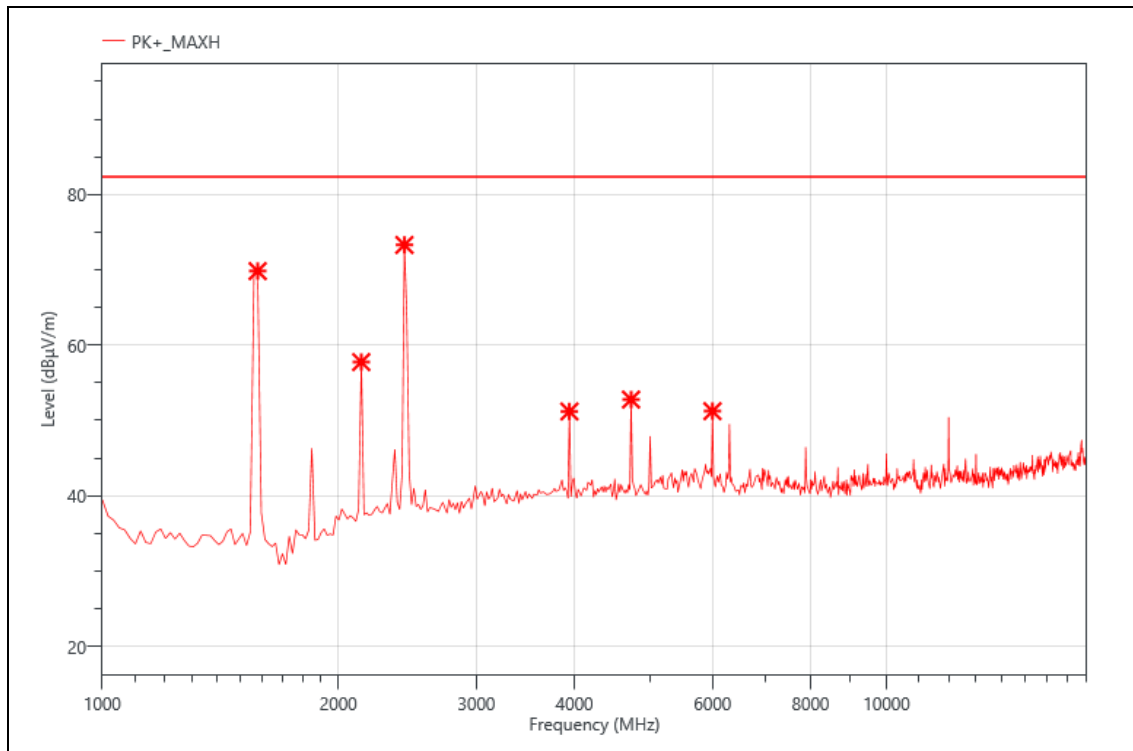


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1578.000	91.69	-21.86	69.83	82.30	12.47	PK+	V
2	2139.000	75.76	-18.01	57.75	82.30	24.55	PK+	V
3	2428.000	90.51	-17.21	73.30	82.30	9.00	PK+	V
4	3941.000	64.58	-13.39	51.19	82.30	31.11	PK+	V
5	4723.000	64.35	-11.58	52.77	82.30	29.53	PK+	V
6	5998.000	60.22	-8.99	51.23	82.30	31.07	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

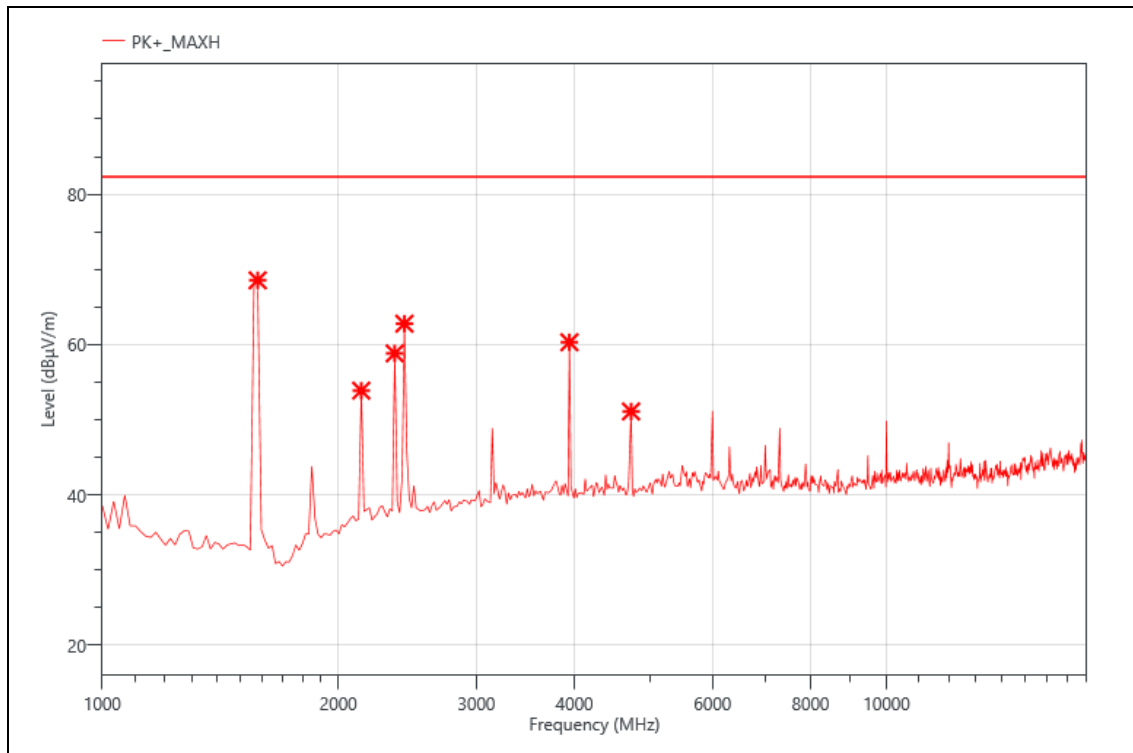


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1578.000	90.42	-21.86	68.56	82.30	13.74	PK+	H
2	2139.000	71.89	-18.01	53.88	82.30	28.42	PK+	H
3	2360.000	76.26	-17.43	58.83	82.30	23.47	PK+	H
4	2428.000	80.00	-17.21	62.79	82.30	19.51	PK+	H
5	3941.000	73.71	-13.39	60.32	82.30	21.98	PK+	H
6	4723.000	62.69	-11.58	51.11	82.30	31.19	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

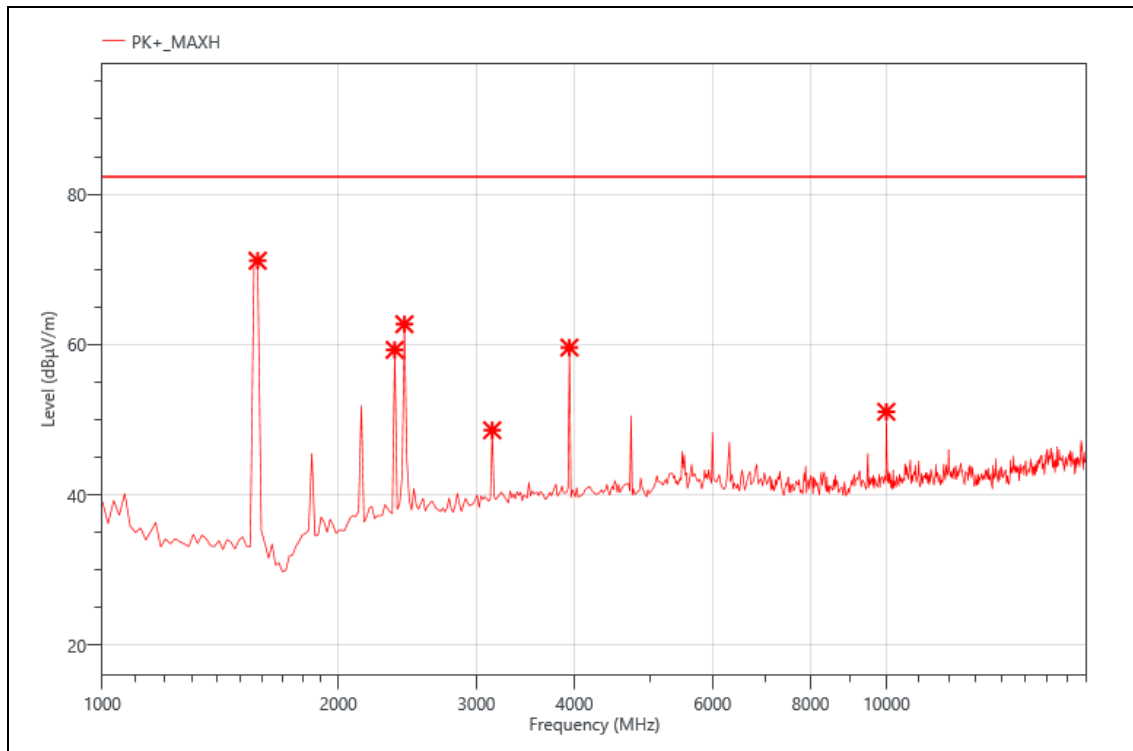


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1578.000	93.02	-21.86	71.16	82.30	11.14	PK+	H
2	2360.000	76.73	-17.43	59.30	82.30	23.00	PK+	H
3	2428.000	79.93	-17.21	62.72	82.30	19.58	PK+	H
4	3142.000	63.89	-15.28	48.61	82.30	33.69	PK+	H
5	3941.000	73.00	-13.39	59.61	82.30	22.69	PK+	H
6	9993.000	57.17	-6.1	51.07	82.30	31.23	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

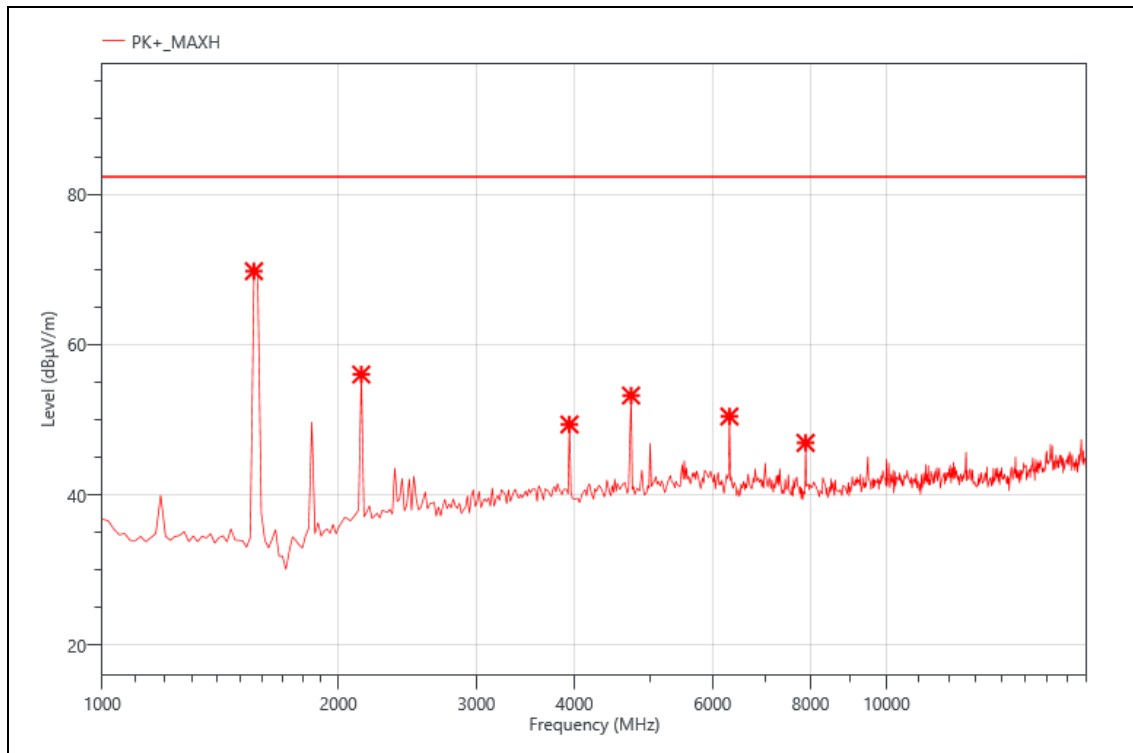


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1561.000	91.76	-21.99	69.77	82.30	12.53	PK+	V
2	2139.000	74.03	-18.01	56.02	82.30	26.28	PK+	V
3	3941.000	62.77	-13.39	49.38	82.30	32.92	PK+	V
4	4723.000	64.81	-11.58	53.23	82.30	29.07	PK+	V
5	6304.000	57.81	-7.37	50.44	82.30	31.86	PK+	V
6	7885.000	54.71	-7.78	46.93	82.30	35.37	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

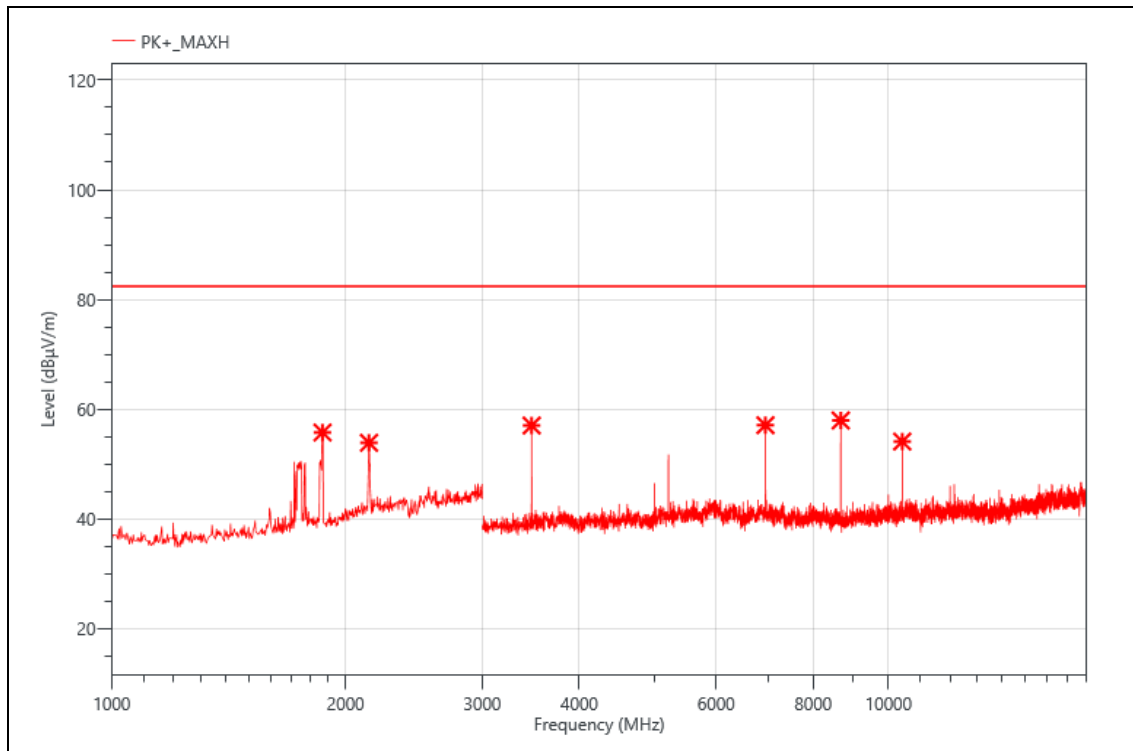


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1868.000	66.13	-10.38	55.75	82.30	26.55	PK+	V
2	2144.000	62.92	-9.05	53.87	82.30	28.43	PK+	V
3	3472.500	71.23	-14.21	57.02	82.30	25.28	PK+	V
4	6943.500	65.12	-8.04	57.08	82.30	25.22	PK+	V
5	8680.500	66.21	-8.27	57.94	82.30	24.36	PK+	V
6	10416.000	59.64	-5.54	54.10	82.30	28.20	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

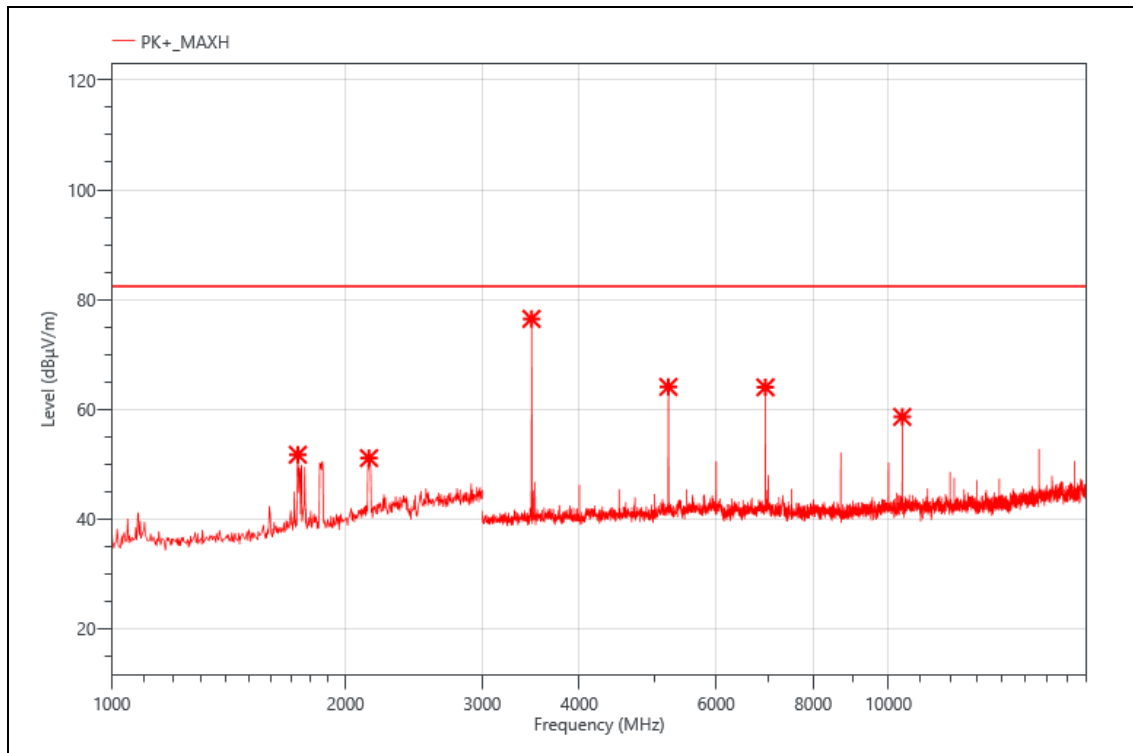


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1736.000	63.19	-11.49	51.70	82.30	30.60	PK+	H
2	2144.000	60.12	-9.05	51.07	82.30	31.23	PK+	H
3	3471.000	90.67	-14.21	76.46	82.30	5.84	PK+	H
4	5208.000	74.48	-10.42	64.06	82.30	18.24	PK+	H
5	6943.500	72.02	-8.04	63.98	82.30	18.32	PK+	H
6	10416.000	64.13	-5.54	58.59	82.30	23.71	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

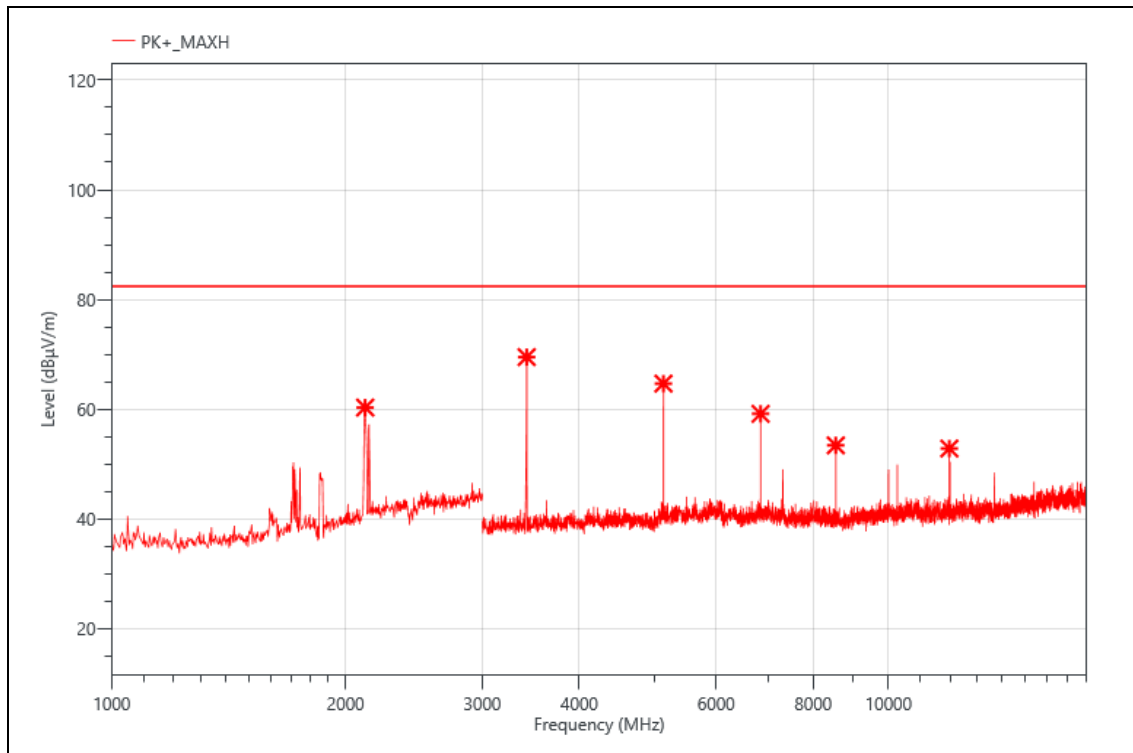


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2120.000	69.42	-9.13	60.29	82.30	22.01	PK+	H
2	3421.500	83.80	-14.31	69.49	82.30	12.81	PK+	H
3	5133.000	74.94	-10.28	64.66	82.30	17.64	PK+	H
4	6844.500	67.30	-8.15	59.15	82.30	23.15	PK+	H
5	8554.500	61.32	-7.91	53.41	82.30	28.89	PK+	H
6	11977.500	57.36	-4.53	52.83	82.30	29.47	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

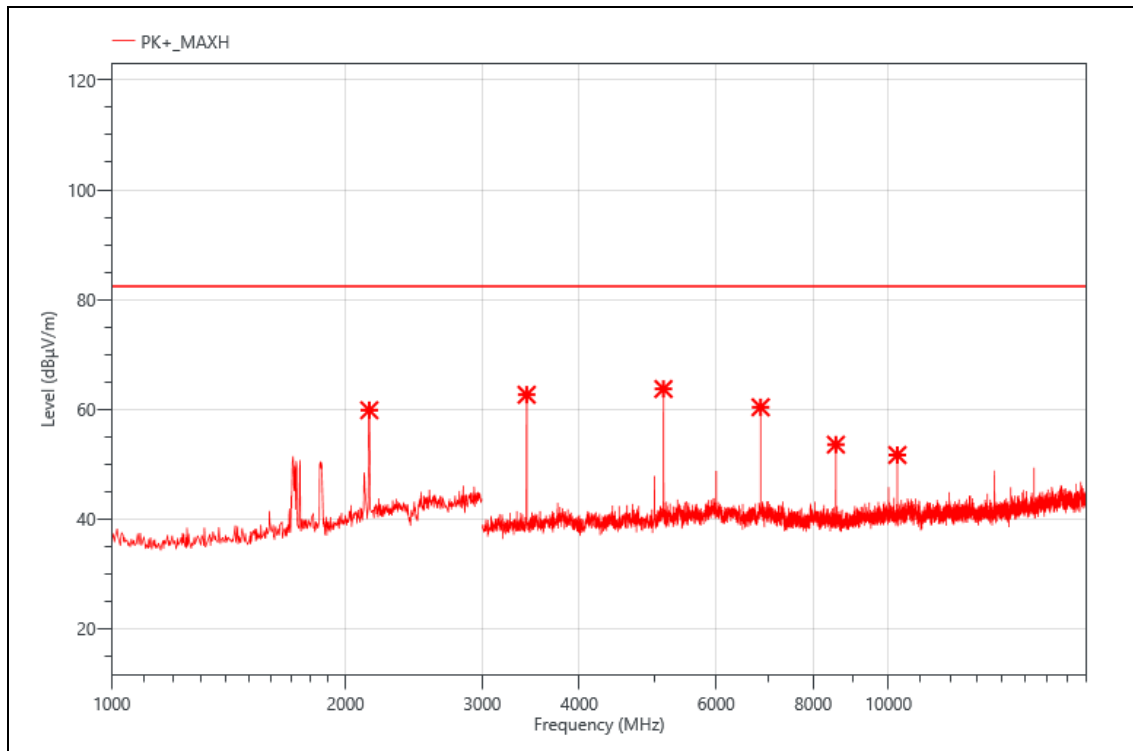


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2146.000	68.86	-9.05	59.81	82.30	22.49	PK+	V
2	3421.500	76.94	-14.31	62.63	82.30	19.67	PK+	V
3	5133.000	73.96	-10.28	63.68	82.30	18.62	PK+	V
4	6844.500	68.50	-8.15	60.35	82.30	21.95	PK+	V
5	8556.000	61.42	-7.89	53.53	82.30	28.77	PK+	V
6	10266.000	57.44	-5.8	51.64	82.30	30.66	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

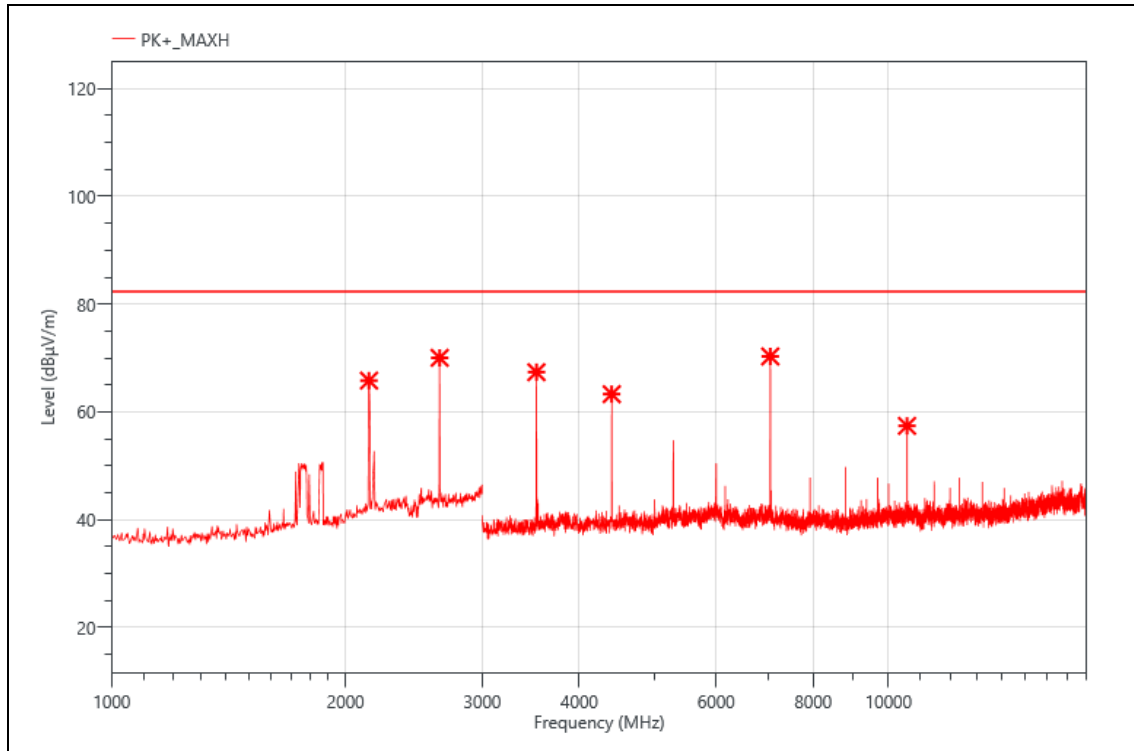


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2144.000	74.86	-9.05	65.81	82.30	16.49	PK+	V
2	2644.000	78.73	-8.69	70.04	82.30	12.26	PK+	V
3	3522.000	81.27	-13.9	67.37	82.30	14.93	PK+	V
4	4402.500	75.17	-11.88	63.29	82.30	19.01	PK+	V
5	7044.000	78.20	-7.91	70.29	82.30	12.01	PK+	V
6	10566.000	62.49	-5.09	57.40	82.30	24.90	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

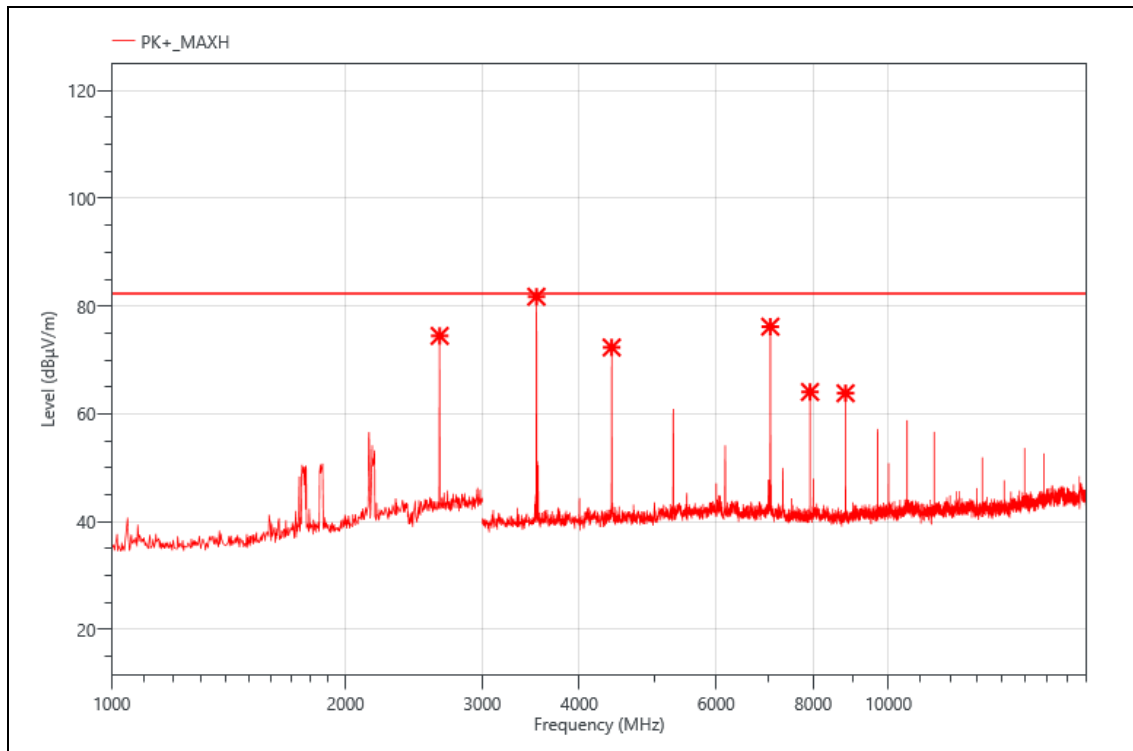


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2644.000	83.17	-8.69	74.48	82.30	7.82	PK+	H
2	3522.000	95.65	-13.9	81.75	82.30	0.55	PK+	H
3	4402.500	84.21	-11.88	72.33	82.30	9.97	PK+	H
4	7044.000	84.10	-7.91	76.19	82.30	6.11	PK+	H
5	7924.500	72.12	-8.05	64.07	82.30	18.23	PK+	H
6	8805.000	71.71	-7.87	63.84	82.30	18.46	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

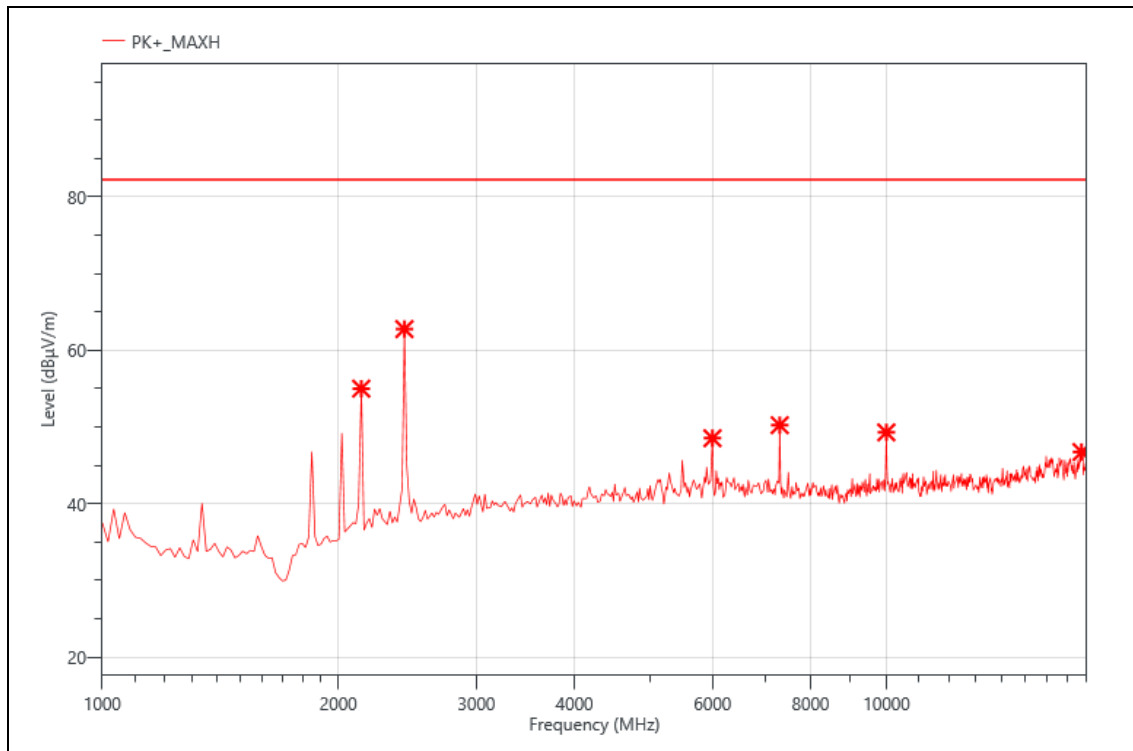


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	73.01	-18.01	55.00	82.30	27.30	PK+	H
2	2428.000	79.98	-17.21	62.77	82.30	19.53	PK+	H
3	5998.000	57.53	-8.99	48.54	82.30	33.76	PK+	H
4	7307.000	58.05	-7.81	50.24	82.30	32.06	PK+	H
5	9993.000	55.40	-6.1	49.30	82.30	33.00	PK+	H
6	17728.000	46.22	0.52	46.74	82.30	35.56	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

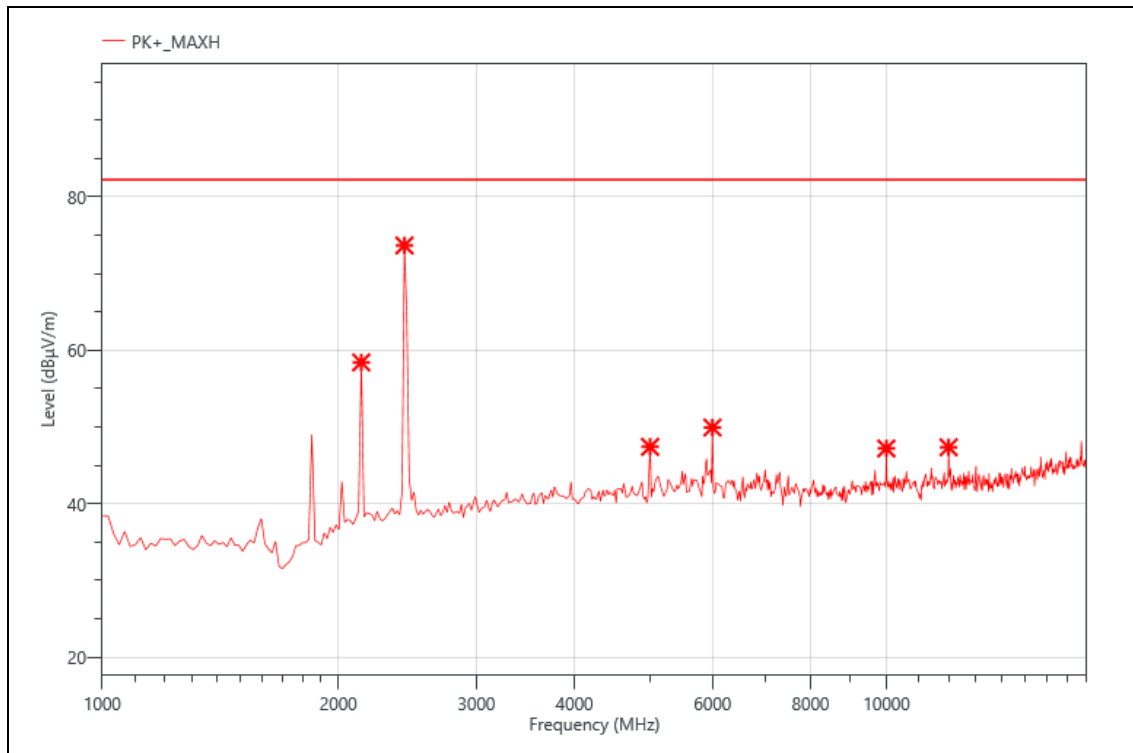


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	76.43	-18.01	58.42	82.30	23.88	PK+	V
2	2428.000	90.88	-17.21	73.67	82.30	8.63	PK+	V
3	4995.000	58.51	-11.1	47.41	82.30	34.89	PK+	V
4	5998.000	58.92	-8.99	49.93	82.30	32.37	PK+	V
5	9993.000	53.30	-6.1	47.20	82.30	35.10	PK+	V
6	11999.000	51.44	-4.09	47.35	82.30	34.95	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

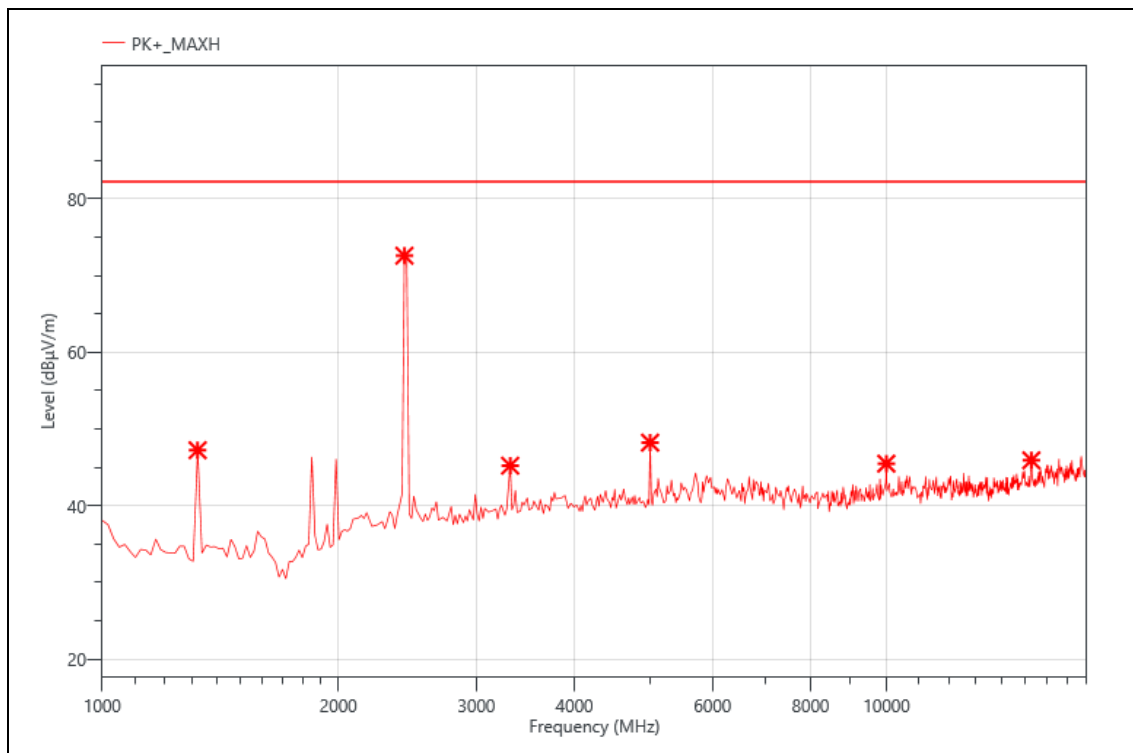


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1323.000	70.10	-22.87	47.23	82.30	35.07	PK+	V
2	2428.000	89.81	-17.21	72.60	82.30	9.70	PK+	V
3	3312.000	59.92	-14.7	45.22	82.30	37.08	PK+	V
4	4995.000	59.32	-11.1	48.22	82.30	34.08	PK+	V
5	9993.000	51.58	-6.1	45.48	82.30	36.82	PK+	V
6	15297.000	48.59	-2.67	45.92	82.30	36.38	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

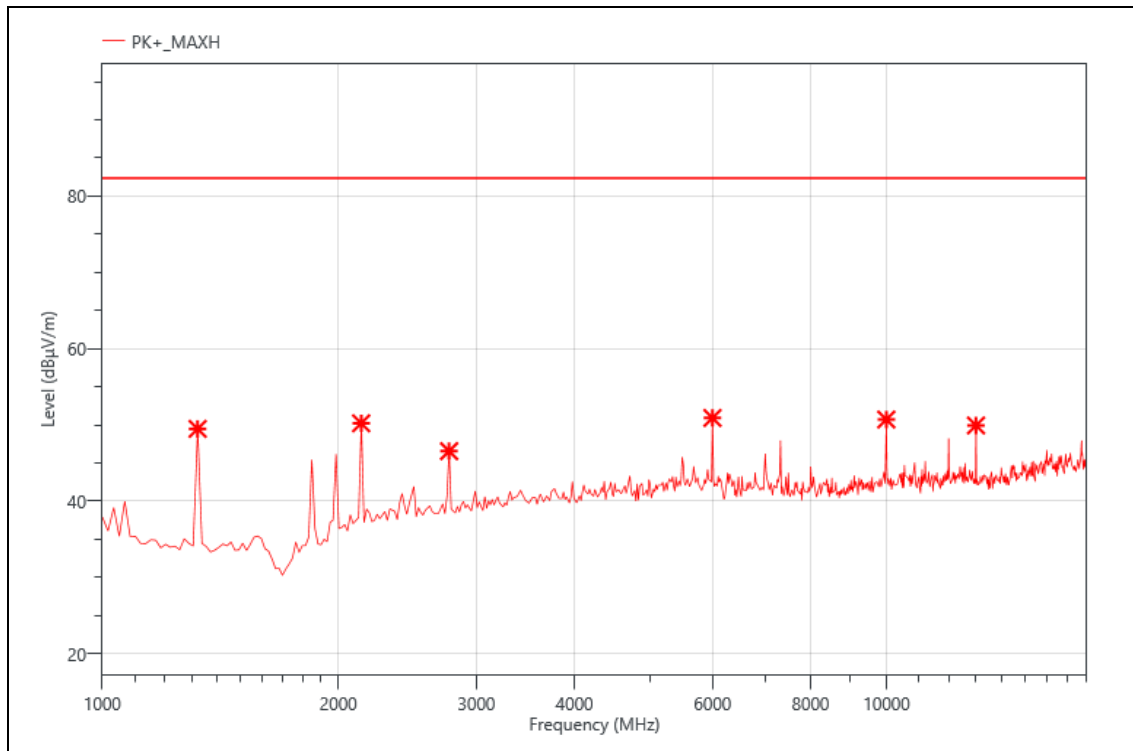


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1323.000	72.35	-22.87	49.48	82.30	32.82	PK+	H
2	2139.000	68.22	-18.01	50.21	82.30	32.09	PK+	H
3	2768.000	63.33	-16.77	46.56	82.30	35.74	PK+	H
4	5998.000	59.90	-8.99	50.91	82.30	31.39	PK+	H
5	9993.000	56.81	-6.1	50.71	82.30	31.59	PK+	H
6	13002.000	54.48	-4.55	49.93	82.30	32.37	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

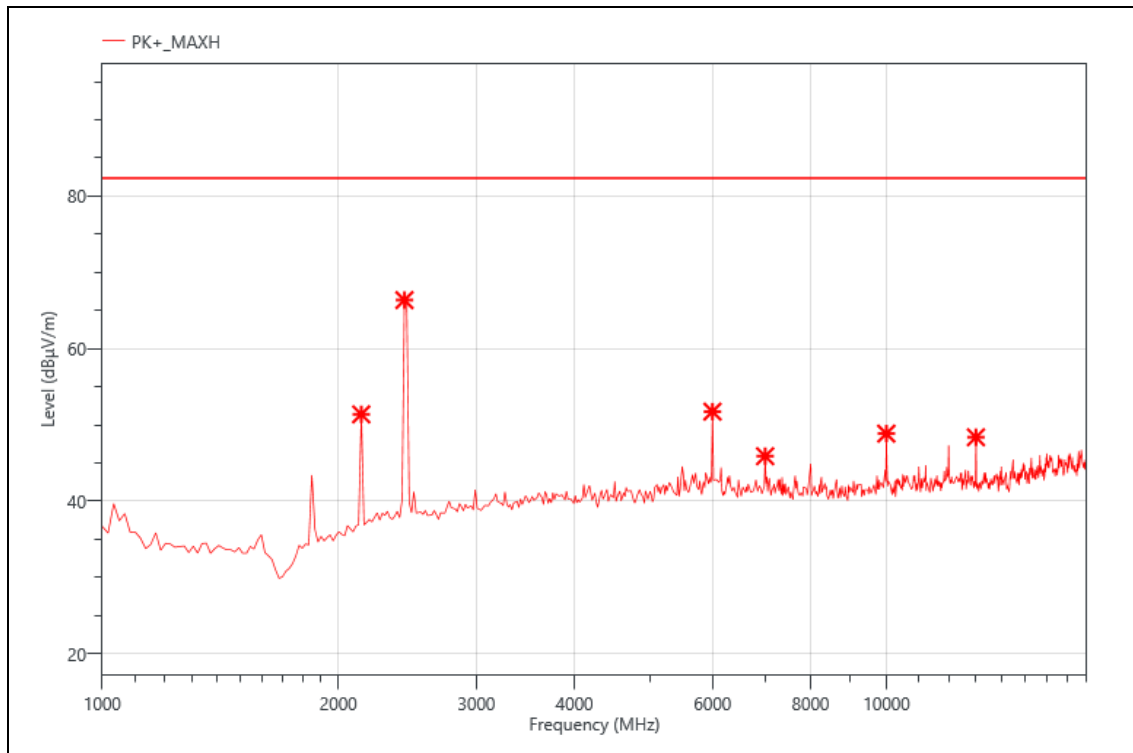


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	69.40	-18.01	51.39	82.30	30.91	PK+	H
2	2428.000	83.58	-17.21	66.37	82.30	15.93	PK+	H
3	5998.000	60.73	-8.99	51.74	82.30	30.56	PK+	H
4	7001.000	53.50	-7.6	45.90	82.30	36.40	PK+	H
5	9993.000	54.96	-6.1	48.86	82.30	33.44	PK+	H
6	13002.000	52.93	-4.55	48.38	82.30	33.92	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND71-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

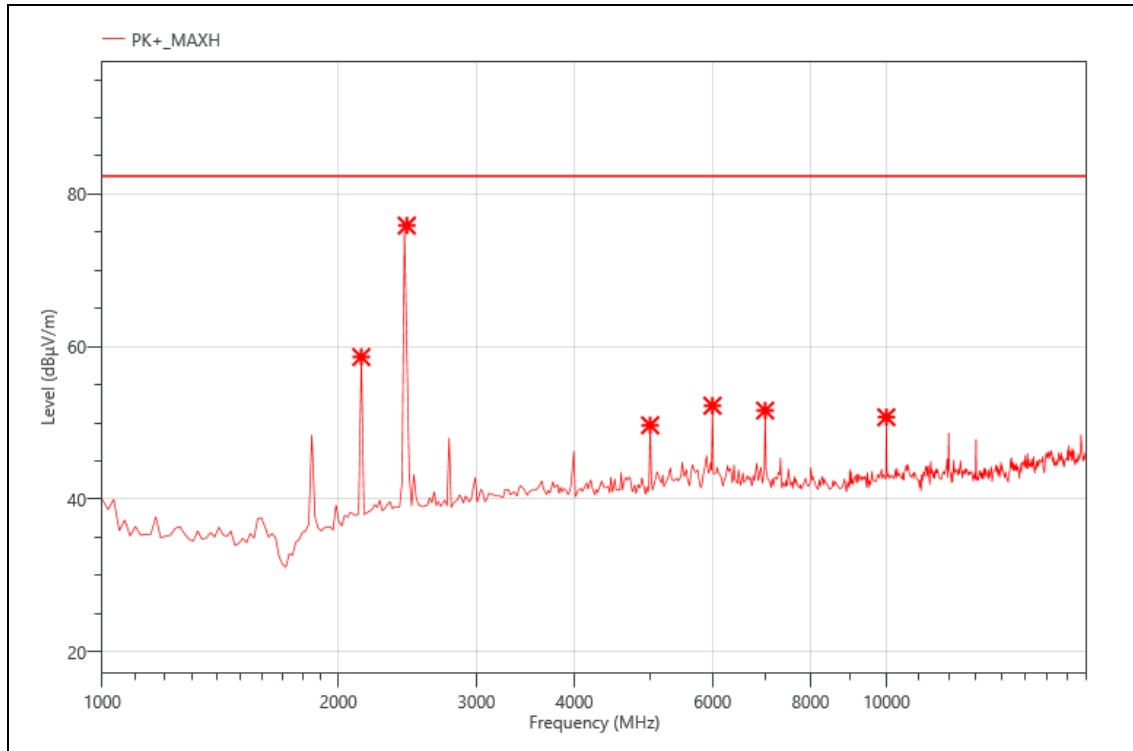

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	76.65	-18.01	58.64	82.30	23.66	PK+	V
2	2445.000	93.17	-17.29	75.88	82.30	6.42	PK+	V
3	4995.000	60.79	-11.1	49.69	82.30	32.61	PK+	V
4	5998.000	61.24	-8.99	52.25	82.30	30.05	PK+	V
5	7001.000	59.22	-7.6	51.62	82.30	30.68	PK+	V
6	9993.000	56.84	-6.1	50.74	82.30	31.56	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Note: 1. Limit= -13dBm+95.25=82.25 dBuV/m

2. L: Lowest channel; M: Middle channel; H: Highest channel.