


Mode:	LTE-BAND2-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

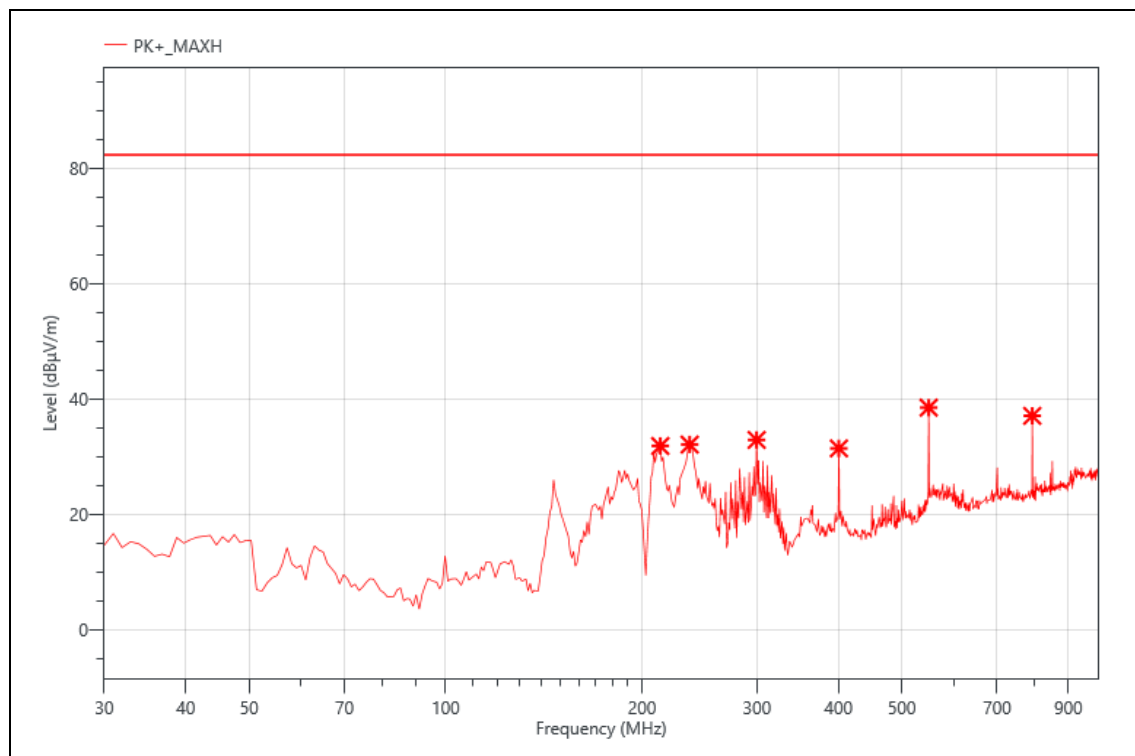


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	213.330	52.75	-20.94	31.81	82.30	50.49	PK+	V
2	236.610	51.46	-19.4	32.06	82.30	50.24	PK+	V
3	299.660	51.54	-18.68	32.86	82.30	49.44	PK+	V
4	400.540	44.94	-13.55	31.39	82.30	50.91	PK+	V
5	549.920	47.95	-9.49	38.46	82.30	43.84	PK+	V
6	792.420	43.08	-6.05	37.03	82.30	45.27	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

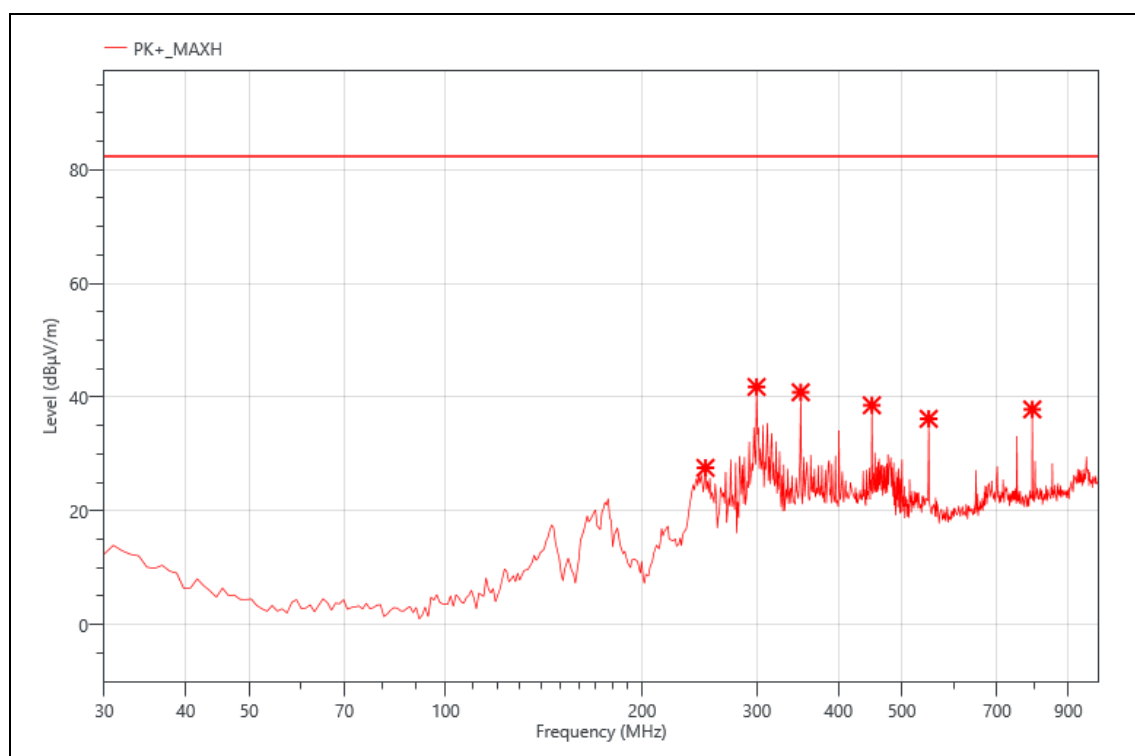


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	250.190	46.30	-18.74	27.56	82.30	54.74	PK+	H
2	299.660	60.47	-18.68	41.79	82.30	40.51	PK+	H
3	350.100	57.04	-16.2	40.84	82.30	41.46	PK+	H
4	450.010	52.24	-13.68	38.56	82.30	43.74	PK+	H
5	549.920	45.68	-9.49	36.19	82.30	46.11	PK+	H
6	792.420	43.89	-6.05	37.84	82.30	44.46	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

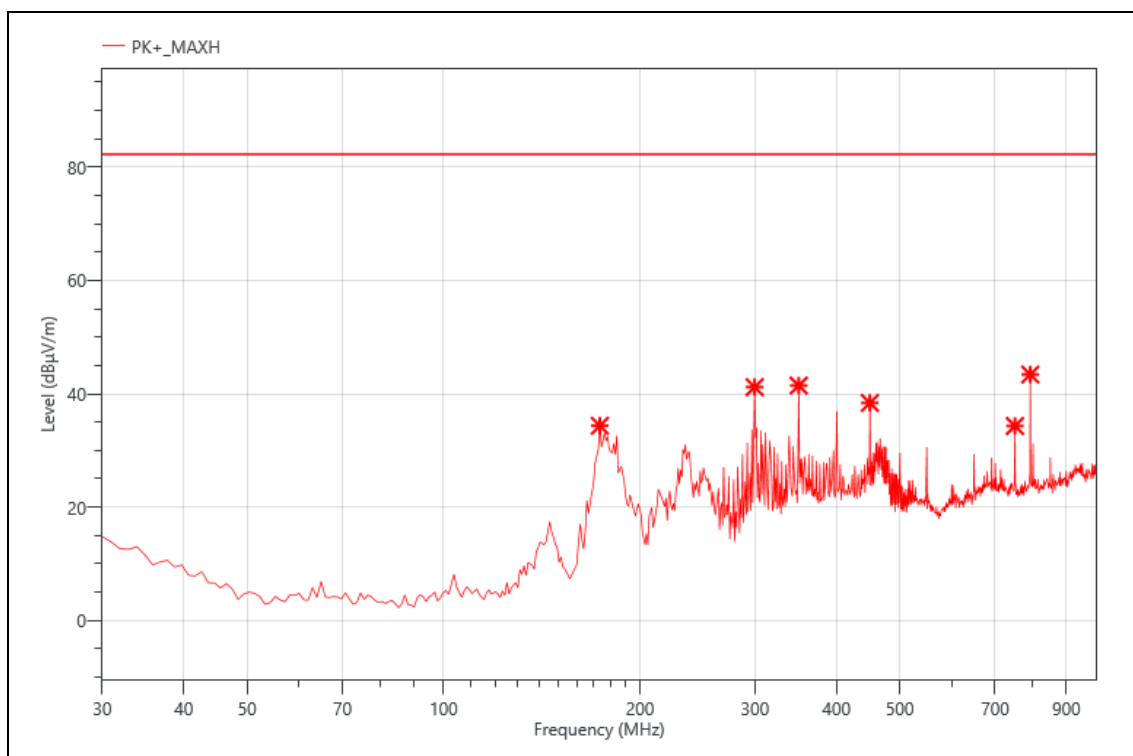


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	173.560	56.42	-22.05	34.37	82.30	47.93	PK+	H
2	299.660	59.87	-18.68	41.19	82.30	41.11	PK+	H
3	350.100	57.67	-16.2	41.47	82.30	40.83	PK+	H
4	450.010	52.08	-13.68	38.40	82.30	43.90	PK+	H
5	750.710	41.04	-6.71	34.33	82.30	47.97	PK+	H
6	792.420	49.47	-6.05	43.42	82.30	38.88	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

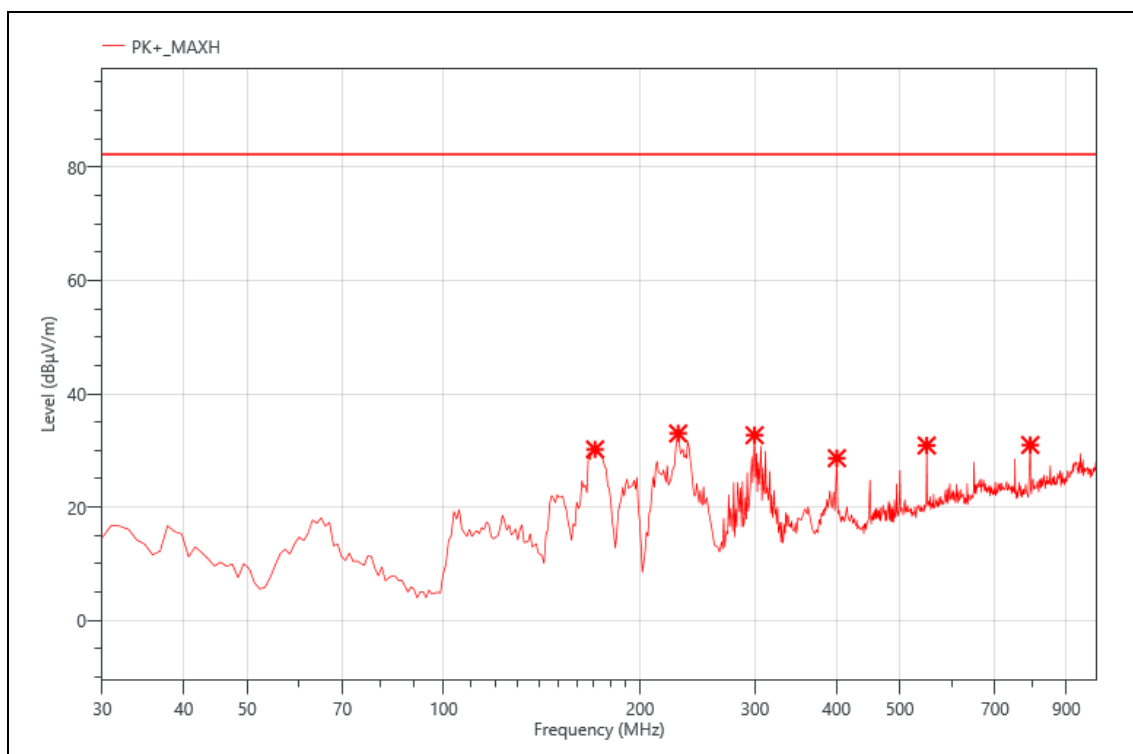


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	170.650	52.37	-22.17	30.20	82.30	52.10	PK+	V
2	228.850	53.05	-20.04	33.01	82.30	49.29	PK+	V
3	299.660	51.38	-18.68	32.70	82.30	49.60	PK+	V
4	400.540	42.20	-13.55	28.65	82.30	53.65	PK+	V
5	549.920	40.38	-9.49	30.89	82.30	51.41	PK+	V
6	792.420	37.02	-6.05	30.97	82.30	51.33	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

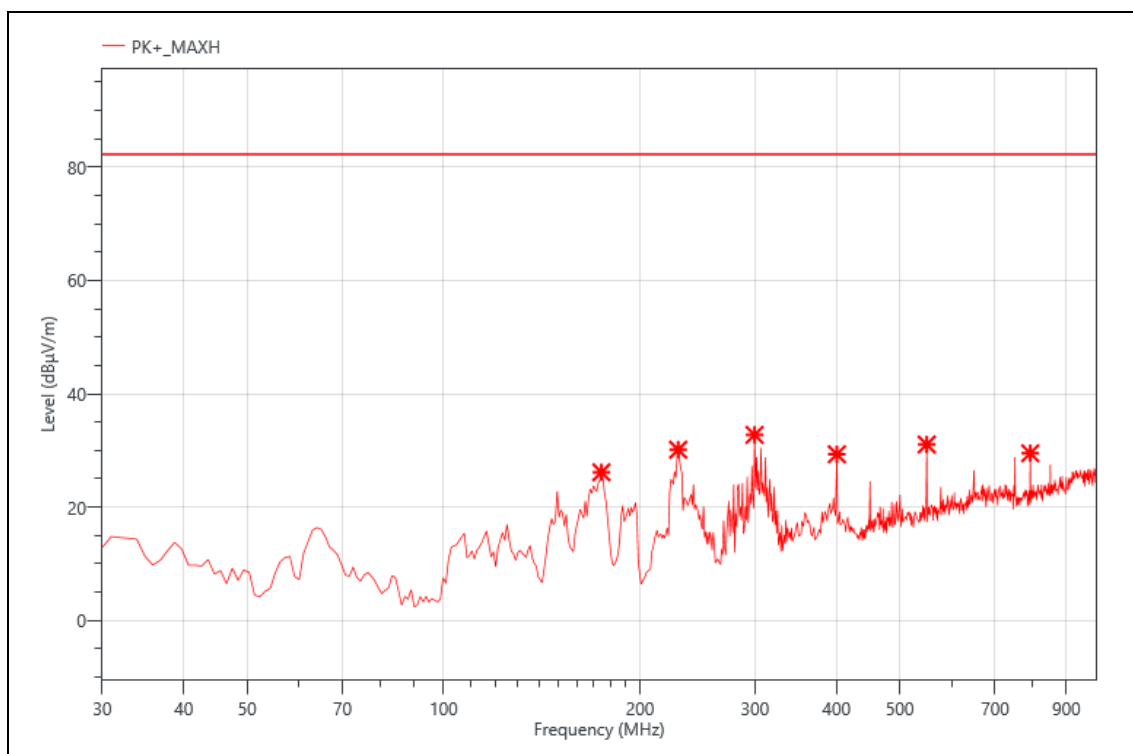


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	174.530	48.14	-21.99	26.15	82.30	56.15	PK+	V
2	228.850	50.19	-20.04	30.15	82.30	52.15	PK+	V
3	299.660	51.44	-18.68	32.76	82.30	49.54	PK+	V
4	400.540	42.88	-13.55	29.33	82.30	52.97	PK+	V
5	549.920	40.55	-9.49	31.06	82.30	51.24	PK+	V
6	792.420	35.57	-6.05	29.52	82.30	52.78	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND2-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

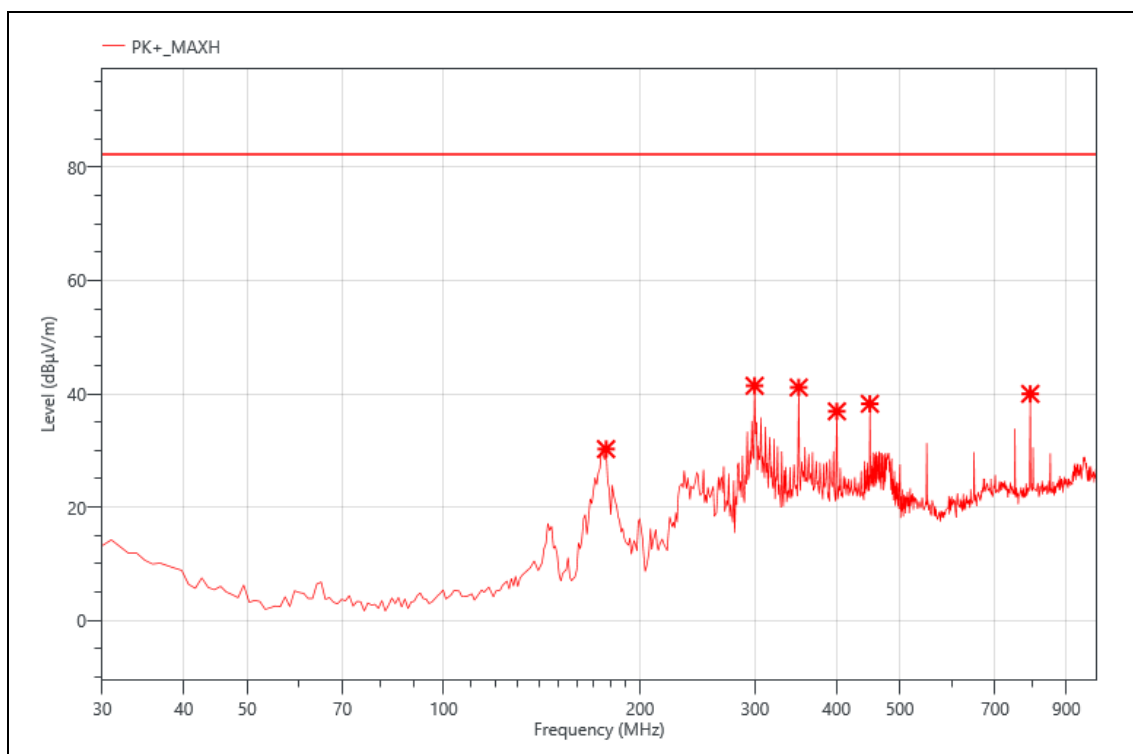


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	177.440	52.19	-21.93	30.26	82.30	52.04	PK+	H
2	299.660	60.10	-18.68	41.42	82.30	40.88	PK+	H
3	350.100	57.33	-16.2	41.13	82.30	41.17	PK+	H
4	400.540	50.47	-13.55	36.92	82.30	45.38	PK+	H
5	450.010	51.92	-13.68	38.24	82.30	44.06	PK+	H
6	792.420	46.05	-6.05	40.00	82.30	42.30	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

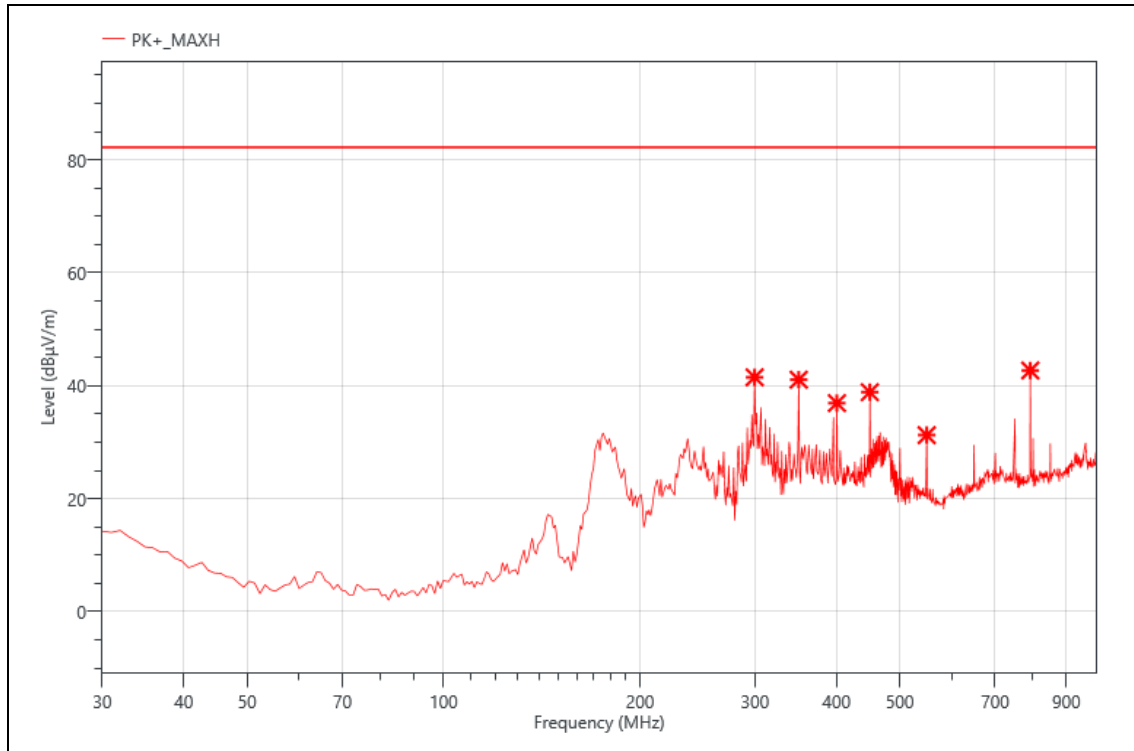


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	299.660	60.18	-18.68	41.50	82.30	40.80	PK+	H
2	350.100	57.27	-16.2	41.07	82.30	41.23	PK+	H
3	400.540	50.48	-13.55	36.93	82.30	45.37	PK+	H
4	450.010	52.54	-13.68	38.86	82.30	43.44	PK+	H
5	549.920	40.75	-9.49	31.26	82.30	51.04	PK+	H
6	792.420	48.76	-6.05	42.71	82.30	39.59	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

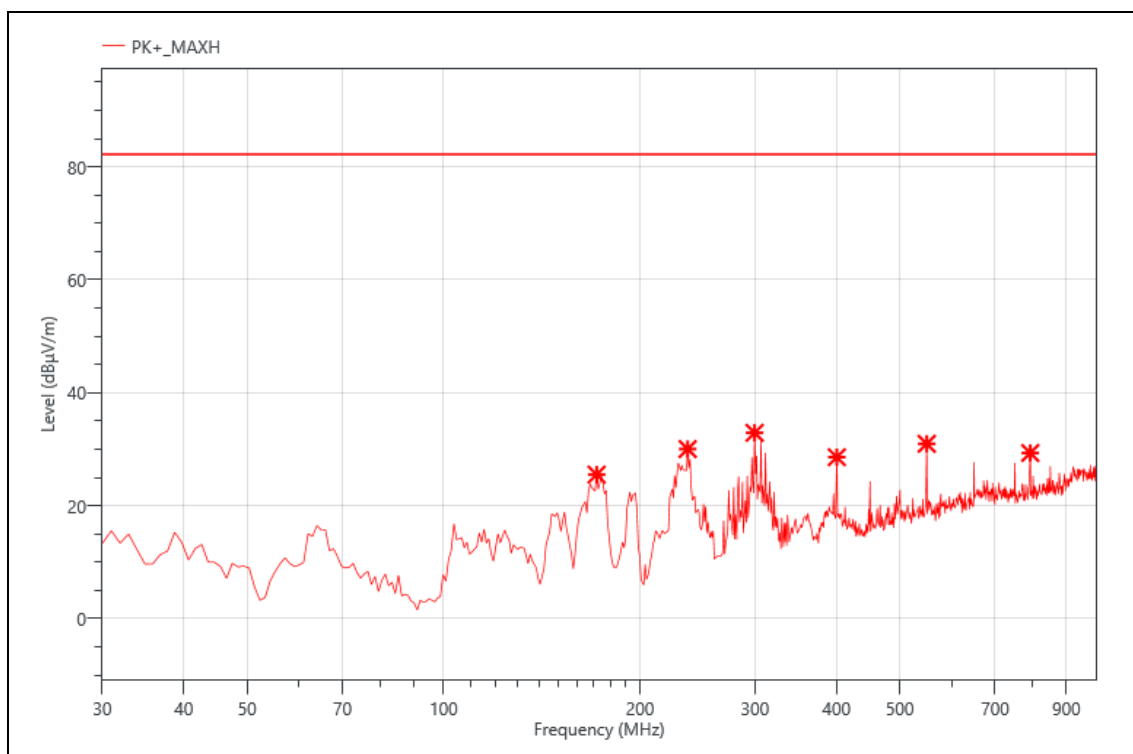


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	171.620	47.64	-22.14	25.50	82.30	56.80	PK+	V
2	236.610	49.43	-19.4	30.03	82.30	52.27	PK+	V
3	299.660	51.58	-18.68	32.90	82.30	49.40	PK+	V
4	400.540	42.13	-13.55	28.58	82.30	53.72	PK+	V
5	549.920	40.45	-9.49	30.96	82.30	51.34	PK+	V
6	792.420	35.38	-6.05	29.33	82.30	52.97	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

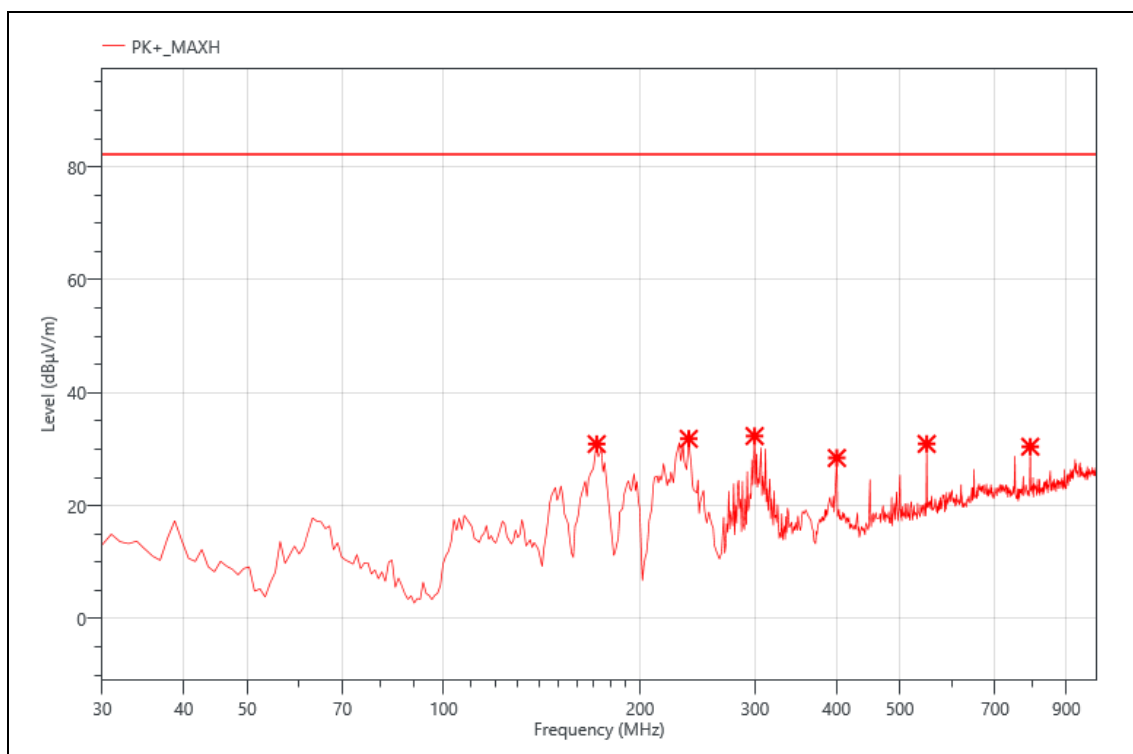


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	171.620	53.05	-22.14	30.91	82.30	51.39	PK+	V
2	237.580	51.20	-19.36	31.84	82.30	50.46	PK+	V
3	299.660	51.01	-18.68	32.33	82.30	49.97	PK+	V
4	400.540	42.00	-13.55	28.45	82.30	53.85	PK+	V
5	549.920	40.43	-9.49	30.94	82.30	51.36	PK+	V
6	792.420	36.49	-6.05	30.44	82.30	51.86	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

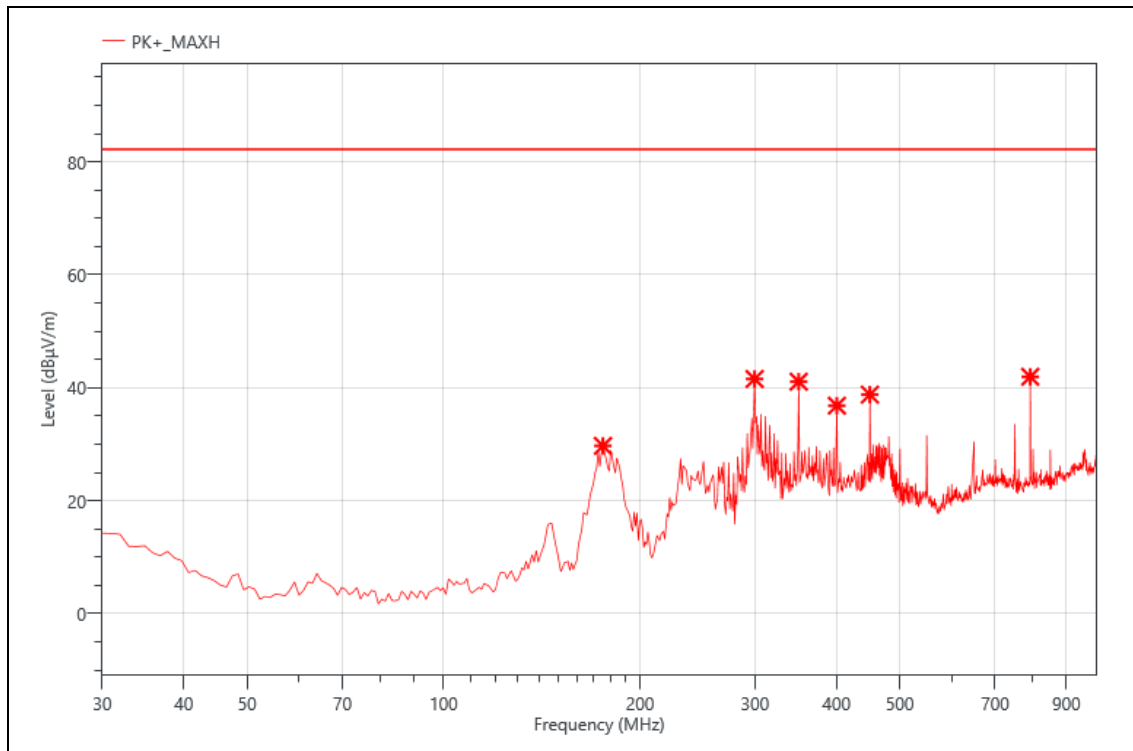


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	51.72	-22.01	29.71	82.30	52.59	PK+	H
2	299.660	60.23	-18.68	41.55	82.30	40.75	PK+	H
3	350.100	57.27	-16.2	41.07	82.30	41.23	PK+	H
4	400.540	50.38	-13.55	36.83	82.30	45.47	PK+	H
5	450.010	52.46	-13.68	38.78	82.30	43.52	PK+	H
6	792.420	48.00	-6.05	41.95	82.30	40.35	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

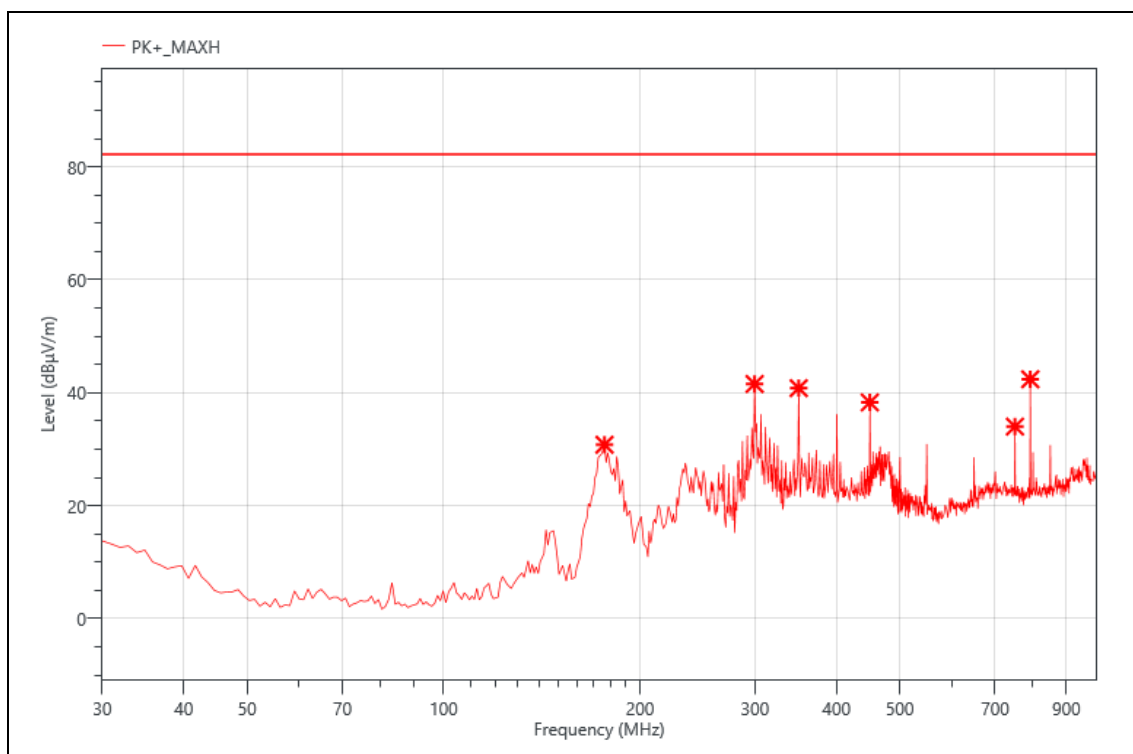


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	52.76	-21.97	30.79	82.30	51.51	PK+	H
2	299.660	60.23	-18.68	41.55	82.30	40.75	PK+	H
3	350.100	57.02	-16.2	40.82	82.30	41.48	PK+	H
4	450.010	51.97	-13.68	38.29	82.30	44.01	PK+	H
5	750.710	40.72	-6.71	34.01	82.30	48.29	PK+	H
6	792.420	48.44	-6.05	42.39	82.30	39.91	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND4-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

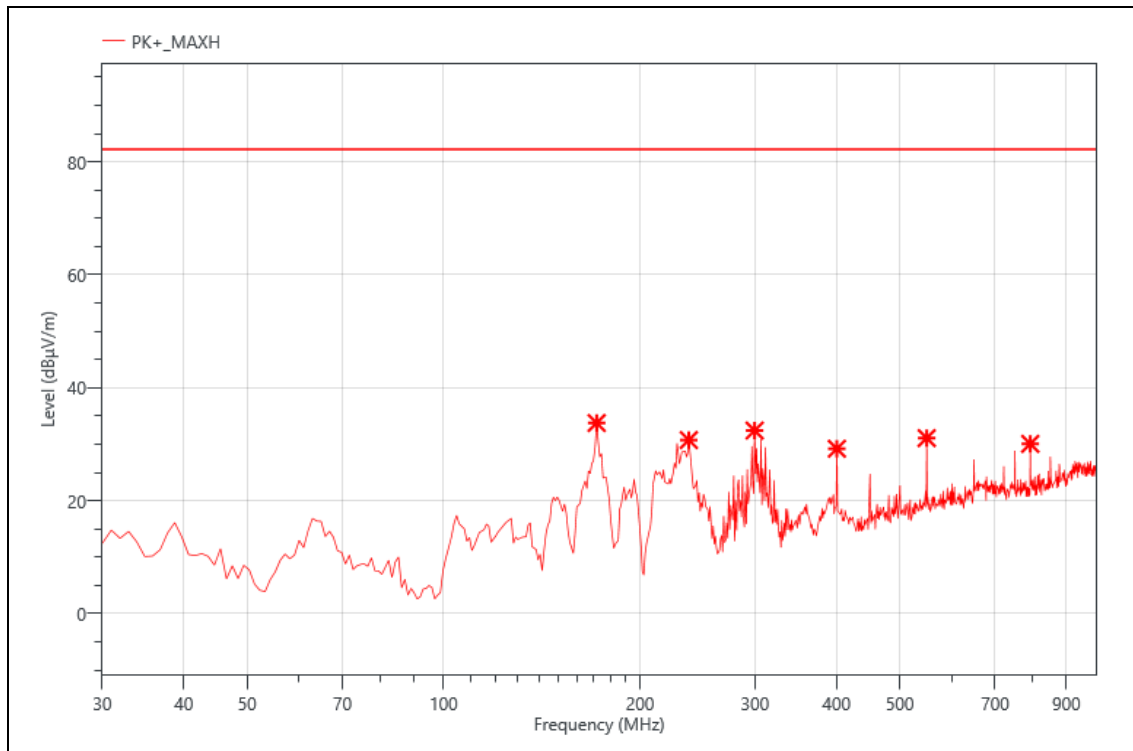


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	171.620	55.90	-22.14	33.76	82.30	48.54	PK+	V
2	237.580	50.10	-19.36	30.74	82.30	51.56	PK+	V
3	299.660	51.10	-18.68	32.42	82.30	49.88	PK+	V
4	400.540	42.75	-13.55	29.20	82.30	53.10	PK+	V
5	549.920	40.57	-9.49	31.08	82.30	51.22	PK+	V
6	792.420	36.11	-6.05	30.06	82.30	52.24	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

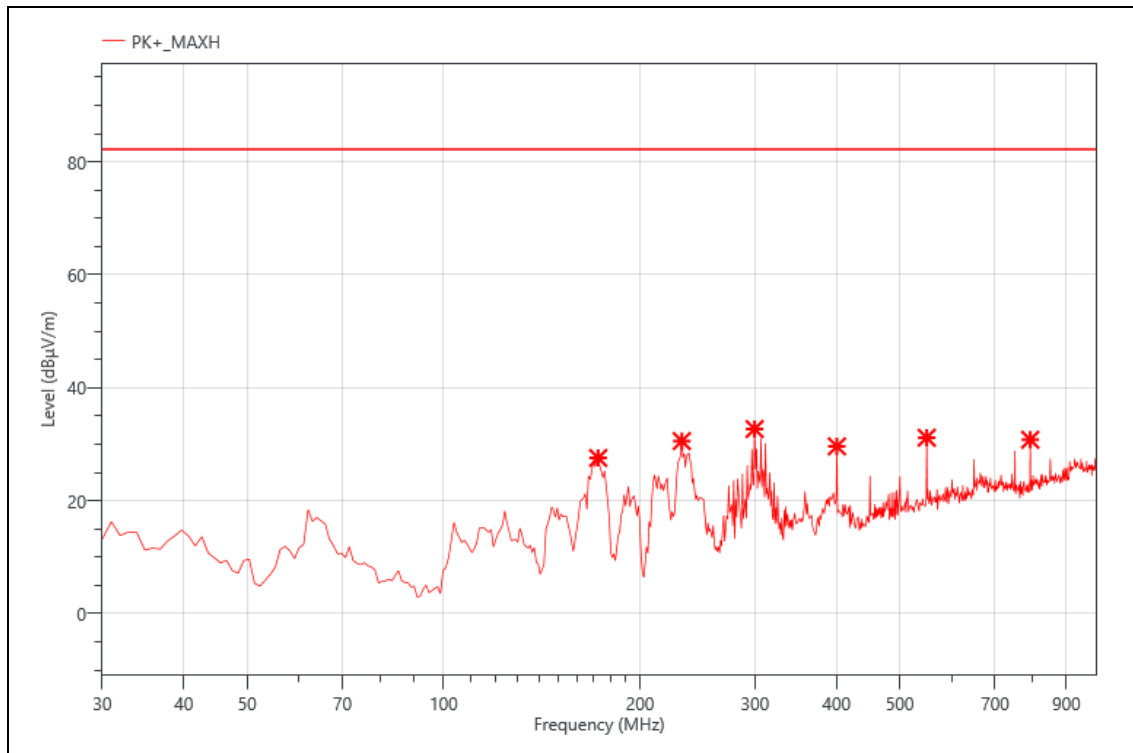


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	172.590	49.67	-22.1	27.57	82.30	54.73	PK+	V
2	231.760	50.36	-19.81	30.55	82.30	51.75	PK+	V
3	299.660	51.37	-18.68	32.69	82.30	49.61	PK+	V
4	400.540	43.17	-13.55	29.62	82.30	52.68	PK+	V
5	549.920	40.64	-9.49	31.15	82.30	51.15	PK+	V
6	792.420	36.84	-6.05	30.79	82.30	51.51	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

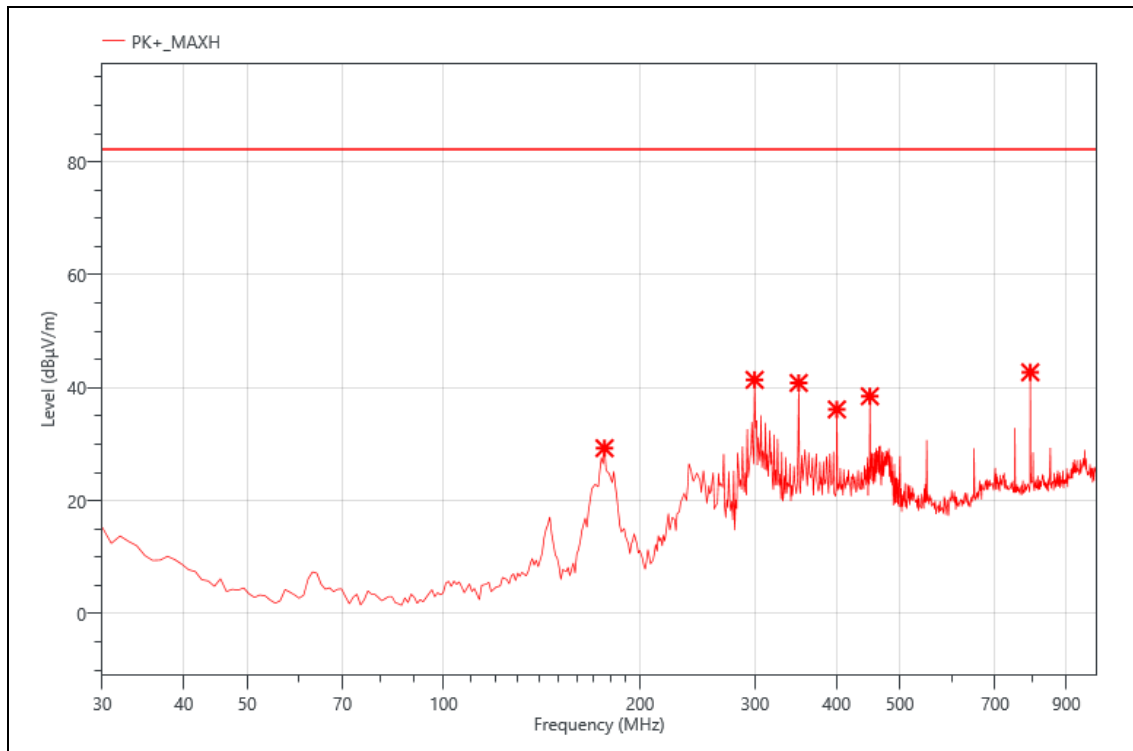


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	51.27	-21.97	29.30	82.30	53.00	PK+	H
2	299.660	60.07	-18.68	41.39	82.30	40.91	PK+	H
3	350.100	57.05	-16.2	40.85	82.30	41.45	PK+	H
4	400.540	49.72	-13.55	36.17	82.30	46.13	PK+	H
5	450.010	52.17	-13.68	38.49	82.30	43.81	PK+	H
6	792.420	48.78	-6.05	42.73	82.30	39.57	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

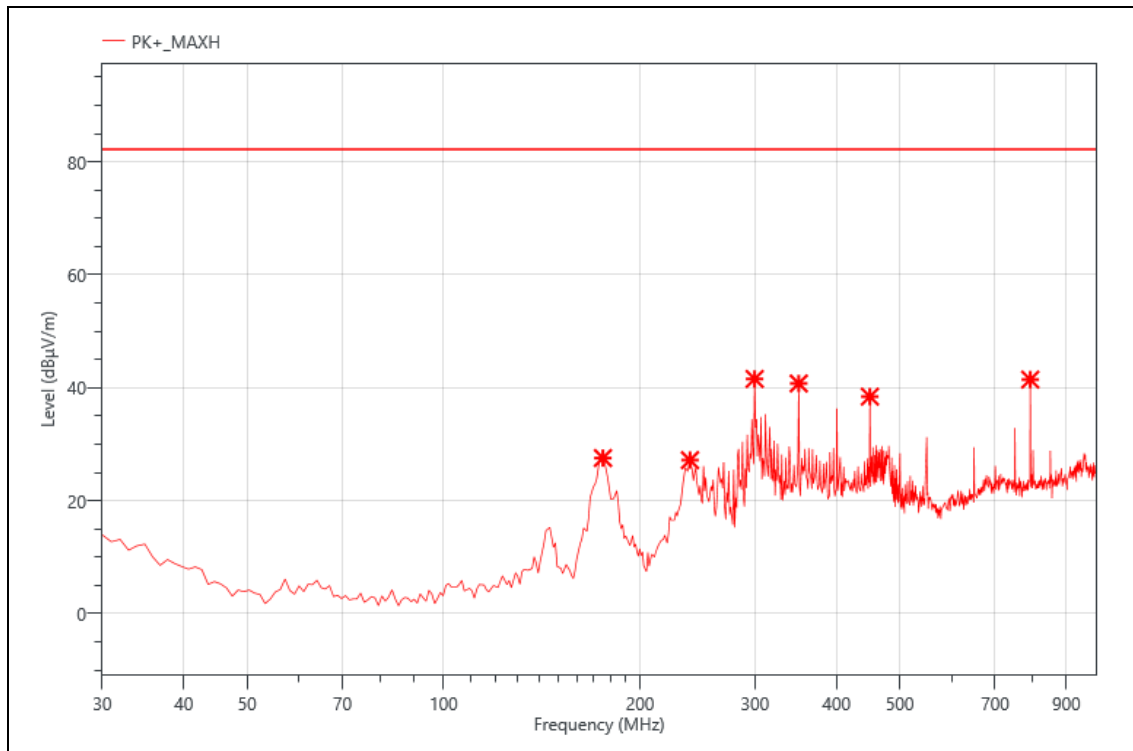


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	49.56	-22.01	27.55	82.30	54.75	PK+	H
2	238.550	46.50	-19.32	27.18	82.30	55.12	PK+	H
3	299.660	60.24	-18.68	41.56	82.30	40.74	PK+	H
4	350.100	56.96	-16.2	40.76	82.30	41.54	PK+	H
5	450.010	52.11	-13.68	38.43	82.30	43.87	PK+	H
6	792.420	47.50	-6.05	41.45	82.30	40.85	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

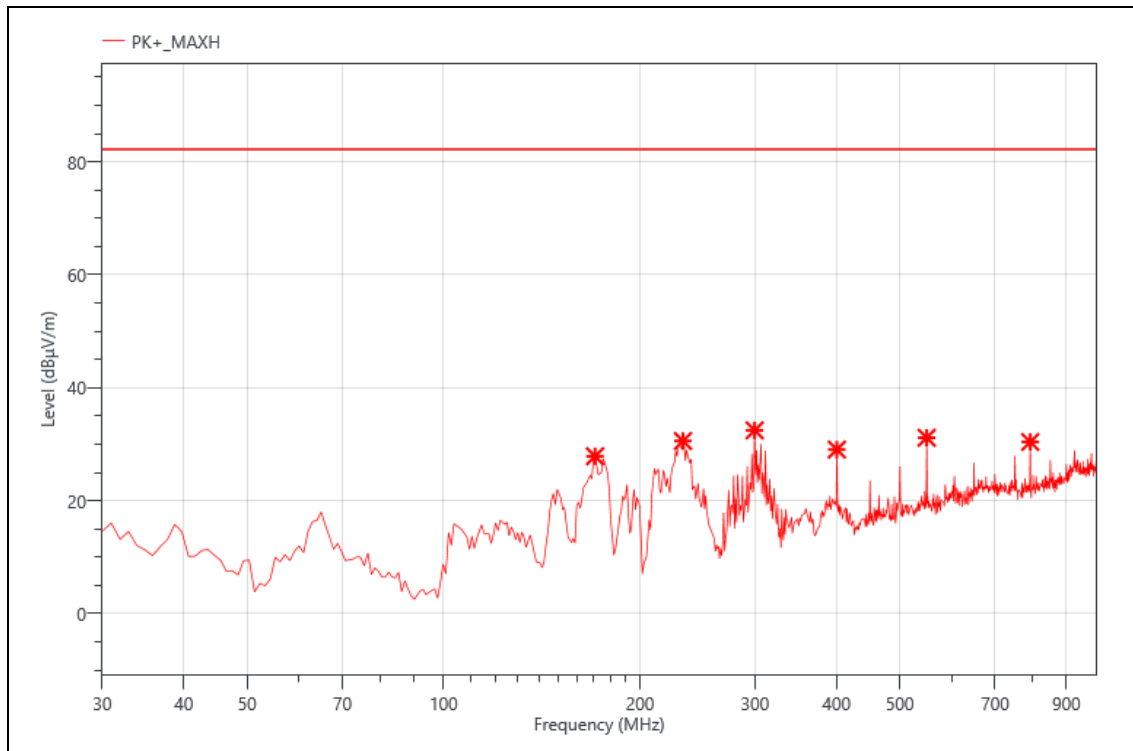


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	170.650	50.04	-22.17	27.87	82.30	54.43	PK+	V
2	232.730	50.31	-19.74	30.57	82.30	51.73	PK+	V
3	299.660	51.14	-18.68	32.46	82.30	49.84	PK+	V
4	400.540	42.60	-13.55	29.05	82.30	53.25	PK+	V
5	549.920	40.63	-9.49	31.14	82.30	51.16	PK+	V
6	792.420	36.45	-6.05	30.40	82.30	51.90	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

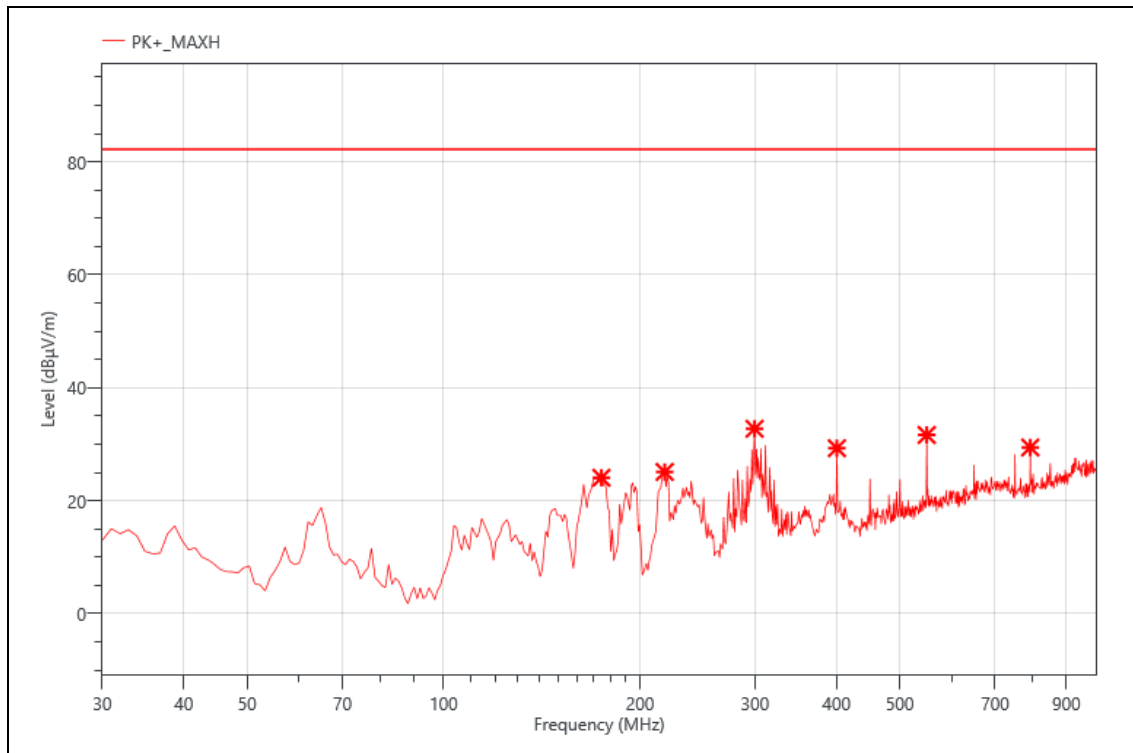


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	174.530	46.05	-21.99	24.06	82.30	58.24	PK+	V
2	218.180	45.72	-20.63	25.09	82.30	57.21	PK+	V
3	299.660	51.41	-18.68	32.73	82.30	49.57	PK+	V
4	400.540	42.84	-13.55	29.29	82.30	53.01	PK+	V
5	549.920	41.13	-9.49	31.64	82.30	50.66	PK+	V
6	792.420	35.47	-6.05	29.42	82.30	52.88	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

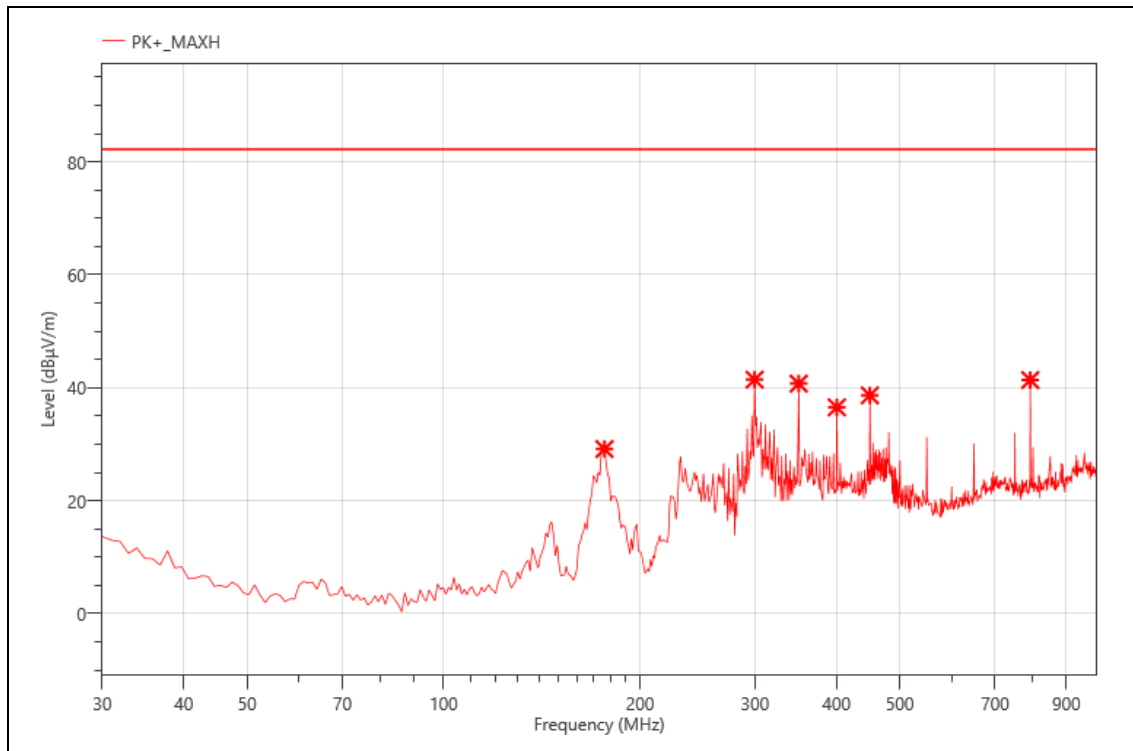


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	51.12	-21.97	29.15	82.30	53.15	PK+	H
2	299.660	60.12	-18.68	41.44	82.30	40.86	PK+	H
3	350.100	56.94	-16.2	40.74	82.30	41.56	PK+	H
4	400.540	50.08	-13.55	36.53	82.30	45.77	PK+	H
5	450.010	52.33	-13.68	38.65	82.30	43.65	PK+	H
6	792.420	47.41	-6.05	41.36	82.30	40.94	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

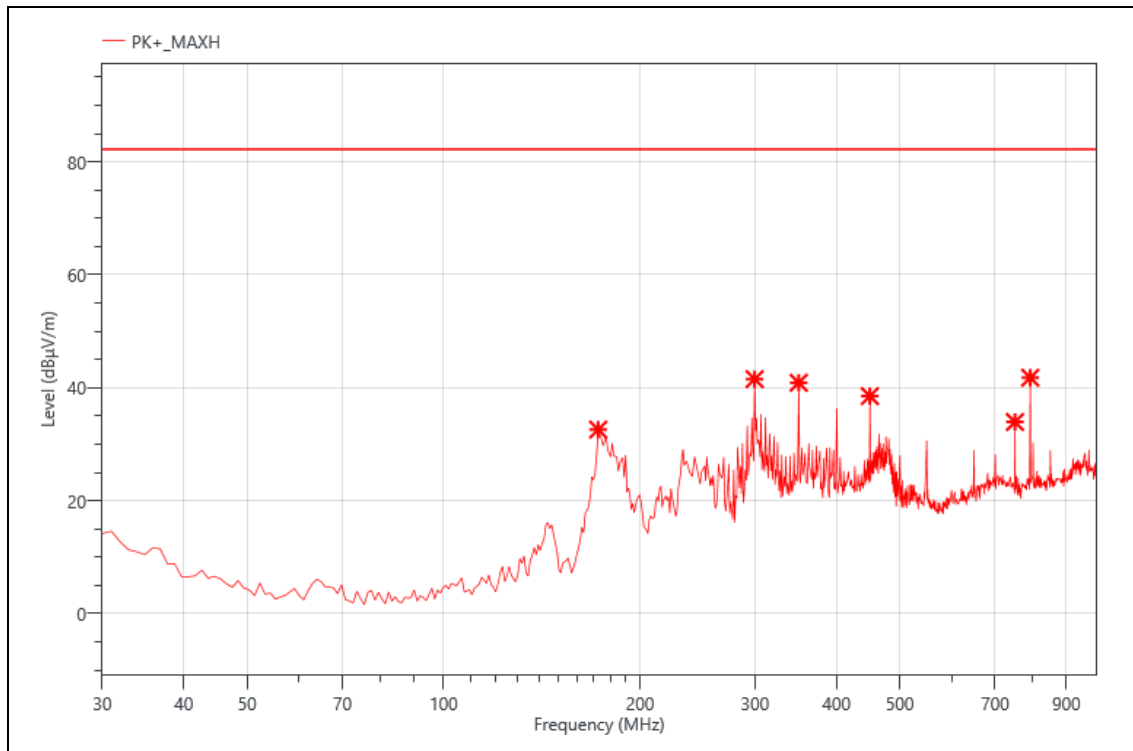


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	172.590	54.69	-22.1	32.59	82.30	49.71	PK+	H
2	299.660	60.21	-18.68	41.53	82.30	40.77	PK+	H
3	350.100	57.09	-16.2	40.89	82.30	41.41	PK+	H
4	450.010	52.20	-13.68	38.52	82.30	43.78	PK+	H
5	750.710	40.65	-6.71	33.94	82.30	48.36	PK+	H
6	792.420	47.83	-6.05	41.78	82.30	40.52	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

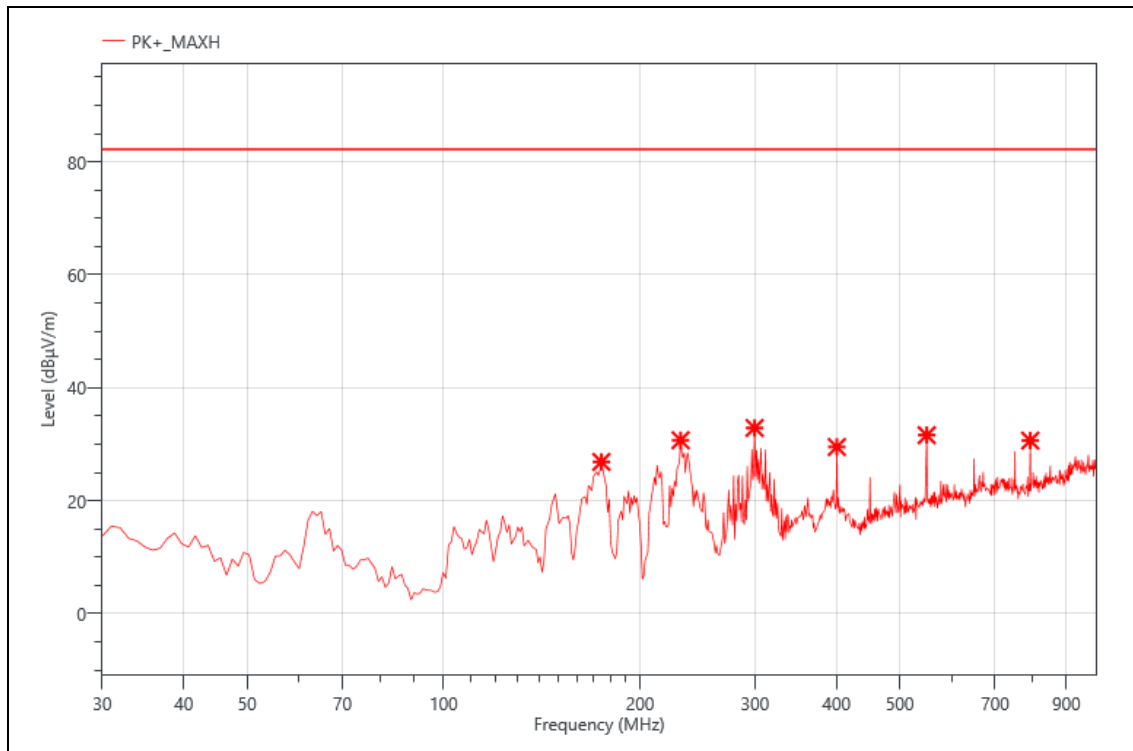

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	174.530	48.86	-21.99	26.87	82.30	55.43	PK+	V
2	230.790	50.58	-19.87	30.71	82.30	51.59	PK+	V
3	299.660	51.56	-18.68	32.88	82.30	49.42	PK+	V
4	400.540	43.06	-13.55	29.51	82.30	52.79	PK+	V
5	549.920	41.10	-9.49	31.61	82.30	50.69	PK+	V
6	792.420	36.70	-6.05	30.65	82.30	51.65	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]