


Mode:	LTE-BAND12-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

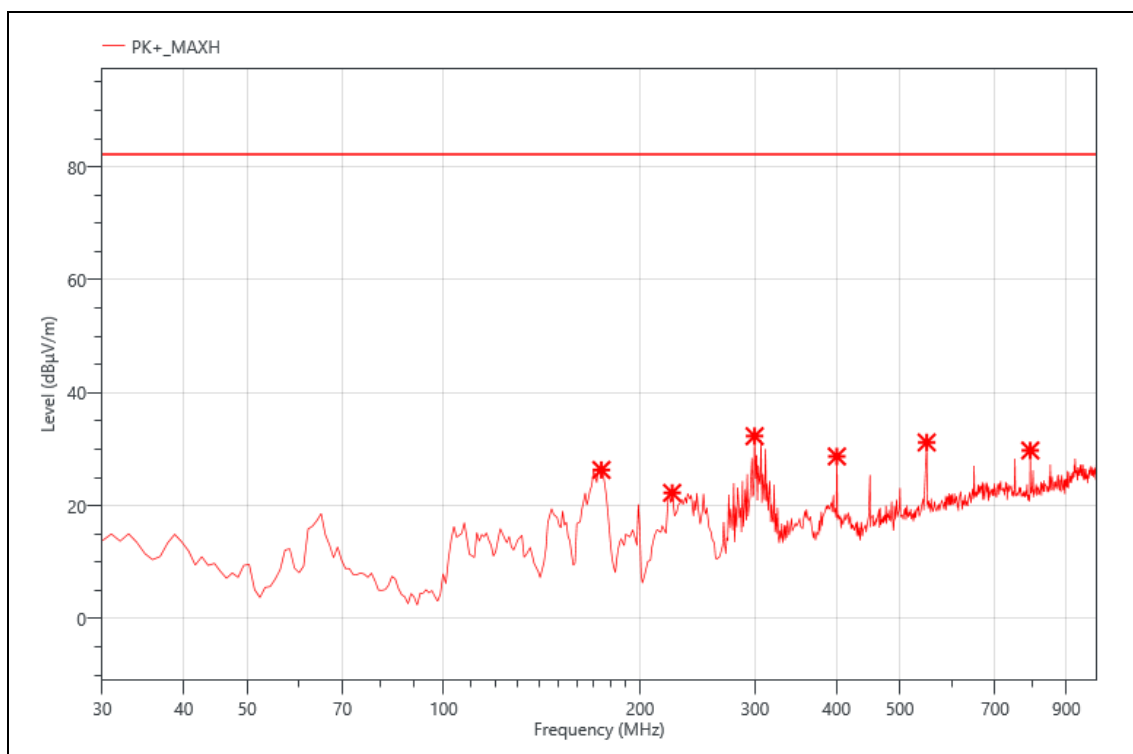


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	174.530	48.32	-21.99	26.33	82.30	55.97	PK+	V
2	224.000	42.57	-20.3	22.27	82.30	60.03	PK+	V
3	299.660	50.99	-18.68	32.31	82.30	49.99	PK+	V
4	400.540	42.27	-13.55	28.72	82.30	53.58	PK+	V
5	549.920	40.69	-9.49	31.20	82.30	51.10	PK+	V
6	792.420	35.83	-6.05	29.78	82.30	52.52	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

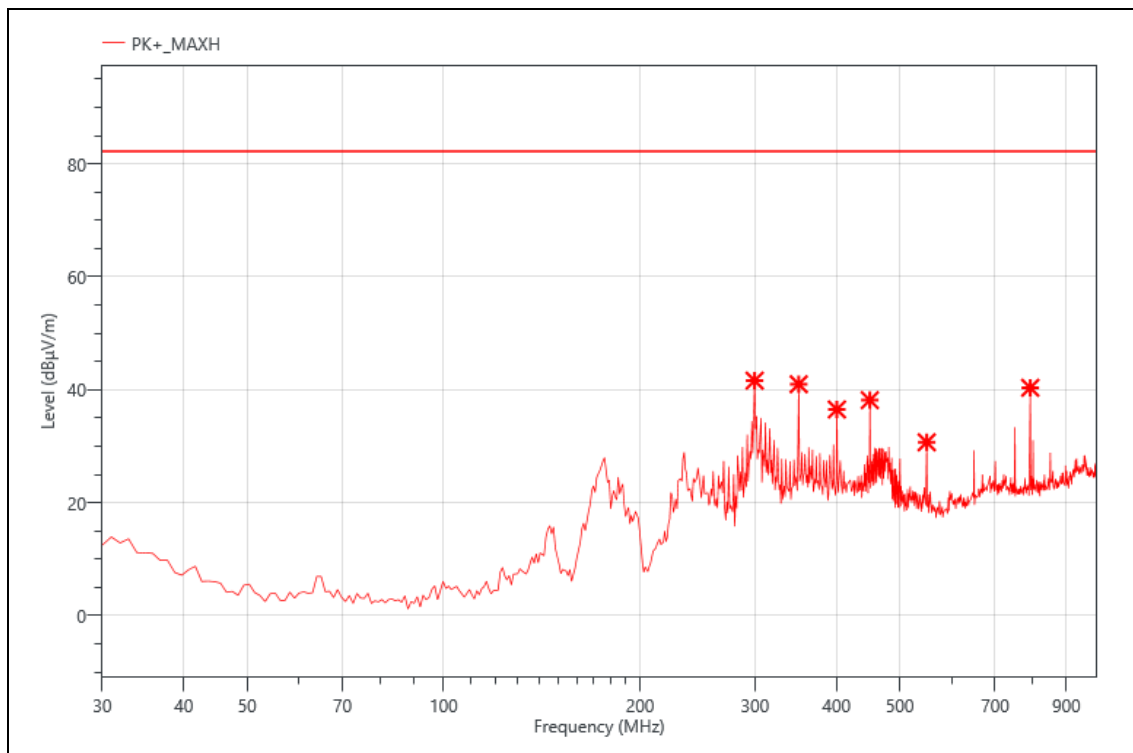


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	299.660	60.30	-18.68	41.62	82.30	40.68	PK+	H
2	350.100	57.18	-16.2	40.98	82.30	41.32	PK+	H
3	400.540	50.06	-13.55	36.51	82.30	45.79	PK+	H
4	450.010	51.84	-13.68	38.16	82.30	44.14	PK+	H
5	549.920	40.19	-9.49	30.70	82.30	51.60	PK+	H
6	792.420	46.40	-6.05	40.35	82.30	41.95	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

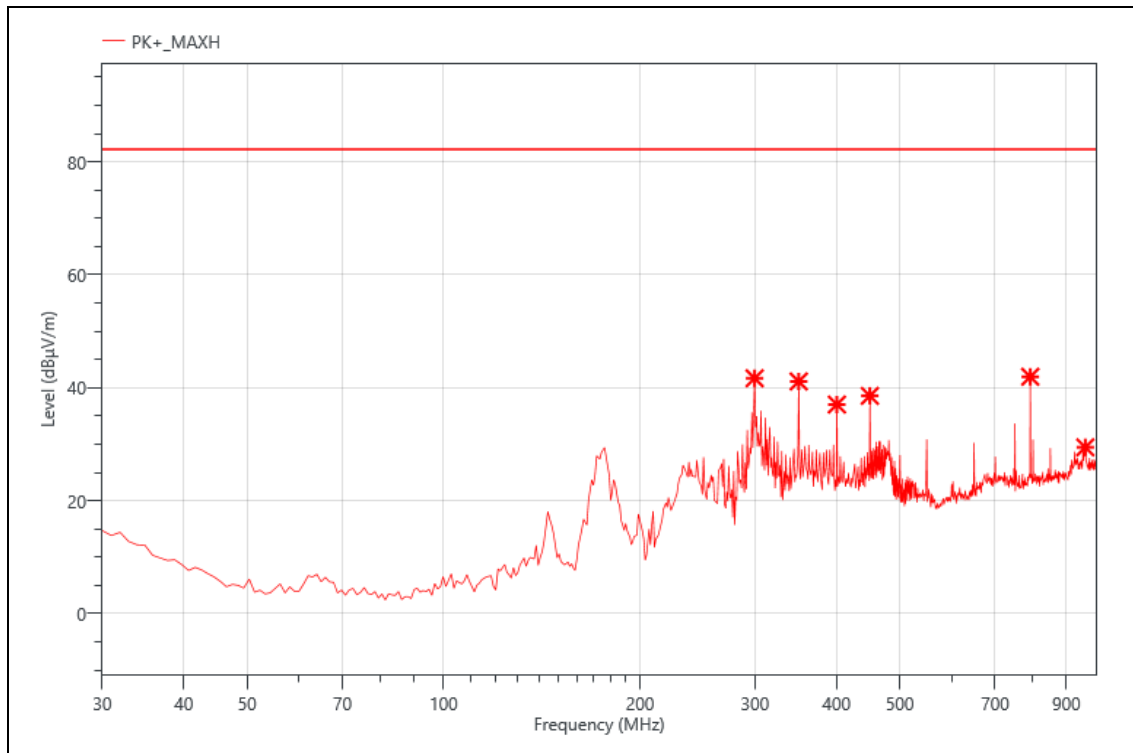


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	299.660	60.36	-18.68	41.68	82.30	40.62	PK+	H
2	350.100	57.32	-16.2	41.12	82.30	41.18	PK+	H
3	400.540	50.58	-13.55	37.03	82.30	45.27	PK+	H
4	450.010	52.25	-13.68	38.57	82.30	43.73	PK+	H
5	792.420	48.00	-6.05	41.95	82.30	40.35	PK+	H
6	962.170	32.29	-2.84	29.45	82.30	52.85	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

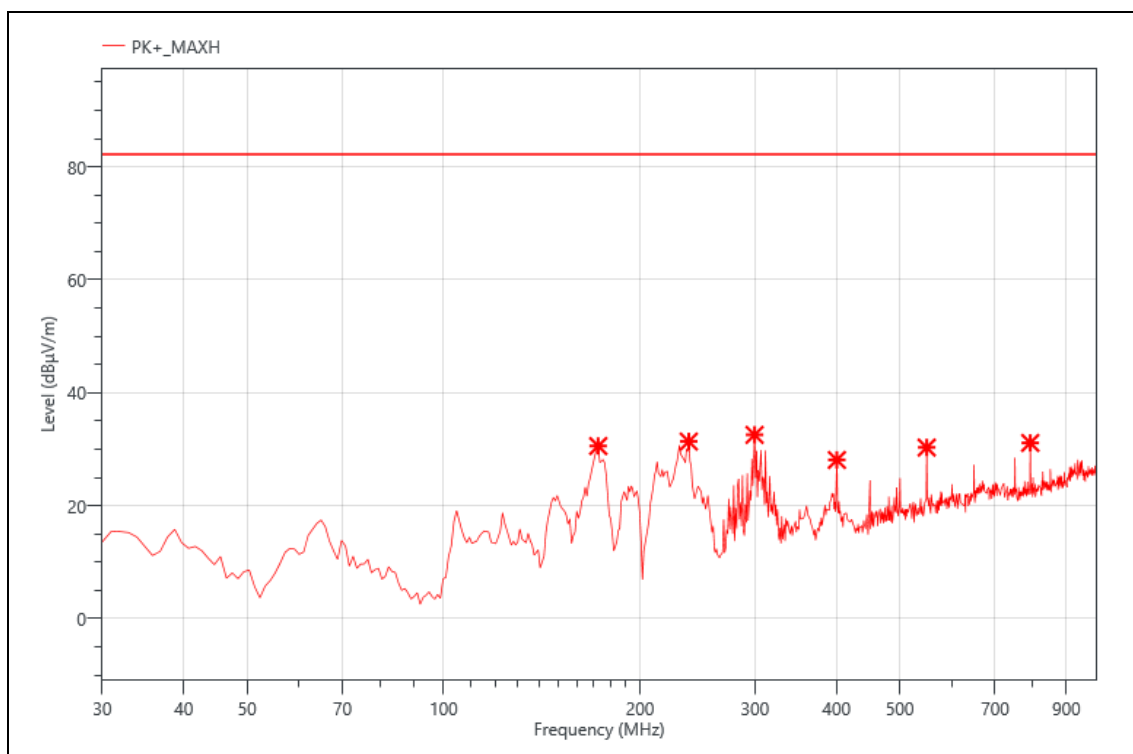


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	172.590	52.66	-22.1	30.56	82.30	51.74	PK+	V
2	237.580	50.72	-19.36	31.36	82.30	50.94	PK+	V
3	299.660	51.22	-18.68	32.54	82.30	49.76	PK+	V
4	400.540	41.65	-13.55	28.10	82.30	54.20	PK+	V
5	549.920	39.79	-9.49	30.30	82.30	52.00	PK+	V
6	792.420	37.16	-6.05	31.11	82.30	51.19	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

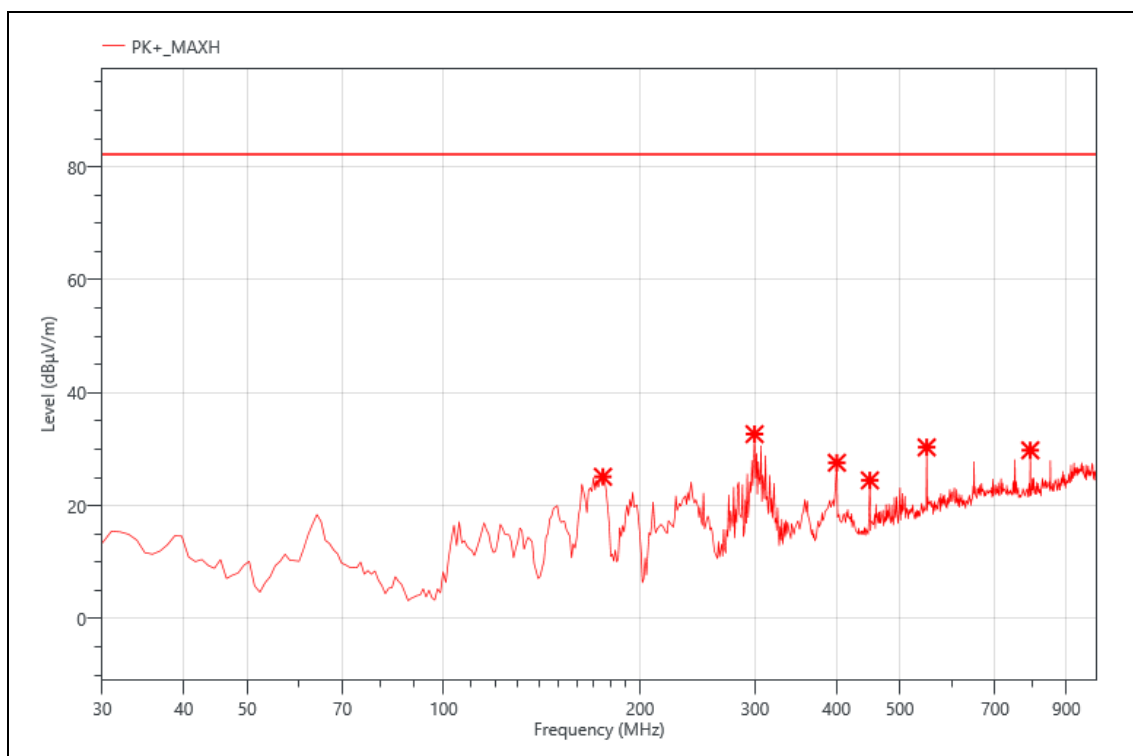


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	47.13	-22.01	25.12	82.30	57.18	PK+	V
2	299.660	51.35	-18.68	32.67	82.30	49.63	PK+	V
3	400.540	41.15	-13.55	27.60	82.30	54.70	PK+	V
4	450.010	38.16	-13.68	24.48	82.30	57.82	PK+	V
5	549.920	39.82	-9.49	30.33	82.30	51.97	PK+	V
6	792.420	35.86	-6.05	29.81	82.30	52.49	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

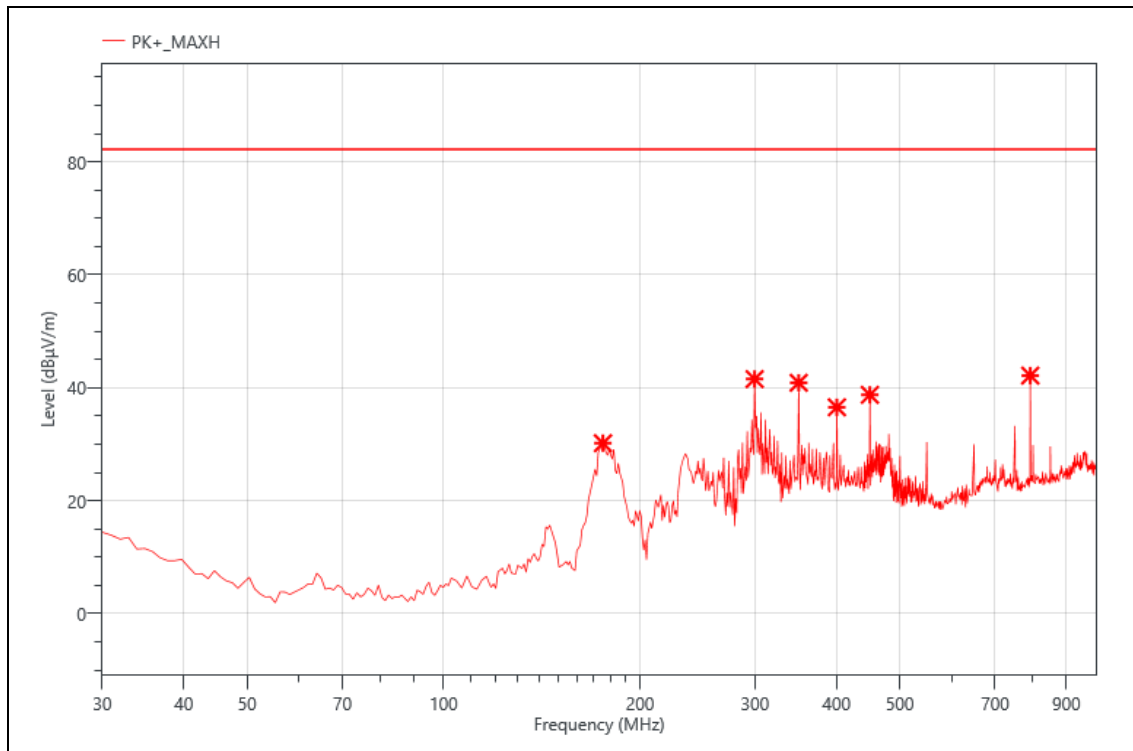


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	52.20	-22.01	30.19	82.30	52.11	PK+	H
2	299.660	60.22	-18.68	41.54	82.30	40.76	PK+	H
3	350.100	57.08	-16.2	40.88	82.30	41.42	PK+	H
4	400.540	50.09	-13.55	36.54	82.30	45.76	PK+	H
5	450.010	52.42	-13.68	38.74	82.30	43.56	PK+	H
6	792.420	48.21	-6.05	42.16	82.30	40.14	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

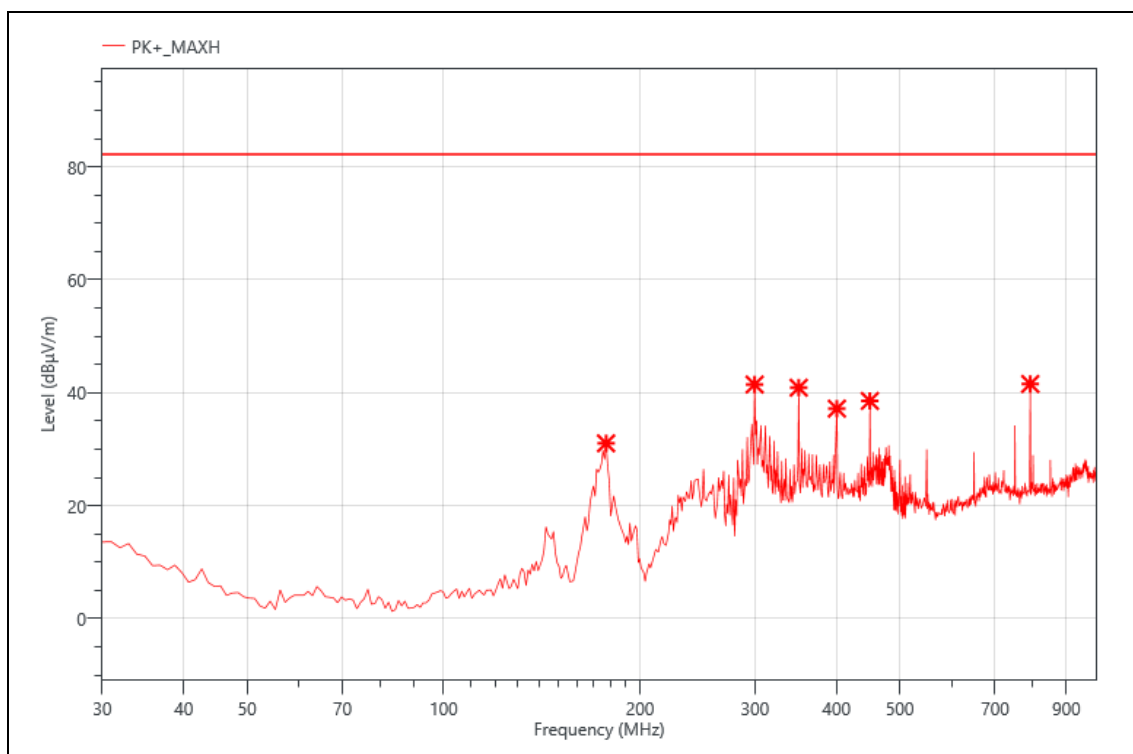


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	177.440	52.98	-21.93	31.05	82.30	51.25	PK+	H
2	299.660	60.14	-18.68	41.46	82.30	40.84	PK+	H
3	350.100	57.10	-16.2	40.90	82.30	41.40	PK+	H
4	400.540	50.74	-13.55	37.19	82.30	45.11	PK+	H
5	450.010	52.23	-13.68	38.55	82.30	43.75	PK+	H
6	792.420	47.60	-6.05	41.55	82.30	40.75	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

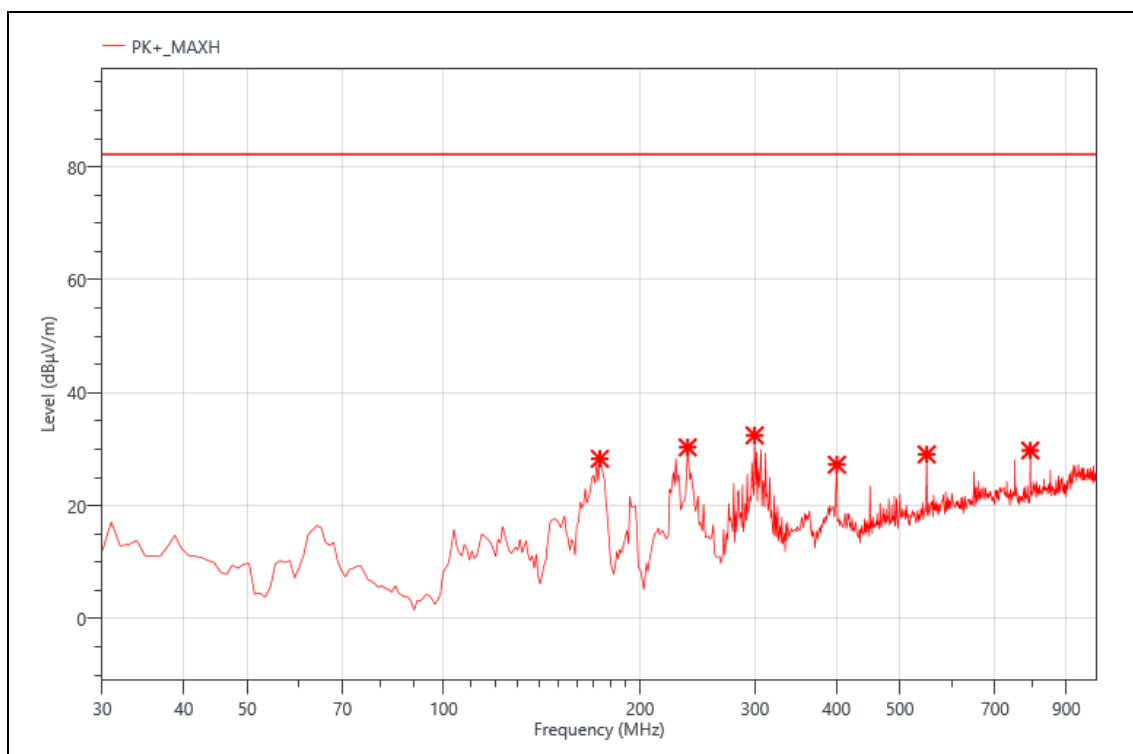


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	173.560	50.36	-22.05	28.31	82.30	53.99	PK+	V
2	236.610	49.73	-19.4	30.33	82.30	51.97	PK+	V
3	299.660	51.13	-18.68	32.45	82.30	49.85	PK+	V
4	400.540	40.82	-13.55	27.27	82.30	55.03	PK+	V
5	549.920	38.57	-9.49	29.08	82.30	53.22	PK+	V
6	792.420	35.83	-6.05	29.78	82.30	52.52	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

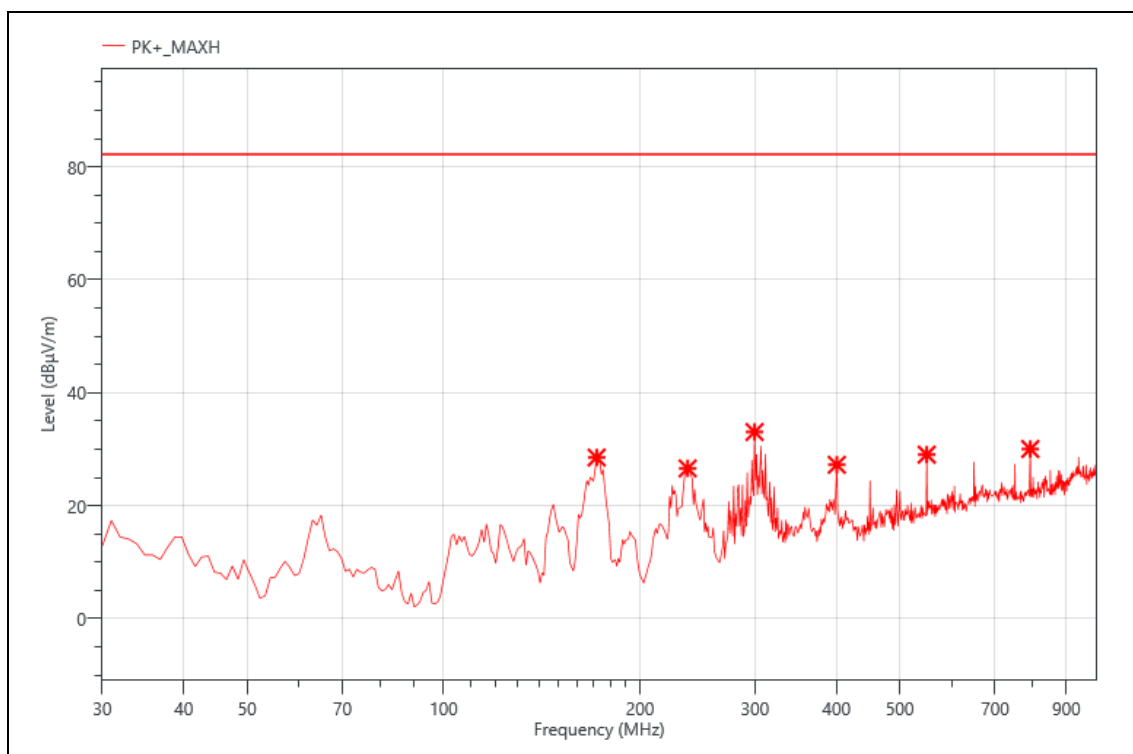


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	171.620	50.67	-22.14	28.53	82.30	53.77	PK+	V
2	236.610	46.00	-19.4	26.60	82.30	55.70	PK+	V
3	299.660	51.73	-18.68	33.05	82.30	49.25	PK+	V
4	400.540	40.79	-13.55	27.24	82.30	55.06	PK+	V
5	549.920	38.53	-9.49	29.04	82.30	53.26	PK+	V
6	792.420	36.09	-6.05	30.04	82.30	52.26	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

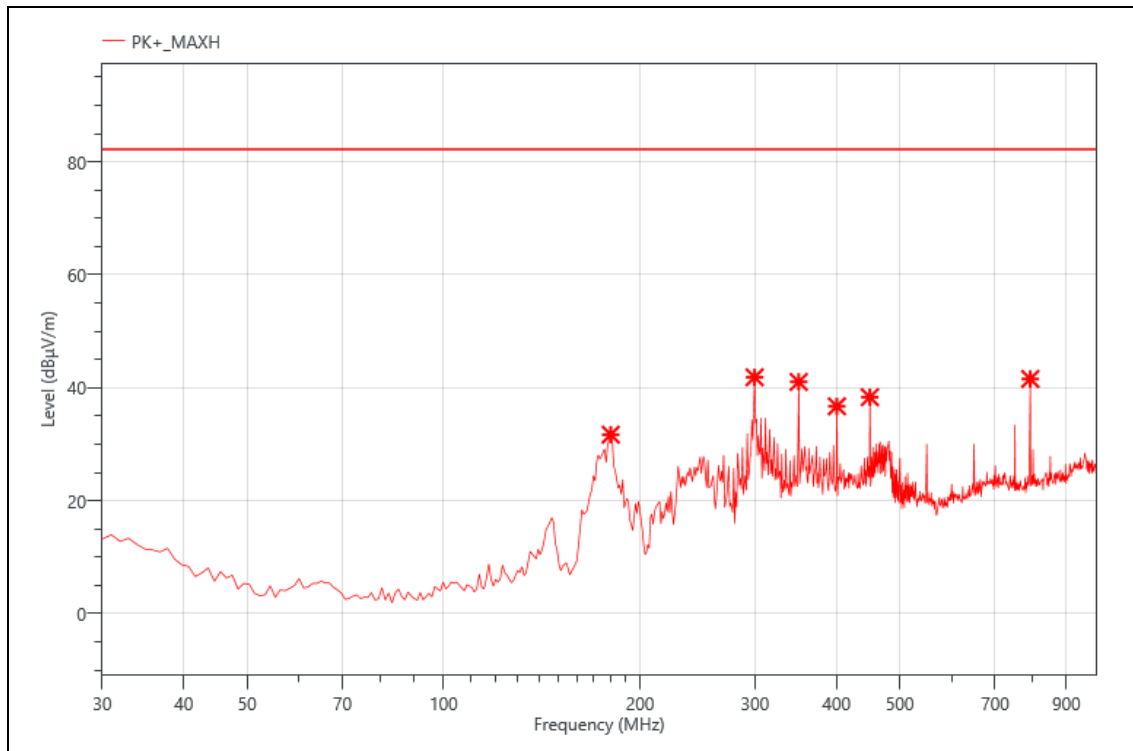


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	180.350	53.74	-22.05	31.69	82.30	50.61	PK+	H
2	299.660	60.53	-18.68	41.85	82.30	40.45	PK+	H
3	350.100	57.23	-16.2	41.03	82.30	41.27	PK+	H
4	400.540	50.26	-13.55	36.71	82.30	45.59	PK+	H
5	450.010	52.01	-13.68	38.33	82.30	43.97	PK+	H
6	792.420	47.61	-6.05	41.56	82.30	40.74	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

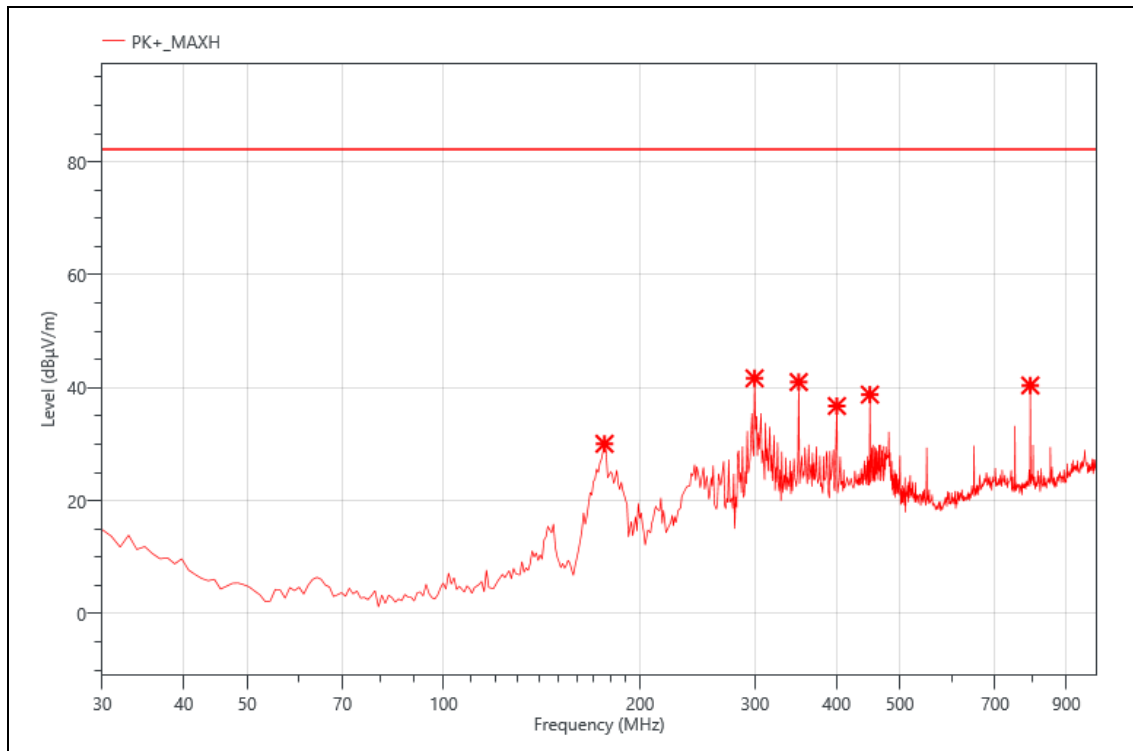


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	52.04	-21.97	30.07	82.30	52.23	PK+	H
2	299.660	60.35	-18.68	41.67	82.30	40.63	PK+	H
3	350.100	57.21	-16.2	41.01	82.30	41.29	PK+	H
4	400.540	50.31	-13.55	36.76	82.30	45.54	PK+	H
5	450.010	52.46	-13.68	38.78	82.30	43.52	PK+	H
6	792.420	46.46	-6.05	40.41	82.30	41.89	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

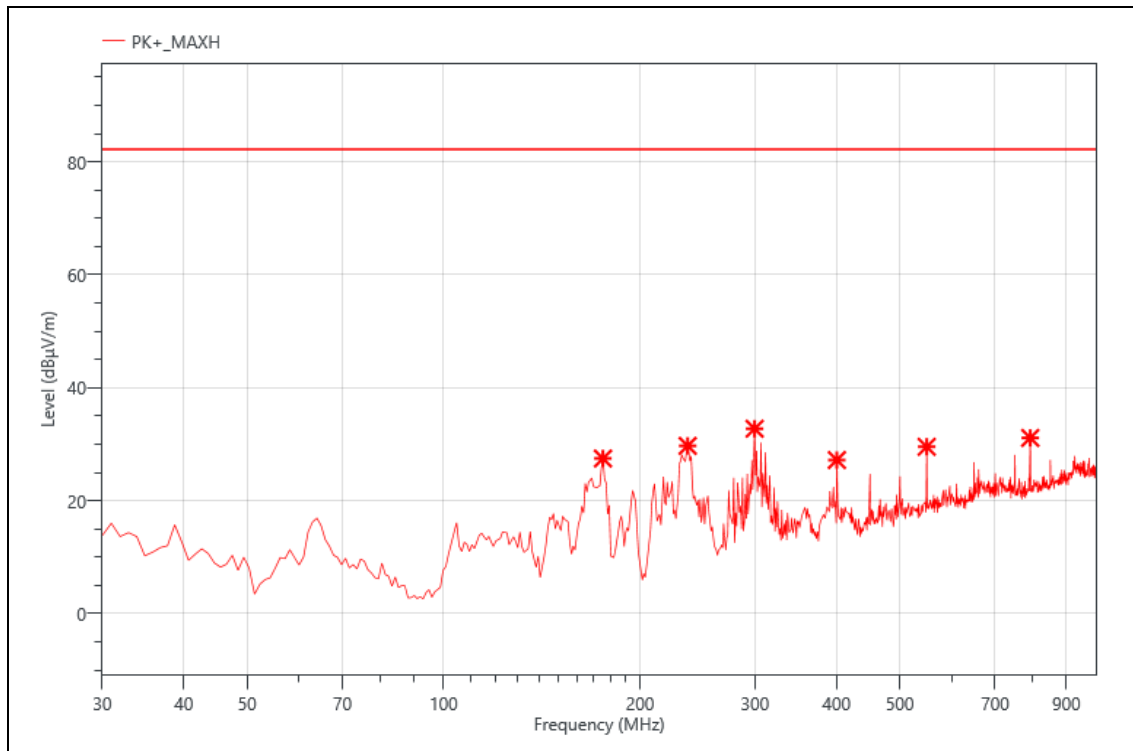


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	49.48	-22.01	27.47	82.30	54.83	PK+	V
2	236.610	49.11	-19.4	29.71	82.30	52.59	PK+	V
3	299.660	51.42	-18.68	32.74	82.30	49.56	PK+	V
4	400.540	40.75	-13.55	27.20	82.30	55.10	PK+	V
5	549.920	39.03	-9.49	29.54	82.30	52.76	PK+	V
6	792.420	37.16	-6.05	31.11	82.30	51.19	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

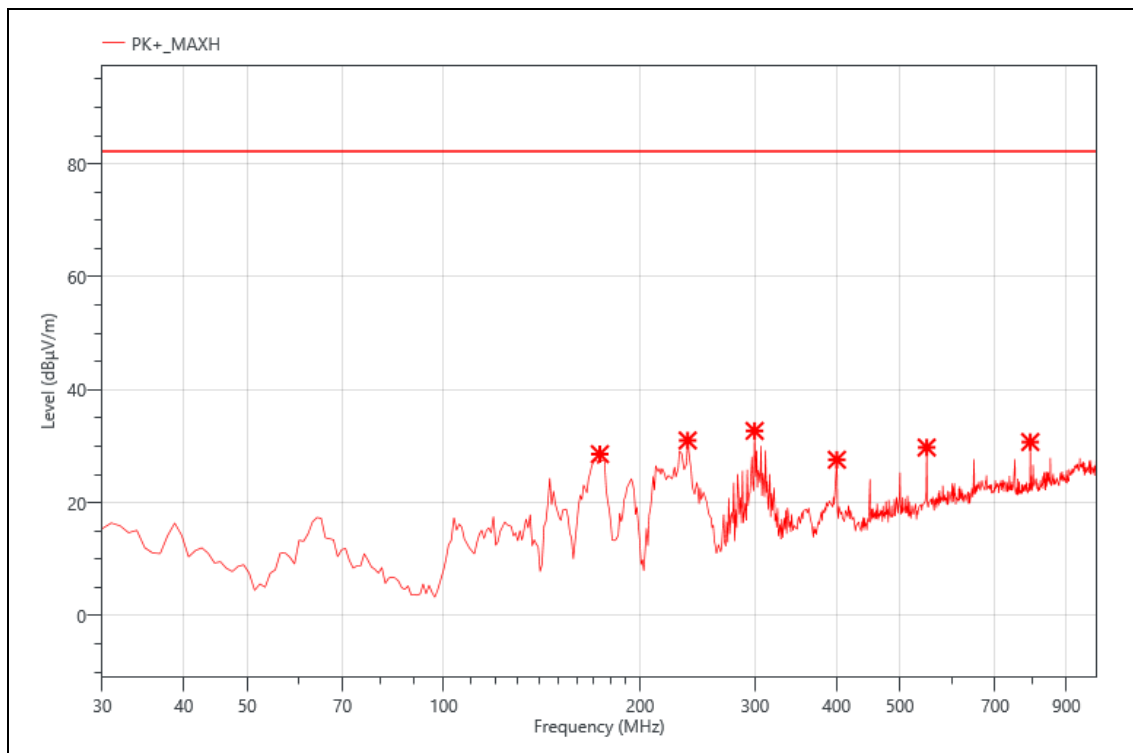


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	173.560	50.65	-22.05	28.60	82.30	53.70	PK+	V
2	236.610	50.42	-19.4	31.02	82.30	51.28	PK+	V
3	299.660	51.39	-18.68	32.71	82.30	49.59	PK+	V
4	400.540	41.15	-13.55	27.60	82.30	54.70	PK+	V
5	549.920	39.26	-9.49	29.77	82.30	52.53	PK+	V
6	792.420	36.79	-6.05	30.74	82.30	51.56	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

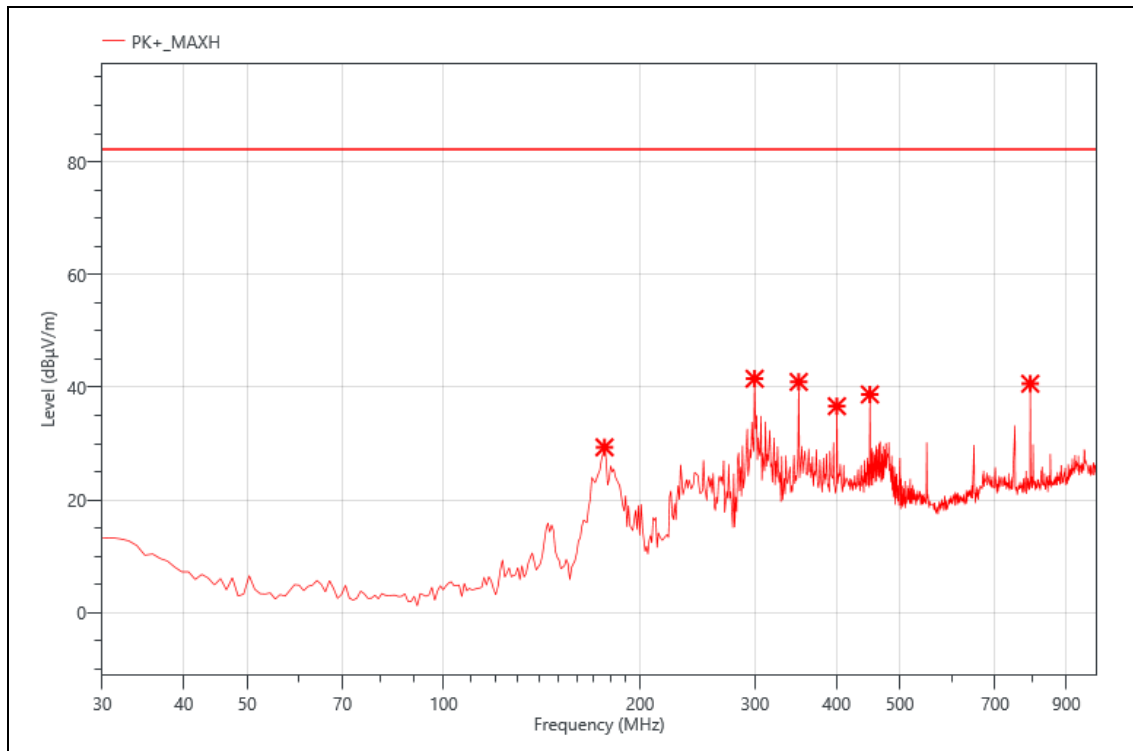


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	51.32	-21.97	29.35	82.30	52.95	PK+	H
2	299.660	60.20	-18.68	41.52	82.30	40.78	PK+	H
3	350.100	57.15	-16.2	40.95	82.30	41.35	PK+	H
4	400.540	50.19	-13.55	36.64	82.30	45.66	PK+	H
5	450.010	52.41	-13.68	38.73	82.30	43.57	PK+	H
6	792.420	46.68	-6.05	40.63	82.30	41.67	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

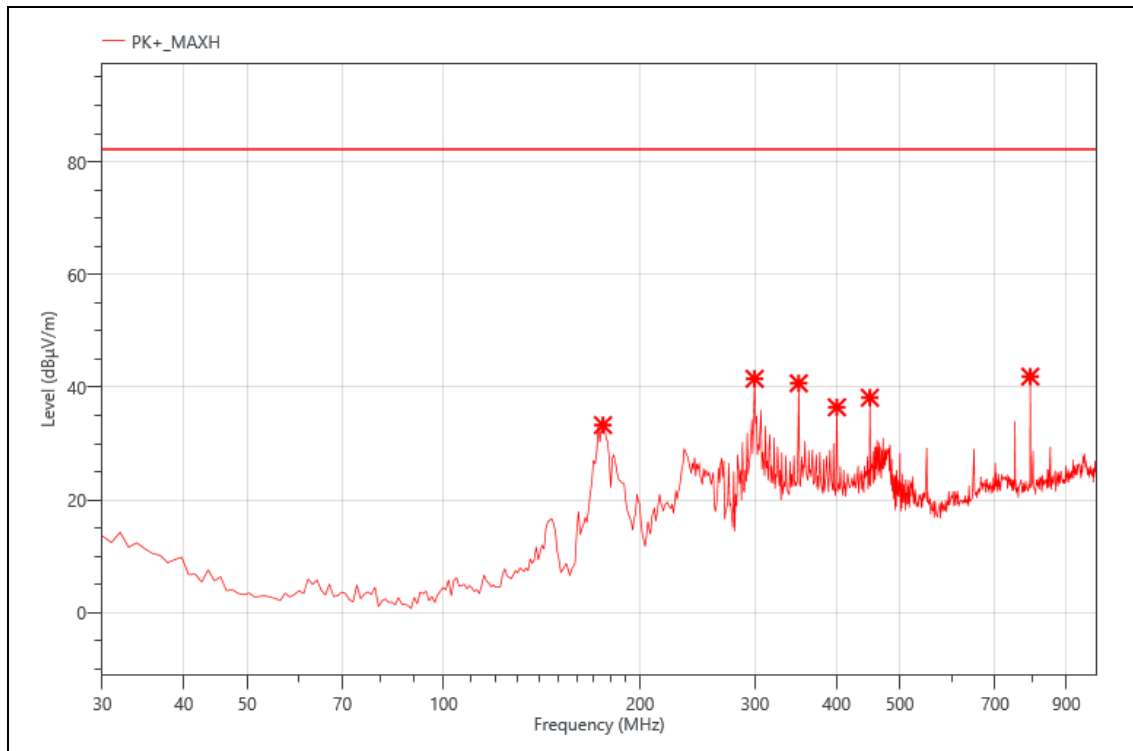


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	55.30	-22.01	33.29	82.30	49.01	PK+	H
2	299.660	60.18	-18.68	41.50	82.30	40.80	PK+	H
3	350.100	56.91	-16.2	40.71	82.30	41.59	PK+	H
4	400.540	50.00	-13.55	36.45	82.30	45.85	PK+	H
5	450.010	51.82	-13.68	38.14	82.30	44.16	PK+	H
6	792.420	47.93	-6.05	41.88	82.30	40.42	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

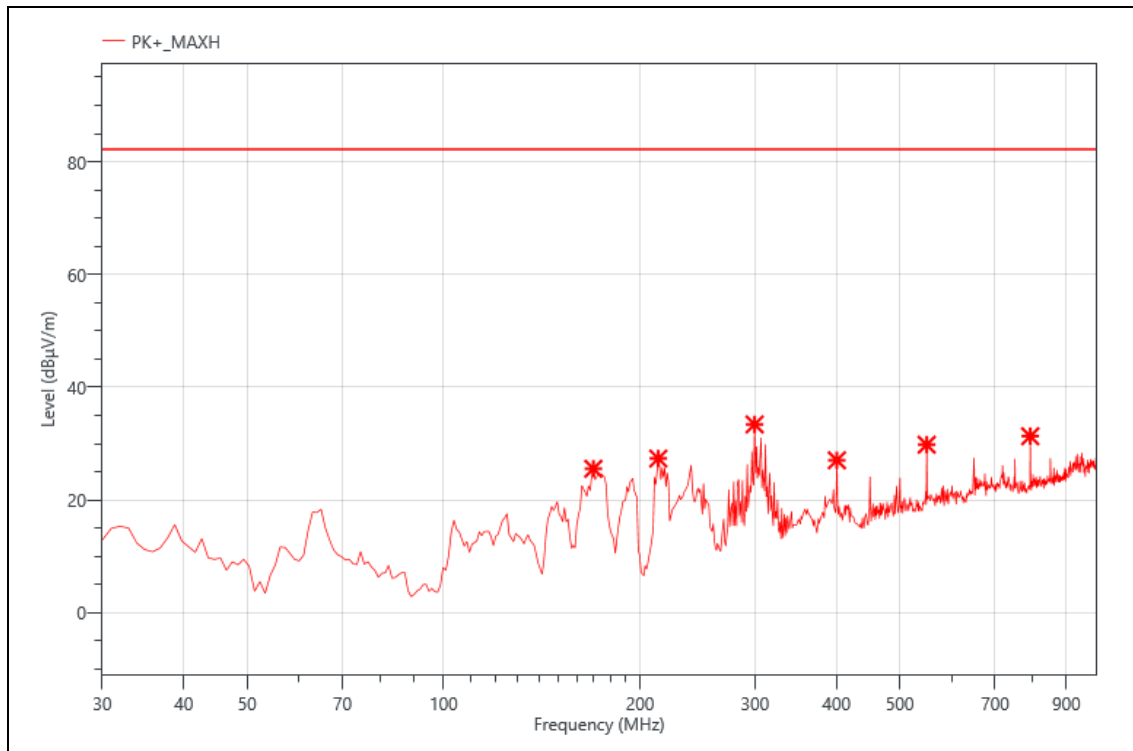


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	169.680	47.74	-22.19	25.55	82.30	56.75	PK+	V
2	213.330	48.30	-20.94	27.36	82.30	54.94	PK+	V
3	299.660	52.09	-18.68	33.41	82.30	48.89	PK+	V
4	400.540	40.60	-13.55	27.05	82.30	55.25	PK+	V
5	549.920	39.31	-9.49	29.82	82.30	52.48	PK+	V
6	792.420	37.37	-6.05	31.32	82.30	50.98	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

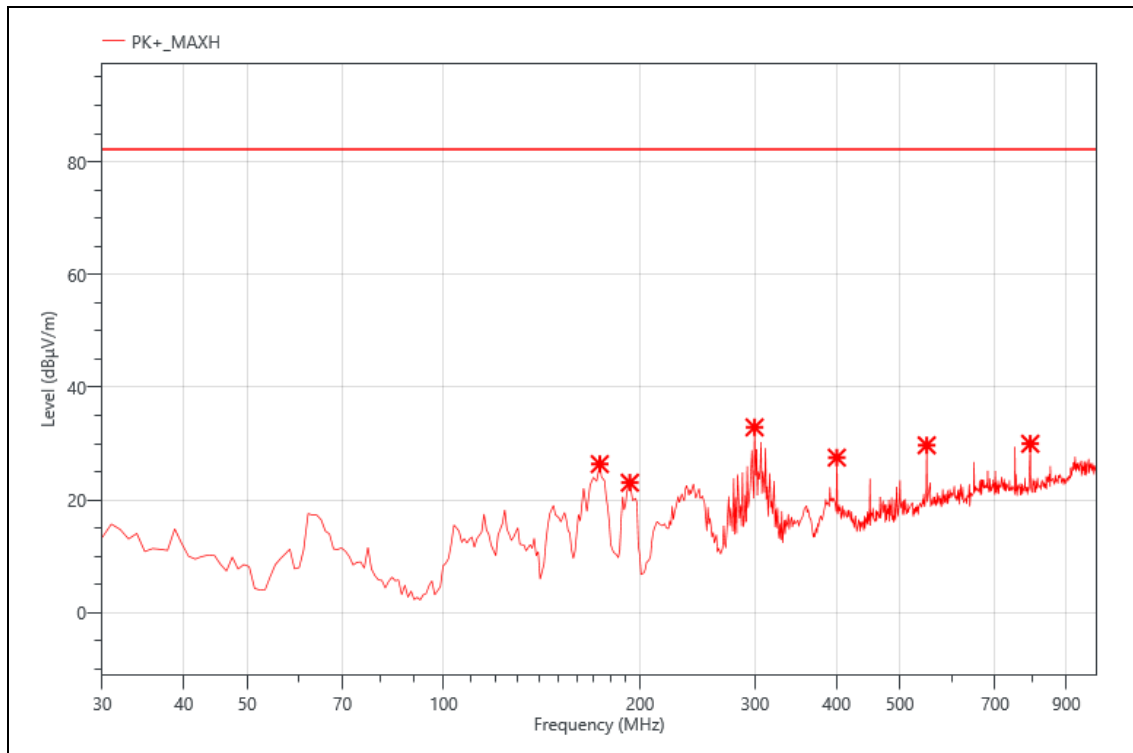


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	173.560	48.42	-22.05	26.37	82.30	55.93	PK+	V
2	192.960	45.60	-22.53	23.07	82.30	59.23	PK+	V
3	299.660	51.57	-18.68	32.89	82.30	49.41	PK+	V
4	400.540	41.07	-13.55	27.52	82.30	54.78	PK+	V
5	549.920	39.20	-9.49	29.71	82.30	52.59	PK+	V
6	792.420	36.03	-6.05	29.98	82.30	52.32	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

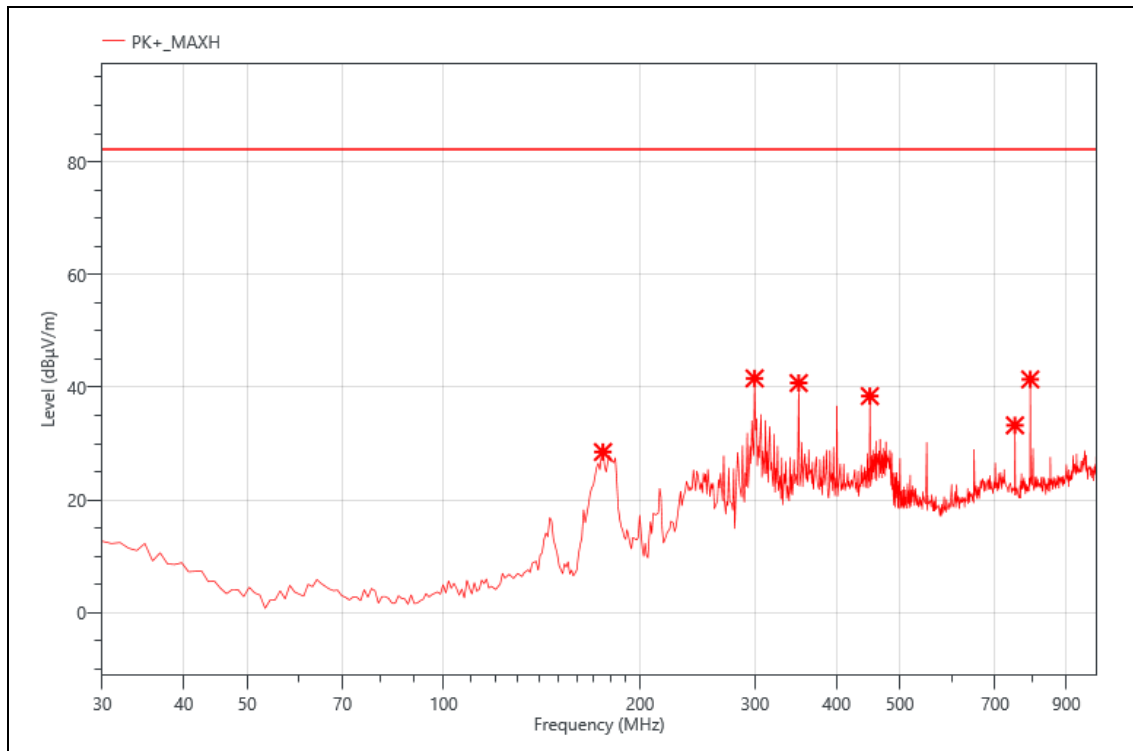


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	175.500	50.52	-22.01	28.51	82.30	53.79	PK+	H
2	299.660	60.26	-18.68	41.58	82.30	40.72	PK+	H
3	350.100	56.95	-16.2	40.75	82.30	41.55	PK+	H
4	450.010	52.11	-13.68	38.43	82.30	43.87	PK+	H
5	750.710	39.96	-6.71	33.25	82.30	49.05	PK+	H
6	792.420	47.45	-6.05	41.40	82.30	40.90	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

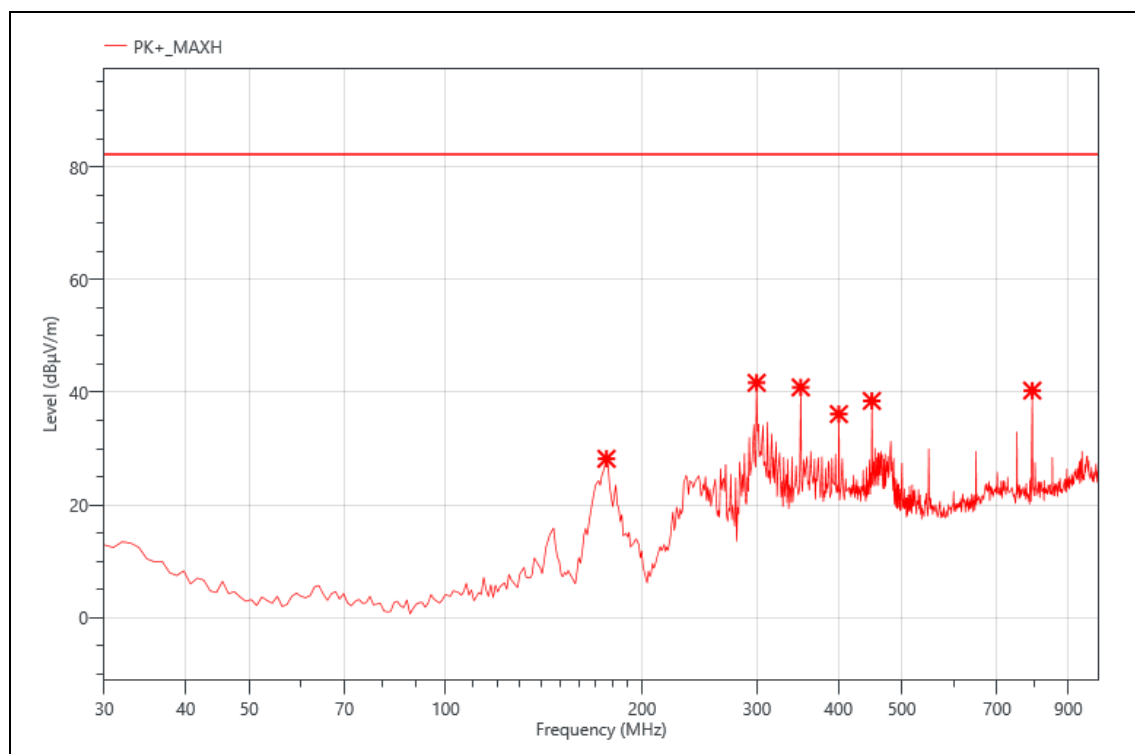


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	176.470	50.17	-21.97	28.20	82.30	54.10	PK+	H
2	299.660	60.36	-18.68	41.68	82.30	40.62	PK+	H
3	350.100	57.06	-16.2	40.86	82.30	41.44	PK+	H
4	400.540	49.68	-13.55	36.13	82.30	46.17	PK+	H
5	450.010	52.14	-13.68	38.46	82.30	43.84	PK+	H
6	792.420	46.35	-6.05	40.30	82.30	42.00	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND66-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

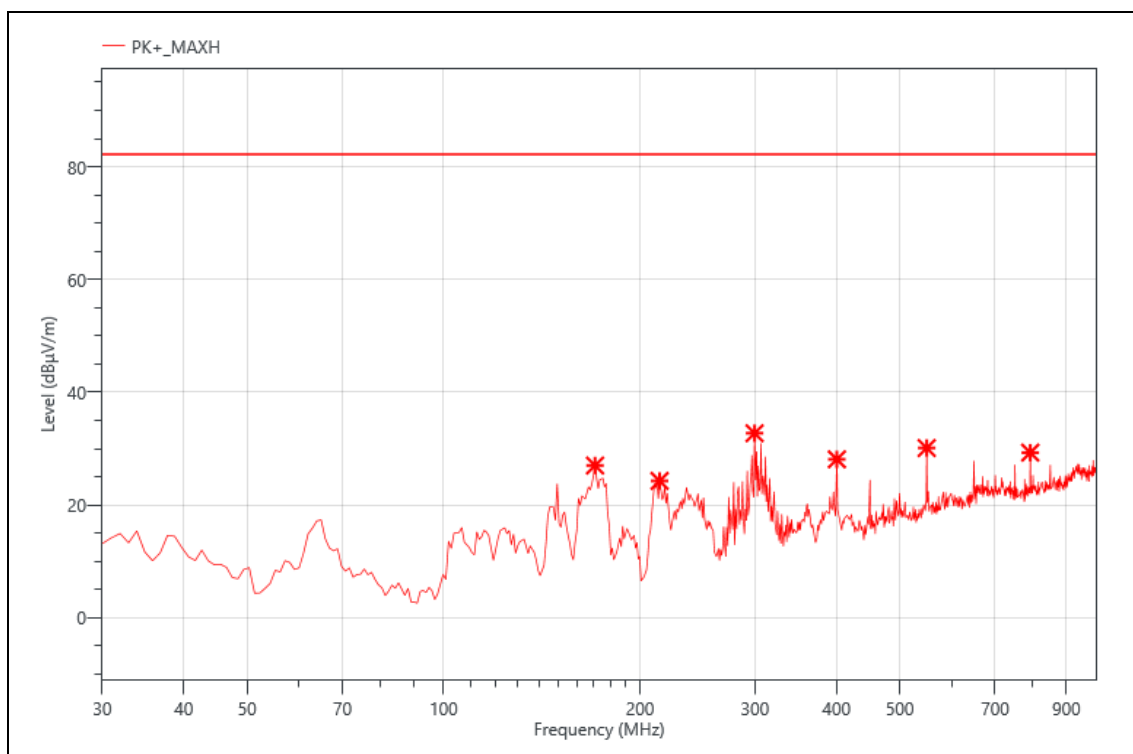

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	170.650	49.18	-22.17	27.01	82.30	55.29	PK+	V
2	214.300	45.20	-20.92	24.28	82.30	58.02	PK+	V
3	299.660	51.41	-18.68	32.73	82.30	49.57	PK+	V
4	400.540	41.65	-13.55	28.10	82.30	54.20	PK+	V
5	549.920	39.60	-9.49	30.11	82.30	52.19	PK+	V
6	792.420	35.35	-6.05	29.30	82.30	53.00	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]