


Antenna specification

1. Technical indicators of products

Frequency Range(MHz)	315MHZ
Band Width(KHz)	2.4
Impedance(Ω)	50
VSWR	1.91MAX
Return Loss (dB)	-15.6
Peak Gain(dBi)	-1.26
Polarization	Linear Vertical
Antenna Material	PCB
Operating Temp ($^{\circ}\text{C}$)	-30~70
Storage Temp ($^{\circ}\text{C}$)	-40~85


2. Product picture

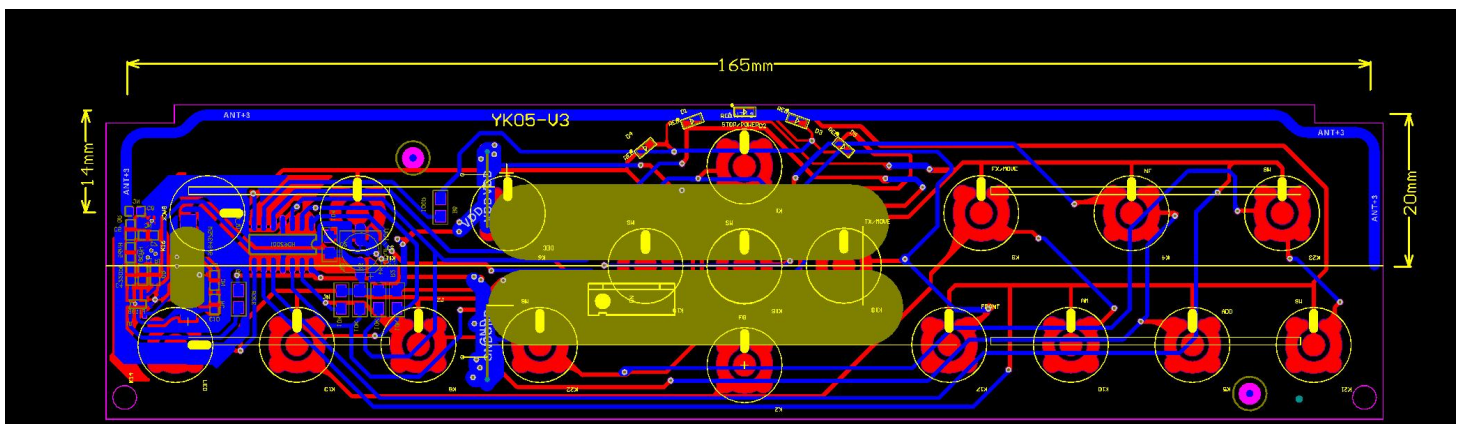

Horizontal: 315 MHz 375 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

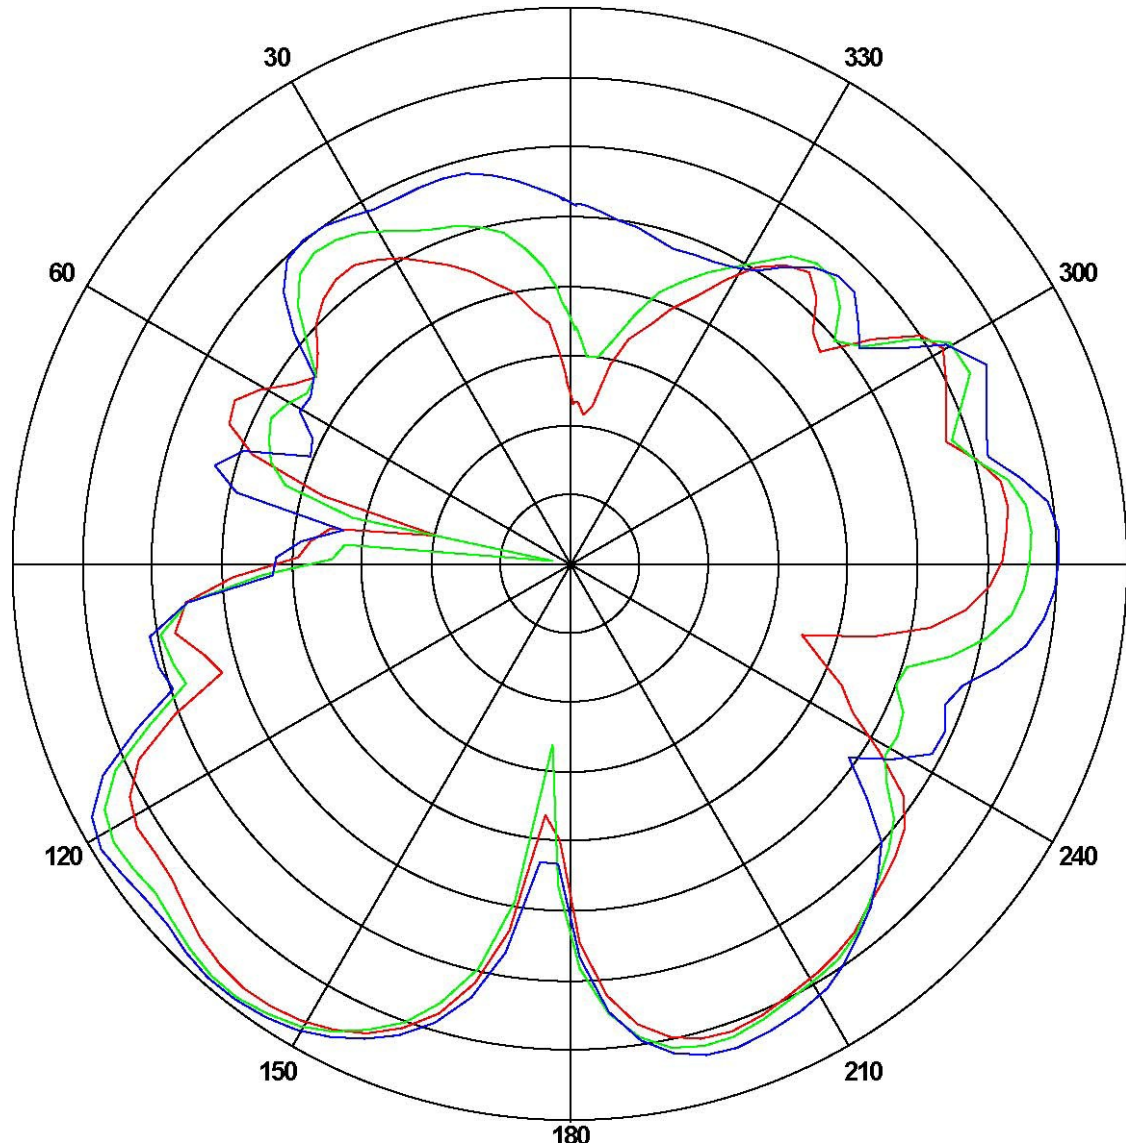


Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
315	-1.26174	-30.0801	-7.18716
375	-0.765802	-36.5604	-7.48023

Vertical: 315 MHz 375 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

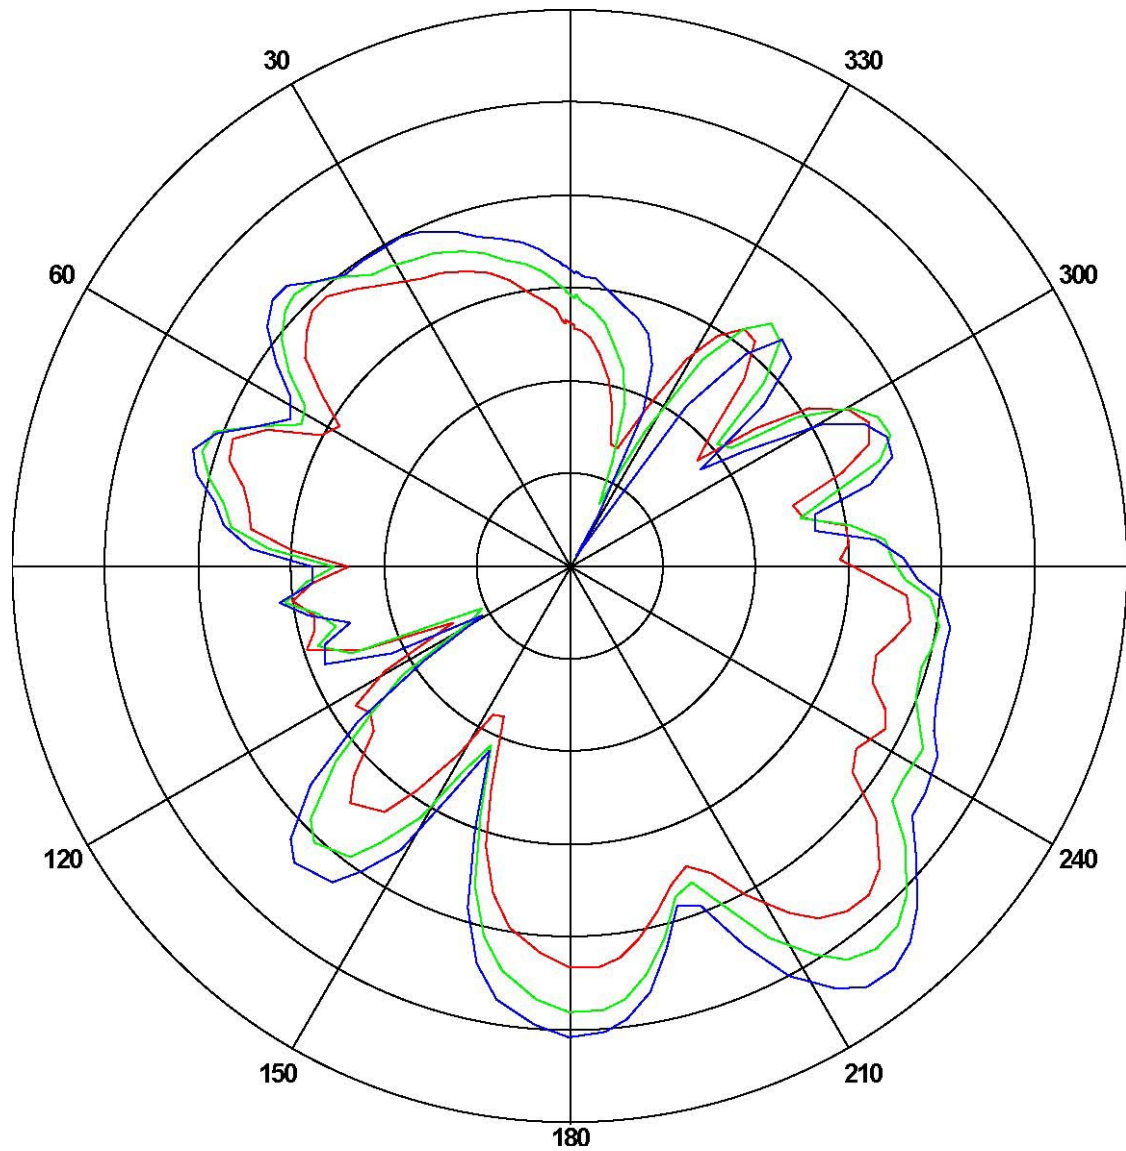

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
315	-5.2537	-22.1424	-12.4294
375	-2.4652	-24.5837	-10.4702

ANT Test Labs: Attestation of Global Compliance Co., Ltd.