

Test Plot 1#: GSM 850 Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.886$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.641 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 92.7%

Maximum value of SAR (measured) = 0.225 W/kg

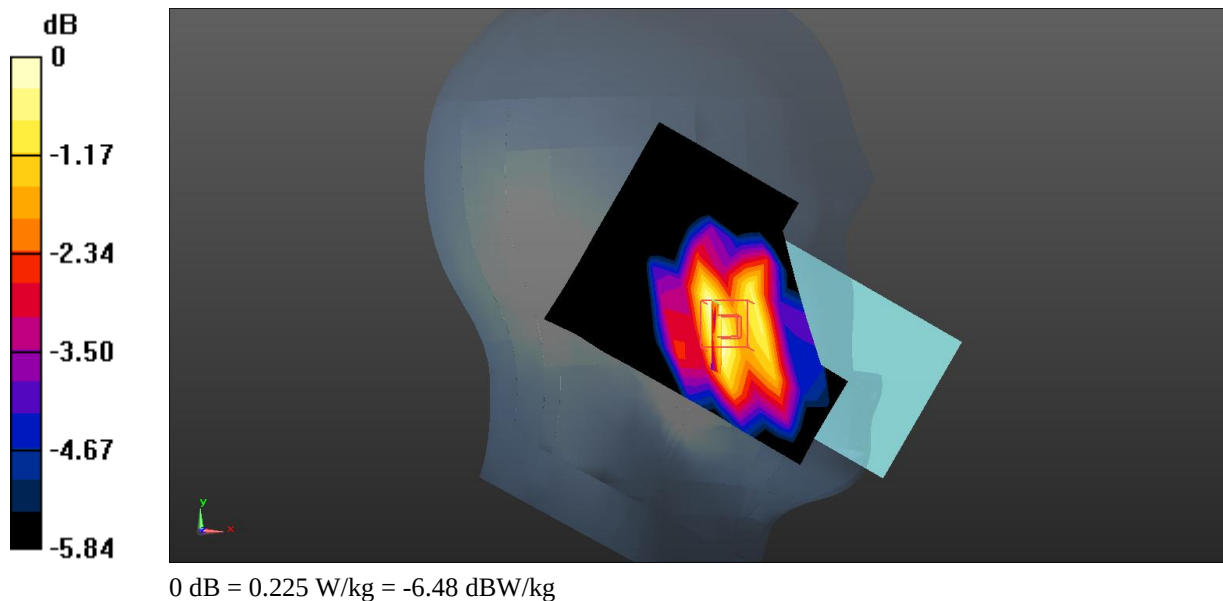

Test Plot 2#: GSM 850 Mid Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.886$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.584 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.59 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.481 W/kg

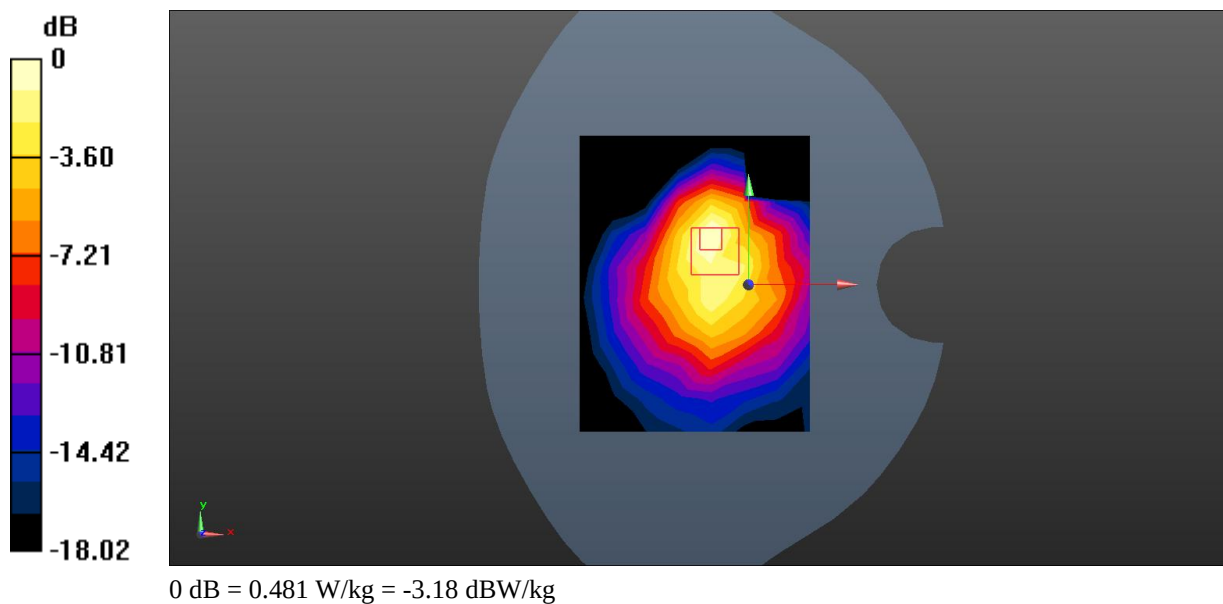

Test Plot 3#: GSM 1900 Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.712$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.178 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.3386 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 82.8%

Maximum value of SAR (measured) = 0.132 W/kg

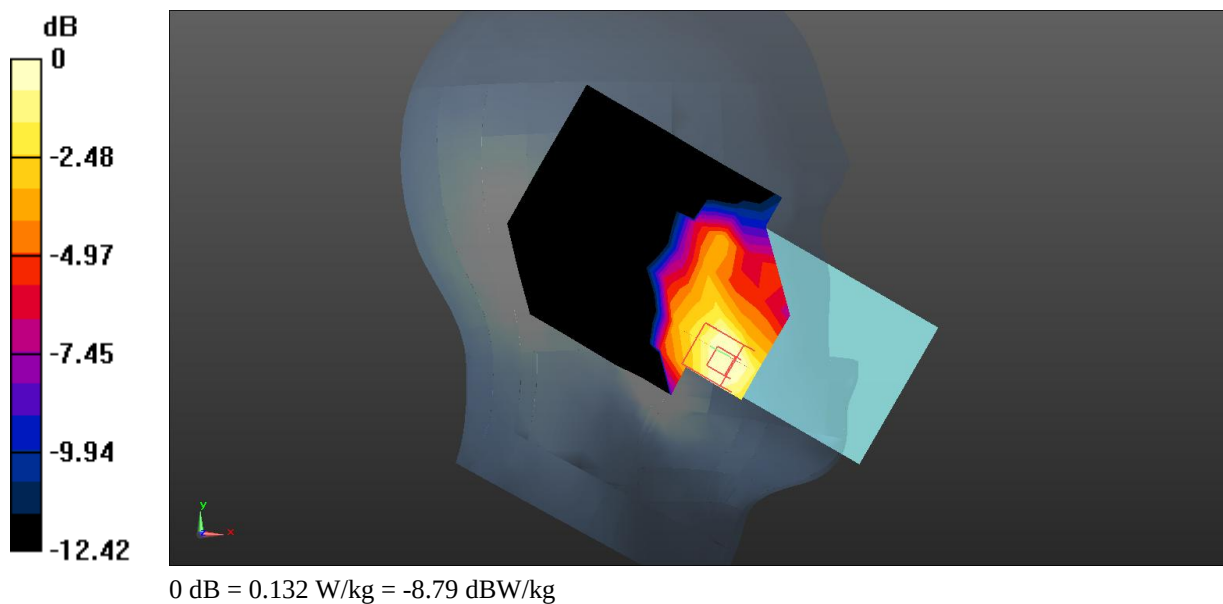

Test Plot 4#: GSM 1900 Mid Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.712$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.846 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.63 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.504 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.7%

Maximum value of SAR (measured) = 0.840 W/kg

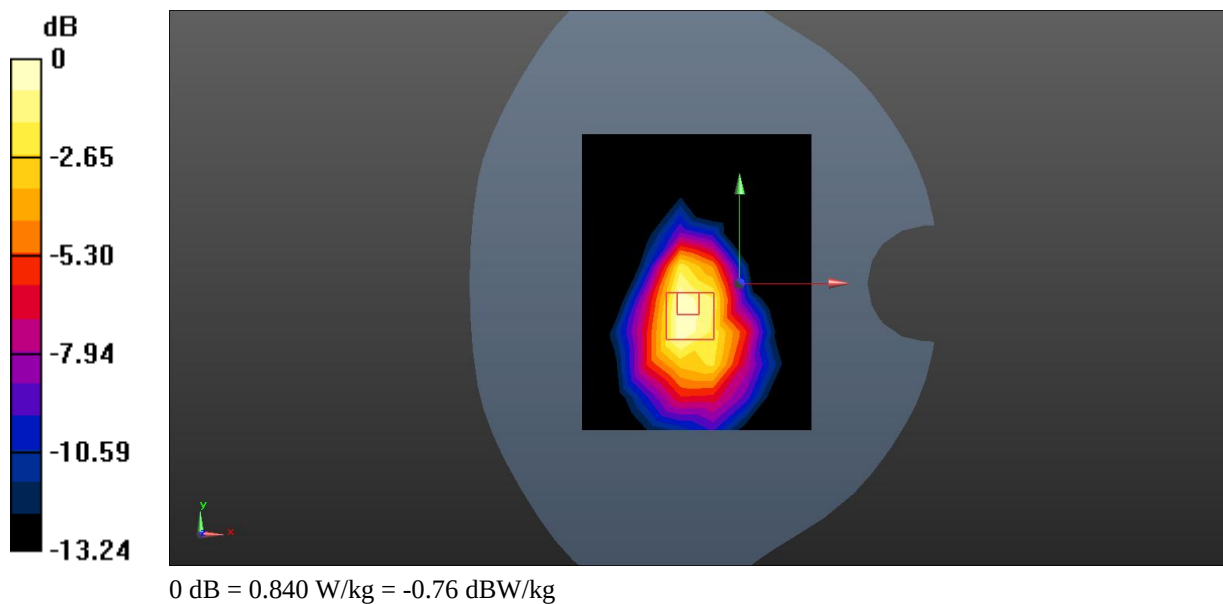

Test Plot 5#: WCDMA Band 2 Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.712$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.133 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.091 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.6%

Maximum value of SAR (measured) = 0.108 W/kg

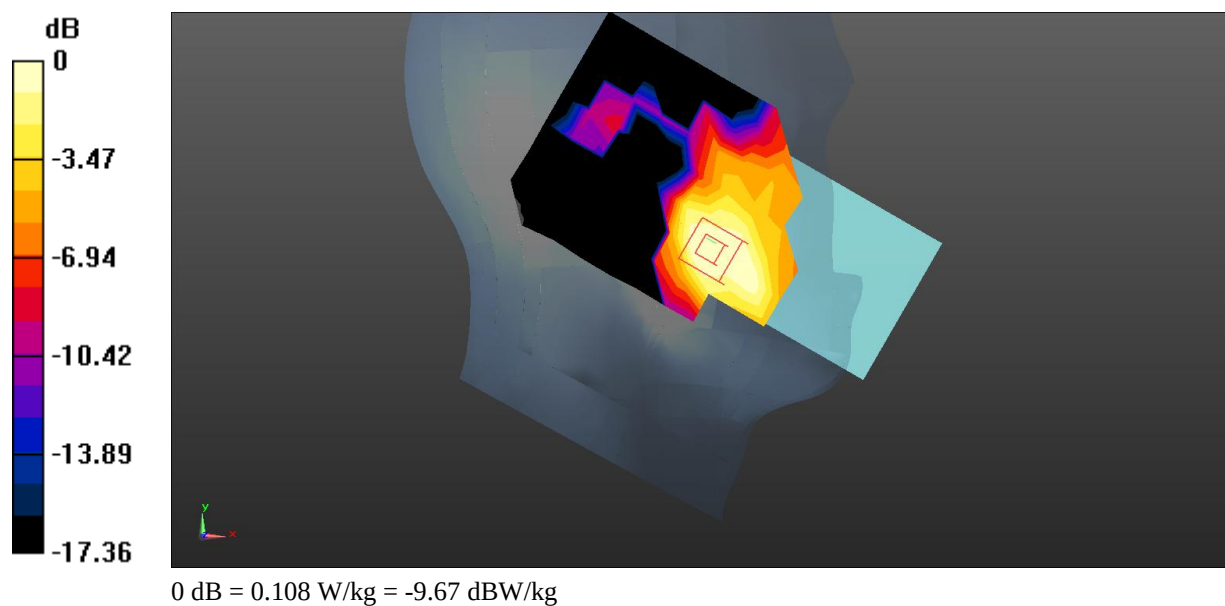

Test Plot 6#: WCDMA Band 2 Low Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 41.329$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1852.4 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.88 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.703 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 90.6%

Maximum value of SAR (measured) = 1.00 W/kg

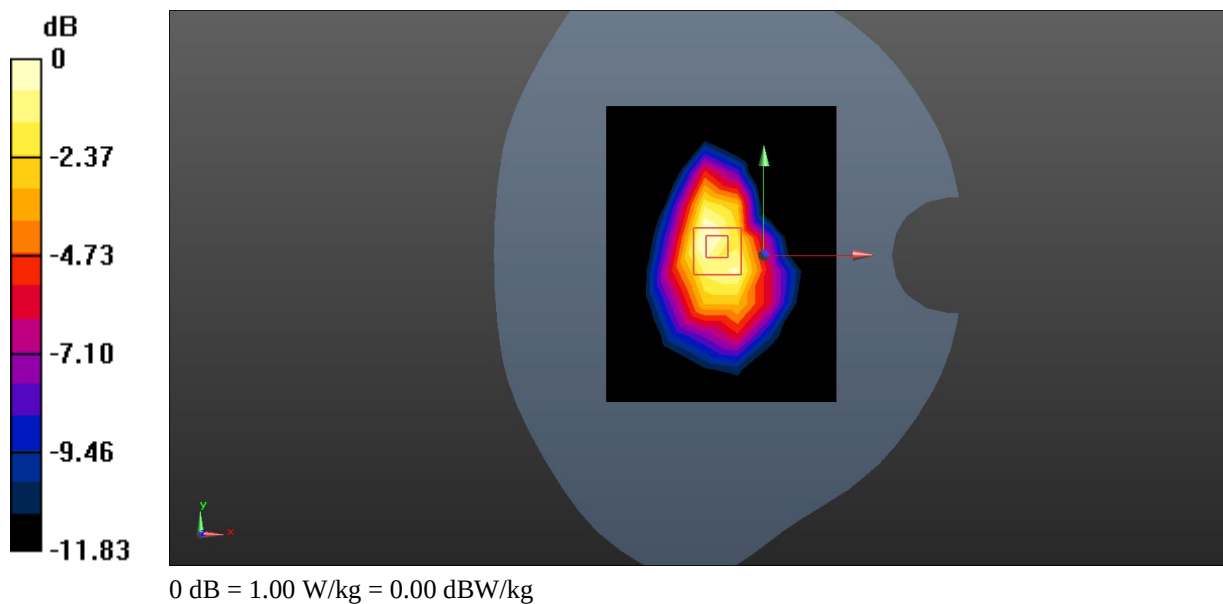

Test Plot 7#: WCDMA Band 4 Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 40.729$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1732.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.383 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.551 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 18.3 mm

Ratio of SAR at M2 to SAR at M1 = 86.9%

Maximum value of SAR (measured) = 0.361 W/kg

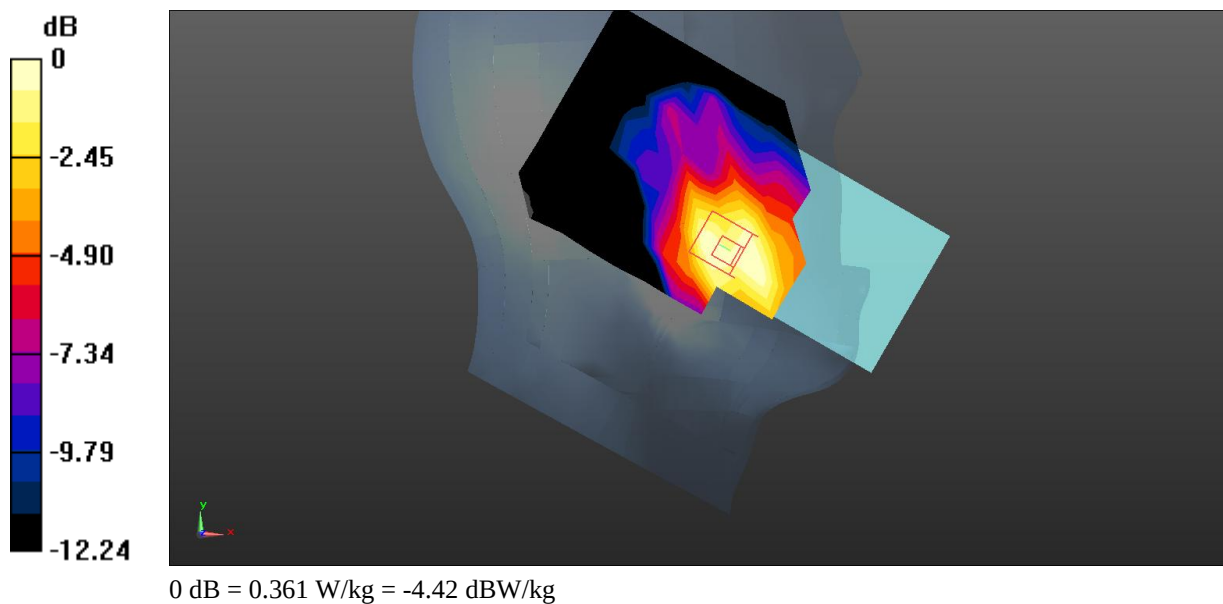

Test Plot 8#: WCDMA Band 4 High Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1752.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.87 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.569 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 90.7%

Maximum value of SAR (measured) = 1.25 W/kg

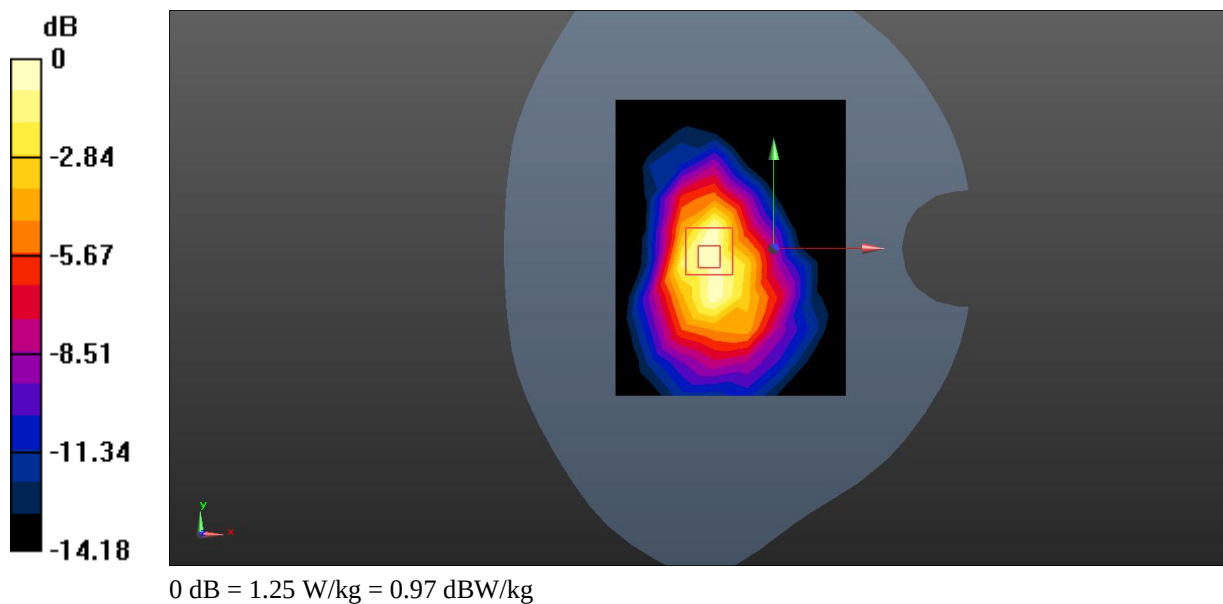

Test Plot 9#: WCDMA Band 5 Mid Head Right Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.919 \text{ S/m}$; $\epsilon_r = 41.886$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0894 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.886 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 98.1%

Maximum value of SAR (measured) = 0.0784 W/kg

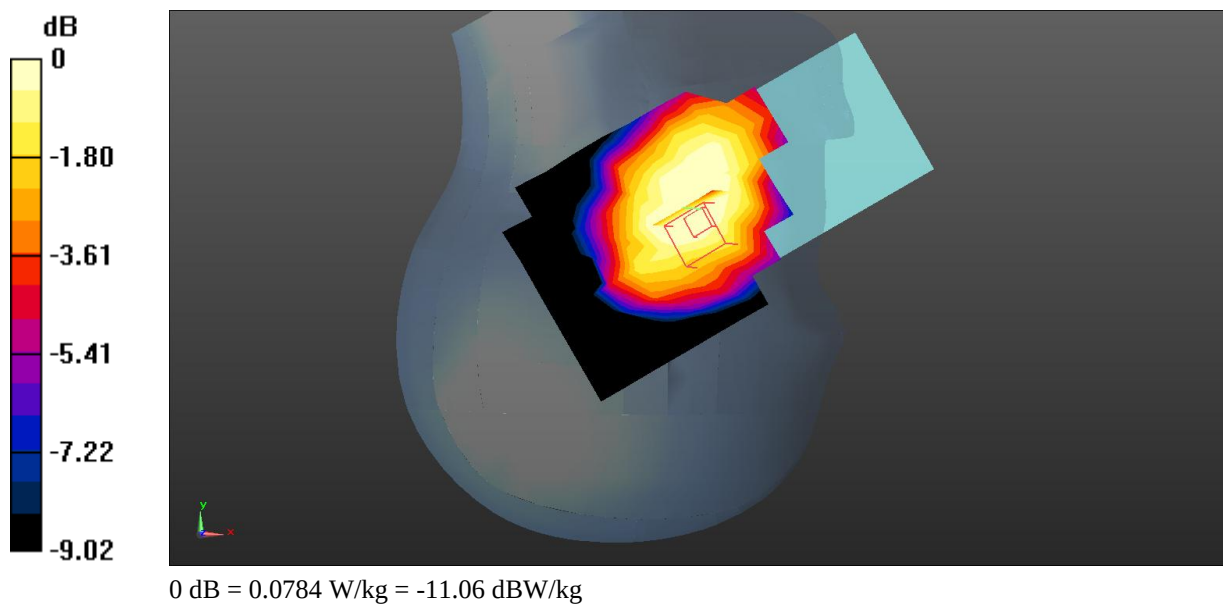

Test Plot 10#: WCDMA Band 5 Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.272 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.02 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.231 W/kg

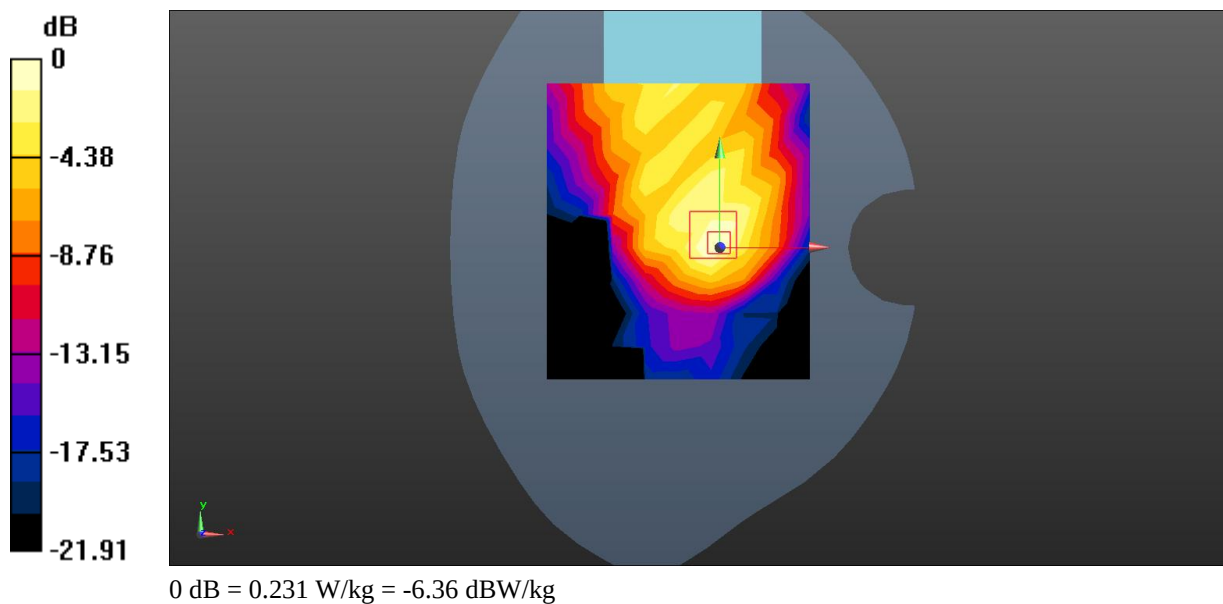

Test Plot 11#: LTE Band 2 1RB Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.712$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.630 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.6%

Maximum value of SAR (measured) = 0.117 W/kg

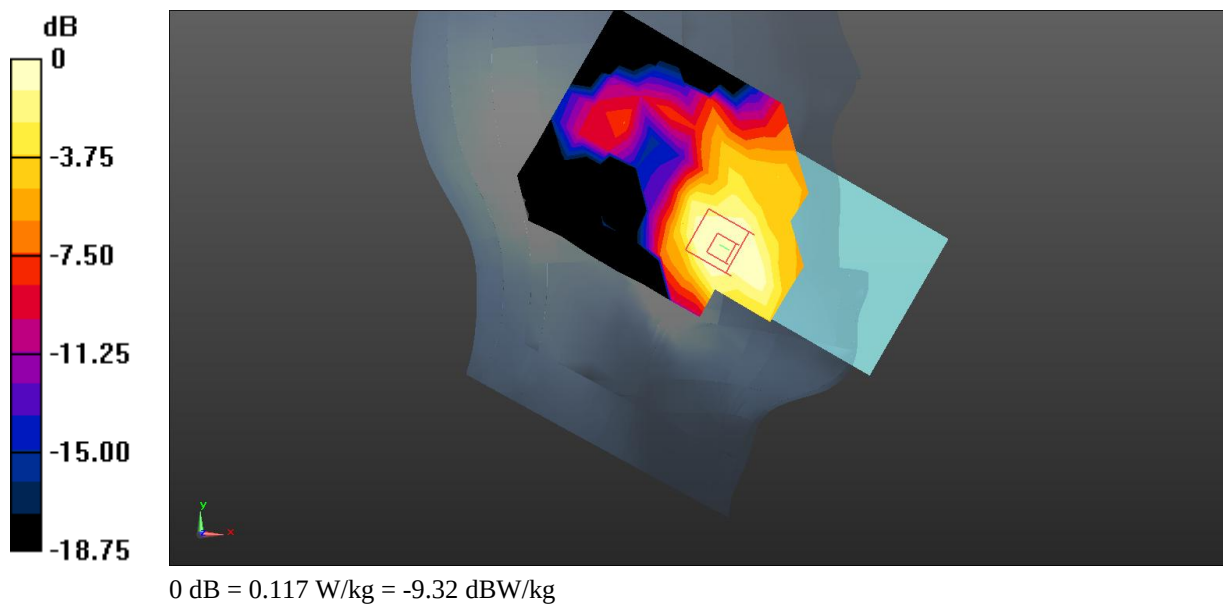

Test Plot 12#: LTE Band 2 1RB Mid Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.712$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.723 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.95 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 88.1%

Maximum value of SAR (measured) = 0.753 W/kg

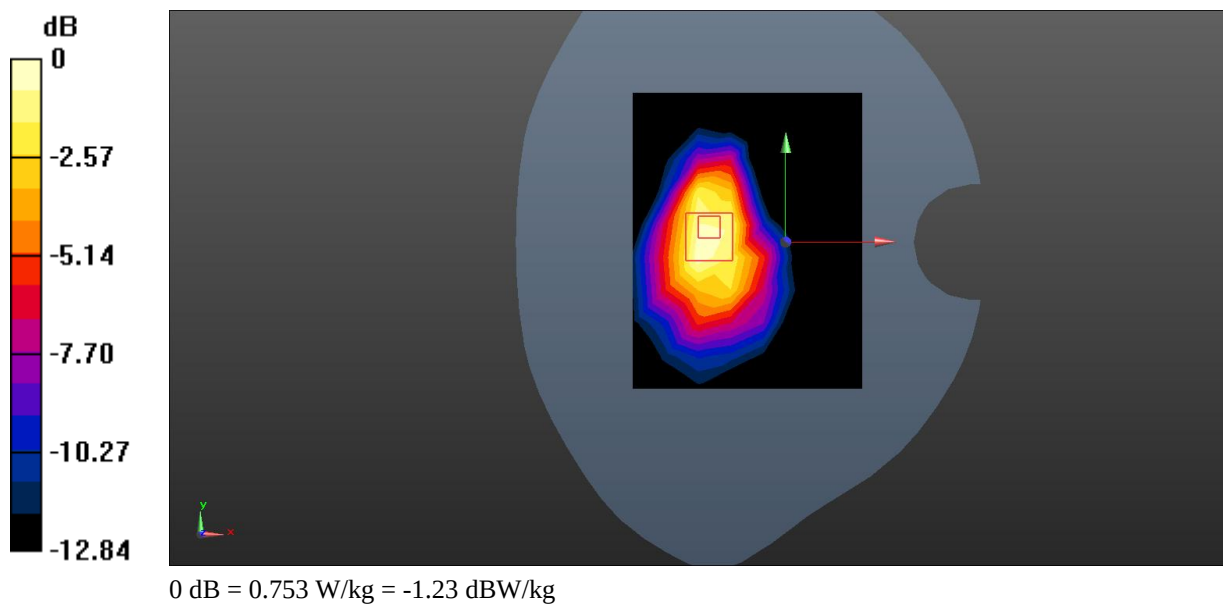

Test Plot 13#: LTE Band 5 1RB Mid Head Right Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.886$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0820 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.594 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 97.2%

Maximum value of SAR (measured) = 0.0750 W/kg

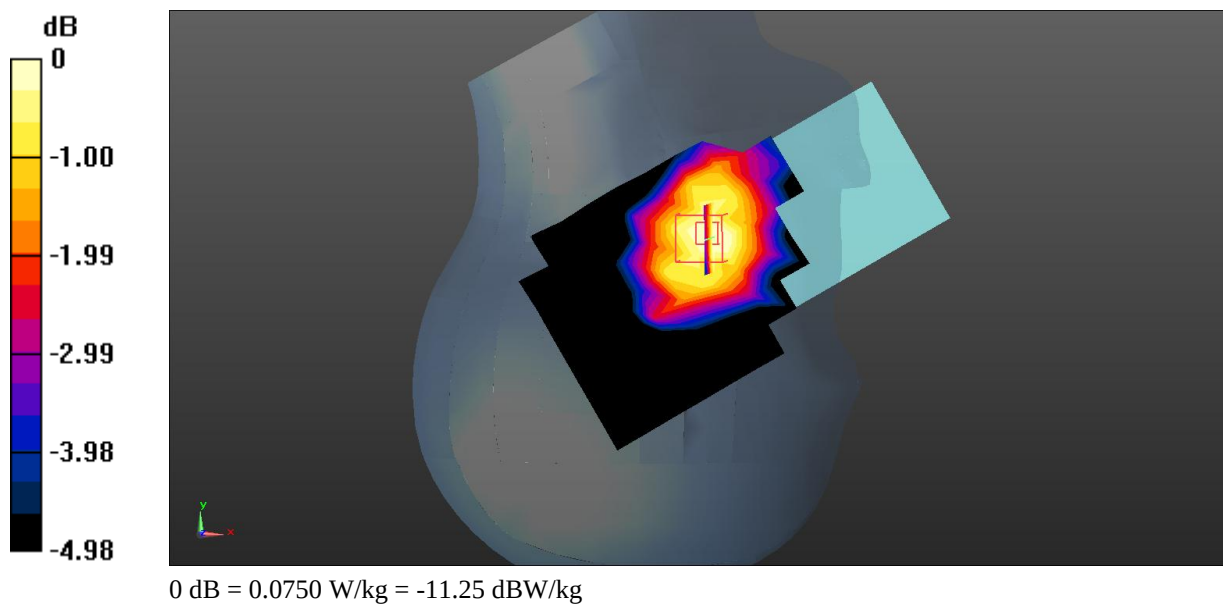

Test Plot 14#: LTE Band 5 1RB Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.886$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.171 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.38 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 87%

Maximum value of SAR (measured) = 0.134 W/kg

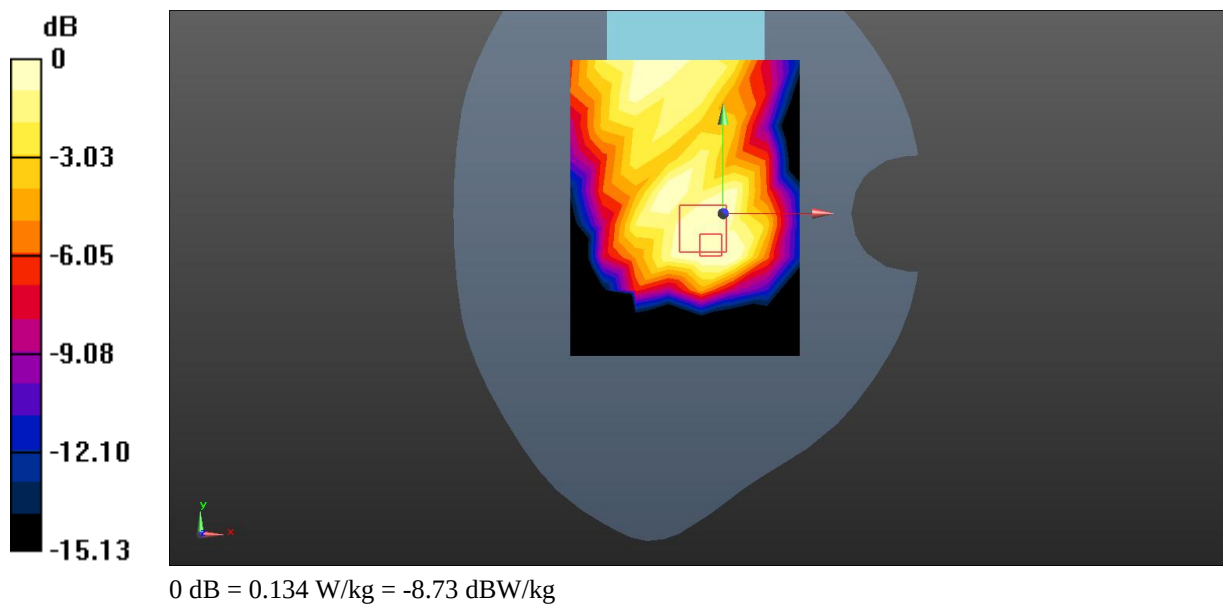

Test Plot 15#: LTE Band 7 1RB Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 39.799$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.110 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 07682 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 92.6%

Maximum value of SAR (measured) = 0.0795 W/kg

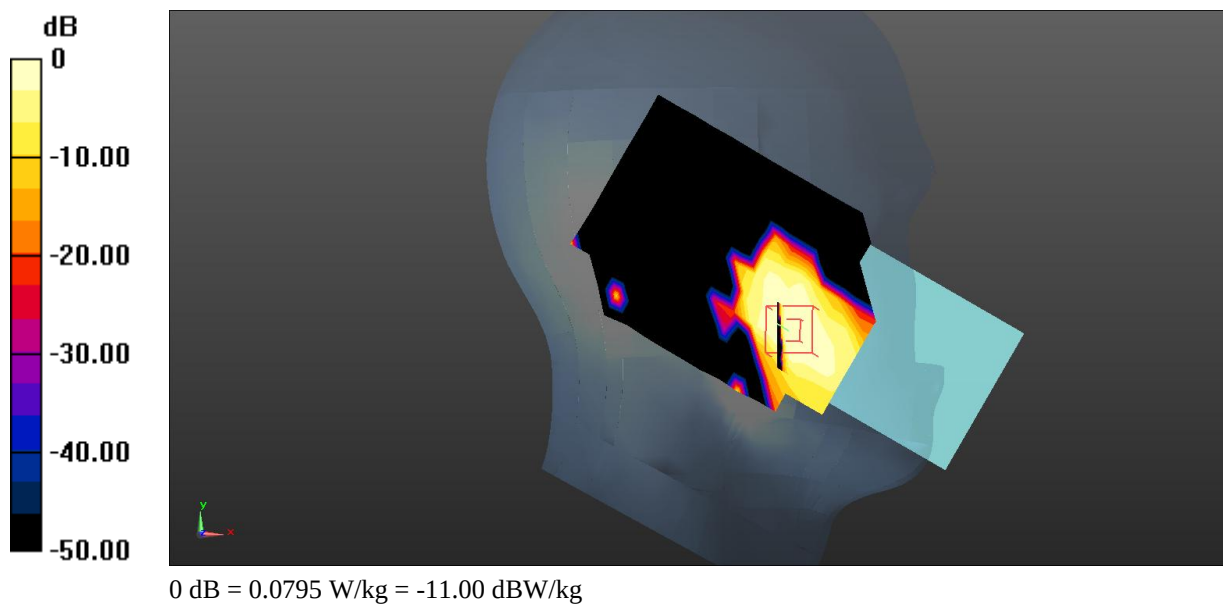

Test Plot 16#: LTE Band 7 1RB Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**


Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.901 \text{ S/m}$; $\epsilon_r = 39.799$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

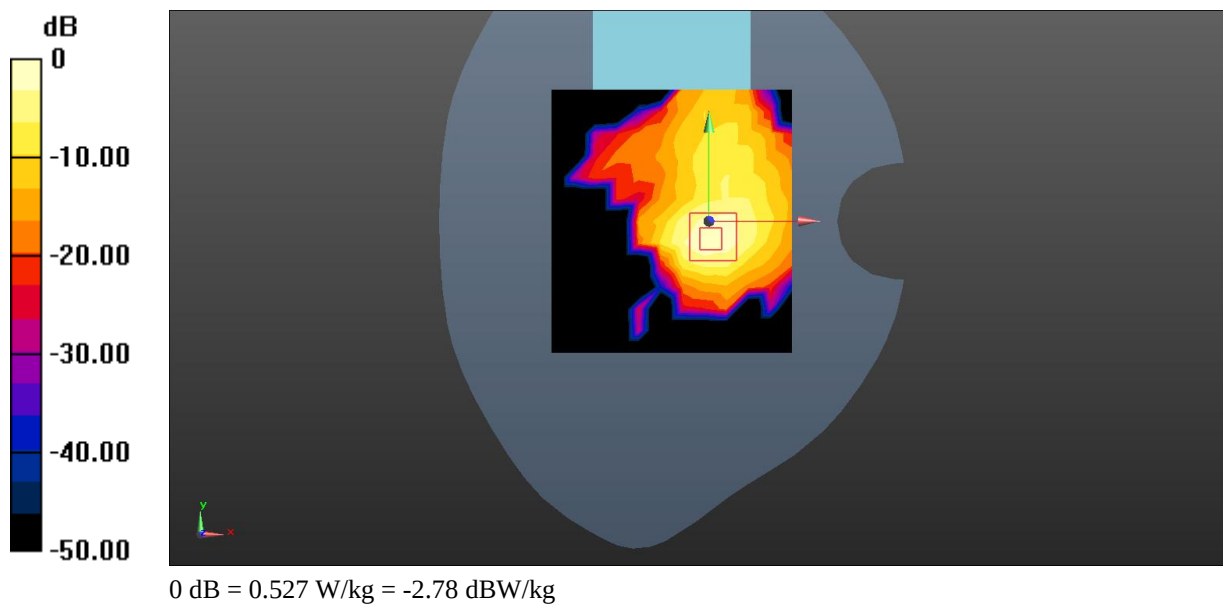Area Scan (12x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.542 W/kg **Zoom Scan (7x7x7) /Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.661 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.706 W/kg **SAR(1 g) = 0.442 W/kg ; SAR(10 g) = 0.204 W/kg** Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 63% Maximum value of SAR (measured) = 0.527 W/kg 

Test Plot 17#: LTE Band 12 50%RB Mid Head Right Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**


Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 43.239$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @707.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

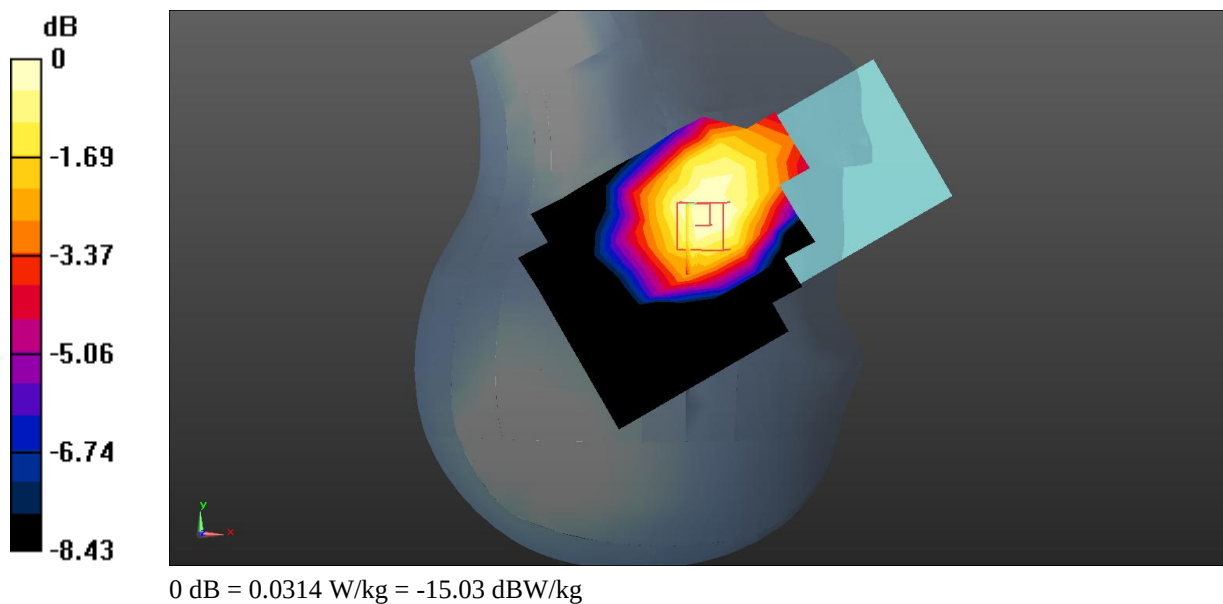Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0327 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0.9940 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.0340 W/kg **SAR(1 g) = 0.031 W/kg ; SAR(10 g) = 0.027 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 99.5% Maximum value of SAR (measured) = 0.0314 W/kg 

Test Plot 18#: LTE Band 12 50%RB Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 43.239$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @707.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.126 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.988 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 91.7%

Maximum value of SAR (measured) = 0.0960 W/kg

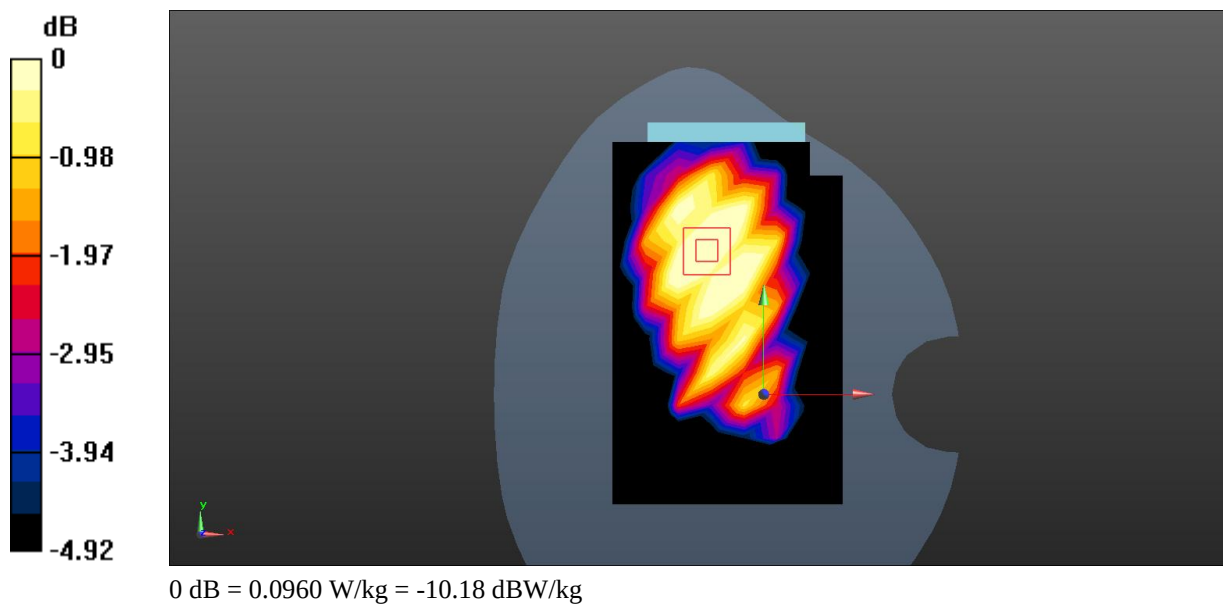

Test Plot 19#: LTE Band 13 1RB Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**


Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 41.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @782 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

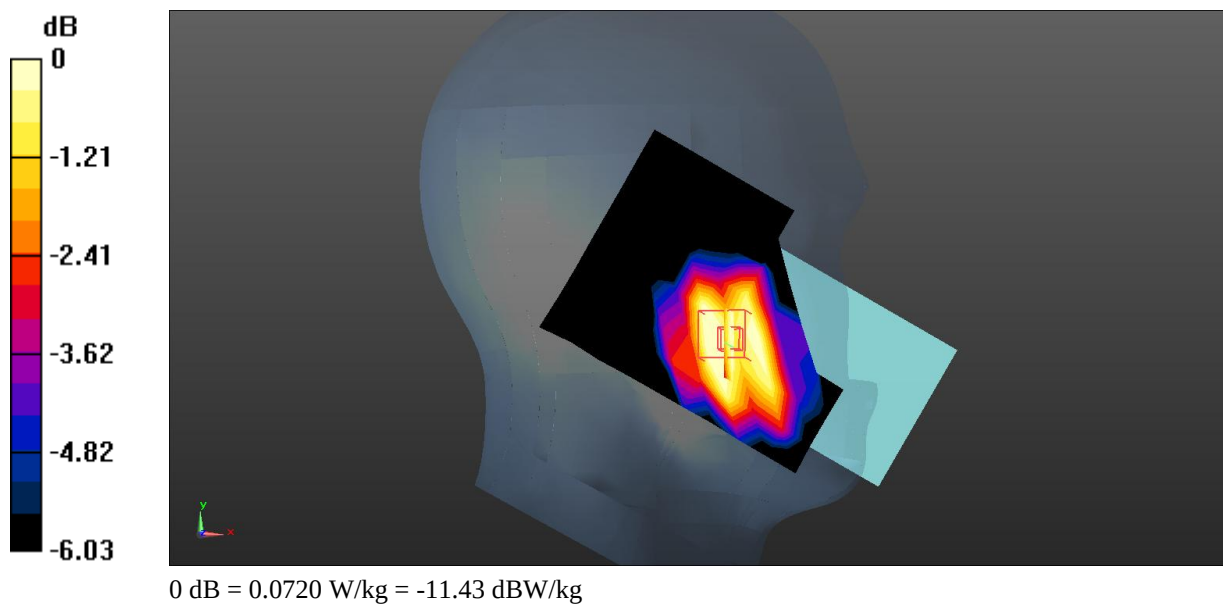Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0881 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.767 V/m ; Power Drift = 0.18 dB Peak SAR (extrapolated) = 0.0820 W/kg **SAR(1 g) = 0.068 W/kg ; SAR(10 g) = 0.061 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 91.4% Maximum value of SAR (measured) = 0.0720 W/kg 

Test Plot 20#: LTE Band 13 1RB Mid Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**


Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 41.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @782 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

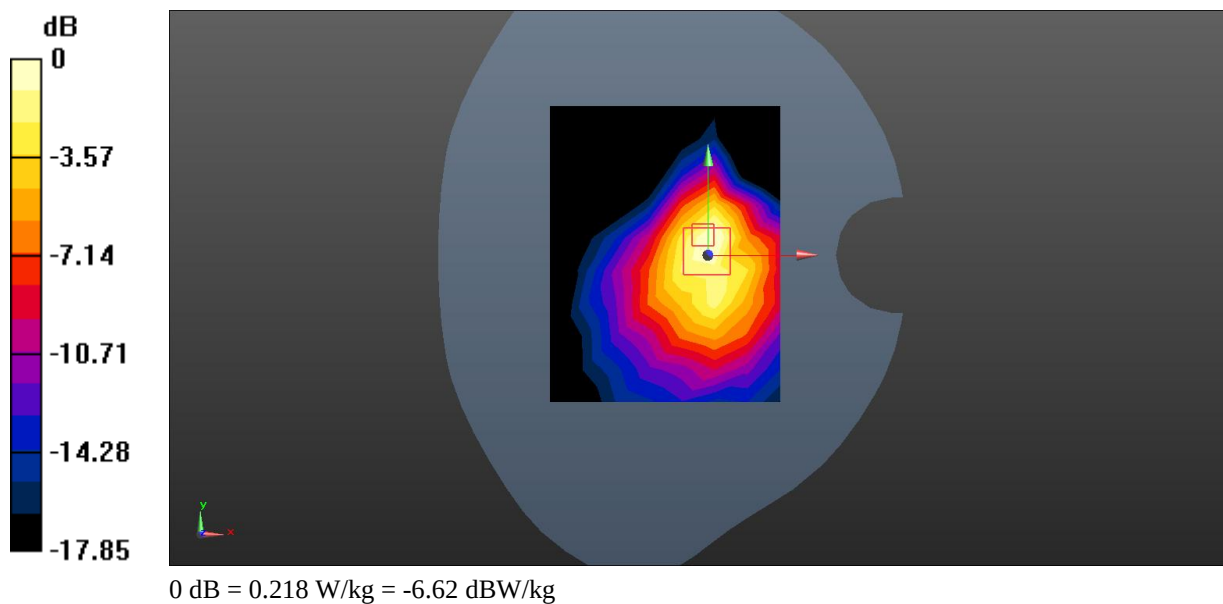Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.272 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.307 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.388 W/kg **SAR(1 g) = 0.203 W/kg ; SAR(10 g) = 0.120 W/kg** Smallest distance from peaks to all points 3 dB below = 9.3 mm Ratio of SAR at M2 to SAR at M1 = 75.7% Maximum value of SAR (measured) = 0.218 W/kg 

Test Plot 21#: LTE Band 41 1RB Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2595 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.190 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9378 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 96.5%

Maximum value of SAR (measured) = 0.125 W/kg

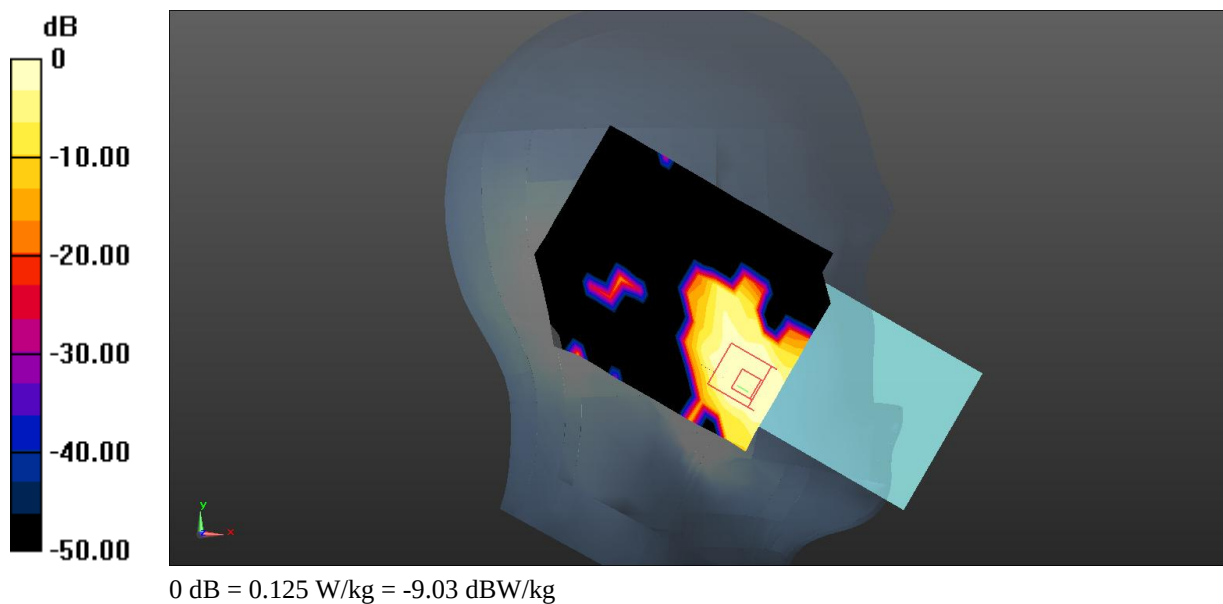

Test Plot 22#: LTE Band 41 1RB Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2595 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.960 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.269 W/kg

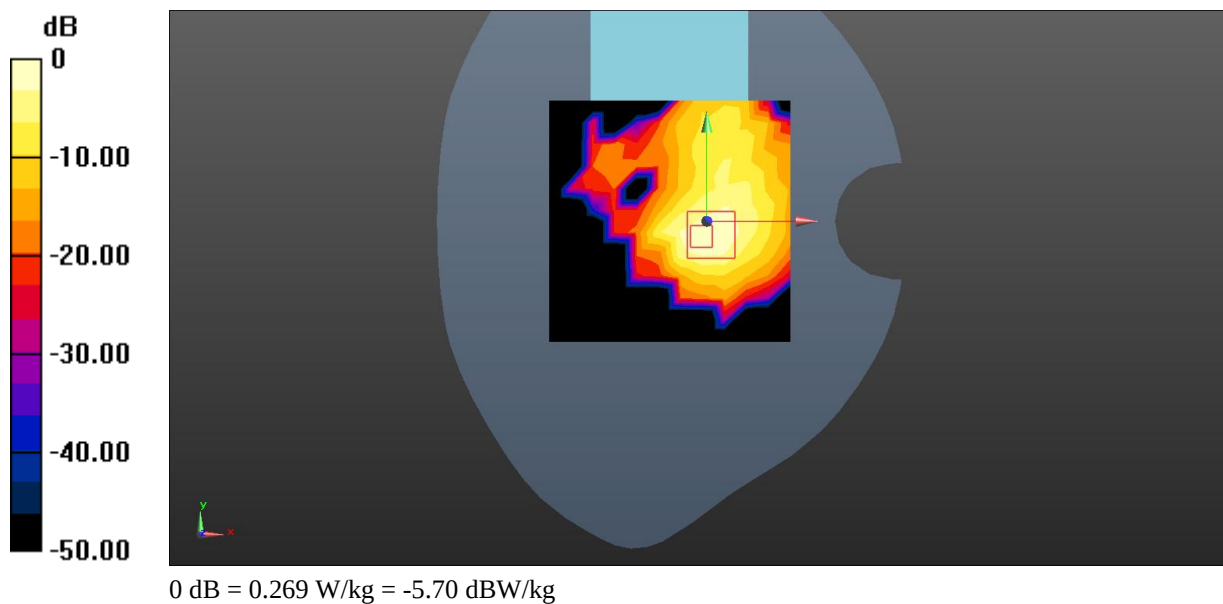

Test Plot 23#: LTE Band 66 1RB Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 40.477$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1745 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.479 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.490 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.2%

Maximum value of SAR (measured) = 0.518 W/kg

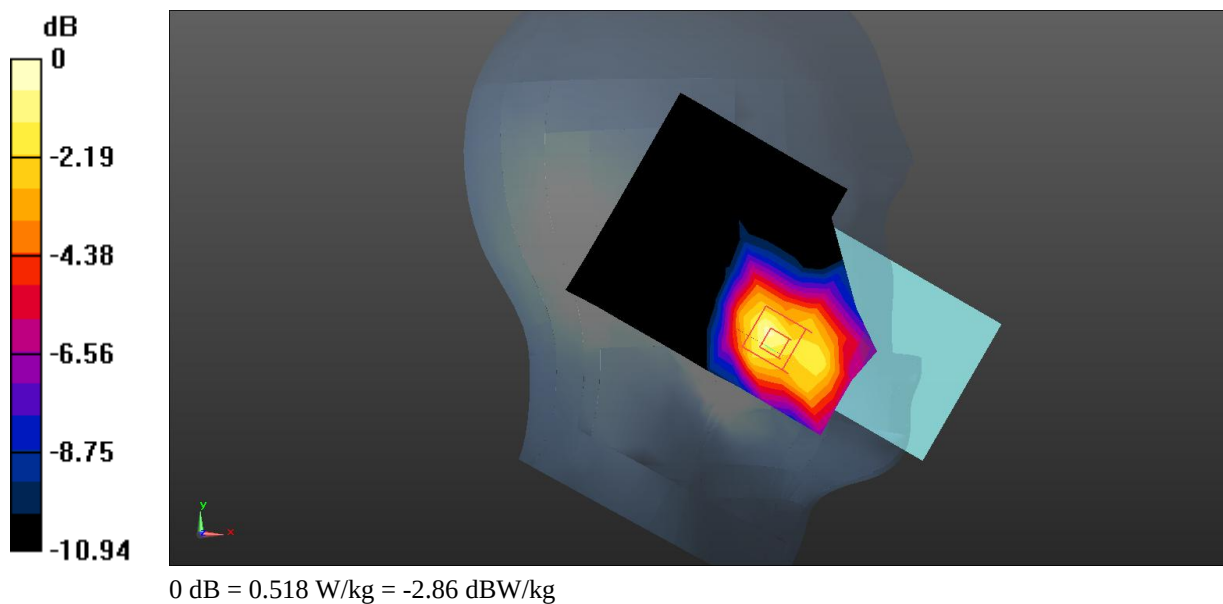

Test Plot 24#: LTE Band 66 1RB High Body Bottom**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.559$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1770 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.35 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.81 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.803 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 89.1%

Maximum value of SAR (measured) = 1.18 W/kg

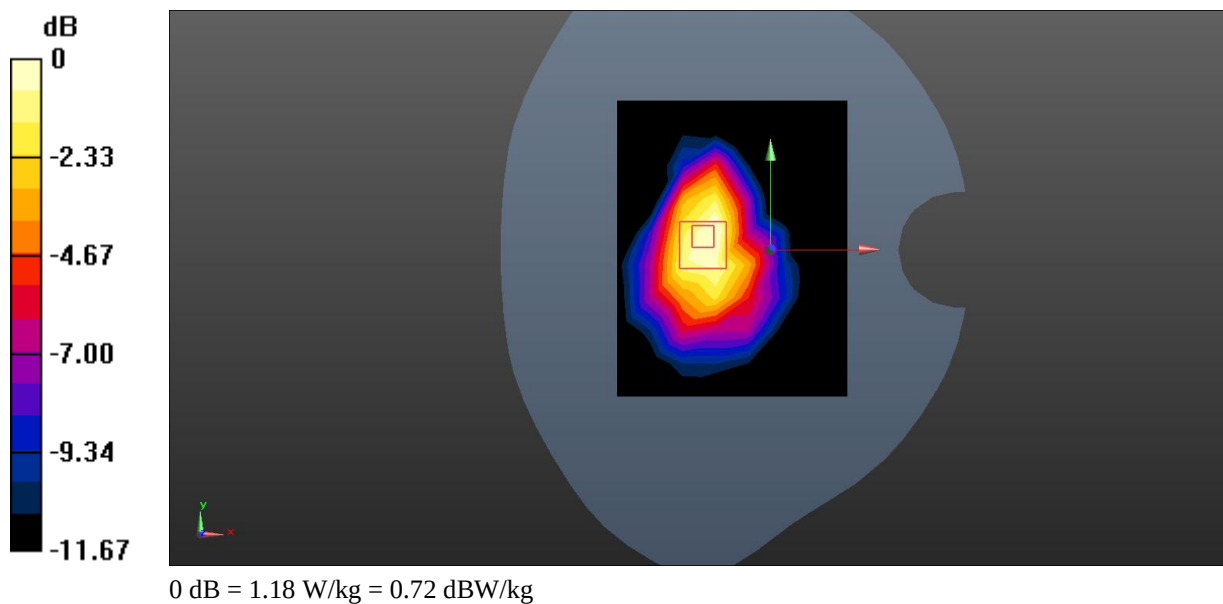

Test Plot 25#: LTE Band 71 50%RB Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 680.5 \text{ MHz}$; $\sigma = 0.867 \text{ S/m}$; $\epsilon_r = 43.624$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @680.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0324 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1296 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.00842 W/kg; SAR(10 g) = 0.00237 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 38%

Maximum value of SAR (measured) = 0.0911 W/kg

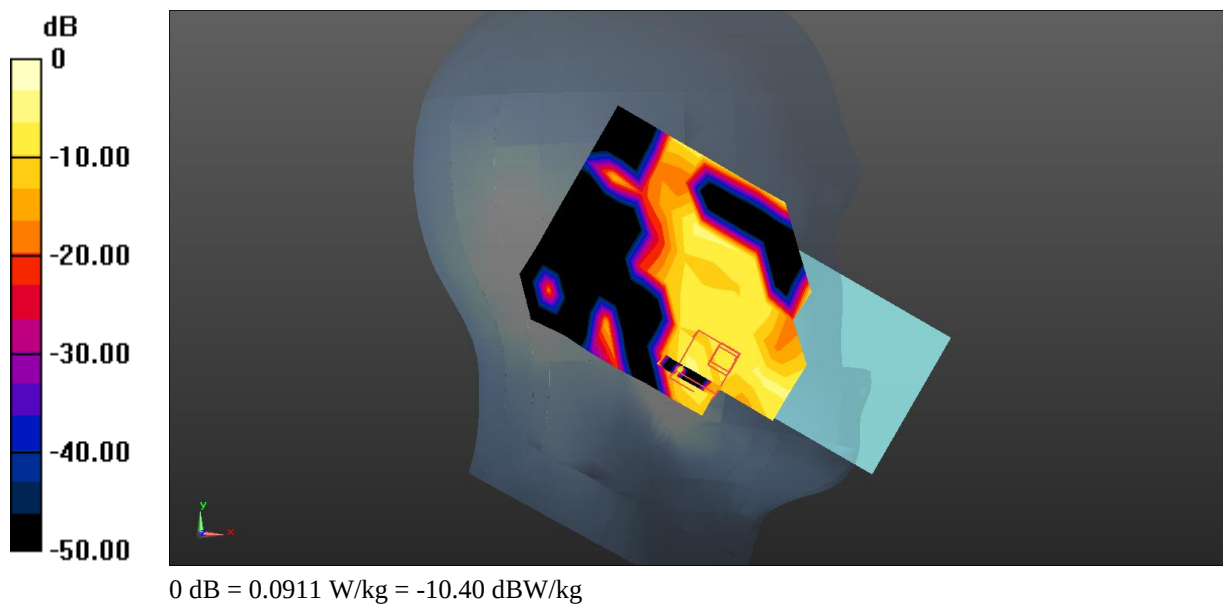

Test Plot 26#: LTE Band 71 50%RB Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 43.624$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @680.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.294 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.155 W/kg

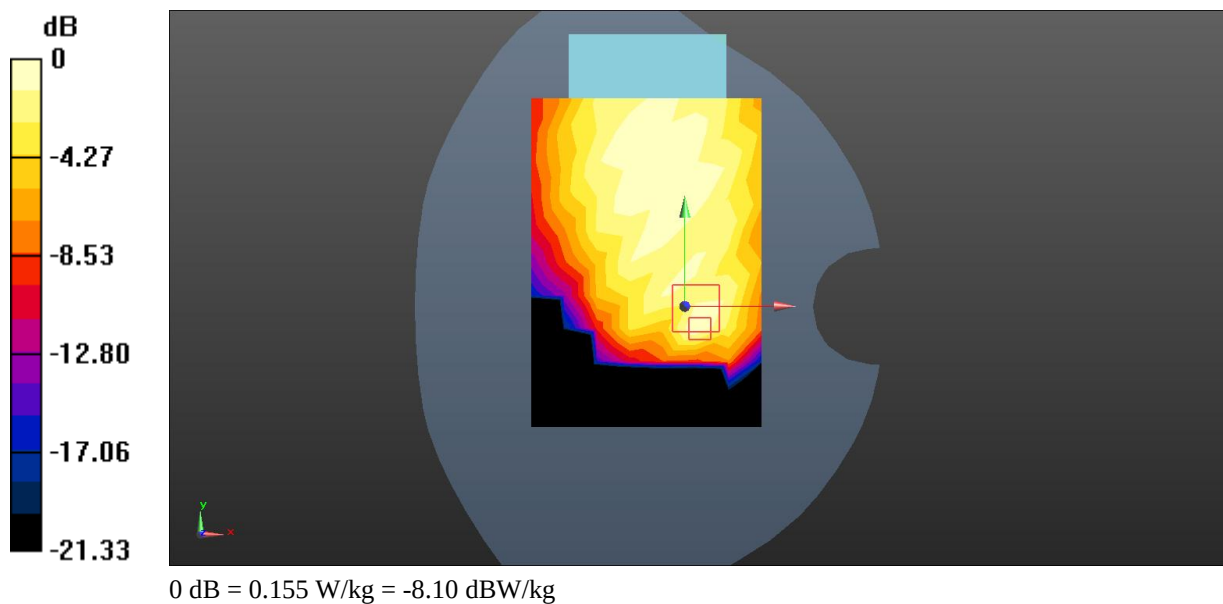

Test Plot 27#: WLAN 802.11b Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.005
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 40.595$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.304 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.857 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.5%

Maximum value of SAR (measured) = 0.231 W/kg

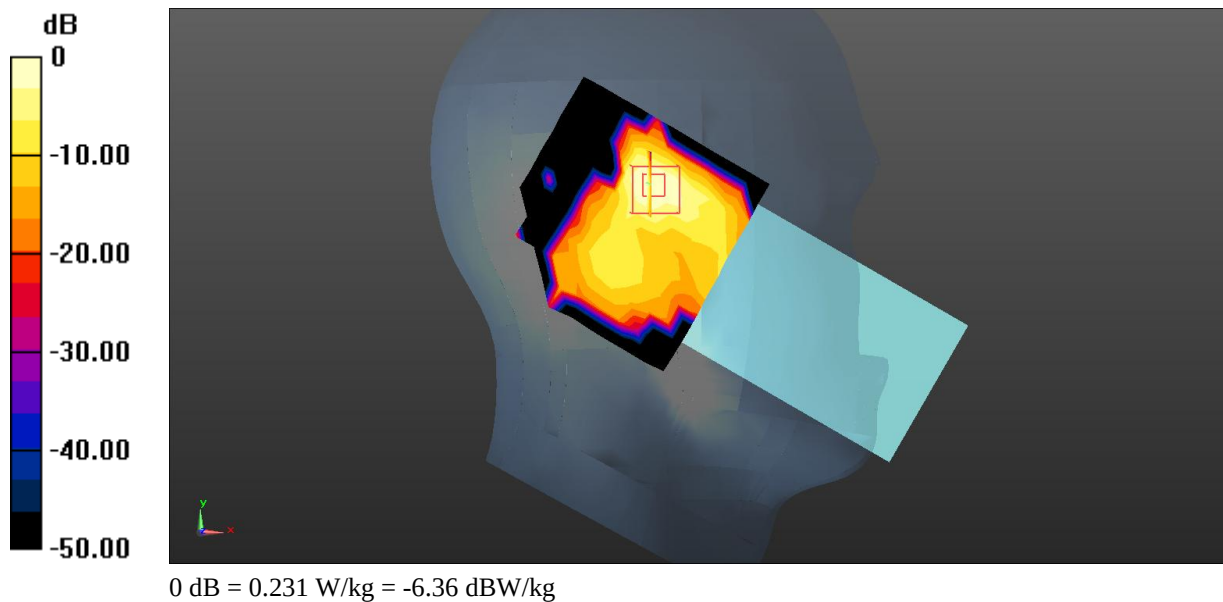

Test Plot 28#: WLAN 802.11b Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.005
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 40.595$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0620 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.684 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 67.3%

Maximum value of SAR (measured) = 0.0624 W/kg

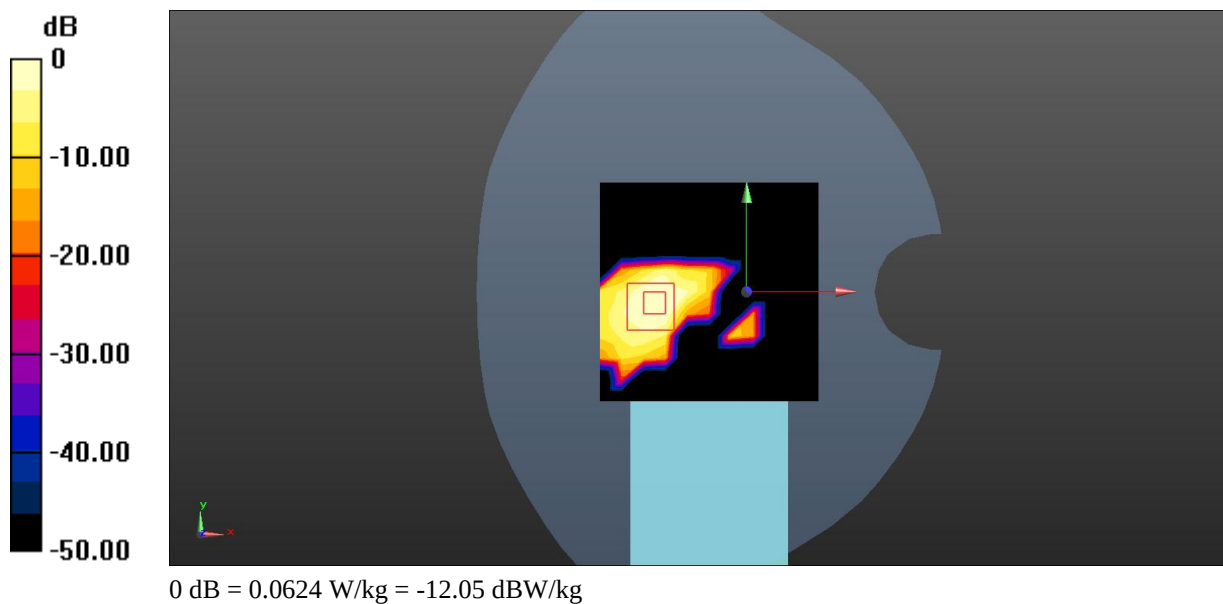

Test Plot 29#: WLAN 5.2G 802.11a Mid Head Right Tilt**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.027
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.808$ S/m; $\epsilon_r = 36.01$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @5200 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.145 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.450 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.1%

Maximum value of SAR (measured) = 0.304 W/kg

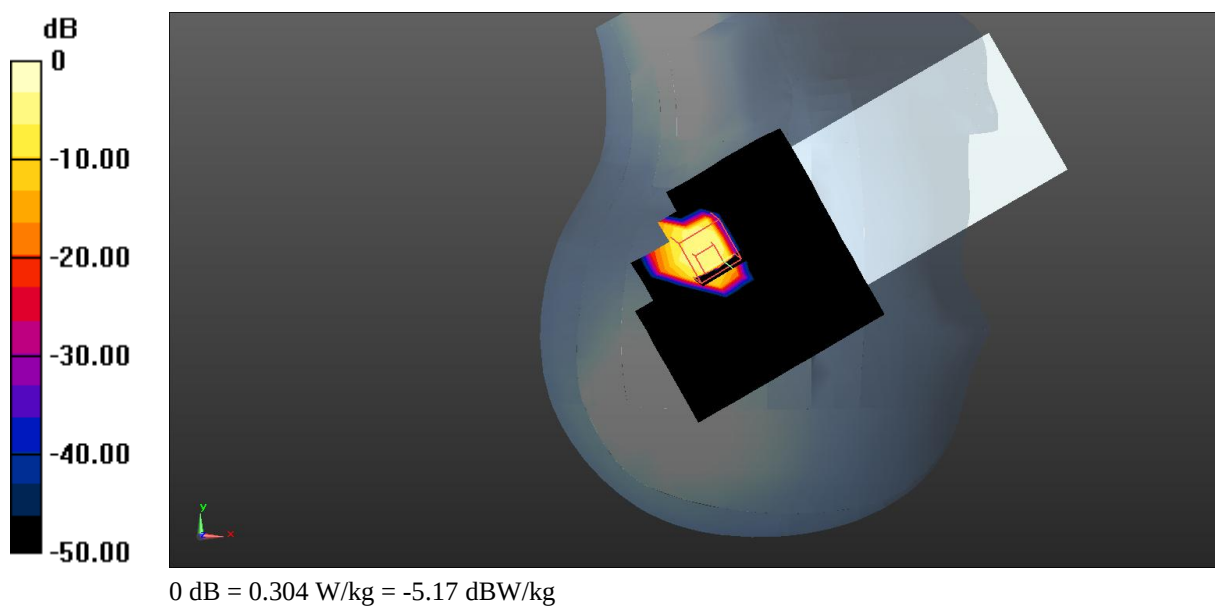

Test Plot 30#: WLAN 5.2G 802.11a Mid Body Top**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.027
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.808$ S/m; $\epsilon_r = 36.01$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @5200 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.119 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.892 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.134 W/kg

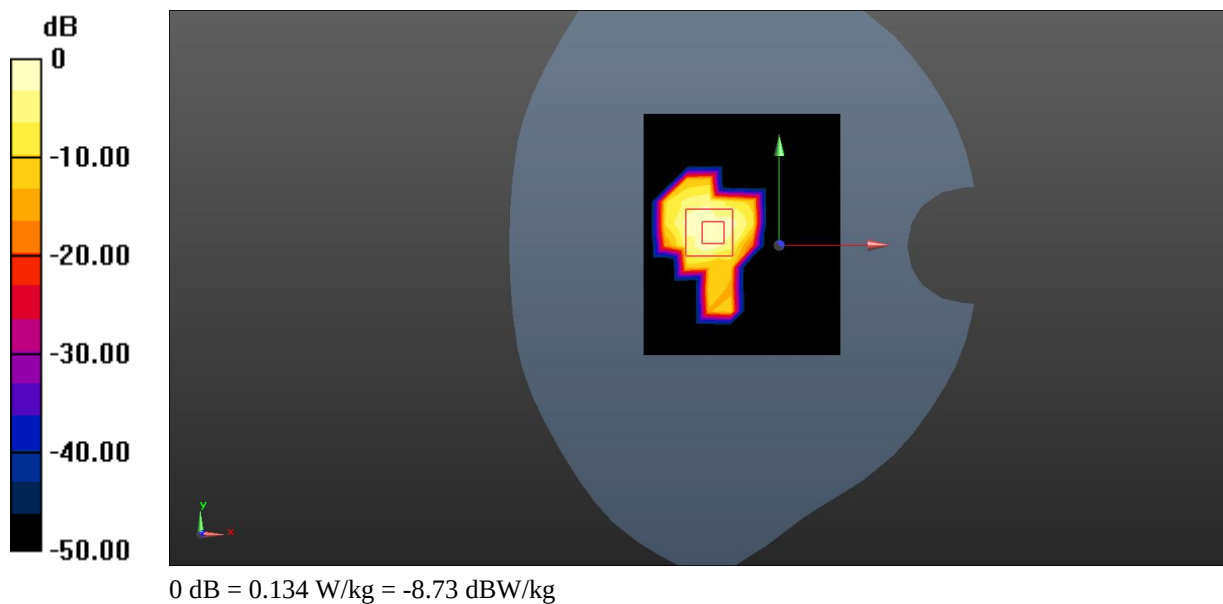


Test Plot 31#: WLAN 5.8G 802.11a Mid Head Left Cheek**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.027
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.195 \text{ S/m}$; $\epsilon_r = 36.179$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.78, 4.76, 4.7) @5785 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

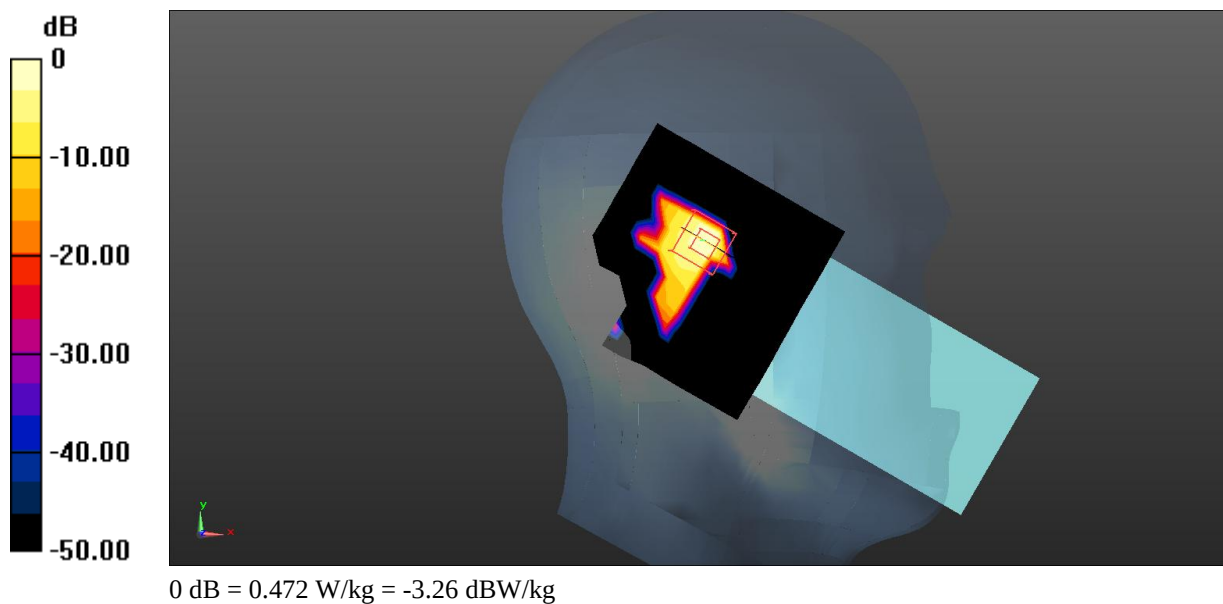Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.383 W/kg **Zoom Scan (8x8x12) /Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.257 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.886 W/kg **SAR(1 g) = 0.257 W/kg ; SAR(10 g) = 0.076 W/kg** Smallest distance from peaks to all points 3 dB below = 4.7 mm Ratio of SAR at M2 to SAR at M1 = 70.4% Maximum value of SAR (measured) = 0.472 W/kg 

Test Plot 32#: WLAN 5.8G 802.11a Mid Body Back**DUT: Mobile Data Terminal; Type: TC60 (Am); Serial: 3ABP-1**

Communication System: 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.027
Medium parameters used: $f = 5785$ MHz; $\sigma = 5.195$ S/m; $\epsilon_r = 36.179$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.78, 4.76, 4.7) @5785 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.439 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9981 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.031 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.514 W/kg

