


导体规格 (mm)	导体公差 (mm)	最大外径 (mm)	最小平均厚度 (mm)	最小击穿电压 (KV)	最大电阻 (20°)(Ω/km)	最小伸长率 (%)	回弹角 (°)
φ1.32	±0.15	1.47	0.33	3	56.4	/	5.0

表1		版次 REV.	变更号码 ECN.NO.	修改内容 MODIFY.CONTENT	修改日期 DATE
		A0			

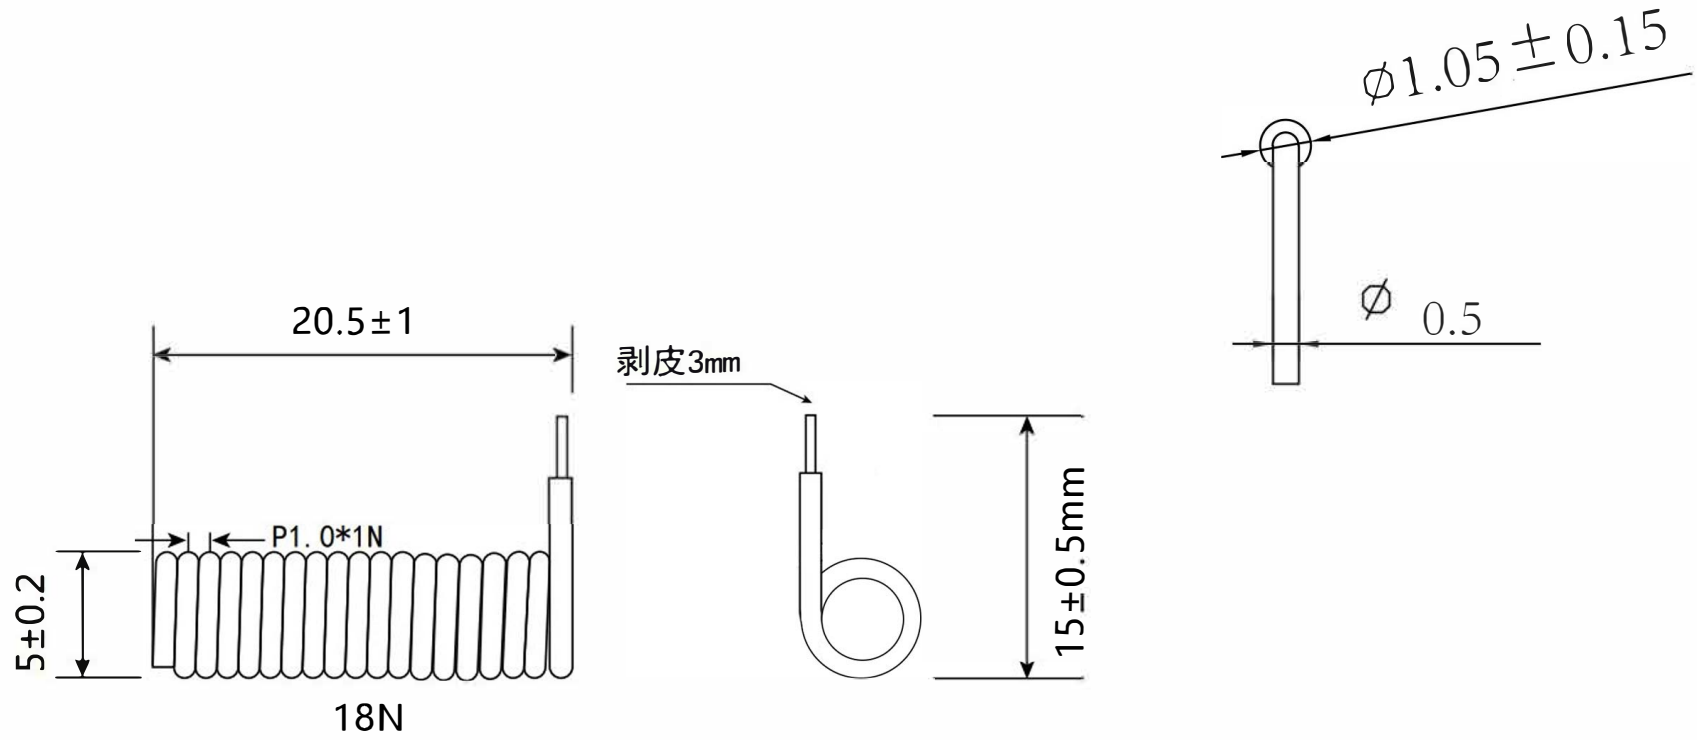

技术要求:

- 1. 材料: 单支铁芯线径0.5, 带皮1.05
- 2. 外径: 5, 直线长度: 250MM
- 3. 圈数: 18 N, 绝缘材质黑色PVC料
- 4. 温度: 线皮塑胶最高温度120度
- 5. 频率范围: 315-434MHz, 驻波比: 1.5

输入阻抗: 50 Ω, 天线增益: 2dBi
Operation frequency: 433.92MHz

We, Hangzhou Chenzezhian Maoyiyouxiangongsi, states that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

GENERAL TOLERANCE		图号 FILE.NO.	绘图 DRAWN	蔡昌立	比例 SCALE	
X.±0.15	x.±3'	品名 TITLE	审核 CHECKED		单位 UNITS	mm
.X±0.10	.x.±1'		核准 APPROVED			
.XX±0.05	.xx.±0.5'	料号 PART.NO.	日期 DATE	2025. 11. 18		
.XXX±0.03	.xxx.±0.2'	版次 REV.	Shenzhen Jinghe Spring Technology Co., Ltd.			
页次 SHEET	数量 QTY	A3				