



FCC Radio Test Report

FCC ID: 2BSTS-MC400


This report concerns: Original Grant

Project No. : 2510C323
Equipment : Projector
Brand Name : 
Model Name : MC400, X1FR, MC400A, MC400PRO, X1F Pro, X1F Plus
Applicant : Global Aiptek Inc.
Address : 2911 N Cicero Ave., Chicago, IL, 60641, US
Manufacturer : Global Aiptek Inc.
Address : 2911 N Cicero Ave., Chicago, IL, 60641, US
Factory1 : BO CHENG RUBBER PHILIPPINES INC.
Address : BLOCK 5 LOT 3 PHASE 3 LIMA TECHNOLOGY CENTER-SEZ SAN FERNANDO MALVAR BATANGAS, 4233 Philippines
Factory2 : Chengdu Hotack Technology Co., Ltd.
Address : 501-502, Unit 3, Building 13, No. 666 Jinfenghuang Avenue, High-tech Industry Park, Jinniu District, Chengdu City, Si Chuan Province, China.
Date of Receipt : Nov. 03, 2025
Date of Test : Nov. 04, 2025 ~ Jan. 08, 2026
Issued Date : Jan. 12, 2026
Test Sample : Engineering Sample No.: DG92025110336 for power, DG92025110335 for other conducted, DG92025110333 for Radiated 1 GHz to 18 GHz, DG92025110335 for worst case of radiated, DG92025110334 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by

:


Chella Zheng

Approved by

:


Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	14
3.4 DUTY CYCLE	15
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
3.6 SUPPORT UNITS	17
3.7 CUSTOMER INFORMATION DESCRIPTION	17
4 . AC POWER LINE CONDUCTED EMISSIONS	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	19
4.6 TEST RESULTS	19
5 . RADIATED EMISSIONS	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM TEST STANDARD	22
5.4 TEST SETUP	22
5.5 EUT OPERATION CONDITIONS	24
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	24
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	24
5.8 TEST RESULTS - ABOVE 1000 MHZ	24
6 . BANDWIDTH	25
6.1 LIMIT	25

Table of Contents	Page
6.2 TEST PROCEDURE	25
6.3 DEVIATION FROM STANDARD	25
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
7 . MAXIMUM OUTPUT POWER	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	27
7.5 EUT OPERATION CONDITIONS	27
7.6 TEST RESULTS	27
8 . POWER SPECTRAL DENSITY	28
8.1 LIMIT	28
8.2 TEST PROCEDURE	28
8.3 DEVIATION FROM STANDARD	28
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . FREQUENCY STABILITY	30
9.1 LIMIT	30
9.2 TEST PROCEDURE	30
9.3 DEVIATION FROM STANDARD	30
9.4 TEST SETUP	30
9.5 EUT OPERATION CONDITIONS	30
9.6 TEST RESULTS	30
10 . MEASUREMENT INSTRUMENTS LIST	31
11 . EUT TEST PHOTOS	34
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	40
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	43
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	48
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	51

Table of Contents	Page
APPENDIX E - BANDWIDTH	86
APPENDIX F - MAXIMUM OUTPUT POWER	93
APPENDIX G - POWER SPECTRAL DENSITY	96
APPENDIX H - FREQUENCY STABILITY	100

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2510C323	R00	Original Report.	Dec. 25, 2025	Invalid
BTL-FCCP-4-2510C323	R01	This report changes are as follow: 1. Revised the test date in page 49~50. 2. Added the test date in page 82~85. It is a revision of the report BTL-FCCP-4-2510C323 R00. This is a newly released report. replacing the BTL-FCCP-4-2510C323 R00 report.	Jan. 12, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☐ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of

For Radiated 1 GHz to 18 GHz:

Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For Others:

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U , (dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U , (dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U , (dB)
DGGDCB01 (3m)	CISPR	1GHz ~ 18GHz	3.98

Test Site	Method	Measurement Frequency Range	U , (dB)
DGDLCB03 (1m)	CISPR	18 ~ 26.5 GHz	4.30
		26.5 ~ 40 GHz	4.74

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.8 dB
Frequency Stability	1.4 ppm
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	23°C	53%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9 kHz to 30 MHz	24°C	53%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -30 MHz to 1000 MHz	25°C	51%	AC 120V/60Hz	Torin Long
Radiated Emissions -Above 1000 MHz	24°C	53%	AC 120V/60Hz	Lafu Li
	25°C	51%	AC 120V/60Hz	Torin Long
	27°C	42%	AC 120V/60Hz	Lafu Li
Bandwidth	23°C	41%	AC 120V/60Hz	Steve Zhou
Maximum Output Power	24°C	49%	AC 120V/60Hz	Arvin Tong
Power Spectral Density	23°C	41%	AC 120V/60Hz	Steve Zhou
Frequency Stability	Normal & Extreme	41%	Normal & Extreme	Steve Zhou

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Projector
Brand Name	
Test Model	MC400
Model Name	MC400, X1FR, MC400A, MC400PRO, X1F Pro, X1F Plus
Model Difference(s)	Model name and colors are different.
Hardware Version	LCD H726 68356A
Software Versio□	Android 14
Power Source	DC Voltage supplied from AC adapter. Model: TPN-LA35
Power Rating	20V==2.25A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 150 Mbps IEEE 802.11ac: up to 200 Mbps
Maximum Output Power_UNII-1	IEEE 802.11ac(VHT20): 15.74 dBm (0.0375 W)
Maximum Output Power_UNII-3	IEEE 802.11a: 16.83 dBm (0.0482 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)	
UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)	
UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

3. Table for Filed Antenna:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		WIFI/BT	FPC	N/A	3.75

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX A Mode Channel 149/157/165 (UNII-3)
Mode 7	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 9	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 10	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 11	TX A Mode Channel 149(UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 11	TX A Mode Channel 149(UNII-3)

Radiated Emissions Test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 11	TX A Mode Channel 149(UNII-3)

Radiated Emissions Test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48(UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48(UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46(UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48(UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46(UNII-1)
Mode 6	TX A Mode Channel 149/157/165(UNII-3)
Mode 7	TX N(HT20) Mode Channel 149/157/165(UNII-3)
Mode 8	TX N(HT40) Mode Channel 151/159(UNII-3)
Mode 9	TX AC(VHT20) Mode Channel 149/157/165(UNII-3)
Mode 10	TX AC(VHT40) Mode Channel 151/159(UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48(UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48(UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46(UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48(UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46(UNII-1)
Mode 6	TX A Mode Channel 149/157/165(UNII-3)
Mode 7	TX N(HT20) Mode Channel 149/157/165(UNII-3)
Mode 8	TX N(HT40) Mode Channel 151/159(UNII-3)
Mode 9	TX AC(VHT20) Mode Channel 149/157/165(UNII-3)
Mode 10	TX AC(VHT40) Mode Channel 151/159(UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX A Mode Channel 149(UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- (6) For radiated emission 1GHz to 18GHz test, both Vertical and Horizontal are evaluated, only the worst polarization is recorded.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	ADB		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	20	20	20
IEEE 802.11ac(VHT20)	20	20	20
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	20	20	

UNII-3			
Test Software Version	ADB		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	16	16	16
IEEE 802.11ac(VHT20)	15	15	15
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	15	16	


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

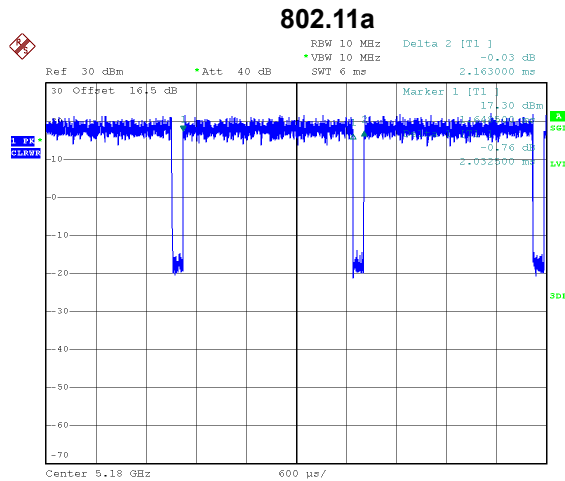


Date: 12.DEC.2025 13:43:05

Duty cycle = 2.033 ms / 2.163 ms = 93.99%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.27 \text{ dB}$

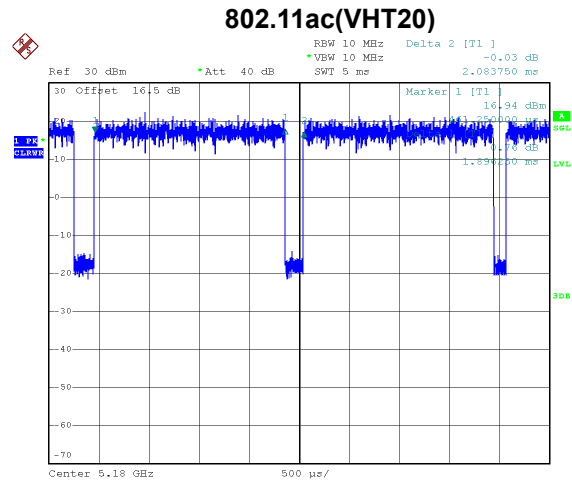

Date: 12.DEC.2025 13:53:47

Duty cycle = 1.896 ms / 2.084 ms = 90.98%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.41 \text{ dB}$

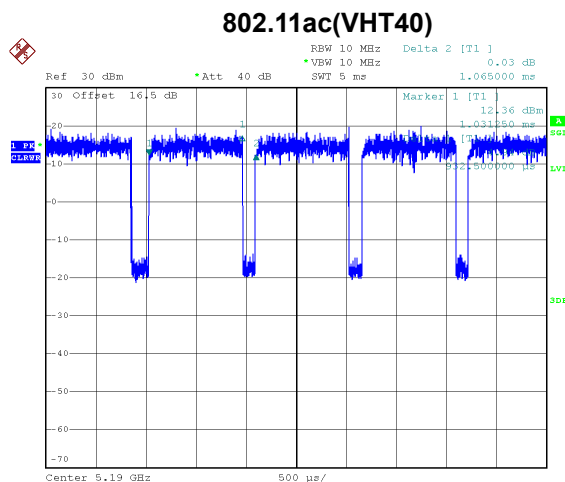

Date: 12.DEC.2025 14:04:39

Duty cycle = 0.933 ms / 1.065 ms = 87.61%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.57 \text{ dB}$

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 492 Hz (Duty cycle < 98%).


For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

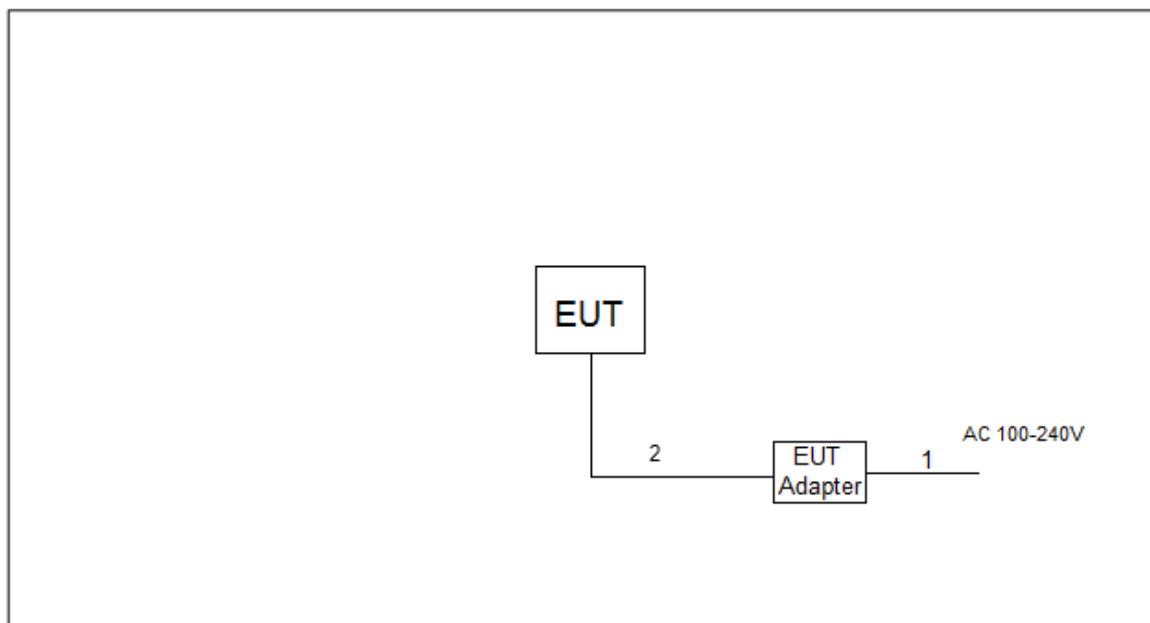

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	0.8m
2	DC Cable	NO	NO	1.2m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

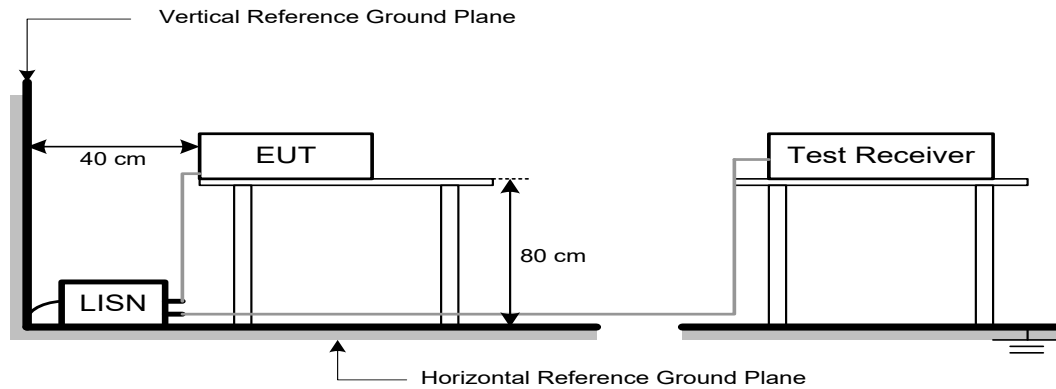

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

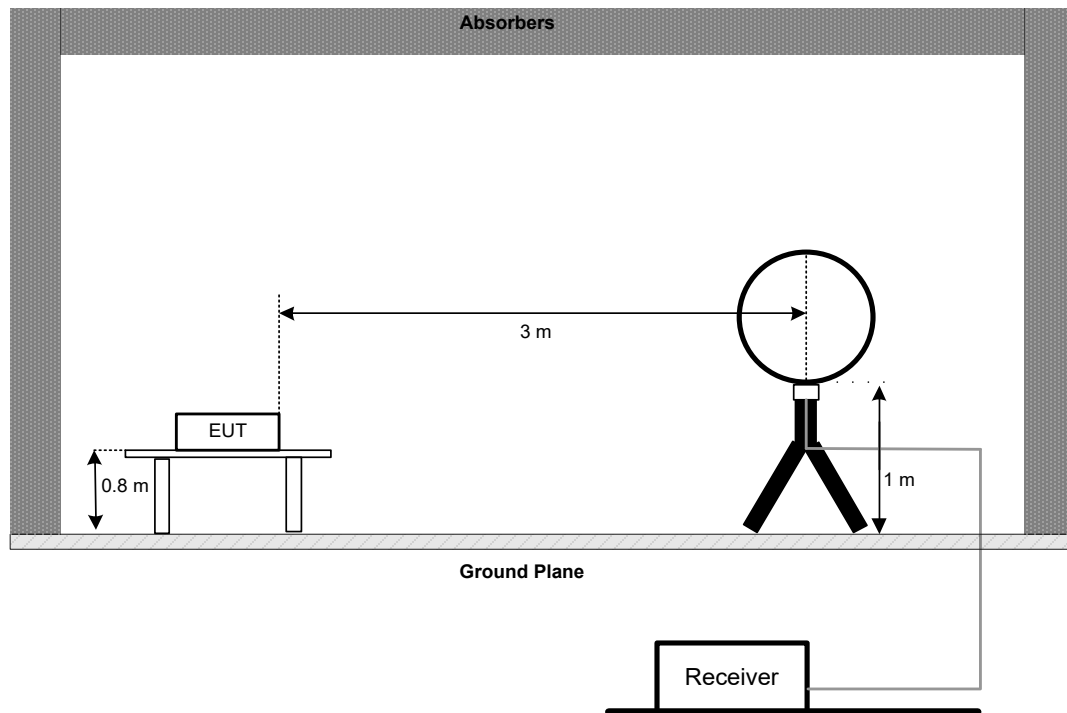


30 MHz to 1 GHz

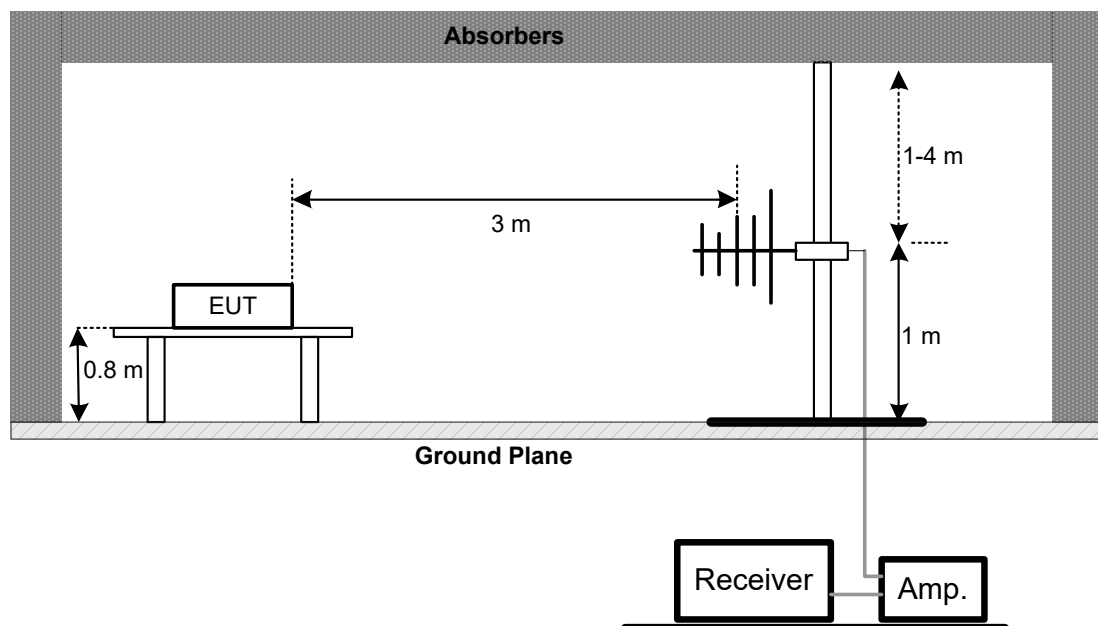

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

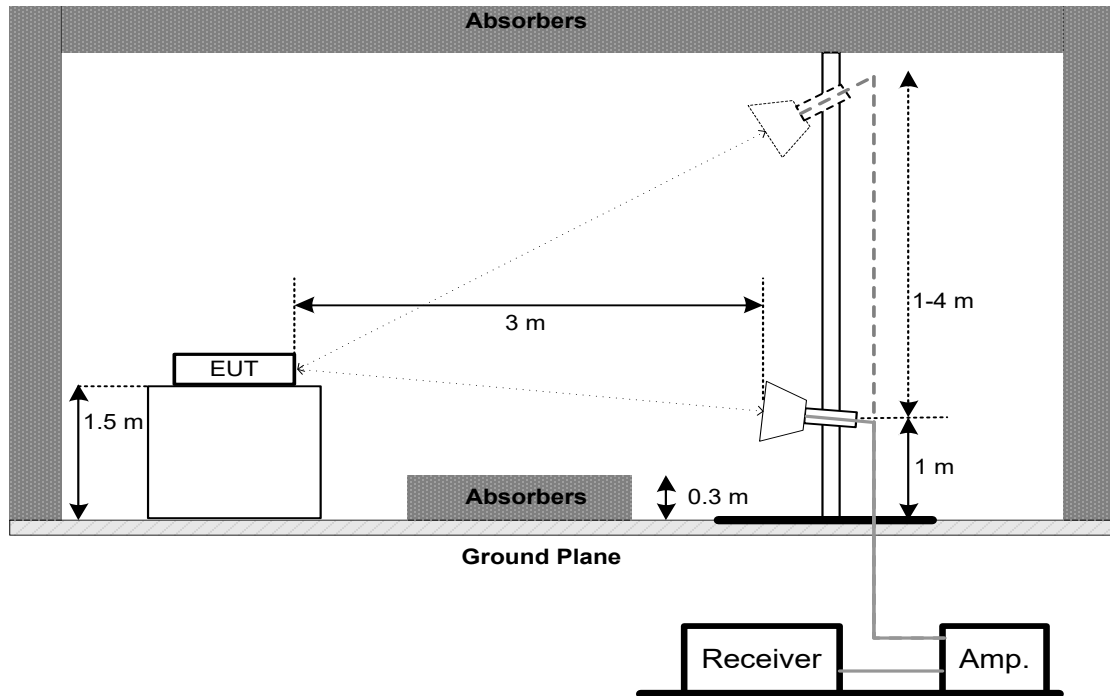

Harmonic(18 GHz to 40 GHz)

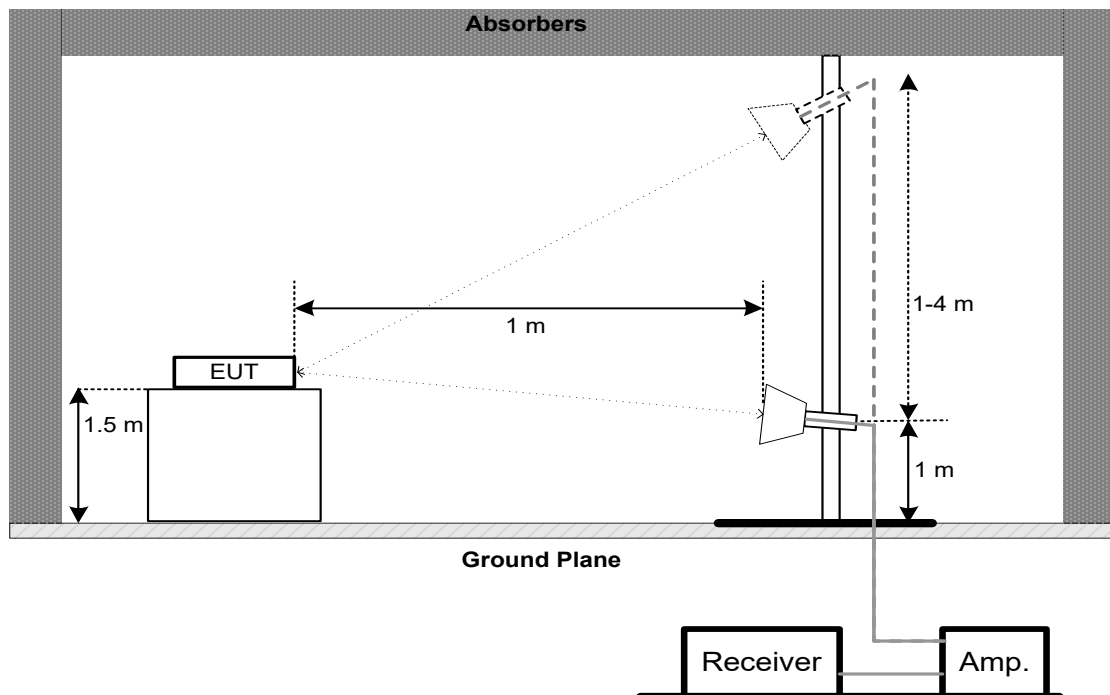

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	26 dB Bandwidth	-	5150-5250
FCC 15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

- b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

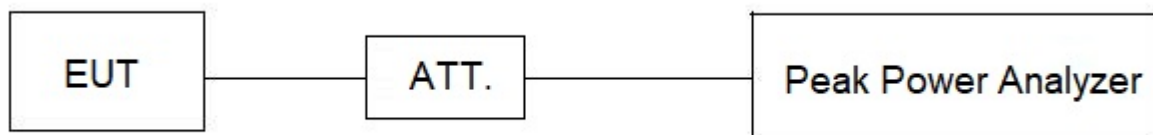

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
For UNII-1:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz
VBW	300 kHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~35°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

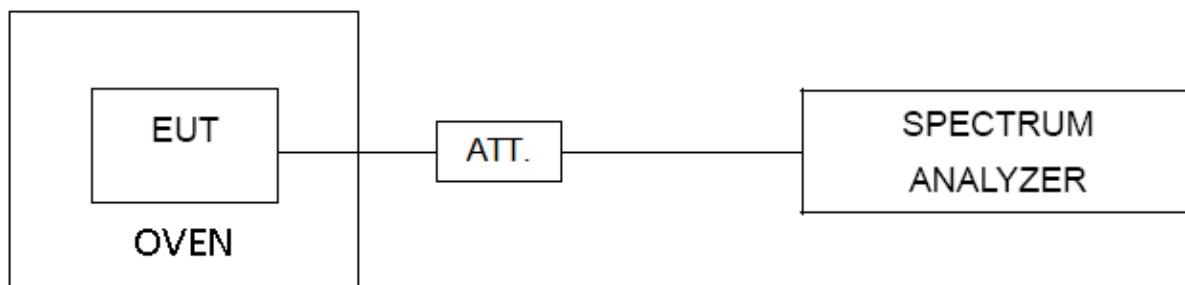

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Nov. 10, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Nov. 11, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Nov. 11, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 1 GHz - 18 GHz (Test Date: Nov. 21, 2025, Jan. 08, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Positioning Controller	MF	MF-7802	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
4	Cable	EMC INSTRUMENT	EMC104-SM-SM-10000	N/A	Oct. 20, 2026
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-3000	N/A	Oct. 20, 2026
6	Cable	RegalWay	RWLP50-4.0A-SMSM-1M	N/A	Oct. 20, 2026
7	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	May 18, 2026
8	Double Ridged Broadband Horn Antenna	RF SPIN	DRH18-E	210106A18E	Jul. 15, 2026
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPF6-M3000-18000-174	N/A	Oct. 17, 2026

Radiated Emissions - Above 18 GHz (Test Date: Nov. 11, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	Tonscend	HF160-KMKM-0.5M	N/A	Oct. 21, 2026
2	Cable	Tonscend	HF160-KMKM-5M	N/A	Oct. 21, 2026
3	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Dec. 06, 2025
4	DRG Horn Antenna	ETS	3116C	218942	Feb. 28, 2026
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Jul. 25, 2026

Bandwidth & Power Spectral Density (Test Date: Dec. 12, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power (Test Date: Dec. 12, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A

Frequency Stability (Test Date: Dec. 12, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	AC power source	Preen	AFC-S-1250	F123080107	Nov. 21, 2026
5	Cable	RegalWay	N/A	RWP50-402-SMSM-1M	N/A
6	Table top type high and low temperature test chamber	CEPREI	CEEC-M64T-40	15-008	Nov. 21, 2026



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

11. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**



Radiated Emissions Test Photos

9 kHz to 30 MHz

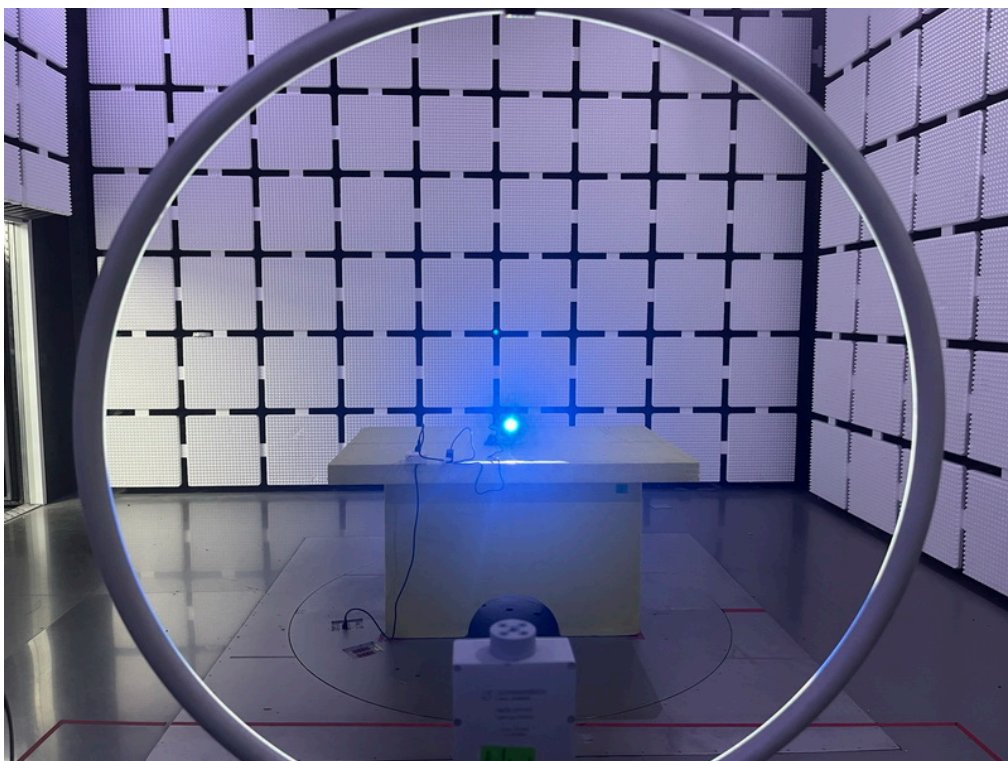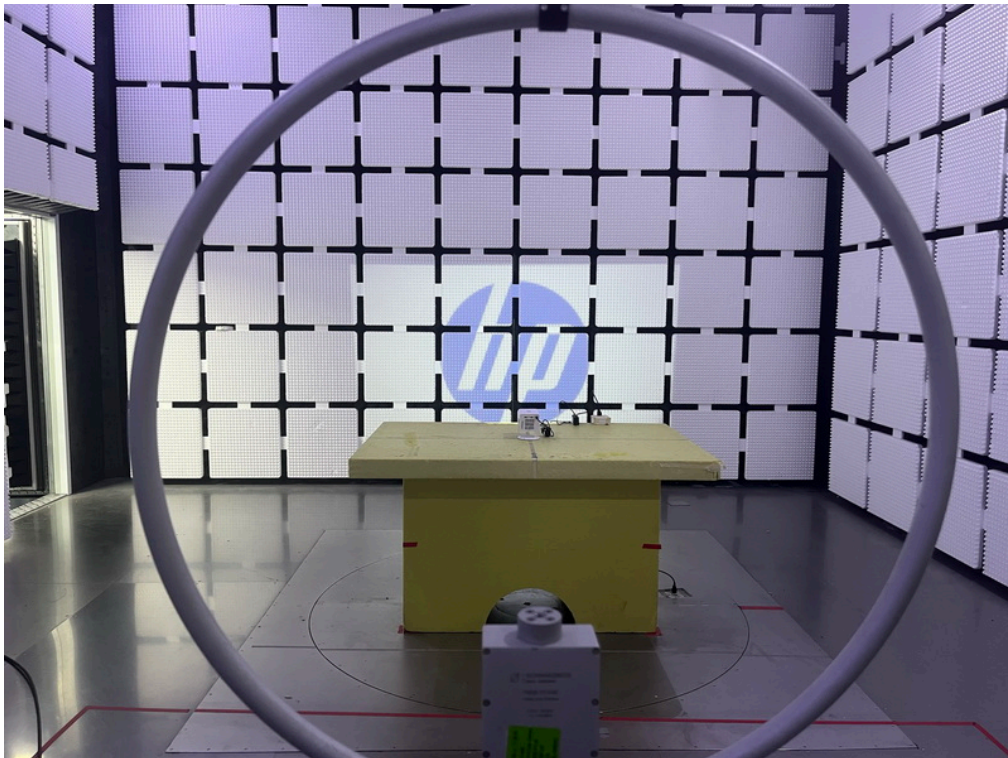



Radiated Emissions Test Photos



30 MHz to 1 GHz

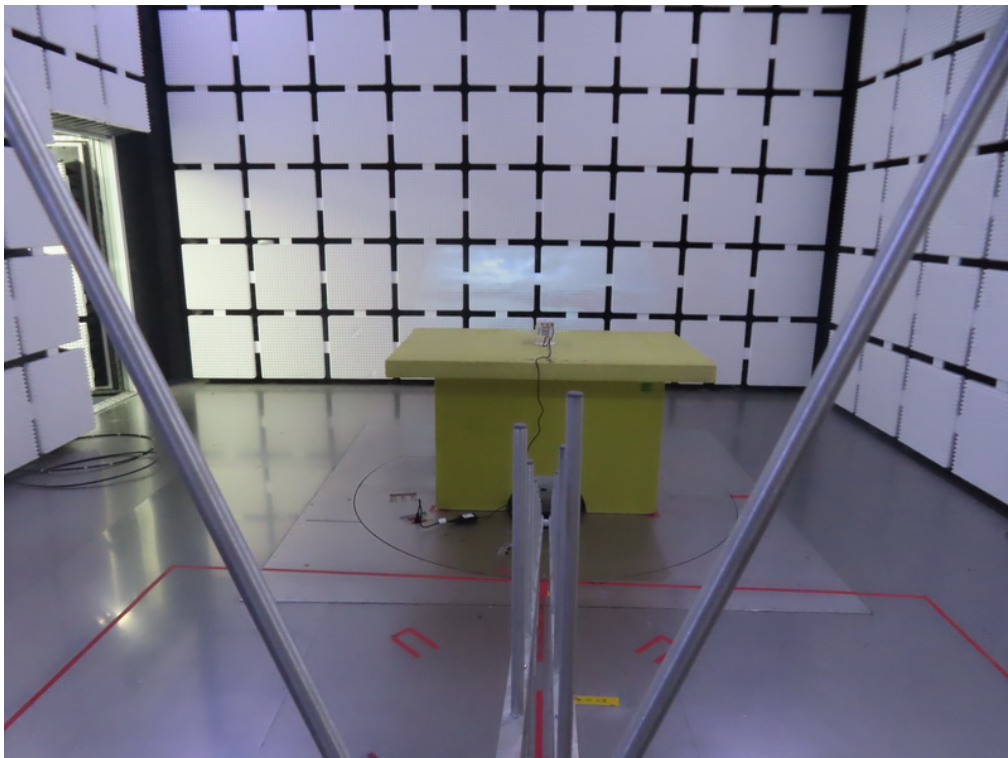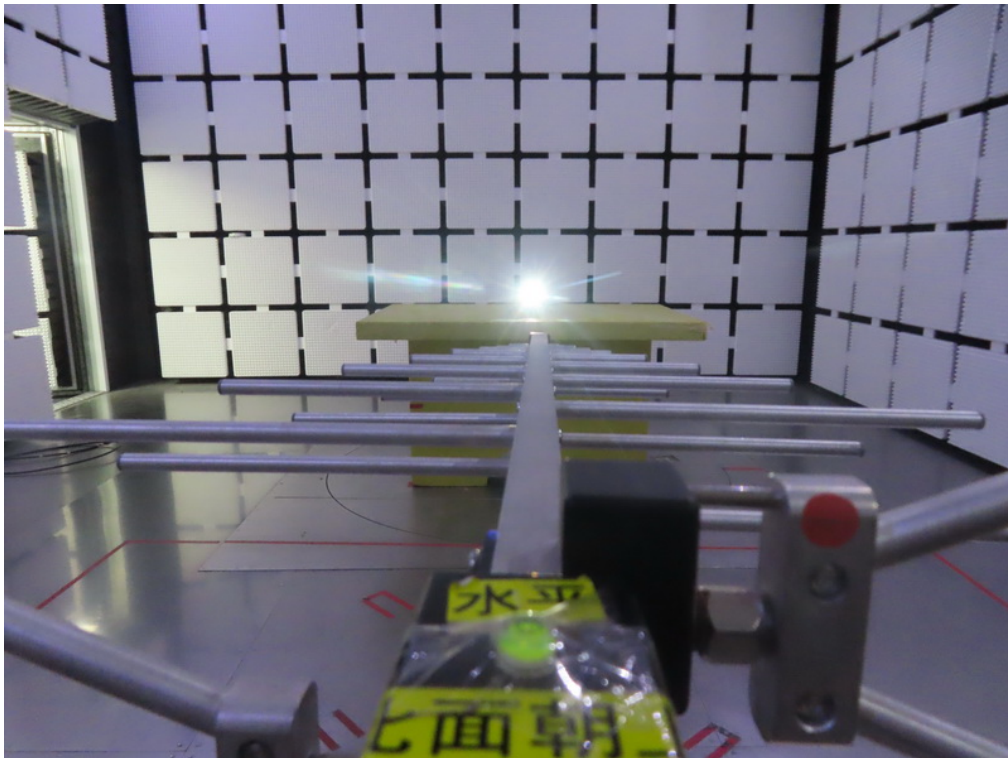


Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

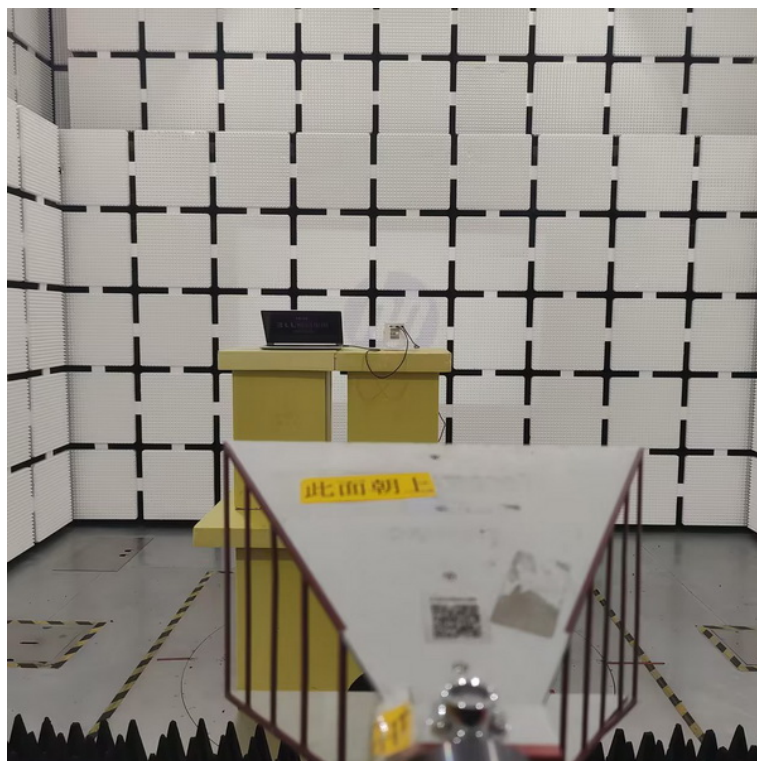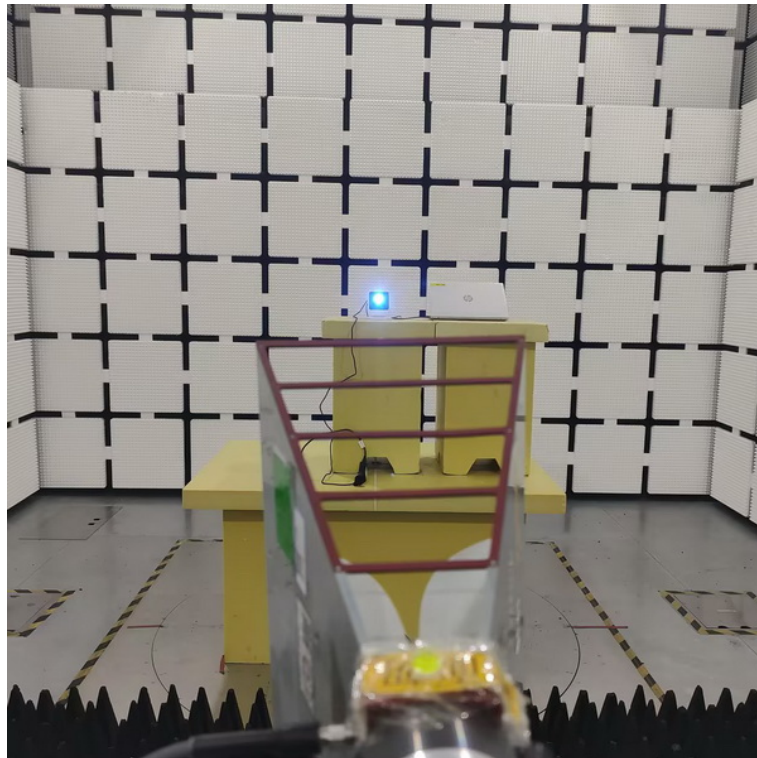

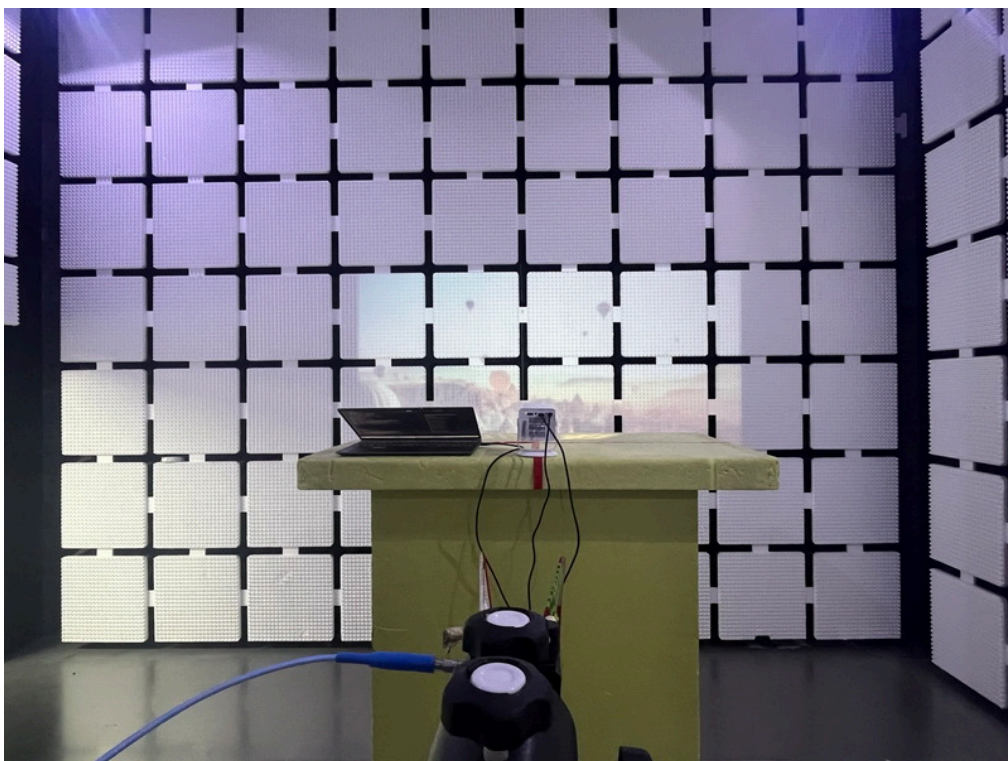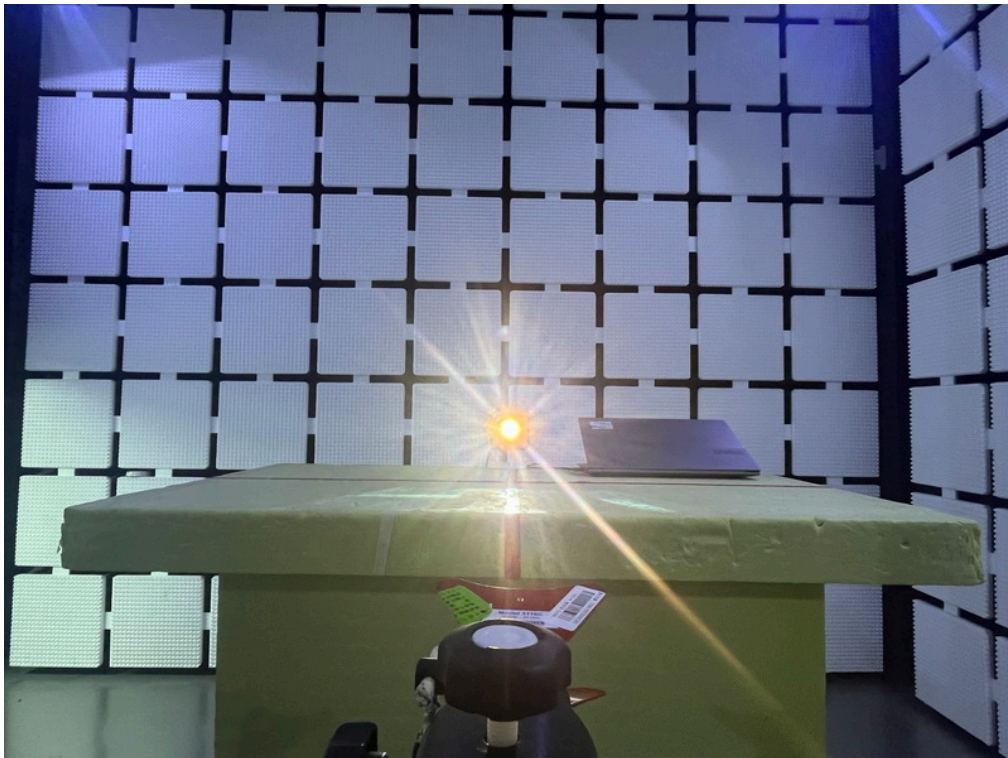
Radiated Emissions Test Photos**Harmonic(18 GHz to 40 GHz)**

Conducted Test Photos

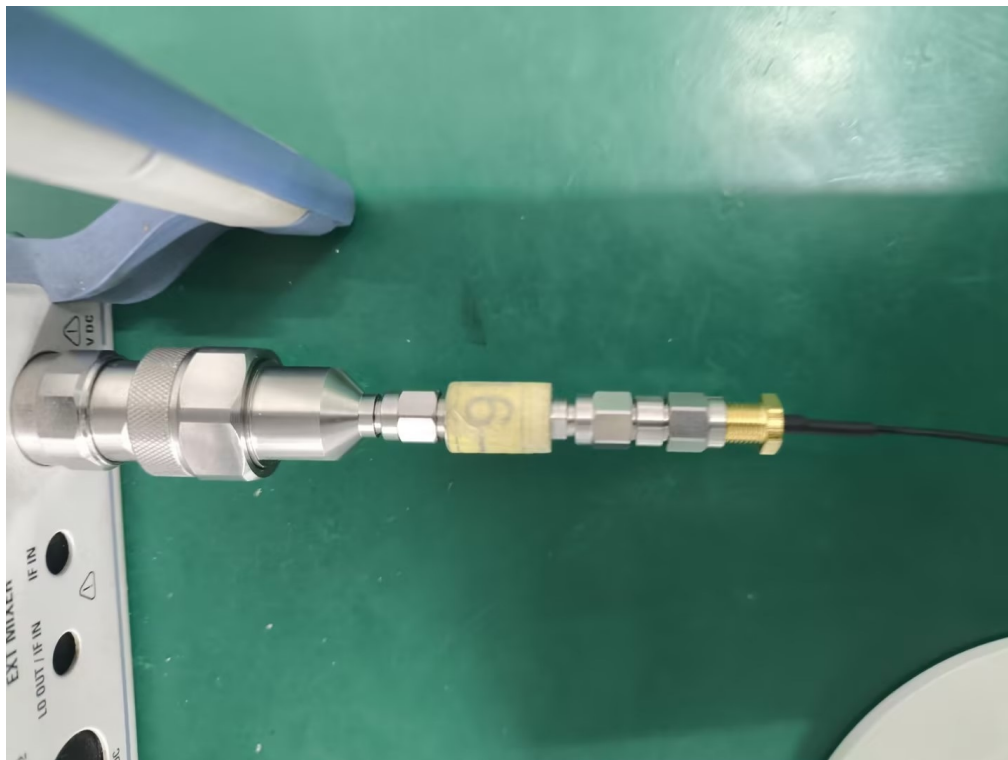

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX A Mode Channel 149 (UNII-3)	Phase	Line
-----------	--------------------------------	-------	------

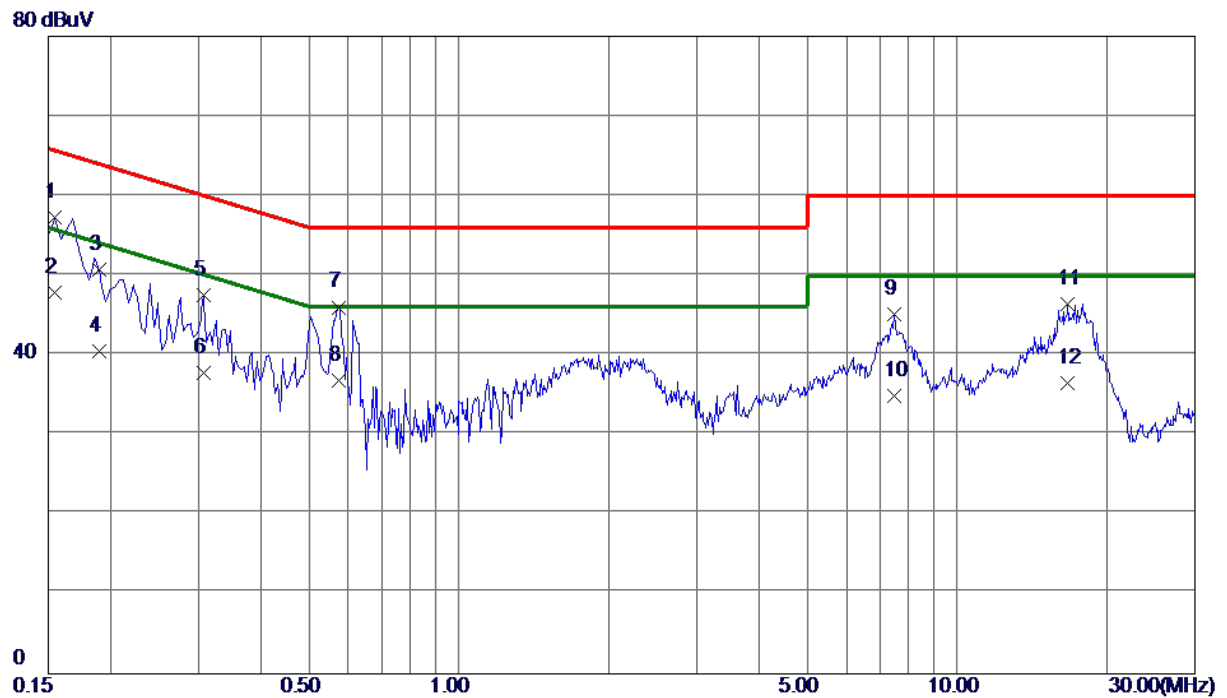


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	47.43	9.90	57.33	65.75	-8.42	QP	
2 *	0.1545	37.91	9.90	47.81	55.75	-7.94	AVG	
3	0.1894	40.75	9.91	50.66	64.06	-13.40	QP	
4	0.1894	30.50	9.91	40.41	54.06	-13.65	AVG	
5	0.3075	37.66	9.93	47.59	60.04	-12.45	QP	
6	0.3075	27.90	9.93	37.83	50.04	-12.21	AVG	
7	0.5730	36.03	9.97	46.00	56.00	-10.00	QP	
8	0.5730	26.81	9.97	36.78	46.00	-9.22	AVG	
9	7.4985	33.94	11.23	45.17	60.00	-14.83	QP	
10	7.4985	23.60	11.23	34.83	50.00	-15.17	AVG	
11	16.6695	32.35	14.12	46.47	60.00	-13.53	QP	
12	16.6695	22.39	14.12	36.51	50.00	-13.49	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 149 (UNII-3)	Phase	Neutral
-----------	--------------------------------	-------	---------

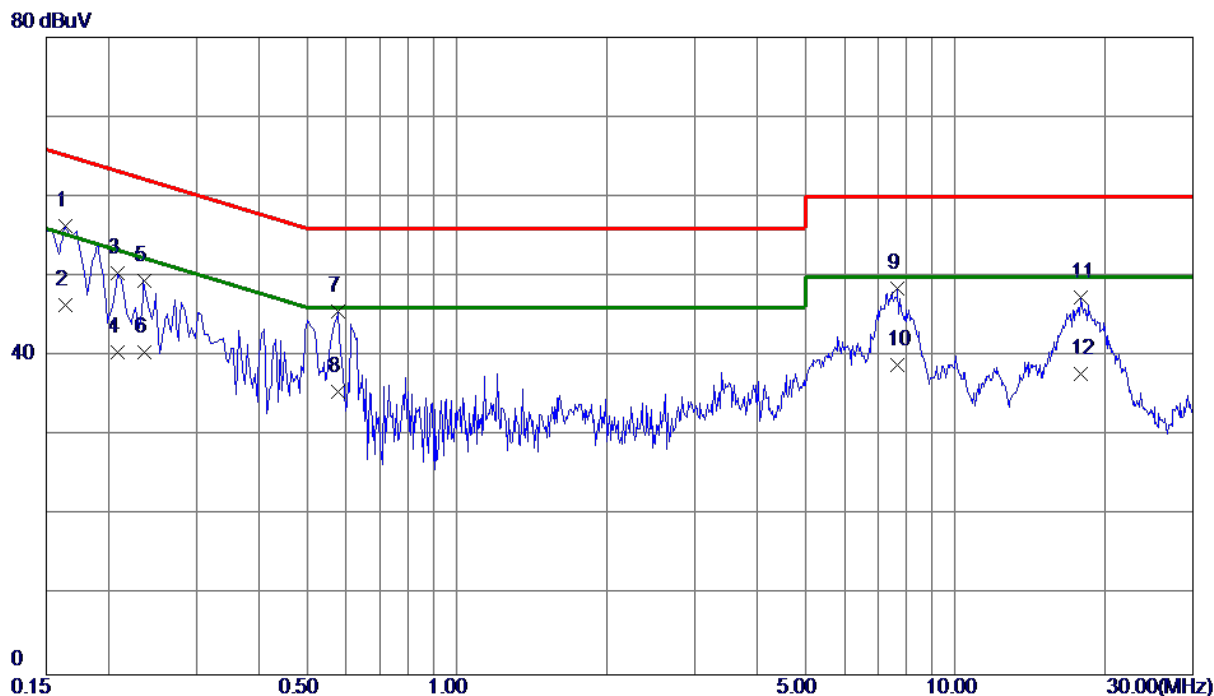


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1635	46.42	9.97	56.39	65.28	-8.89	QP	
2	0.1635	36.40	9.97	46.37	55.28	-8.91	AVG	
3	0.2085	40.39	9.97	50.36	63.26	-12.90	QP	
4	0.2085	30.50	9.97	40.47	53.26	-12.79	AVG	
5	0.2355	39.42	9.98	49.40	62.25	-12.85	QP	
6	0.2355	30.50	9.98	40.48	52.25	-11.77	AVG	
7	0.5775	35.51	10.03	45.54	56.00	-10.46	QP	
8	0.5775	25.50	10.03	35.53	46.00	-10.47	AVG	
9	7.6515	37.20	11.27	48.47	60.00	-11.53	QP	
10	7.6515	27.60	11.27	38.87	50.00	-11.13	AVG	
11	17.9205	32.90	14.39	47.29	60.00	-12.71	QP	
12	17.9205	23.40	14.39	37.79	50.00	-12.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX A Mode Channel 149 (UNII-3)	Polarization	Ant 0°
-----------	--------------------------------	--------------	--------

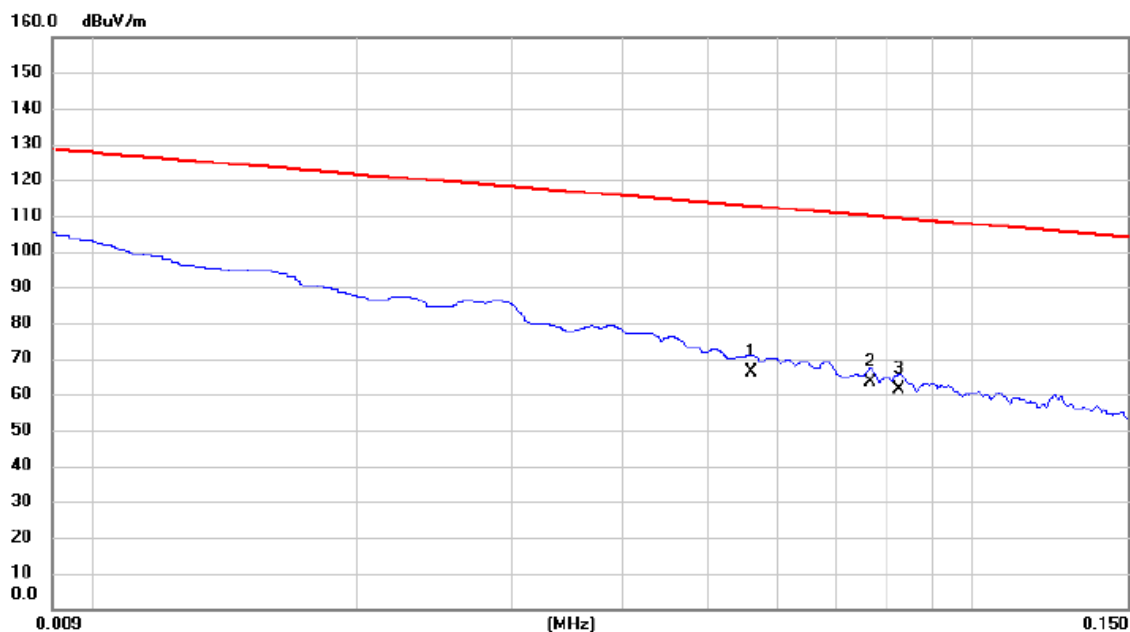


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.056	46.20	20.14	66.34	112.64	-46.30	AVG	
2	0.076	43.20	20.14	63.34	109.93	-46.59	AVG	
3	0.083	41.19	20.14	61.33	109.27	-47.94	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 149 (UNII-3)	Polarization	Ant 0°
-----------	--------------------------------	--------------	--------

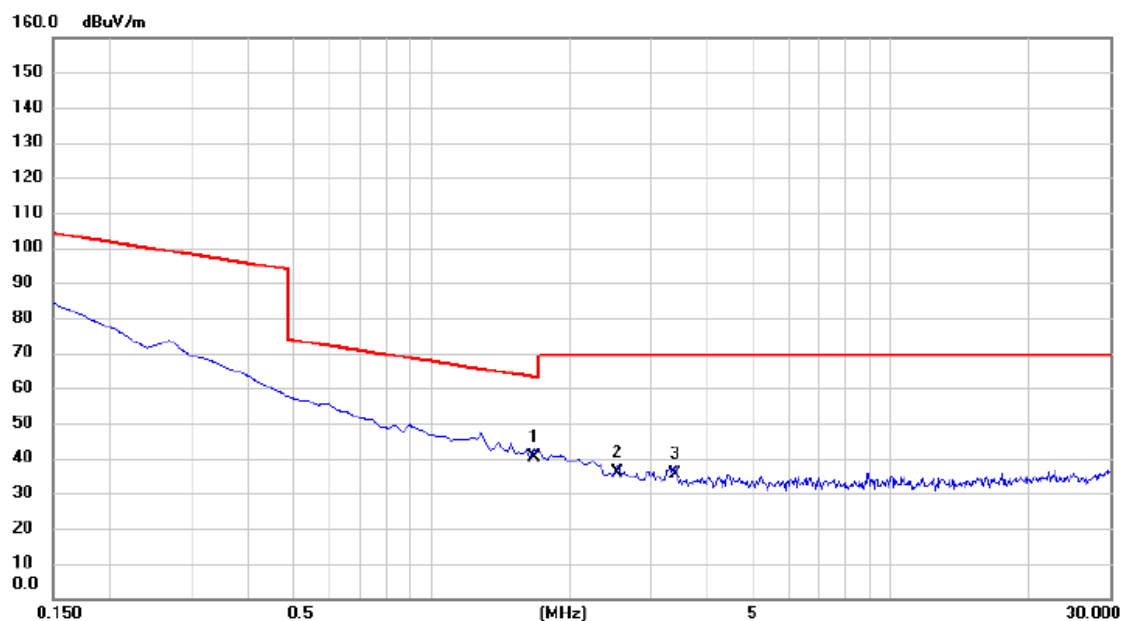


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.672	20.13	20.01	40.14	63.14	-23.00	QP	
2		2.538	15.64	20.05	35.69	69.54	-33.85	QP	
3		3.404	15.29	20.09	35.38	69.54	-34.16	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--------------------------------	--------------	---------

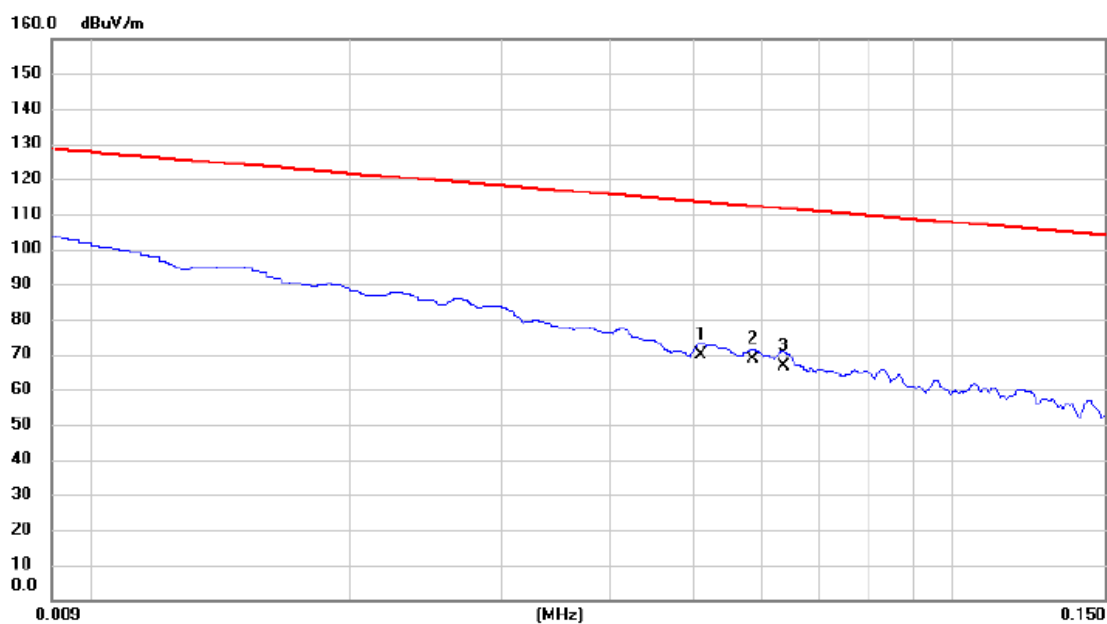


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.051	49.65	20.14	69.79	113.45	-43.66	AVG	
2	*	0.059	48.54	20.14	68.68	112.25	-43.57	AVG	
3		0.064	46.36	20.14	66.50	111.54	-45.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--------------------------------	--------------	---------

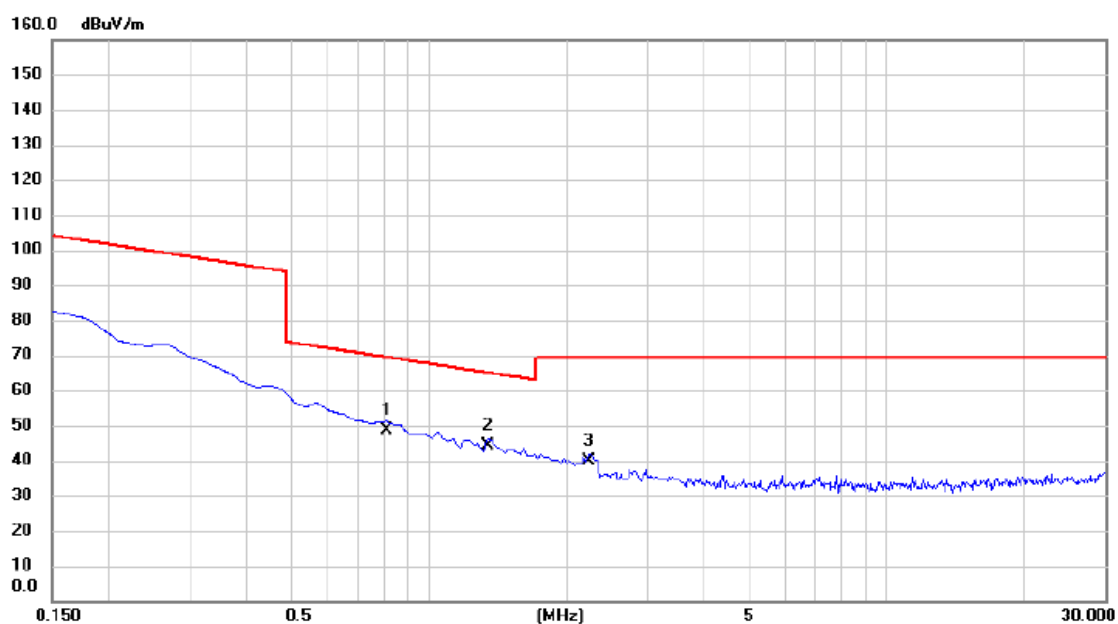


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.807	28.64	19.97	48.61	69.47	-20.86	QP	
2		1.344	24.15	20.00	44.15	65.04	-20.89	QP	
3		2.240	19.64	20.02	39.66	69.54	-29.88	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX A Mode Channel 149 (UNII-3)	Polarization	Vertical
-----------	--------------------------------	--------------	----------

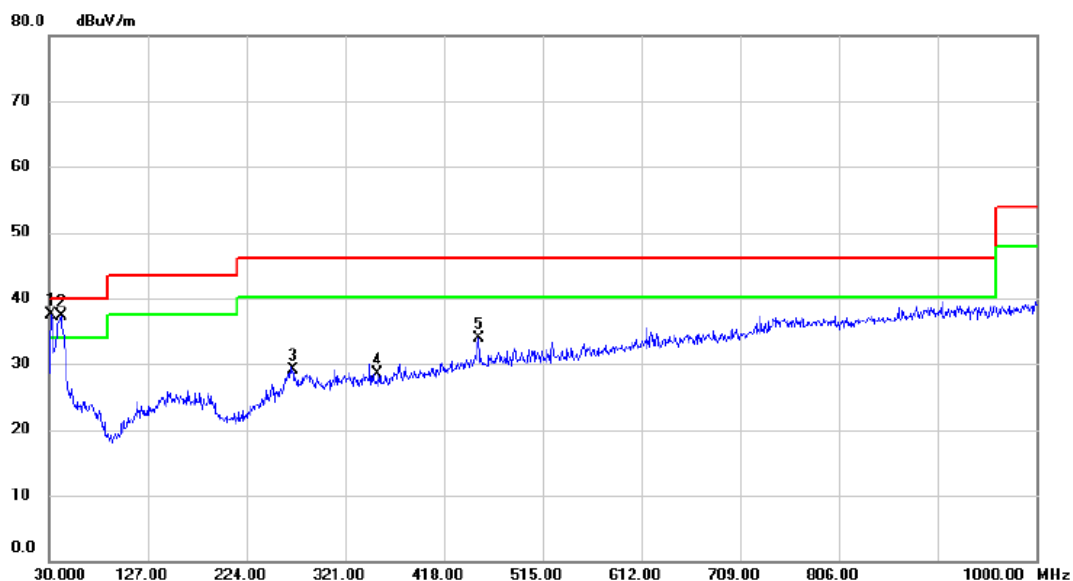


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.940	50.21	-12.65	37.56	40.00	-2.44	peak	
2	!	41.640	48.79	-11.42	37.37	40.00	-2.63	peak	
3		269.590	39.82	-10.72	29.10	46.02	-16.92	peak	
4		353.010	37.08	-8.55	28.53	46.02	-17.49	peak	
5		451.950	39.90	-5.95	33.95	46.02	-12.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 149 (UNII-3)	Polarization	Horizontal
-----------	--------------------------------	--------------	------------

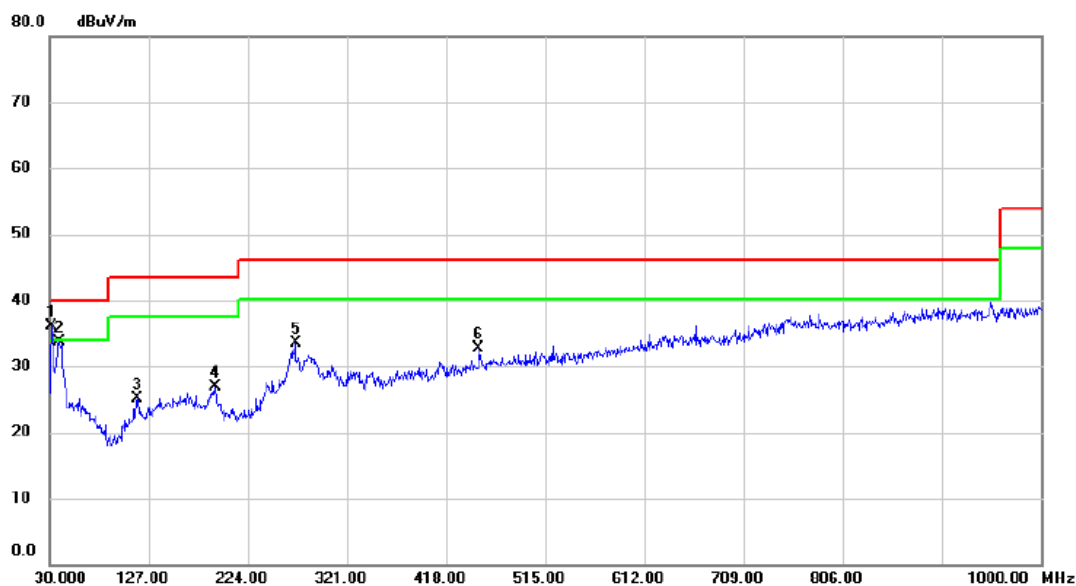


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.940	48.78	-12.65	36.13	40.00	-3.87	peak	
2		39.700	45.36	-11.61	33.75	40.00	-6.25	peak	
3		115.360	38.58	-13.51	25.07	43.52	-18.45	peak	
4		191.990	39.77	-12.86	26.91	43.52	-16.61	peak	
5		270.560	44.18	-10.67	33.51	46.02	-12.51	peak	
6		450.010	38.69	-5.98	32.71	46.02	-13.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

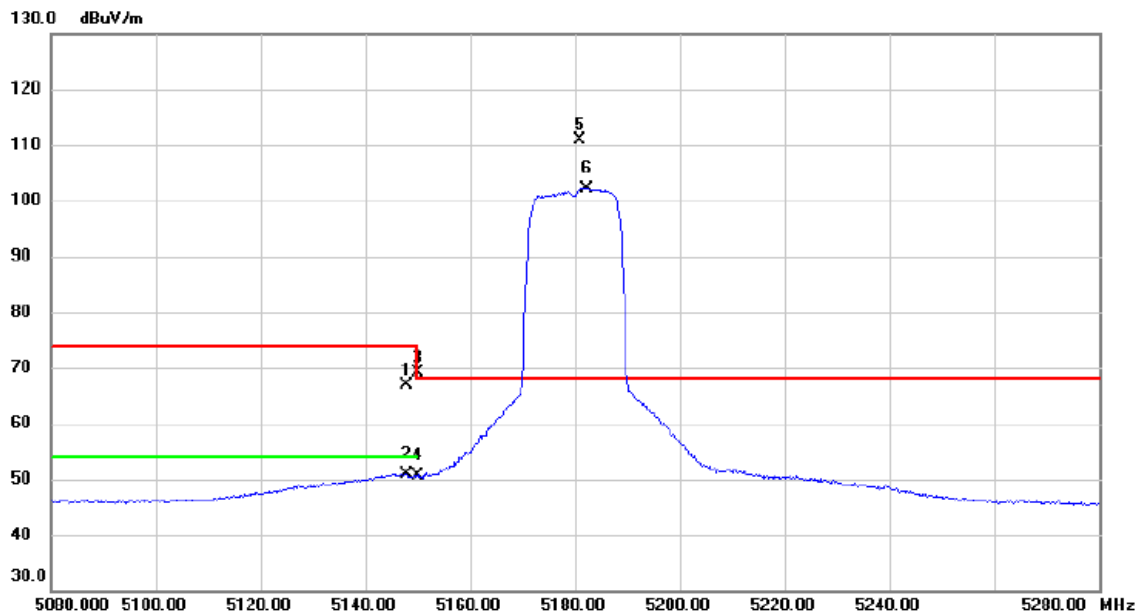


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.800	51.09	15.83	66.92	74.00	-7.08	peak	
2		5147.800	35.15	15.83	50.98	54.00	-3.02	AVG	
3		5150.000	53.38	15.83	69.21	74.00	-4.79	peak	
4		5150.000	34.70	15.83	50.53	54.00	-3.47	AVG	
5	*	5181.000	94.87	15.91	110.78	68.20	42.58	peak	No Limit
6	X	5182.200	86.32	15.91	102.23	68.20	34.03	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

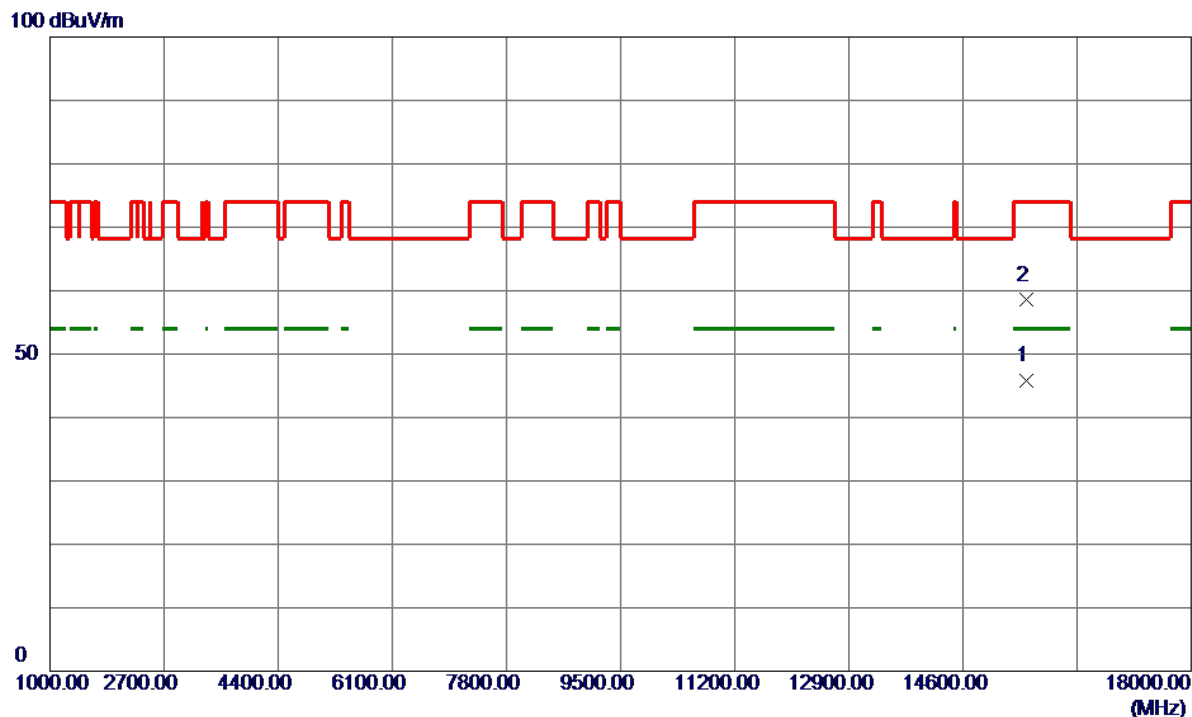


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15539.1000	35.20	10.52	45.72	54.00	-8.28	AVG	
2	15543.2000	47.98	10.52	58.50	74.00	-15.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

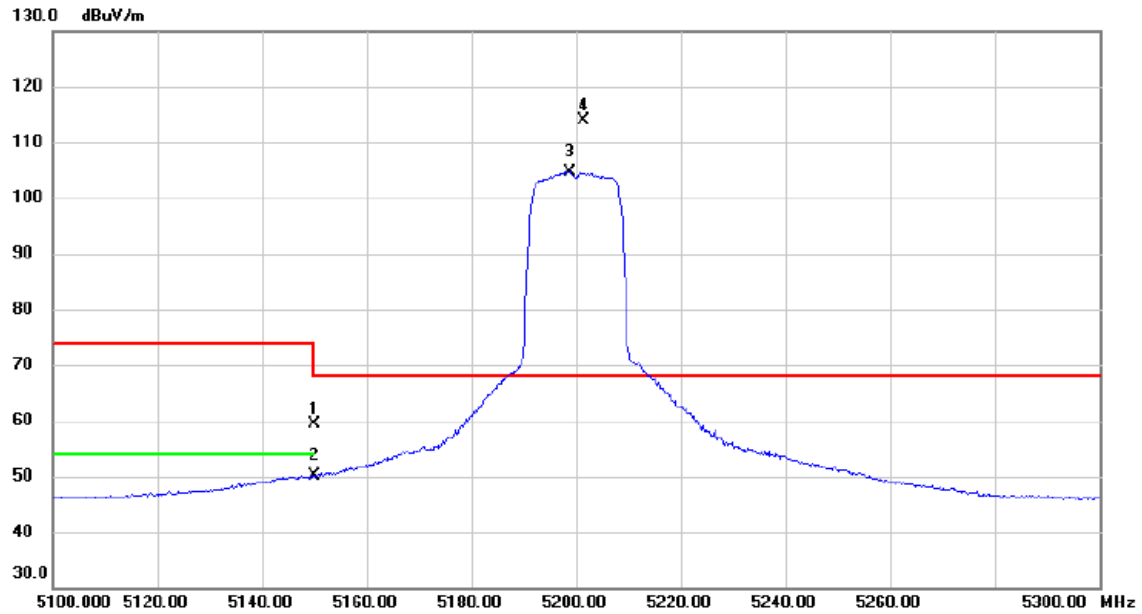


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	43.53	15.83	59.36	74.00	-14.64	peak	
2		5150.000	34.34	15.83	50.17	54.00	-3.83	AVG	
3	X	5198.800	88.71	15.96	104.67	68.20	36.47	AVG	No Limit
4	*	5201.400	97.90	15.96	113.86	68.20	45.66	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

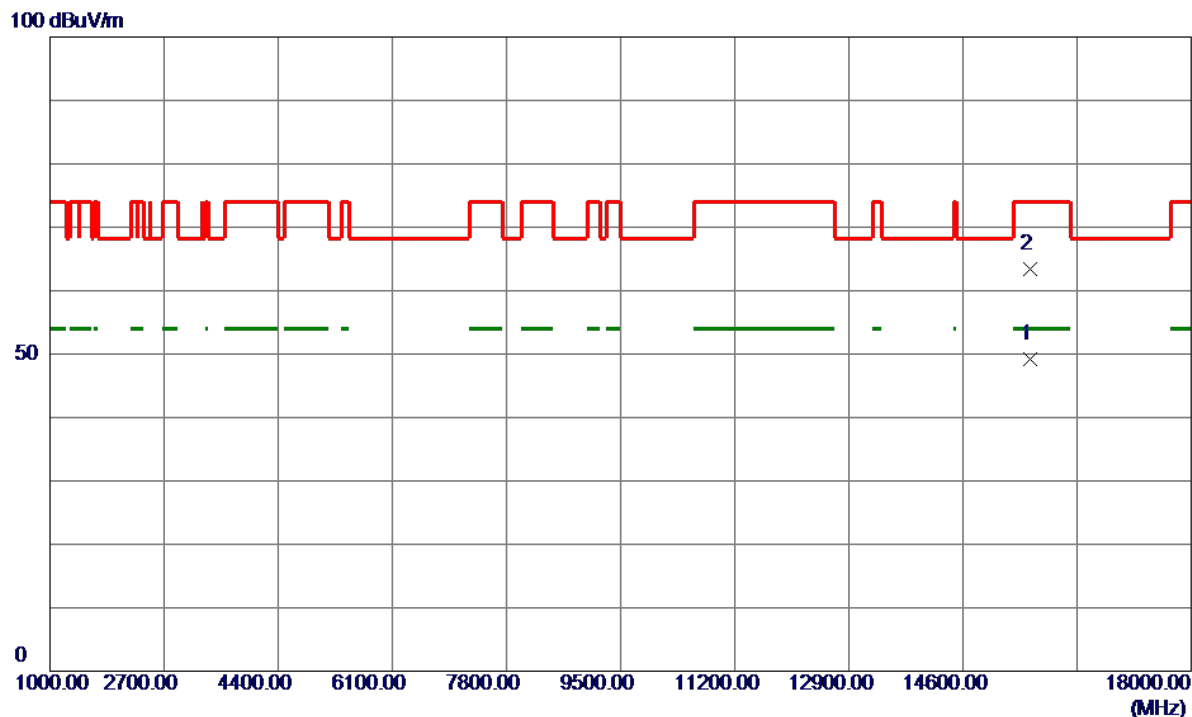


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15600.3000	38.72	10.46	49.18	54.00	-4.82	AVG	
2	15601.0500	52.92	10.45	63.37	74.00	-10.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

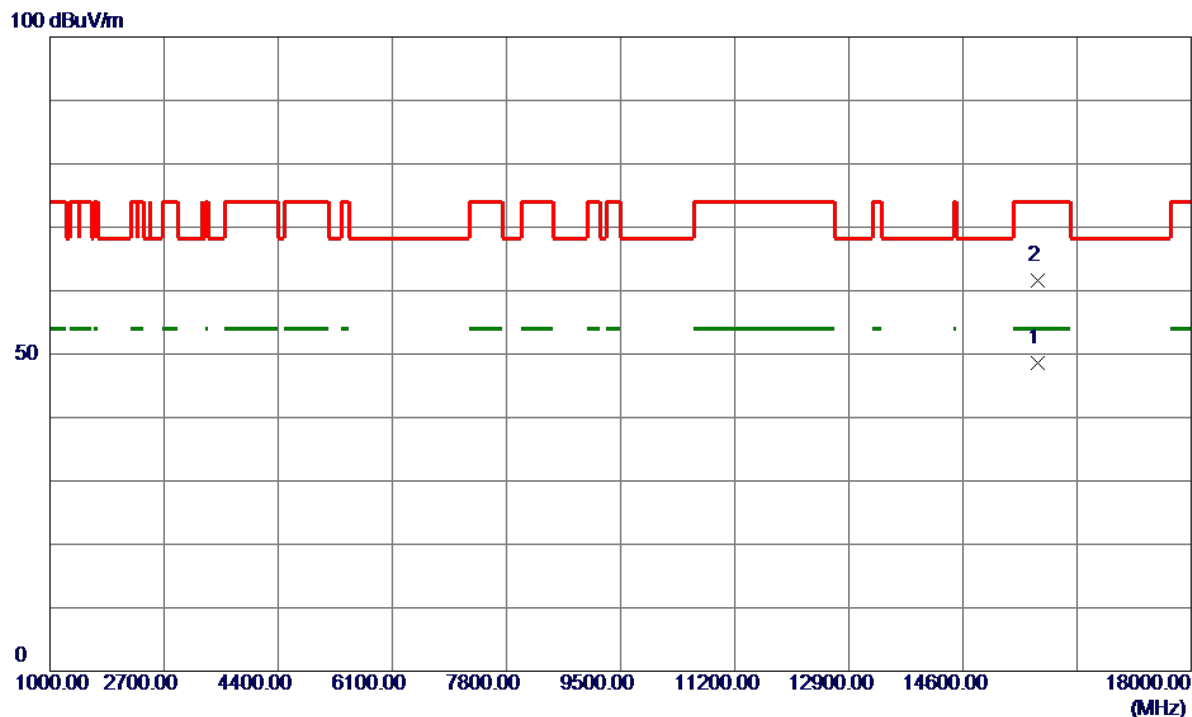


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15717.6500	38.22	10.33	48.55	54.00	-5.45	AVG	
2	15718.1500	51.26	10.33	61.59	74.00	-12.41	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

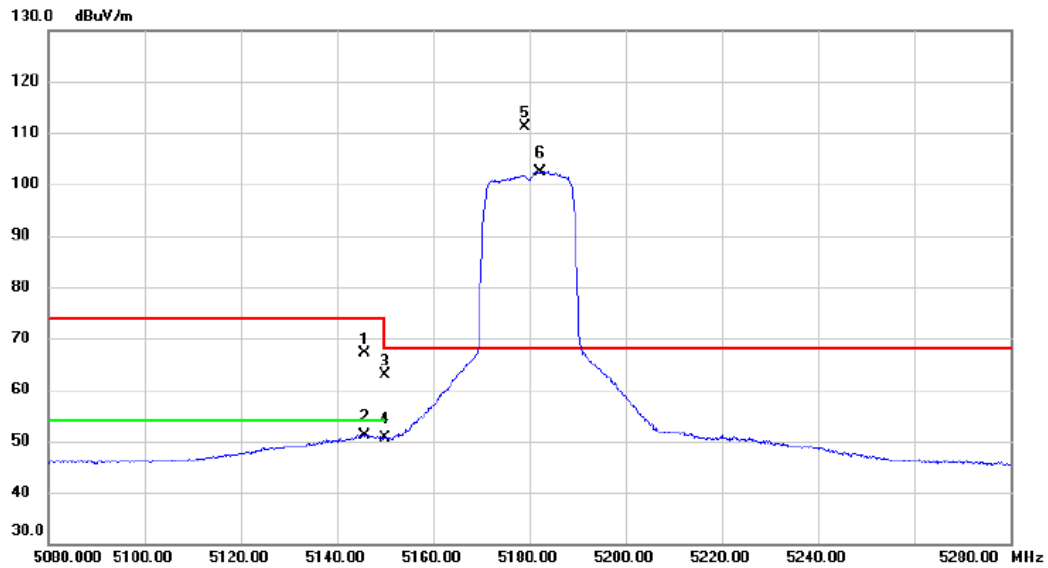


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.600	51.20	15.82	67.02	74.00	-6.98	peak	
2		5145.600	35.40	15.82	51.22	54.00	-2.78	AVG	
3		5150.000	47.16	15.83	62.99	74.00	-11.01	peak	
4		5150.000	34.73	15.83	50.56	54.00	-3.44	AVG	
5	*	5179.000	95.12	15.90	111.02	68.20	42.82	peak	No Limit
6	X	5182.400	86.45	15.91	102.36	68.20	34.16	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

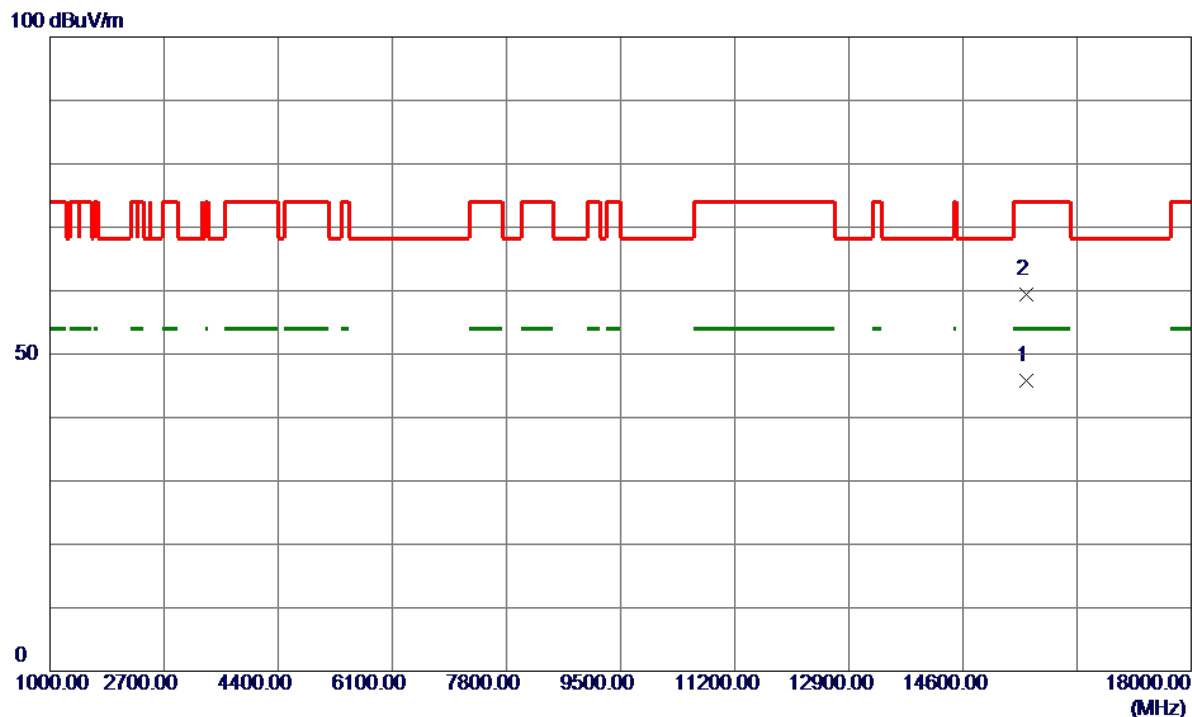


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15541.8500	35.23	10.52	45.75	54.00	-8.25	AVG	
2	15537.5000	48.89	10.52	59.41	74.00	-14.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

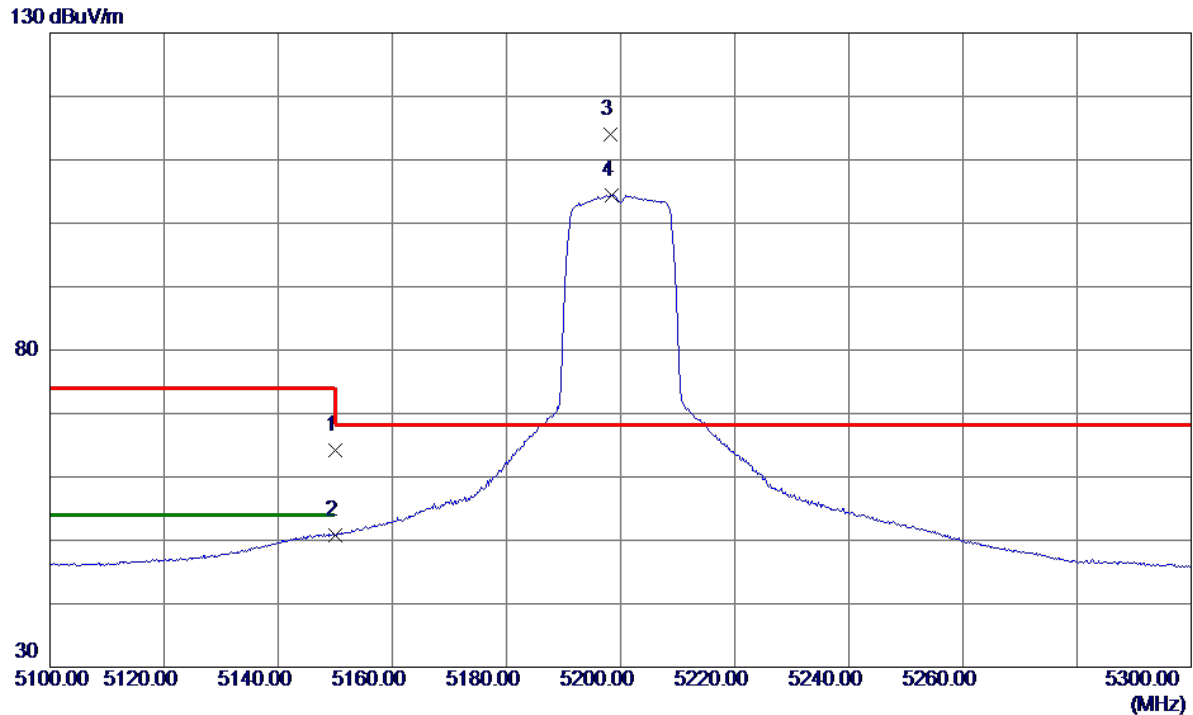


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.40	15.83	64.23	74.00	-9.77	Peak	
2	5150.0000	34.89	15.83	50.72	54.00	-3.28	AVG	
3 *	5198.2000	98.14	15.96	114.10	68.20	45.90	Peak	No Limit
4	5198.4000	88.49	15.96	104.45	999.00	-894.55	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

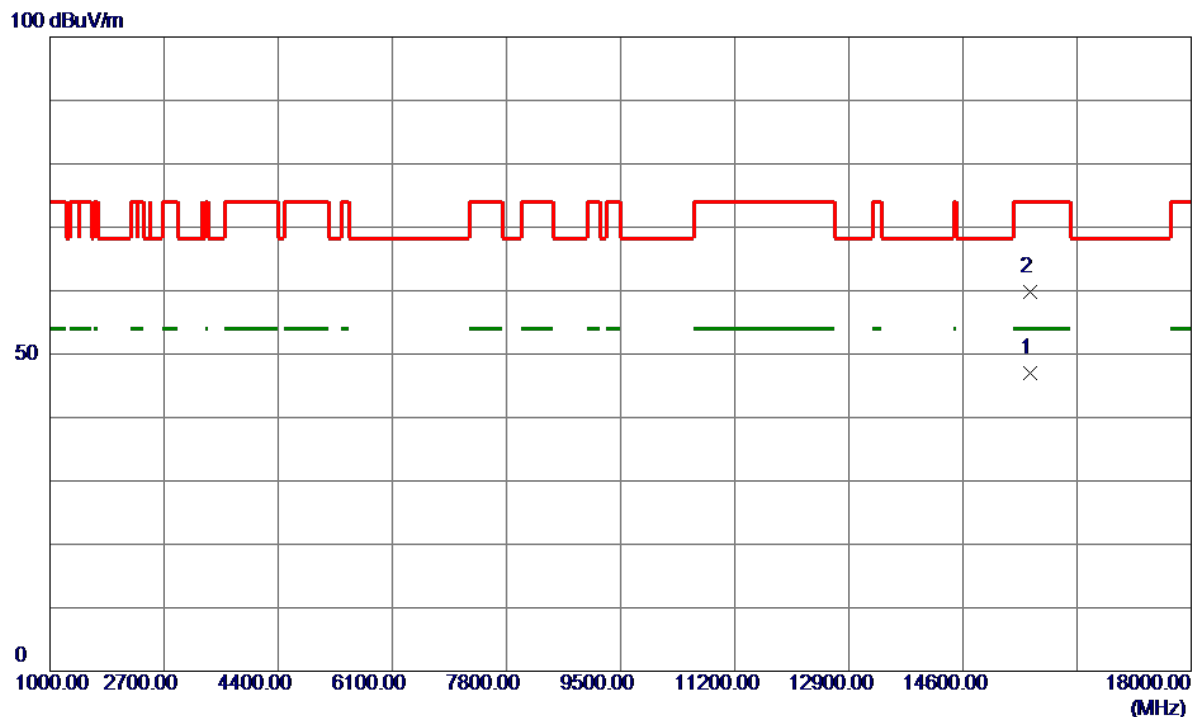


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15599.6500	36.62	10.46	47.08	54.00	-6.92	AVG	
2	15596.9500	49.26	10.46	59.72	74.00	-14.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

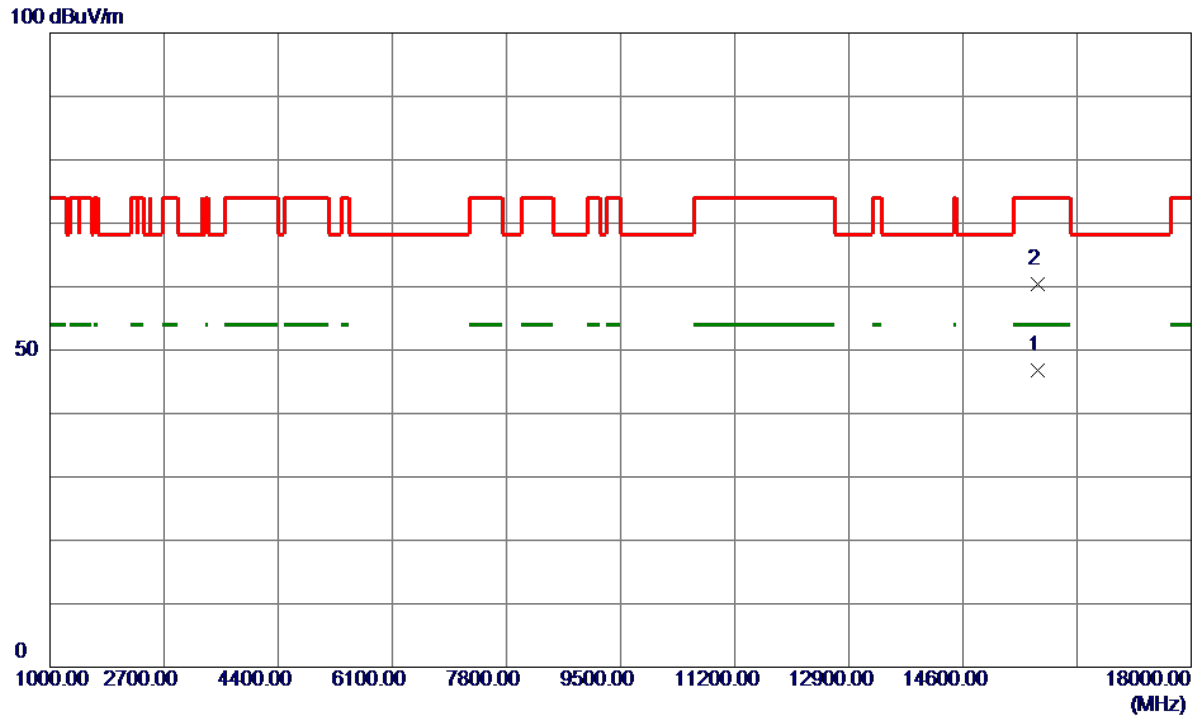

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15723.0500	36.38	10.33	46.71	54.00	-7.29	AVG	
2	15714.7000	50.07	10.34	60.41	74.00	-13.59	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

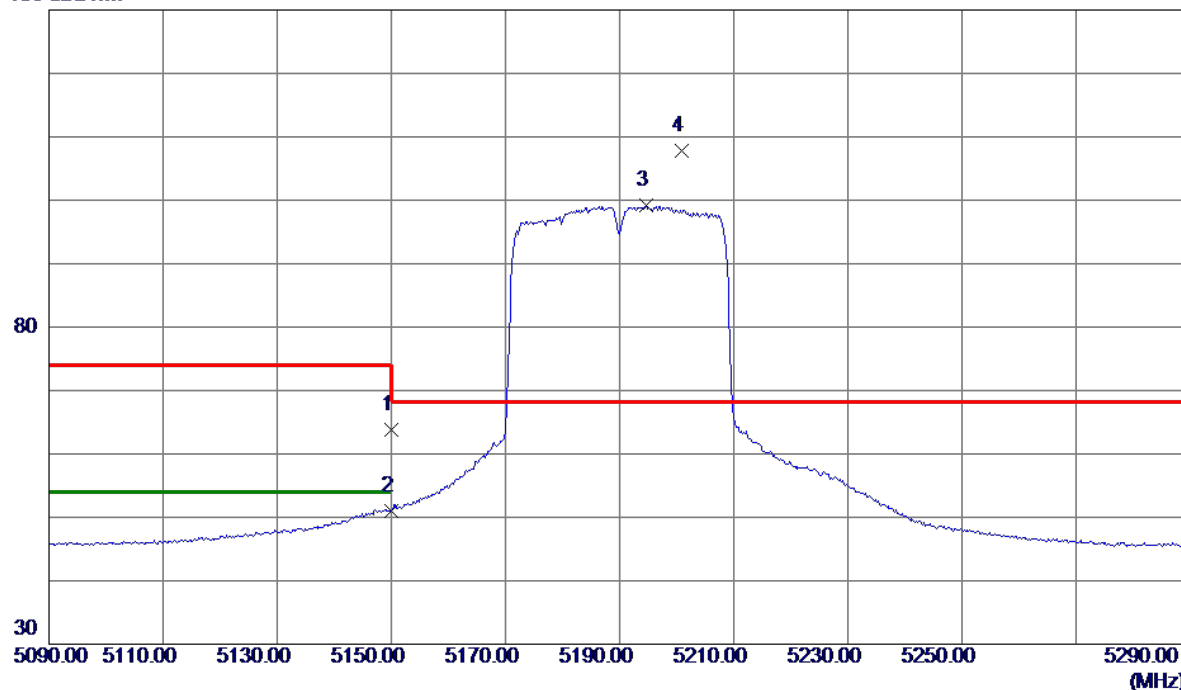


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.92	15.83	63.75	74.00	-10.25	Peak	
2	5150.0000	35.20	15.83	51.03	54.00	-2.97	AVG	
3	5194.6000	83.27	15.95	99.22	999.00	-899.78	AVG	No Limit
4 *	5200.8000	91.80	15.96	107.76	68.20	39.56	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

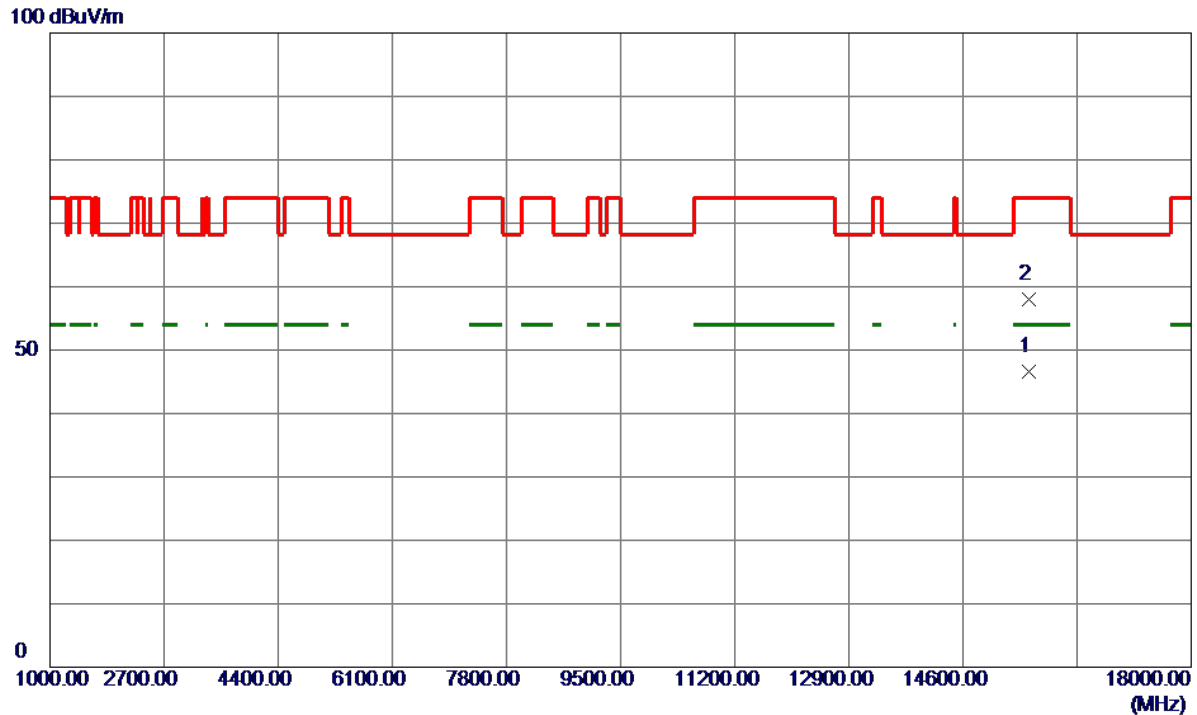


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15578.2000	36.13	10.48	46.61	54.00	-7.39	AVG	
2	15581.9000	47.60	10.47	58.07	74.00	-15.93	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

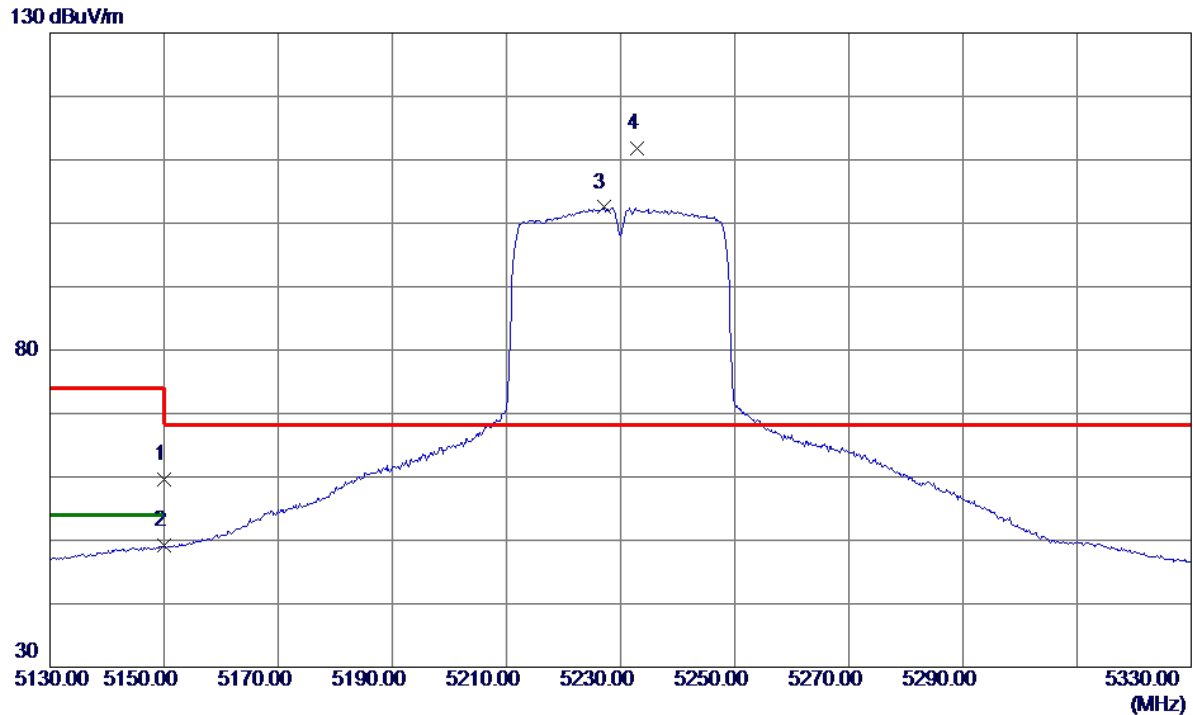


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.76	15.83	59.59	74.00	-14.41	Peak	
2	5150.0000	33.35	15.83	49.18	54.00	-4.82	AVG	
3	5227.0000	86.47	16.03	102.50	999.00	-896.50	AVG	No Limit
4 *	5232.8000	95.79	16.05	111.84	68.20	43.64	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

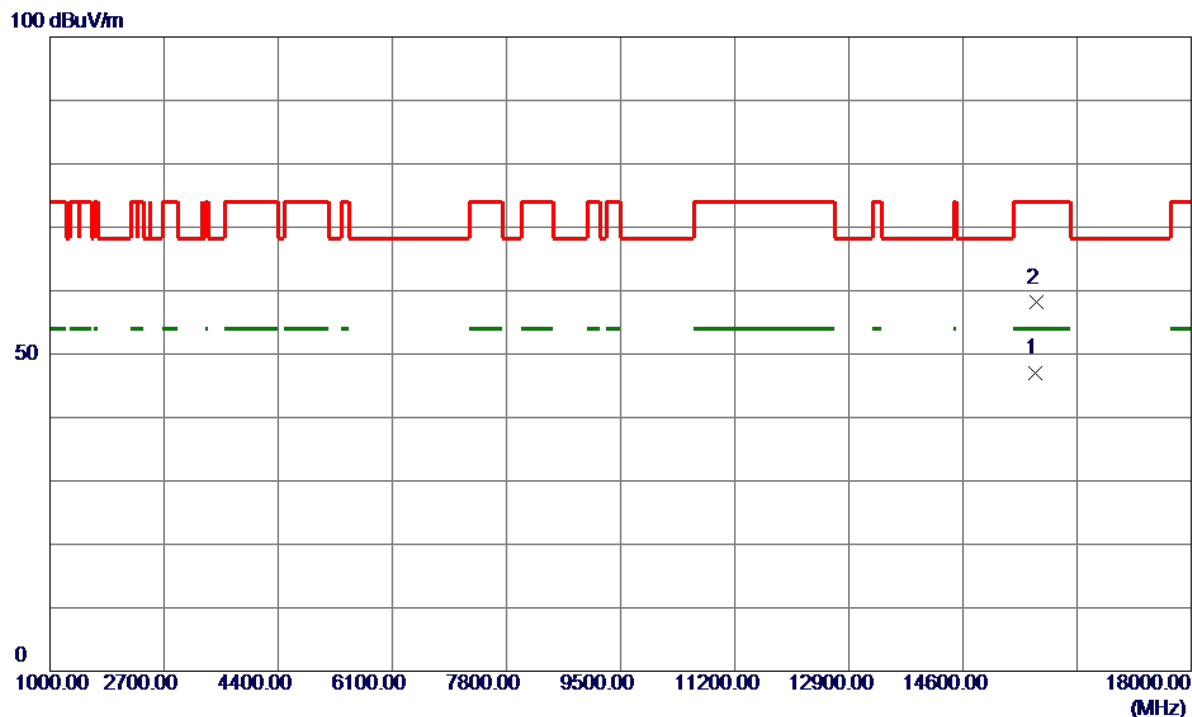


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15685.2000	36.55	10.37	46.92	54.00	-7.08	AVG	
2	15702.9000	47.75	10.35	58.10	74.00	-15.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

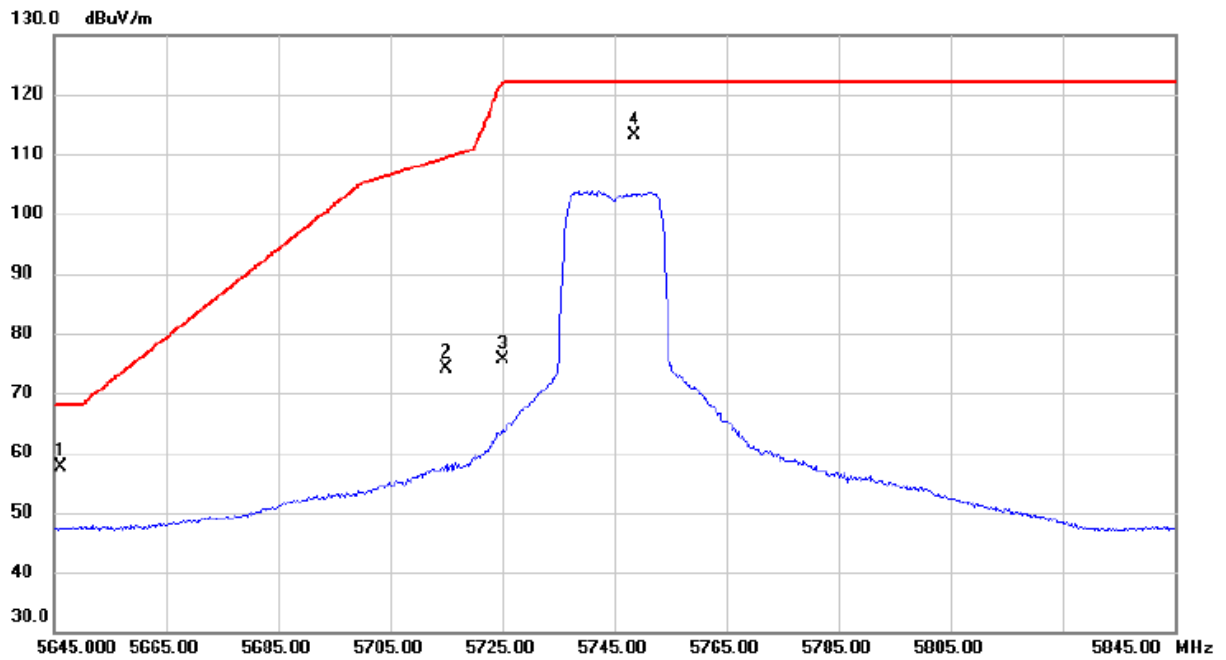


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5646.200	40.40	17.17	57.57	68.20	-10.63	peak	
2		5715.000	56.71	17.37	74.08	109.40	-35.32	peak	
3		5725.000	58.27	17.40	75.67	122.20	-46.53	peak	
4	*	5748.600	95.76	17.47	113.23	122.20	-8.97	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

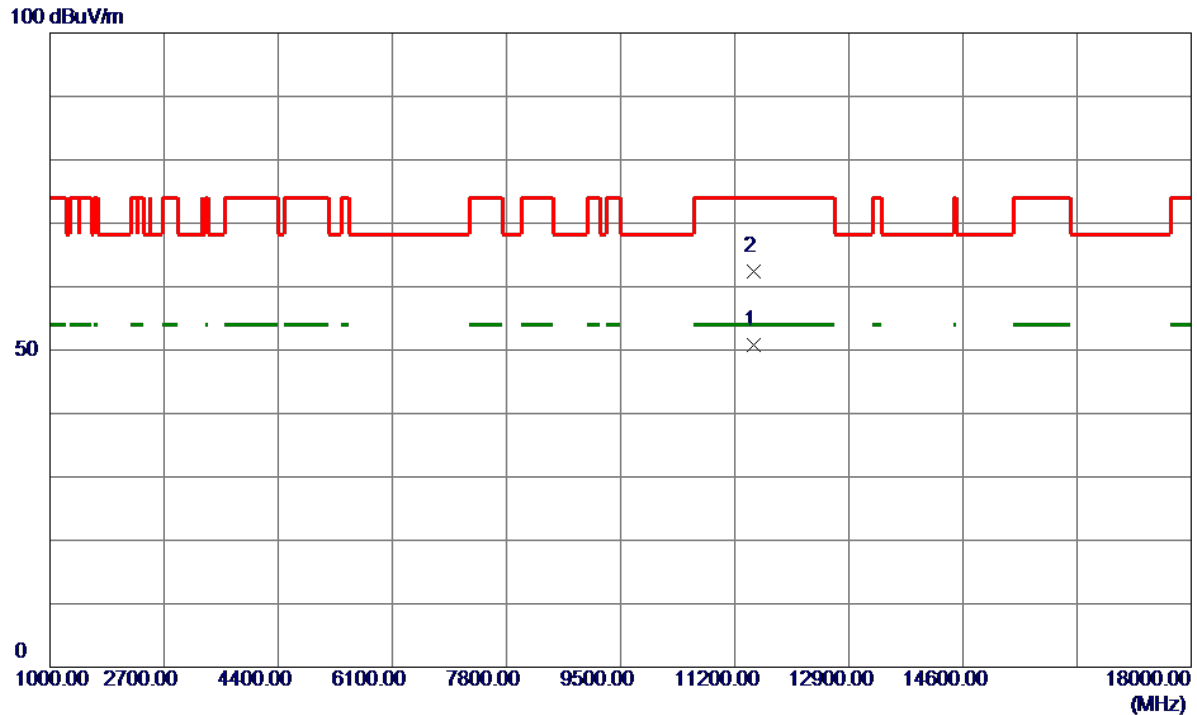


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.7500	37.65	13.10	50.75	54.00	-3.25	AVG	
2	11490.3000	49.39	13.10	62.49	74.00	-11.51	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

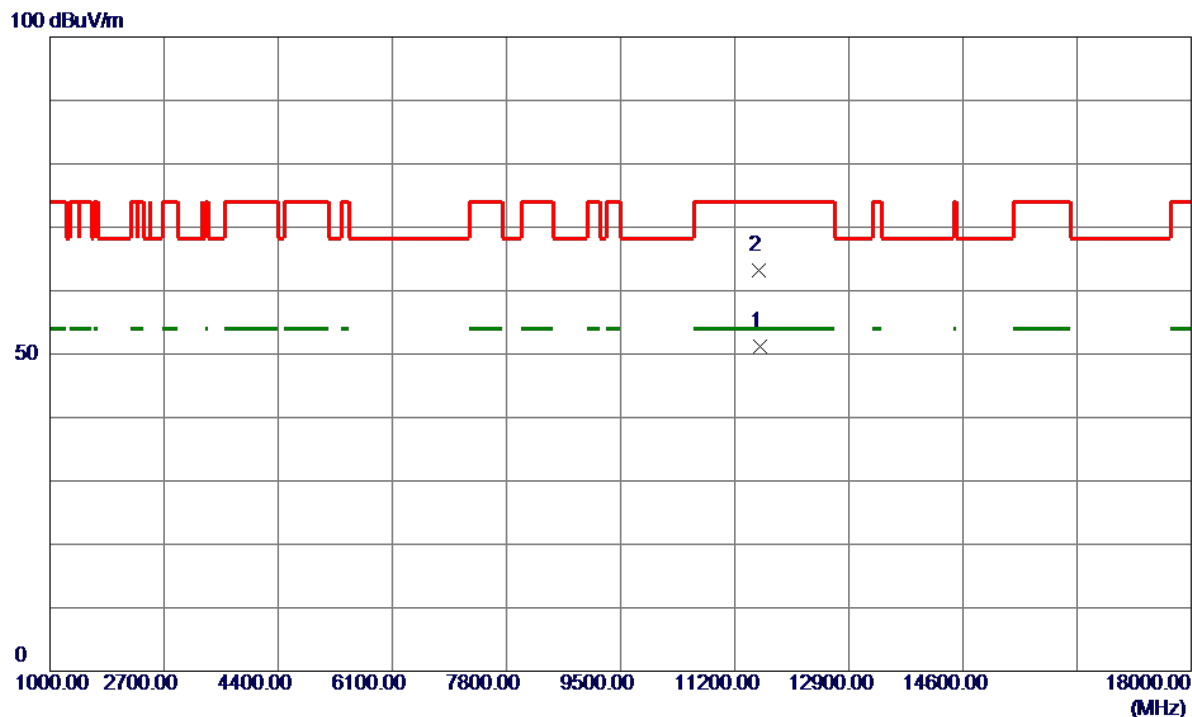


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.8000	38.11	13.12	51.23	54.00	-2.77	AVG	
2	11567.9000	50.03	13.12	63.15	74.00	-10.85	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

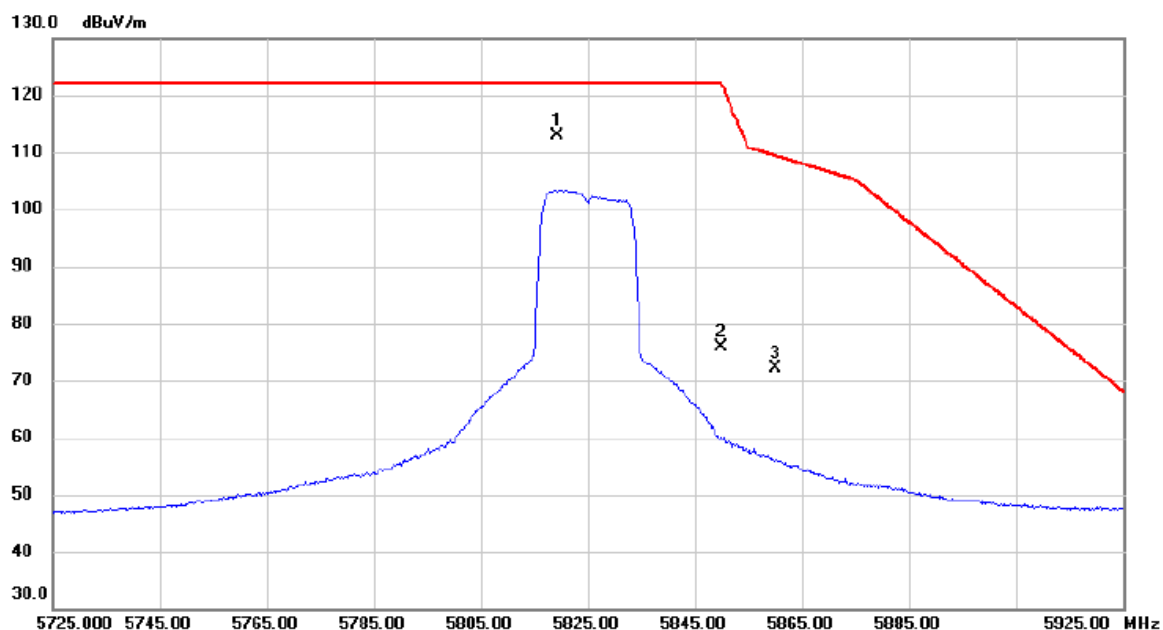


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5819.400	95.18	17.67	112.85	122.20	-9.35	peak	No Limit
2		5850.000	58.22	17.76	75.98	122.20	-46.22	peak	
3		5860.000	54.39	17.79	72.18	109.40	-37.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

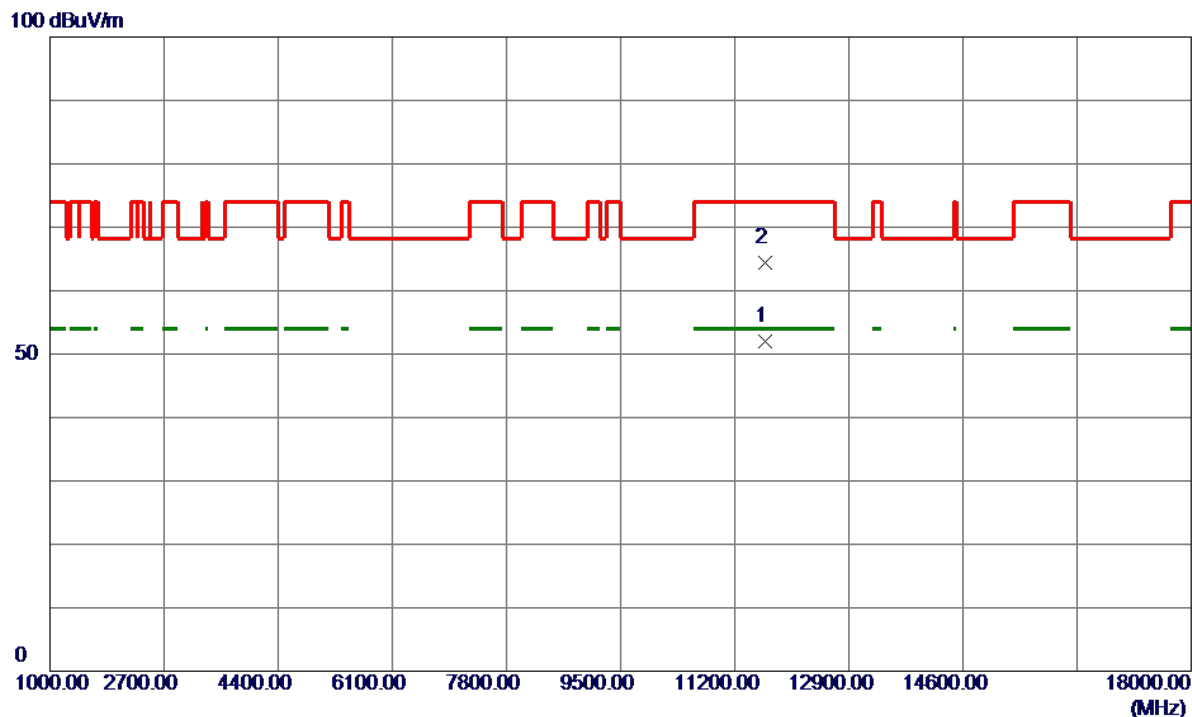


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.2000	38.87	13.11	51.98	54.00	-2.02	AVG	
2	11652.6500	51.38	13.11	64.49	74.00	-9.51	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

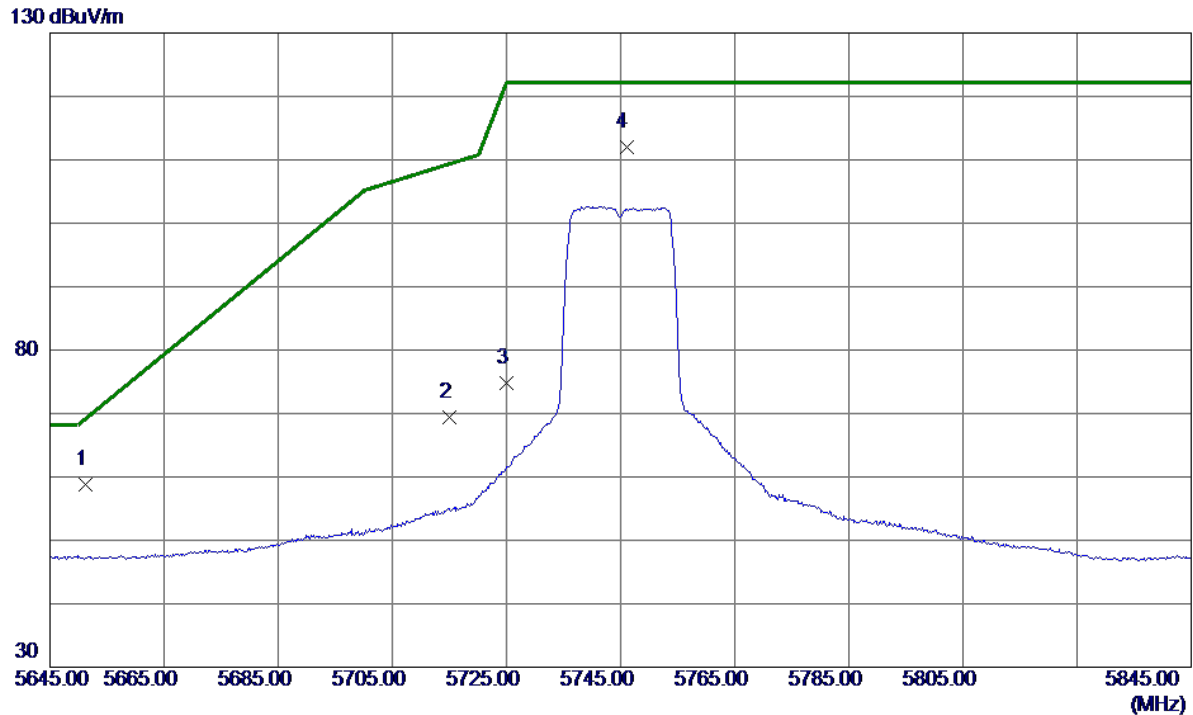


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5651.2000	41.60	17.18	58.78	69.09	-10.31	Peak	
2	5715.0000	51.96	17.37	69.33	109.40	-40.07	Peak	
3	5725.0000	57.39	17.40	74.79	122.20	-47.41	Peak	
4 *	5746.0000	94.51	17.46	111.97	122.20	-10.23	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

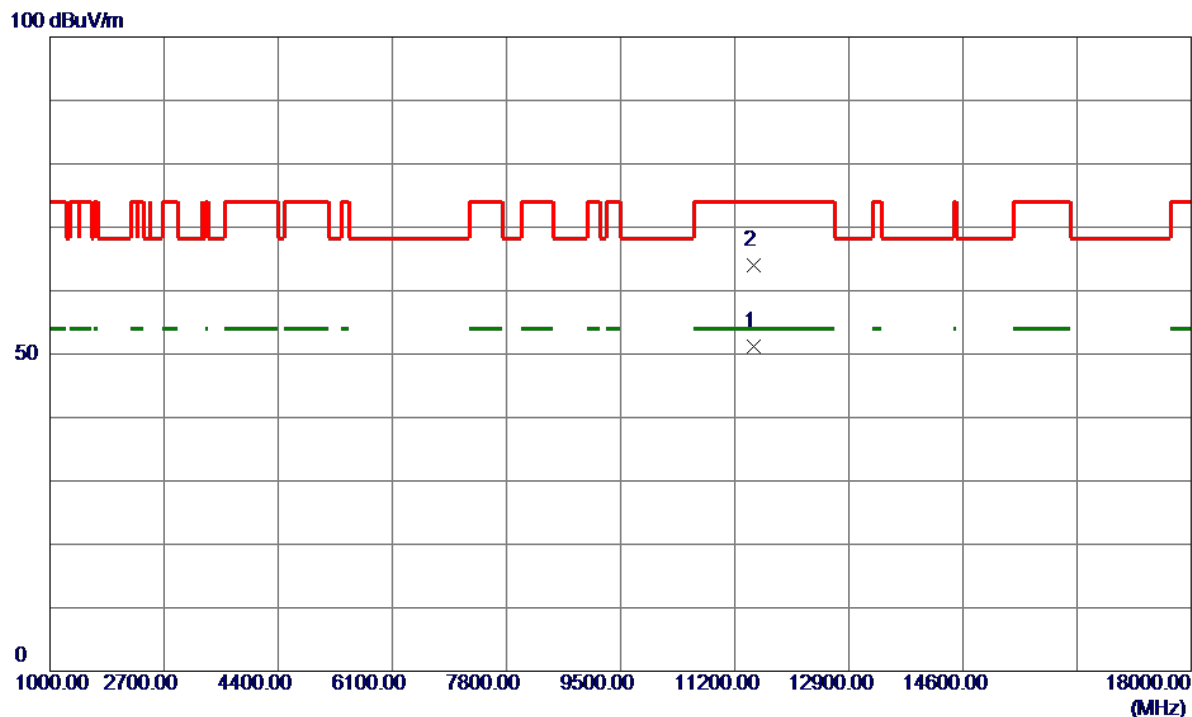


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.5000	38.10	13.10	51.20	54.00	-2.80	AVG	
2	11489.5500	50.85	13.10	63.95	74.00	-10.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

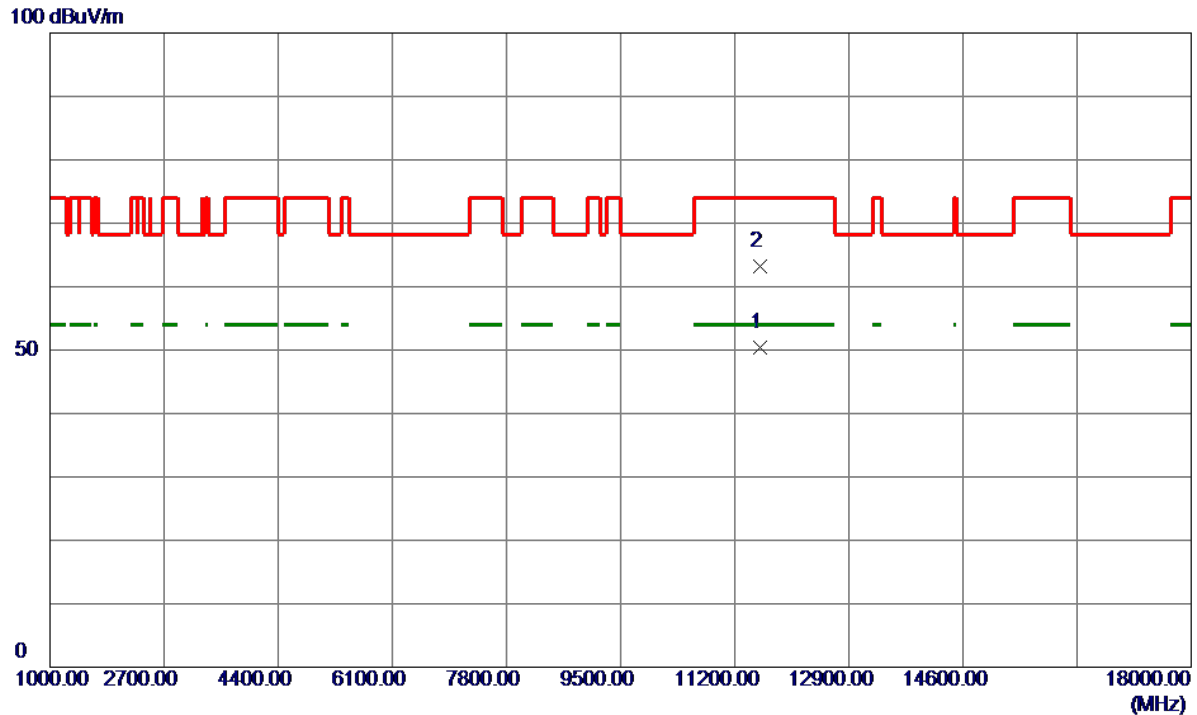


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.9500	37.22	13.12	50.34	54.00	-3.66	AVG	
2	11572.0000	50.08	13.12	63.20	74.00	-10.80	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

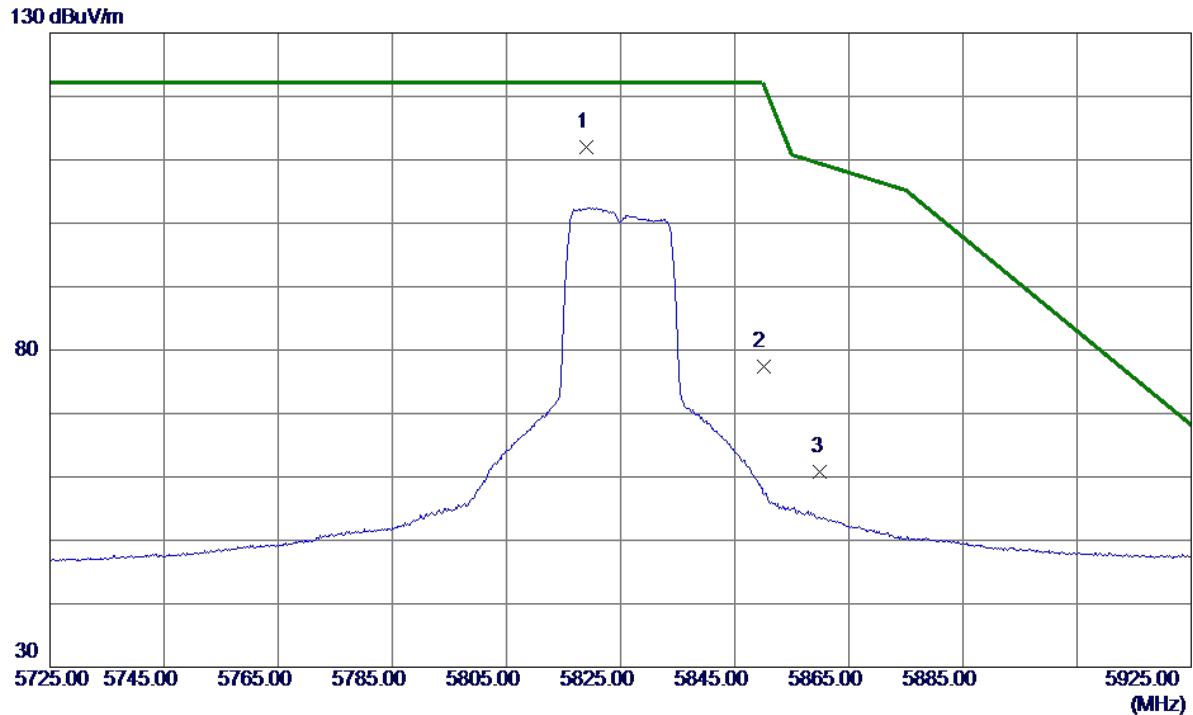


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.0000	94.23	17.67	111.90	122.20	-10.30	Peak	No Limit
2	5850.0000	59.61	17.76	77.37	122.20	-44.83	Peak	
3	5860.0000	43.03	17.79	60.82	109.40	-48.58	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

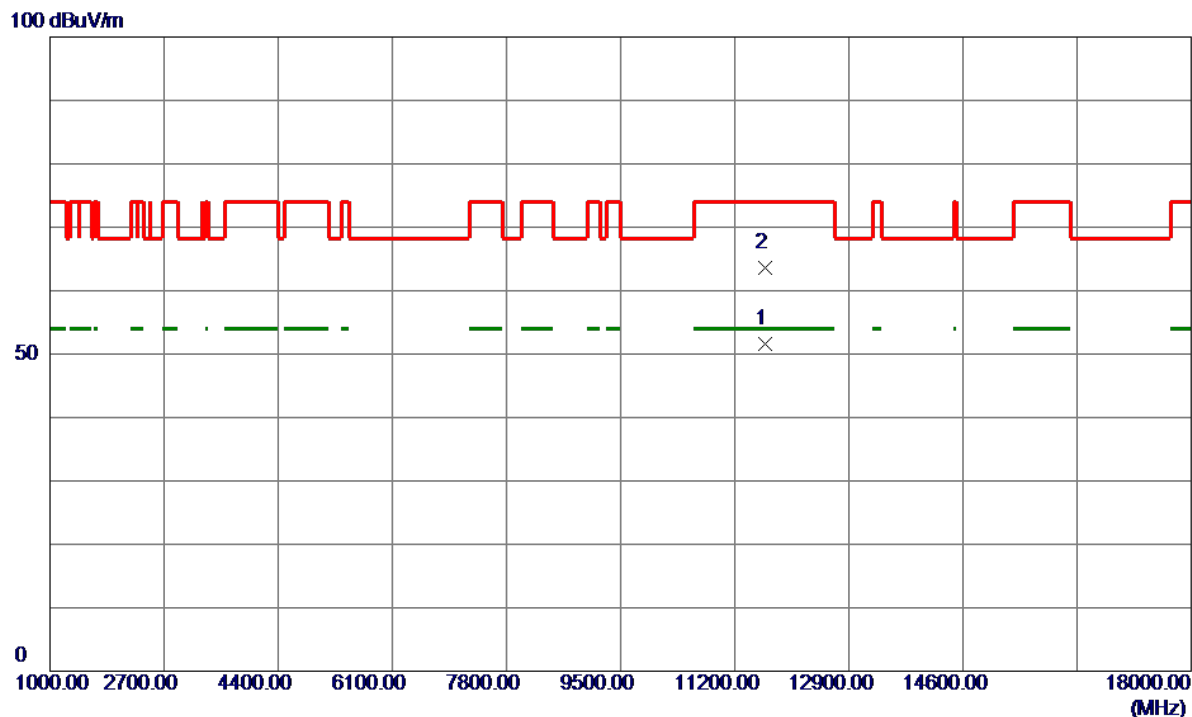


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.3000	38.55	13.11	51.66	54.00	-2.34	AVG	
2	11646.3500	50.42	13.11	63.53	74.00	-10.47	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

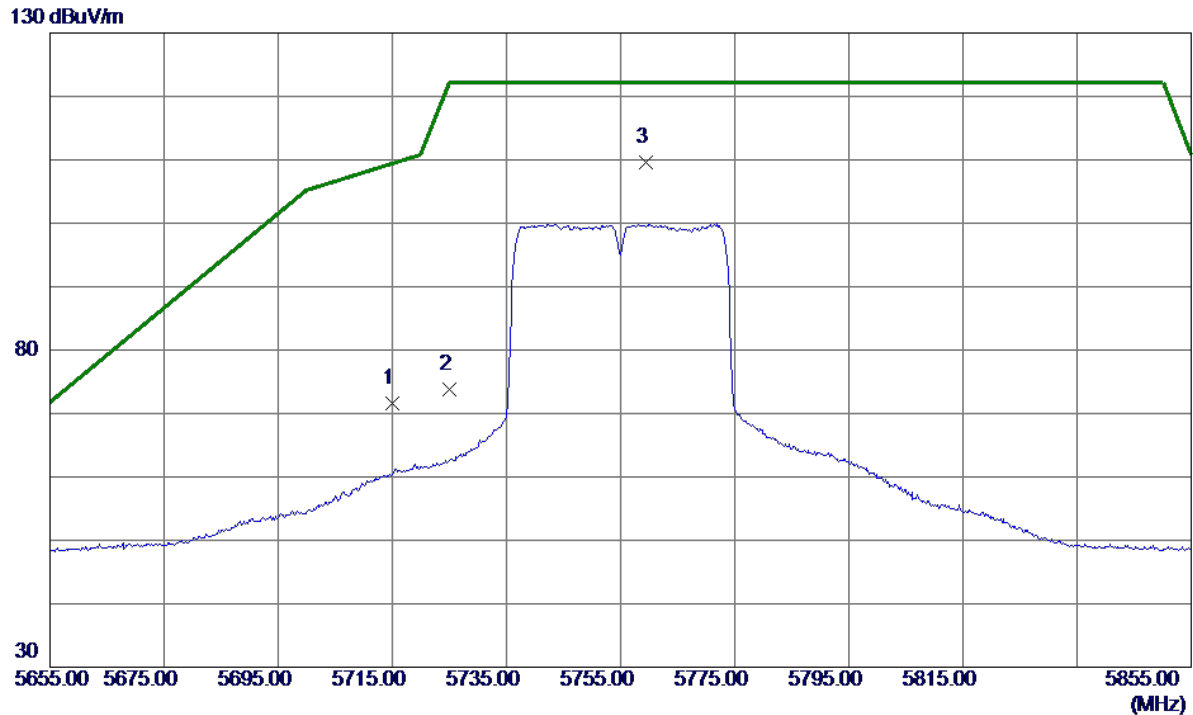


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	54.14	17.37	71.51	109.40	-37.89	Peak	
2	5725.0000	56.43	17.40	73.83	122.20	-48.37	Peak	
3 *	5759.4000	92.07	17.50	109.57	122.20	-12.63	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

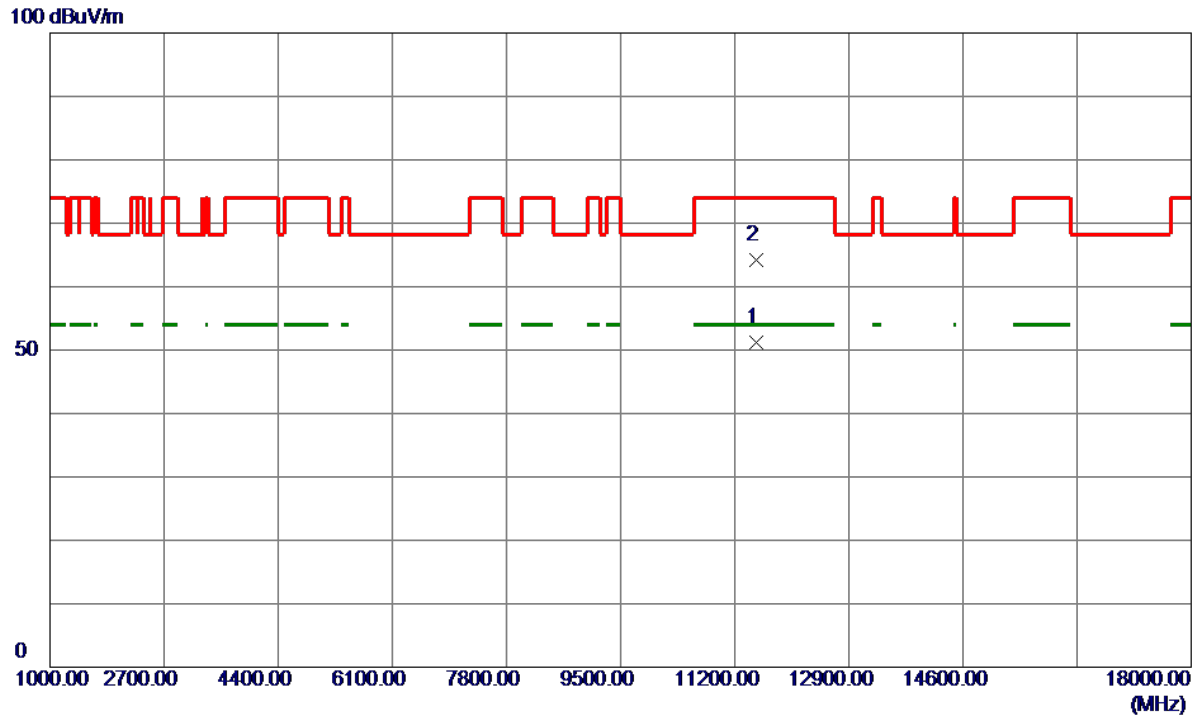


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11528.7000	38.11	13.13	51.24	54.00	-2.76	AVG	
2	11526.6000	51.07	13.13	64.20	74.00	-9.80	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

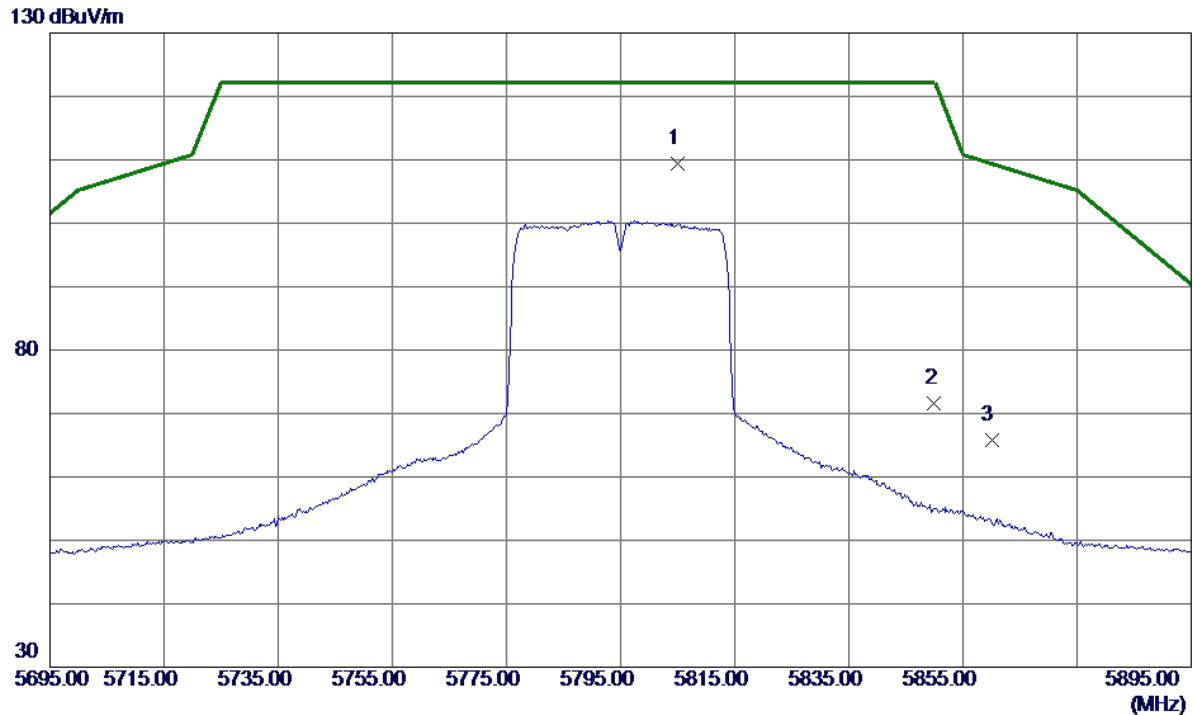


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5805.0000	91.85	17.63	109.48	122.20	-12.72	Peak	No Limit
2	5850.0000	53.88	17.76	71.64	122.20	-50.56	Peak	
3	5860.0000	48.05	17.79	65.84	109.40	-43.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

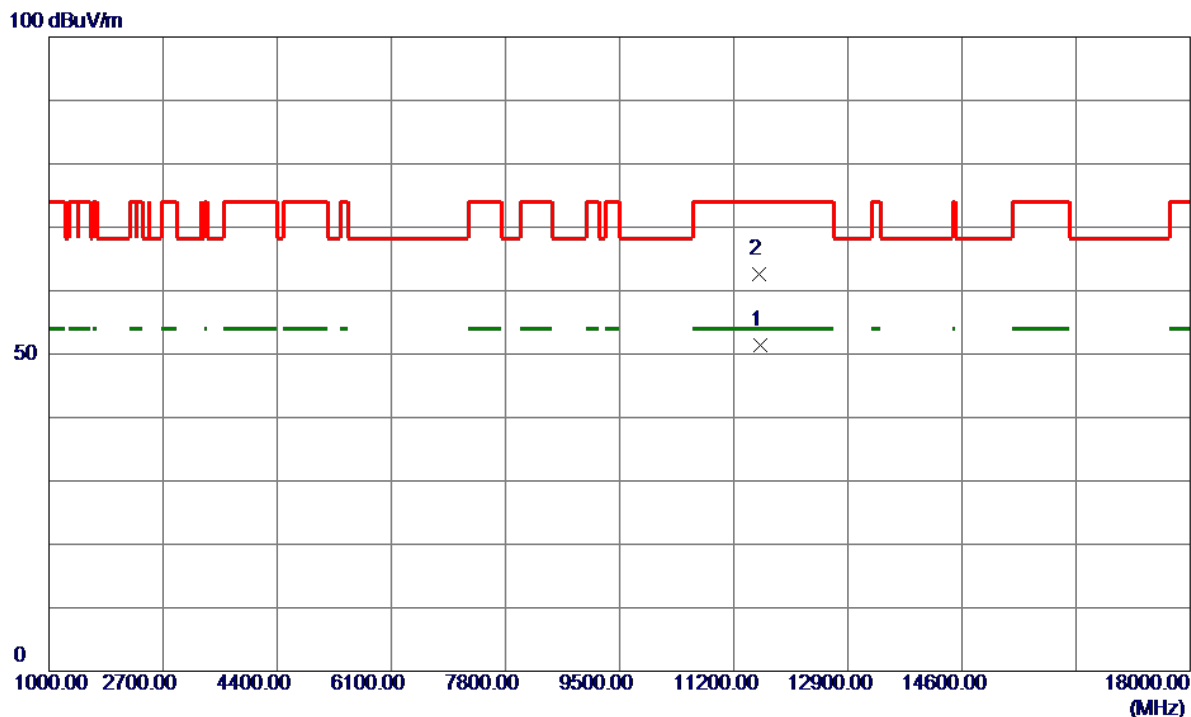


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	38.32	13.12	51.44	54.00	-2.56	AVG	
2	11573.9000	49.56	13.12	62.68	74.00	-11.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

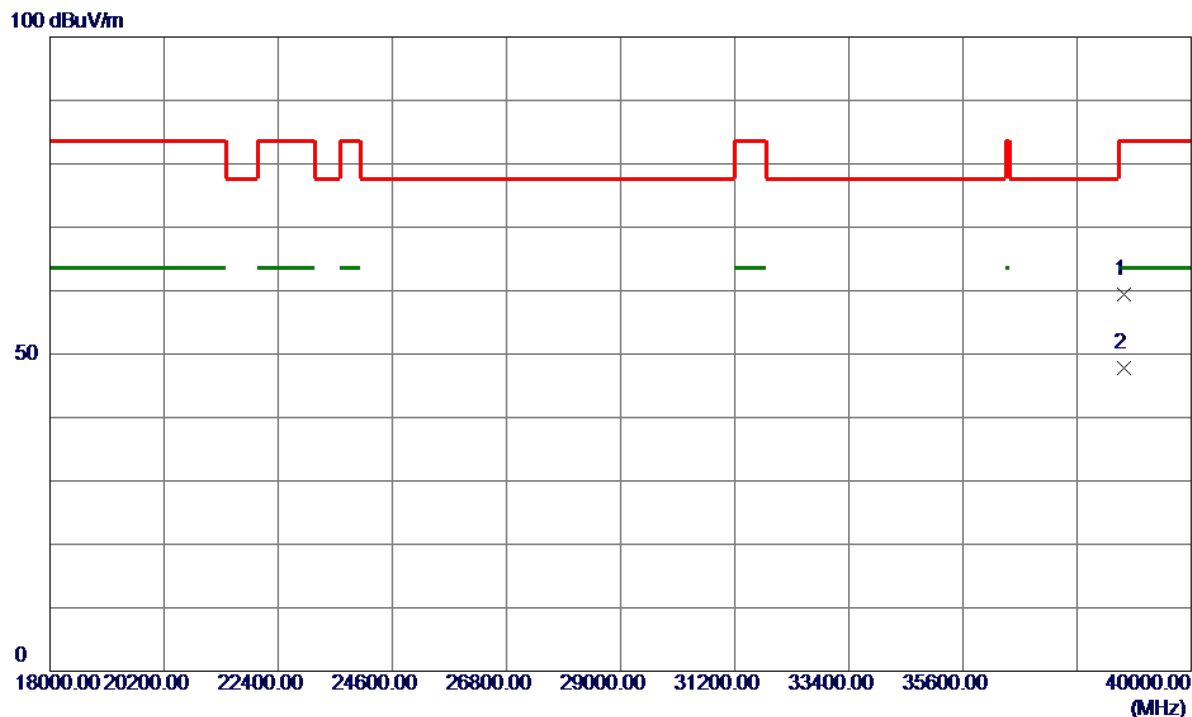


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38702.0000	48.63	10.76	59.39	83.50	-24.11	Peak	
2 *	38702.0000	36.95	10.76	47.71	63.50	-15.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

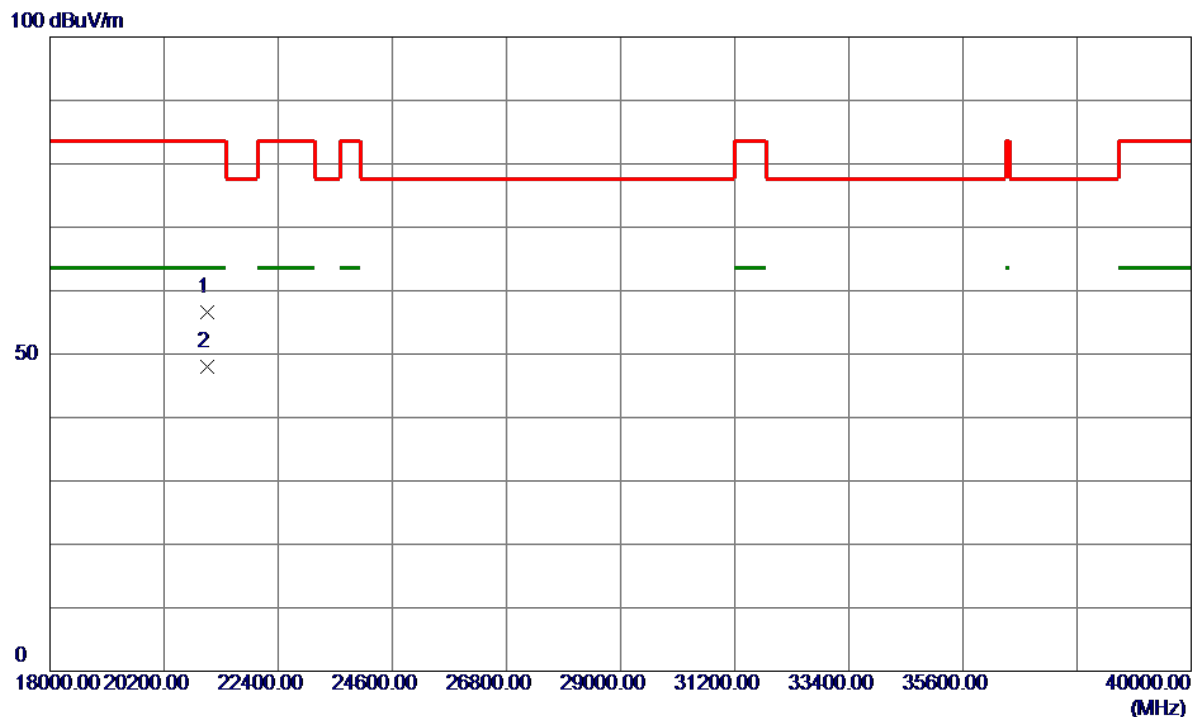


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21036.0000	50.68	5.96	56.64	83.50	-26.86	Peak	
2 *	21036.0000	41.99	5.96	47.95	63.50	-15.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

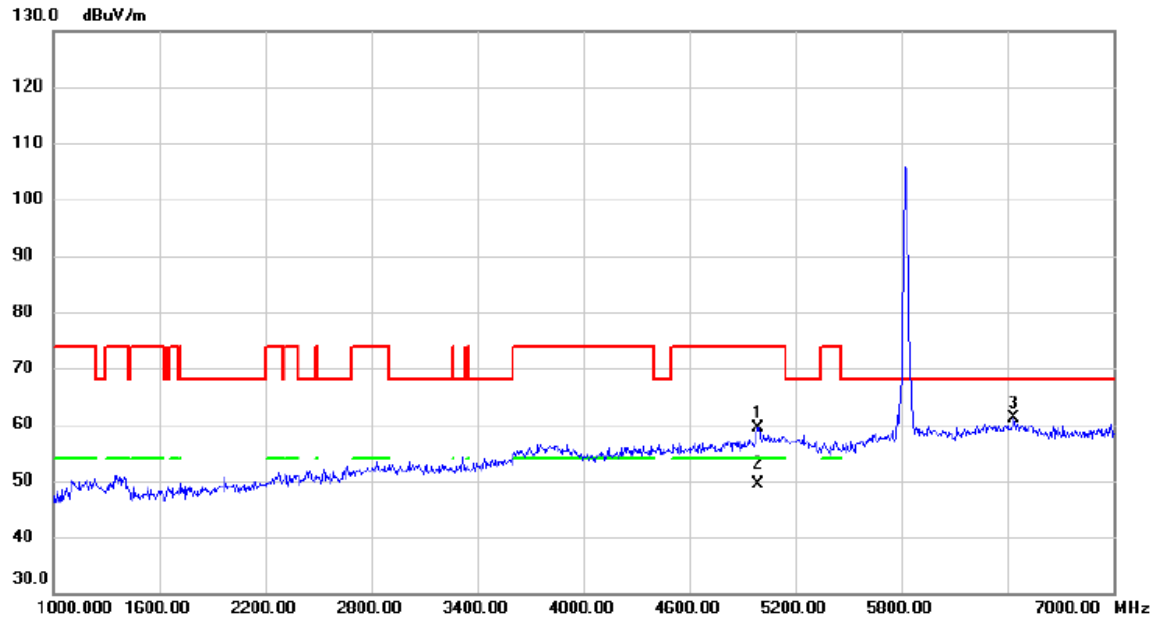


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4990.000	43.63	15.80	59.43	74.00	-14.57	peak	
2	*	4990.000	33.69	15.80	49.49	54.00	-4.51	AVG	
3		6436.000	41.95	19.12	61.07	68.20	-7.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

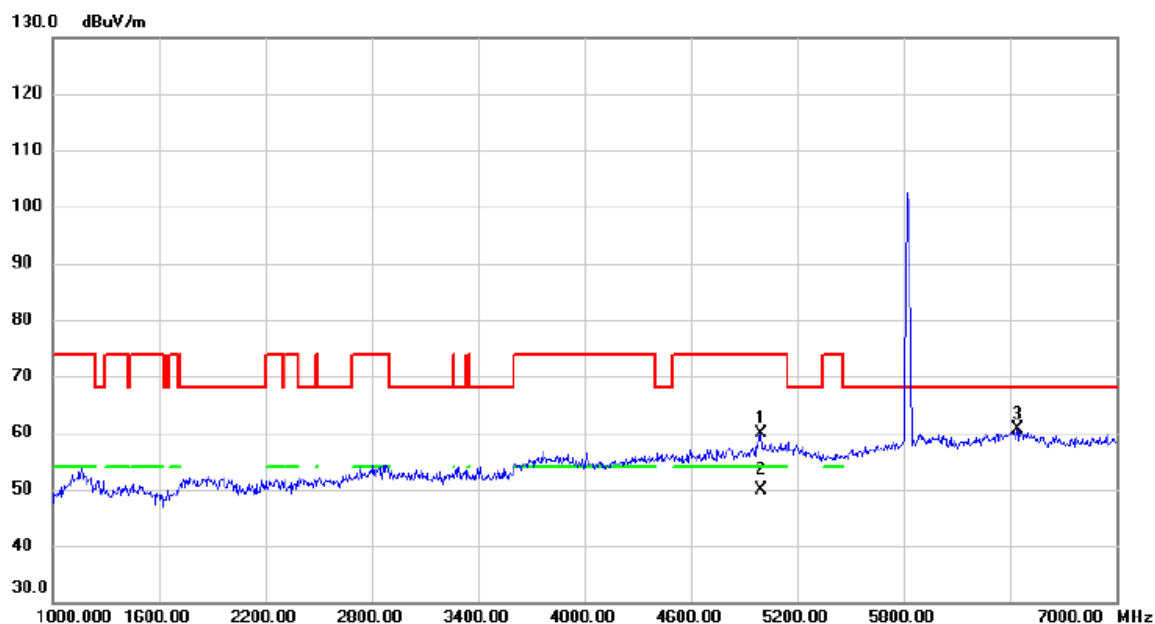


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4996.000	44.10	15.81	59.91	74.00	-14.09	peak	
2	*	4996.000	34.19	15.81	50.00	54.00	-4.00	AVG	
3		6442.000	41.51	19.13	60.64	68.20	-7.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

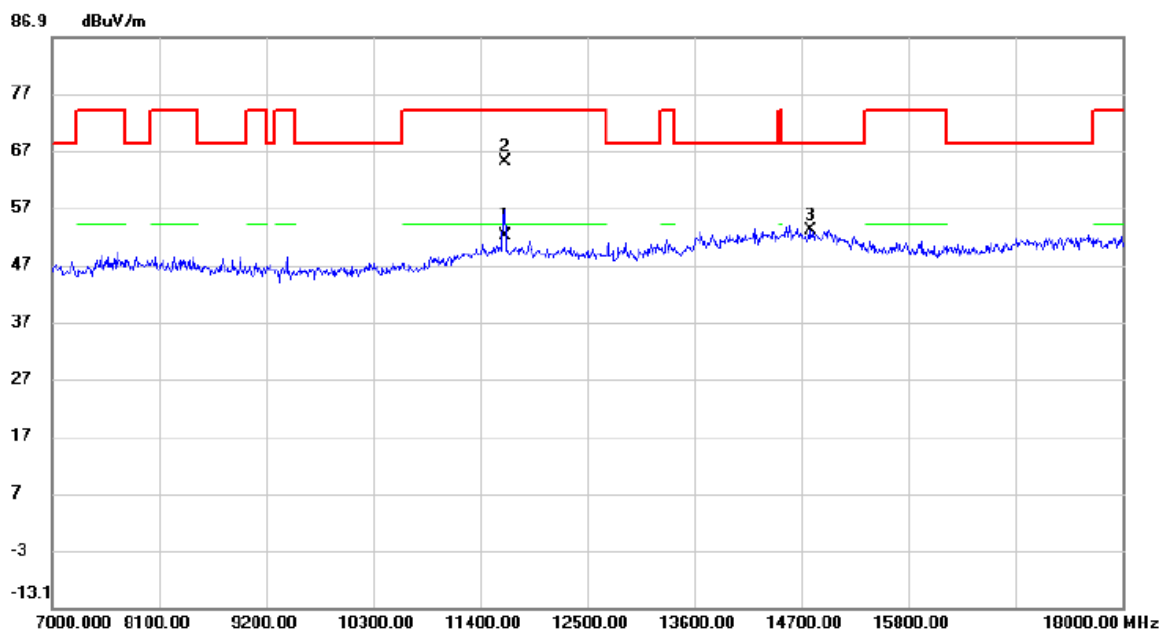


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11650.200	38.27	13.71	51.98	54.00	-2.02	AVG	
2		11652.650	51.39	13.70	65.09	74.00	-8.91	peak	
3		14788.000	39.94	13.15	53.09	68.20	-15.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

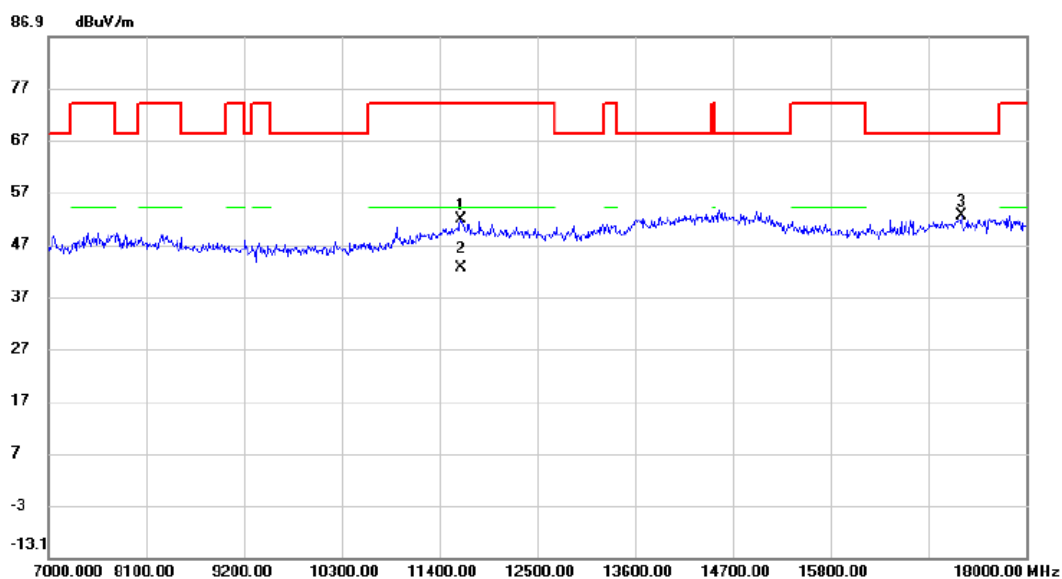

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11642.000	38.01	13.72	51.73	74.00	-22.27	peak	
2	*	11642.000	28.69	13.72	42.41	54.00	-11.59	AVG	
3		17274.000	41.97	10.64	52.61	68.20	-15.59	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	30.000	18.000
40	5200	31.920	17.880
48	5240	32.760	17.880

CH36

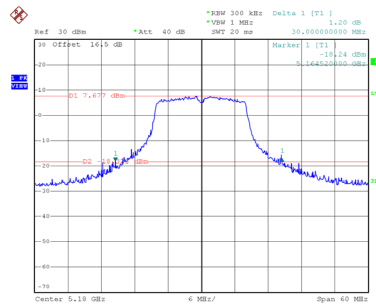


Date: 12.DEC.2025 13:43:18

CH40
26 dB Bandwidth

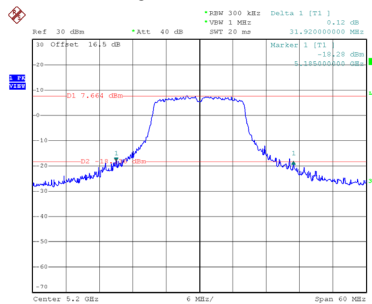


Date: 12.DEC.2025 13:45:05

CH48

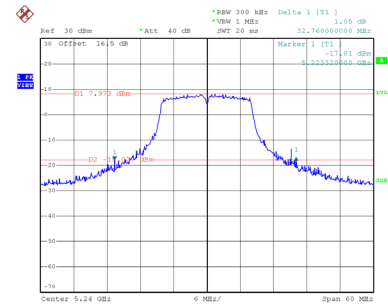


Date: 12.DEC.2025 13:46:14


99 % Occupied Bandwidth

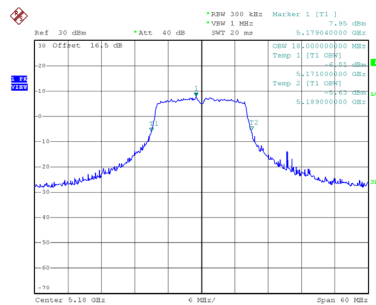

Date: 12.DEC.2025 13:43:31

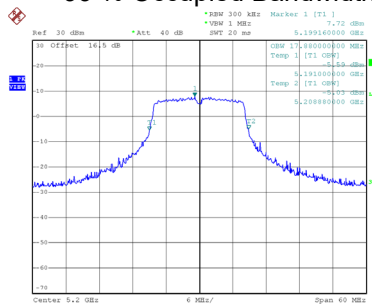

Date: 12.DEC.2025 13:45:18

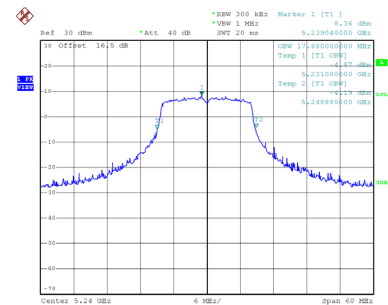


Date: 12.DEC.2025 13:46:27

Test Mode UNII-1_TX AC(VHT20) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	30.840	18.960
40	5200	29.520	18.960
48	5240	29.640	18.960

CH36

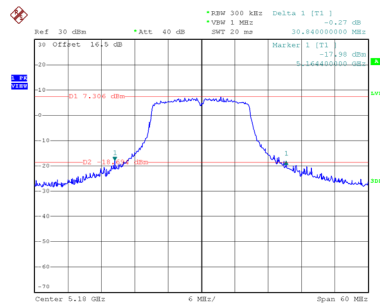


Date: 12.DEC.2025 13:54:00

CH40
26 dB Bandwidth

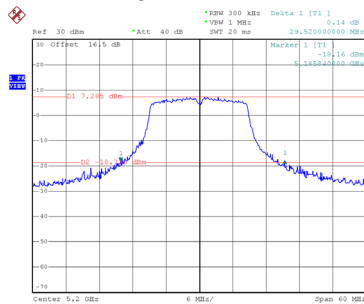


Date: 12.DEC.2025 13:55:21

CH48

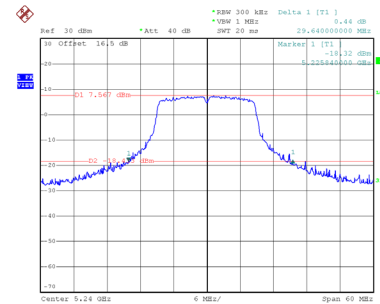


Date: 12.DEC.2025 13:56:30


99 % Occupied Bandwidth

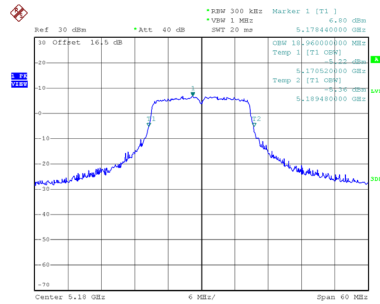

Date: 12.DEC.2025 13:54:13

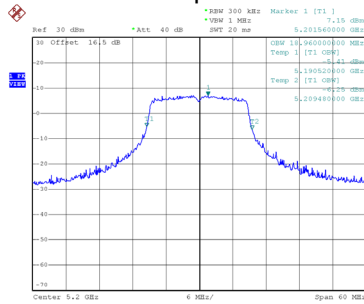

Date: 12.DEC.2025 13:55:34

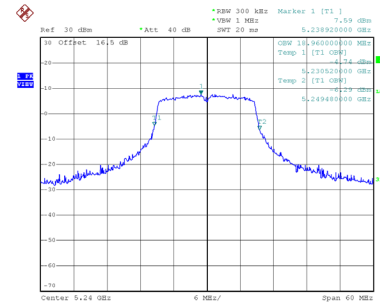


Date: 12.DEC.2025 13:56:43

Test Mode UNII-1_TX AC(VHT40) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	57.600	38.800
46	5230	58.000	39.000

CH38

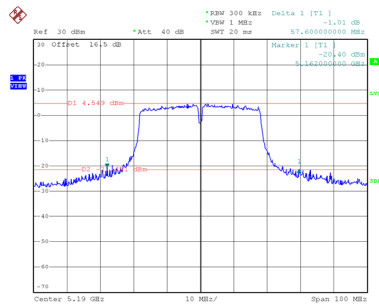


Date: 12.DEC.2025 14:05:02

CH46
26 dB Bandwidth

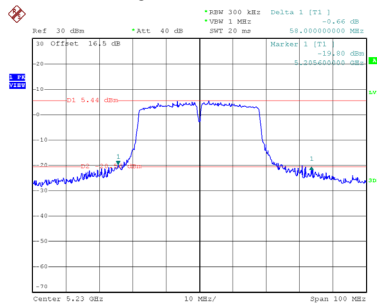


Date: 12.DEC.2025 14:06:18

99 % Occupied Bandwidth

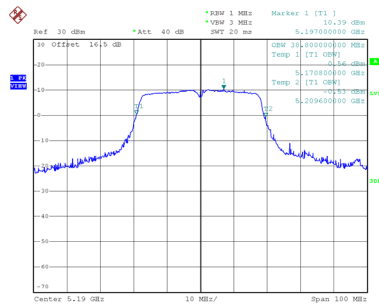

Date: 12.DEC.2025 14:05:15

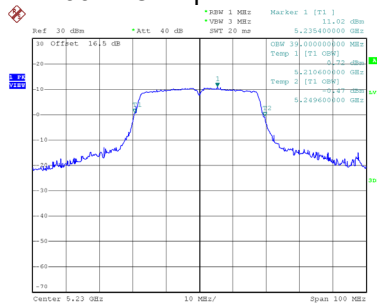


Date: 12.DEC.2025 14:06:31

Test Mode UNII-3_TX A Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	16.440	18.000	0.5	Pass
157	5785	16.440	18.240	0.5	Pass
165	5825	16.440	18.240	0.5	Pass

CH149

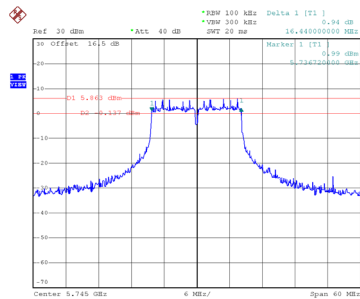


Date: 12.DEC.2025 13:47:32

CH157
6 dB Bandwidth

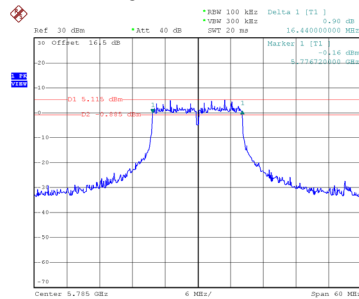


Date: 12.DEC.2025 13:48:32

CH165

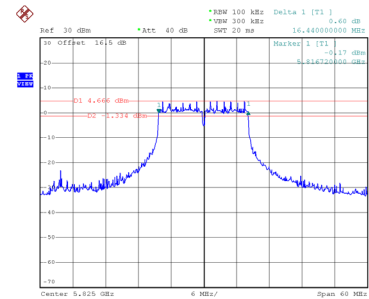


Date: 12.DEC.2025 13:49:44


99 % Occupied Bandwidth

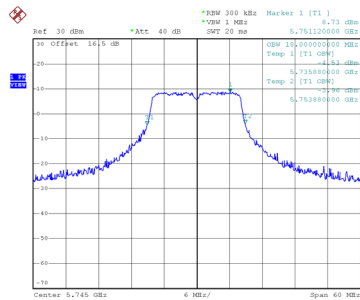

Date: 12.DEC.2025 13:47:45

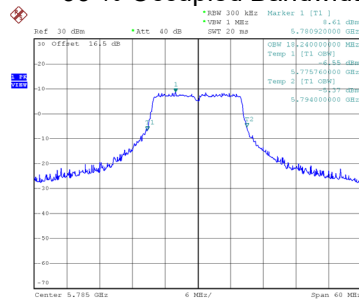

Date: 12.DEC.2025 13:48:45

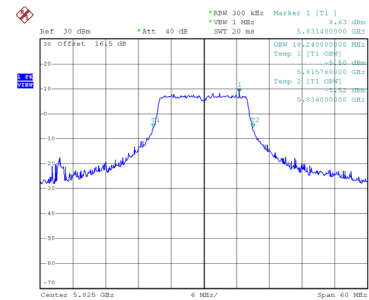


Date: 12.DEC.2025 13:49:57

Test Mode UNII-3_TX AC(VHT20) Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	17.520	18.720	0.5	Pass
157	5785	17.640	18.960	0.5	Pass
165	5825	17.520	19.200	0.5	Pass

CH149

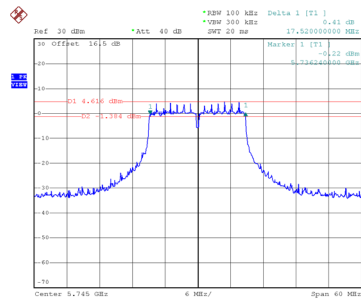


Date: 12.DEC.2025 13:58:36

CH157
6 dB Bandwidth

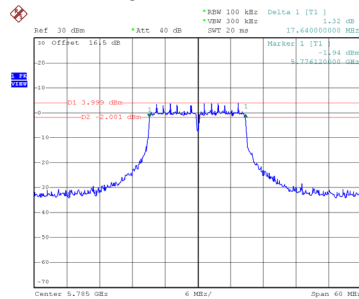


Date: 12.DEC.2025 13:59:27

CH165

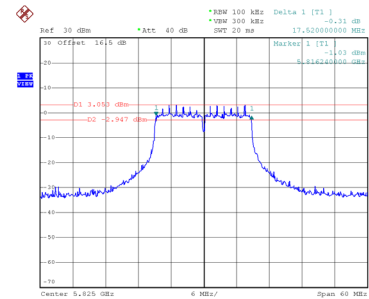


Date: 12.DEC.2025 14:00:37


99 % Occupied Bandwidth

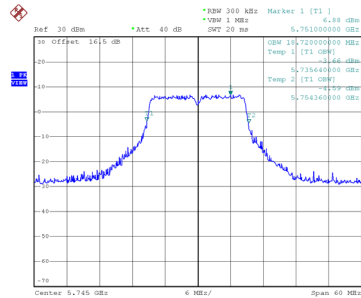

Date: 12.DEC.2025 13:58:49

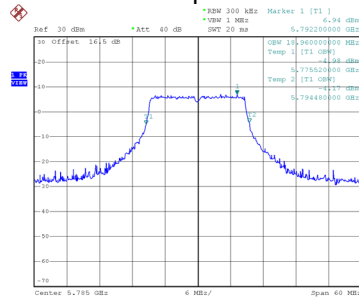

Date: 12.DEC.2025 13:59:41

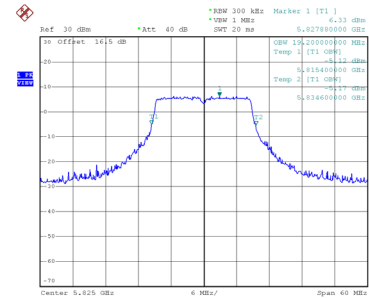


Date: 12.DEC.2025 14:00:50

Test Mode	UNII-3_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
151	5755	36.400	38.800	0.5	Pass
159	5795	36.400	39.200	0.5	Pass

CH151

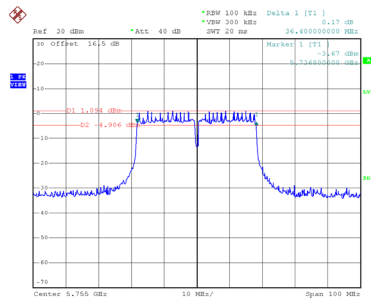


Date: 12.DEC.2025 14:07:22

CH159
6 dB Bandwidth

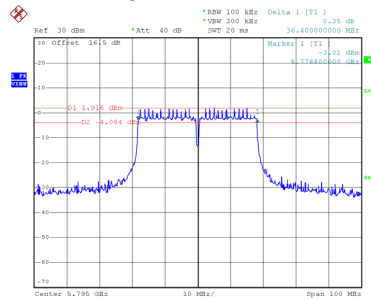


Date: 12.DEC.2025 14:09:07

99 % Occupied Bandwidth

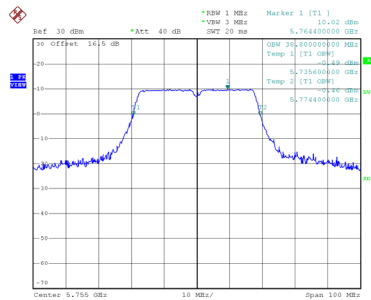

Date: 12.DEC.2025 14:07:35

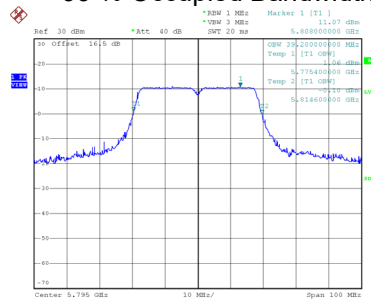

Date: 12.DEC.2025 14:09:20

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	14.97	0.27	15.24	30.00	1.0000	Pass
40	5200	15.12	0.27	15.39	30.00	1.0000	Pass
48	5240	15.46	0.27	15.73	30.00	1.0000	Pass

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	14.92	0.41	15.33	30.00	1.0000	Pass
40	5200	15.01	0.41	15.42	30.00	1.0000	Pass
48	5240	15.33	0.41	15.74	30.00	1.0000	Pass

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	14.39	0.57	14.96	30.00	1.0000	Pass
46	5230	14.03	0.57	14.60	30.00	1.0000	Pass

Test Mode	UNII-3_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	16.56	0.27	16.83	30.00	1.0000	Pass
157	5785	15.92	0.27	16.19	30.00	1.0000	Pass
165	5825	16.04	0.27	16.31	30.00	1.0000	Pass

Test Mode	UNII-3_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.44	0.41	15.85	30.00	1.0000	Pass
157	5785	15.32	0.41	15.73	30.00	1.0000	Pass
165	5825	14.97	0.41	15.38	30.00	1.0000	Pass

Test Mode	UNII-3_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	15.14	0.57	15.71	30.00	1.0000	Pass
159	5795	15.03	0.57	15.60	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss


APPENDIX G - POWER SPECTRAL DENSITY

Test Mode UNII-1_TX A Mode


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor (dB)	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	4.05	0.27	4.32	17.00	Pass
40	5200	4.17	0.27	4.44	17.00	Pass
48	5240	4.34	0.27	4.61	17.00	Pass



Date: 12.DEC.2025 13:43:44

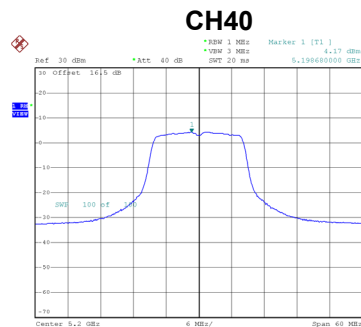

Date: 12.DEC.2025 13:45:31

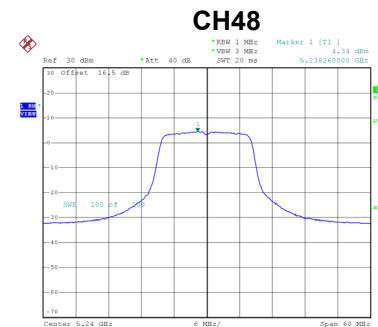

Date: 12.DEC.2025 13:46:40

Test Mode UNII-1_TX AC(VHT20) Mode


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor (dB)	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	3.42	0.41	3.84	17.00	Pass
40	5200	3.73	0.41	4.14	17.00	Pass
48	5240	4.08	0.41	4.49	17.00	Pass



Date: 12.DEC.2025 13:54:26




Date: 12.DEC.2025 13:55:47

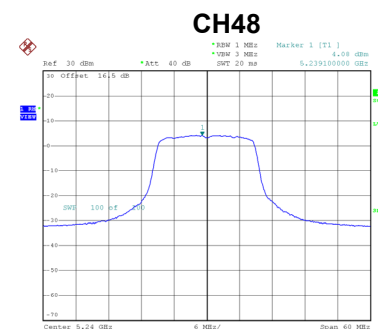


Date: 12.DEC.2025 13:56:56

Test Mode UNII-1_TX AC(VHT40) Mode

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor (dB)	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	0.72	0.57	1.29	17.00	Pass
46	5230	1.17	0.57	1.74	17.00	Pass

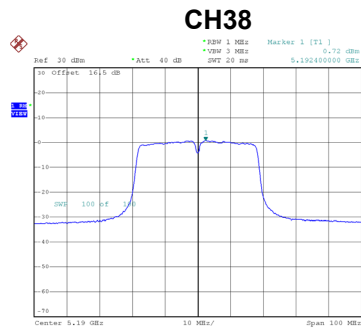

Date: 12.DEC.2025 14:05:29

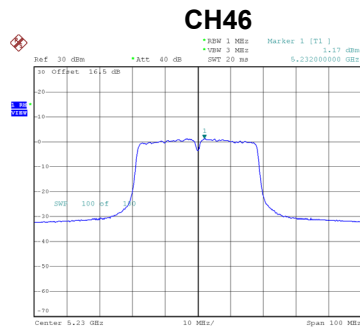


Date: 12.DEC.2025 14:06:44


Test Mode UNII-3_TX A Mode

Channel	Frequency (MHz)	Power Spectral Density (dBm/100 kHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor (dB)	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	-3.37	3.62	0.27	3.89	30.00	Pass
157	5785	-3.86	3.13	0.27	3.40	30.00	Pass
165	5825	-4.41	2.58	0.27	2.85	30.00	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log(500\text{ kHz} / 100\text{ kHz}) = PSD_{dBm/100\text{ kHz}} + 6.99\text{ dB}$

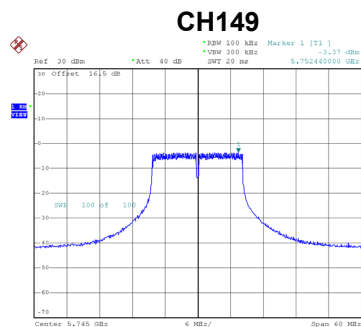

Date: 12.DEC.2025 13:47:58

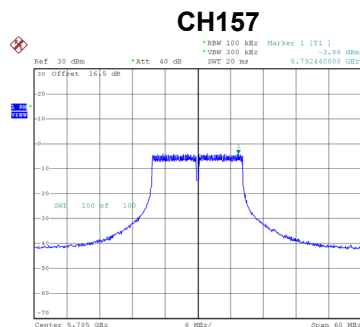

Date: 12.DEC.2025 13:48:59

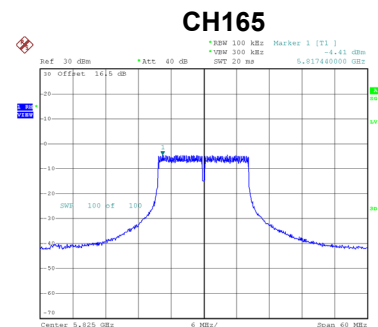


Date: 12.DEC.2025 13:50:11


Test Mode UNII-3_TX AC(VHT20) Mode

Channel	Frequency (MHz)	Power Spectral Density (dBm/100 kHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor (dB)	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	-5.65	1.34	0.41	1.75	30.00	Pass
157	5785	-6.33	0.66	0.41	1.07	30.00	Pass
165	5825	-5.99	1.00	0.41	1.41	30.00	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log(500\text{ kHz} / 100\text{ kHz}) = PSD_{dBm/100\text{ kHz}} + 6.99\text{ dB}$

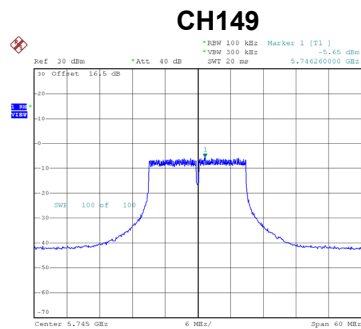

Date: 12.DEC.2025 13:59:02

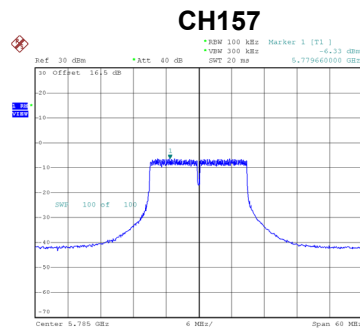

Date: 12.DEC.2025 13:59:54

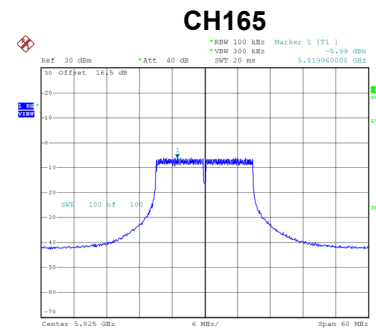


Date: 12.DEC.2025 14:01:04


Test Mode UNII-3_TX AC(VHT40) Mode

Channel	Frequency (MHz)	Power Spectral Density (dBm/100 kHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor (dB)	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	-8.18	-1.19	0.57	-0.61	30.00	Pass
159	5795	-7.40	-0.41	0.57	0.17	30.00	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log(500\text{ kHz} / 100\text{ kHz}) = PSD_{dBm/100\text{ kHz}} + 6.99\text{ dB}$

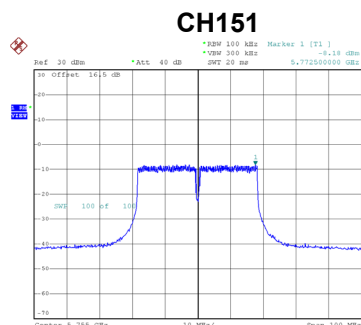

Date: 12.DEC.2025 14:07:49

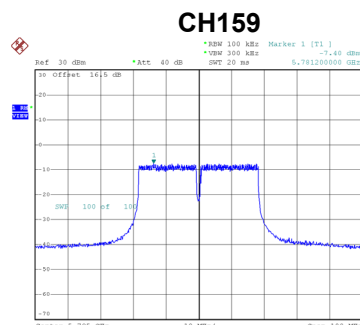

Date: 12.DEC.2025 14:09:33

APPENDIX H - FREQUENCY STABILITY

Test Mode	UNII-1
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5180.0000
138.00	5179.9600
120.00	5179.9600
102.00	5179.9600
Maximum Deviation (MHz)	-0.0400
Maximum Deviation (ppm)	-7.7220

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5180.0000
0.00	5179.9600
10.00	5179.9600
20.00	5179.9600
30.00	5179.9800
35.00	5179.9600
Maximum Deviation (MHz)	-0.0400
Maximum Deviation (ppm)	-7.7220

Test Mode	UNII-3
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5745.0000
138.00	5744.9400
120.00	5744.9400
102.00	5744.9600
Maximum Deviation (MHz)	-0.0600
Maximum Deviation (ppm)	-10.4439

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5745.0000
0.00	5744.9800
10.00	5744.9600
20.00	5744.9400
30.00	5744.9800
35.00	5744.9600
Maximum Deviation (MHz)	-0.0600
Maximum Deviation (ppm)	-10.4439

End of Test Report