

TEST REPORT

Application No.: SUCR2510001027WM
Applicant: CROSSCALL
Address of Applicant: 245, Rue Paul Langevin 13290, Aix-en-Provence, France
Manufacturer: CROSSCALL
Address of Manufacturer: 245, Rue Paul Langevin 13290, Aix-en-Provence, France
Equipment Under Test (EUT):
EUT Name: Mobile phone
Model No.: 54237-1
Trade Mark: CROSSCALL
FCC ID: 2BSUT-54237
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2025-10-22
Date of Test: 2025-12-10 to 2026-01-14
Date of Issue: 2026-01-29

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Revision Record			
Version	Description	Date	Remark
00	Original	2026-01-29	/

Authorized for issue by:			
Tested By		Nature Shen	
		Nature Shen/Project Engineer	
Approved By		Cedar cheng	
		Cedar Cheng /Reviewer	



2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4-2014 +C63.4a-2017	15.107(a);Class B	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.4-2014 +C63.4a-2017	15.109(a);Class B	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.4-2014 +C63.4a-2017	15.109(g);Class B	Pass

Remark: The product is equipped with two memory options: Sample 1 (Samsung KM5P9001DM-B424_P03\TP\JK\ROH) and Sample 2 (Kingston 64UM32-M4GTY7B_GA04). It has been evaluated that the change of memory configuration will not have a material impact on the RF/EMC performance of the product. For Sample 2, the EMC test was performed by verifying the Worst Case scenario already confirmed with Sample 1, and the test results indicate compliance with relevant regulatory requirements.



Report No.: SUCR251000102701

Page: 4 of 30

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty & Decision Rule	5
4.4 Test Location	6
4.5 Test Facility	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions.....	6
5 Equipment List	7
6 Emission Test Results.....	8
6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz).....	8
6.2 Radiated Emissions (30MHz-1GHz)	14
6.3 Radiated Emissions (Above 1GHz).....	22
7 Test Setup Photo	30
8 EUT Constructional Details (EUT Photos).....	30



Report No.: SUCR251000102701

Page: 5 of 30

4 General Information

4.1 Details of E.U.T.

Power supply:	5V
---------------	----

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smauwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.3 Measurement Uncertainty & Decision Rule

Test Item	Measurement Uncertainty
Conducted Emissions (9kHz-150KHz)	$\pm 2.4\text{dB}$
Conducted Emissions (150kHz-30MHz)	$\pm 2.9\text{dB}$
Conducted Emission at telecommunication port using AAN	$\pm 4.0\text{ dB}$
Radiated Emissions (30MHz-1GHz)	$\pm 4.8\text{dB}$
Radiated Emissions (Above 1GHz)	$\pm 4.8\text{dB}$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2025/1/15	2026/1/14
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2025/2/13	2026/2/12
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2025/5/8	2026/5/7
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2025/5/8	2026/5/7
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2025/2/13	2026/2/12
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2025/1/15	2026/1/14
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	2024/8/22	2026/8/21
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2025/1/16	2026/1/15
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2025/2/13	2026/2/12
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2025/1/20	2026/1/19
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/5/7	2027/5/6
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/5/7	2027/5/6
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2025/1/16	2026/1/15
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2025/1/20	2026/1/19
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4-2014 +C63.4a-2017

Limit:

0.15MHz-0.5MHz: 66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5MHz-5MHz: 56dB(μV) quasi-peak, 46dB(μV) average
5MHz-30MHz: 60dB(μV) quasi-peak, 50dB(μV) average
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


6.1.1 E.U.T. Operation

Operating Environment:
Temperature: 23 °C Humidity: 44 % RH Atmospheric Pressure: 1001 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+WCDMA Band 5(RX)Low
Pre-scan	01	Sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+LTE Band 5 (RX) Mid
Pre-scan	02	Sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+MP4+LTE Band 12 (RX) High
Pre-scan	03	Sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+NFC ON+LTE Band 14 (RX) Low
Pre-scan	04	Sample(1)+adapter+usb Cable+BT(Idle)+GNSS+2.4GWLAN(Idle)+GNSS+LTE Band 17 (RX) Mid
Pre-scan	05	Sample(1)+Transfer data between the EUT and the PC via USB port
Final test	06	Sample(2)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+WCDMA Band 5(RX)Low

6.1.3 Test Setup Diagram

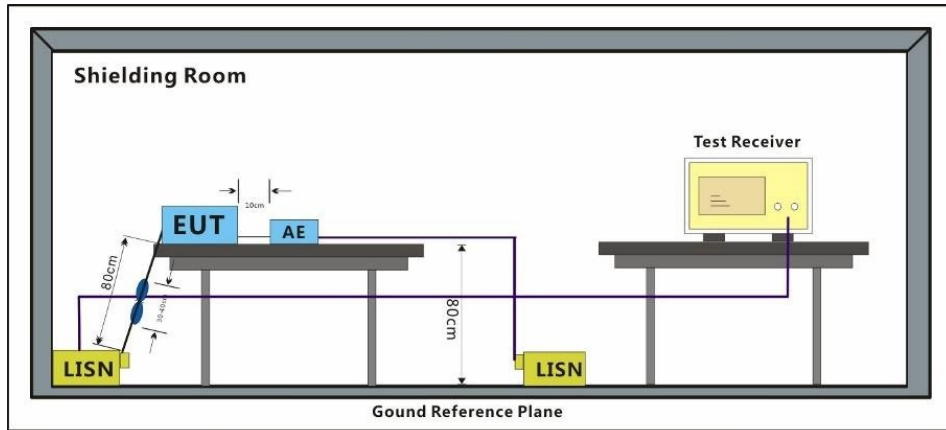


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Remark : $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$


Test Mode: 00; Line: Live line

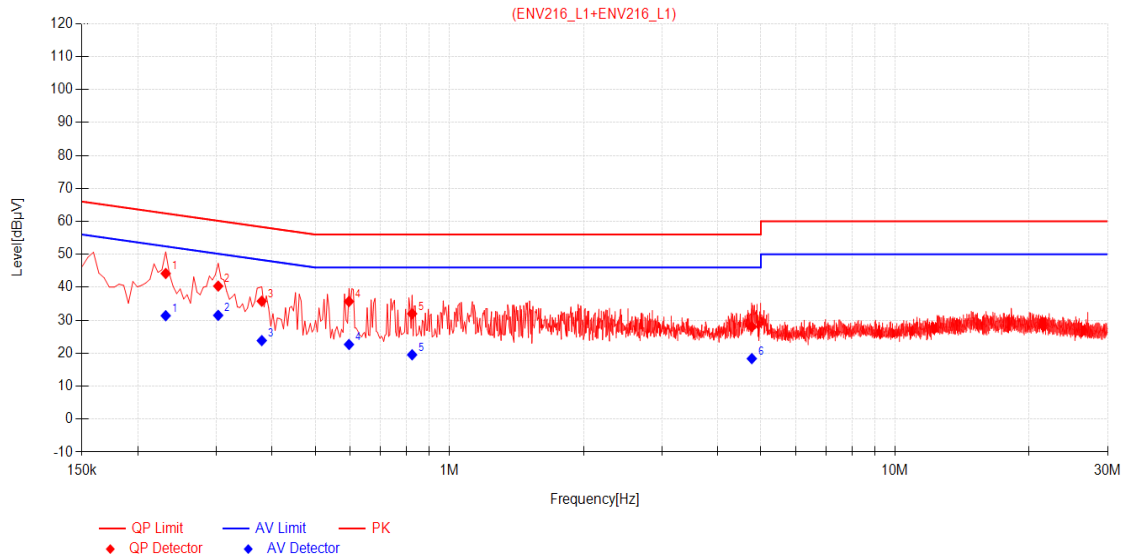

Final Data List

NO.	Frequency [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2310	44.19	62.41	18.22	31.37	52.41	21.04	PASS
2	0.3030	40.36	60.16	19.80	31.48	50.16	18.68	PASS
3	0.3795	35.78	58.29	22.51	23.83	48.29	24.46	PASS
4	0.5955	35.69	56.00	20.31	22.65	46.00	23.35	PASS
5	0.8250	31.98	56.00	24.02	19.52	46.00	26.48	PASS
6	4.7715	28.07	56.00	27.93	18.36	46.00	27.64	PASS


Test Mode: 00; Line: Neutral Line

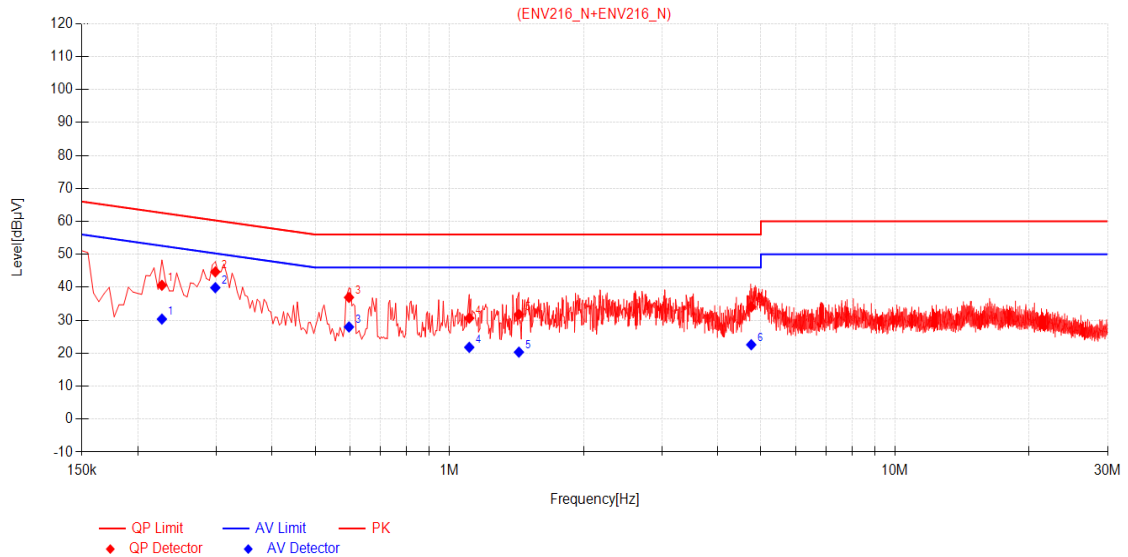

Final Data List

NO.	Frequency [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2265	40.60	62.58	21.98	30.35	52.58	22.23	PASS
2	0.2985	44.68	60.28	15.60	39.88	50.28	10.40	PASS
3	0.5955	36.93	56.00	19.07	27.96	46.00	18.04	PASS
4	1.1085	30.64	56.00	25.36	21.79	46.00	24.21	PASS
5	1.4325	31.78	56.00	24.22	20.33	46.00	25.67	PASS
6	4.7580	34.06	56.00	21.94	22.57	46.00	23.43	PASS

Test Mode: 06; Line: Live line

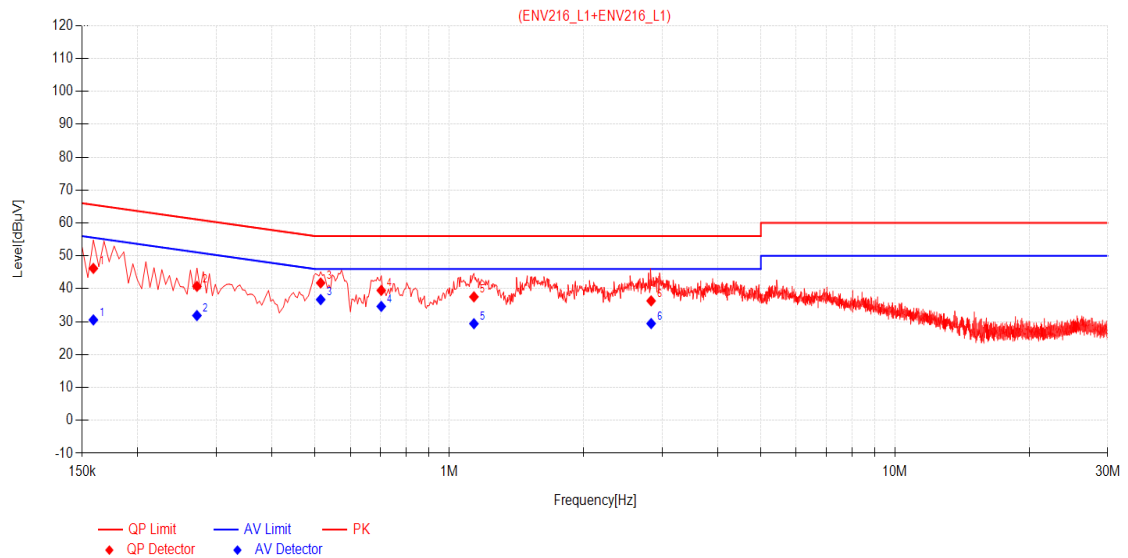


Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBuV]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Reading [dBuV]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]	Verdict
1	0.1590	9.96	36.23	46.19	65.52	19.33	20.58	30.54	55.52	24.98	PASS
2	0.2715	9.97	30.77	40.74	61.07	20.33	21.89	31.86	51.07	19.21	PASS
3	0.5145	9.93	31.83	41.76	56.00	14.24	26.78	36.71	46.00	9.29	PASS
4	0.7035	9.95	29.56	39.51	56.00	16.49	24.69	34.64	46.00	11.36	PASS
5	1.1355	9.94	27.61	37.55	56.00	18.45	19.45	29.39	46.00	16.61	PASS
6	2.8365	10.34	25.98	36.32	56.00	19.68	19.09	29.43	46.00	16.57	PASS



Test Mode: 00; Line: Neutral Line

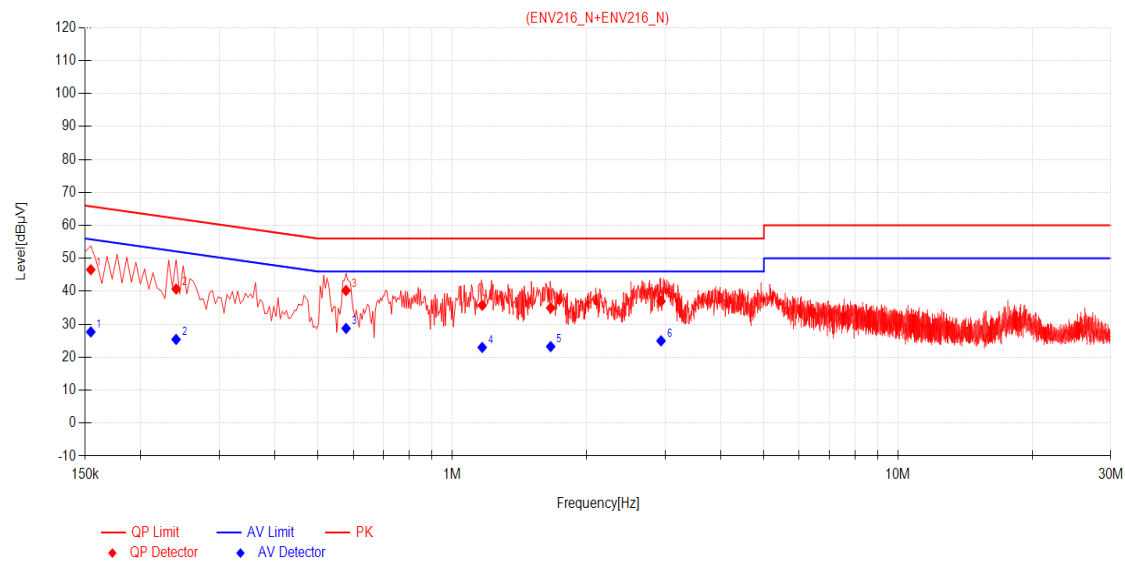

Final Data List											
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1545	9.96	36.57	46.53	65.75	19.22	17.71	27.67	55.75	28.08	PASS
2	0.2400	9.98	30.71	40.69	62.10	21.41	15.42	25.40	52.10	26.70	PASS
3	0.5775	9.91	30.32	40.23	56.00	15.77	18.84	28.75	46.00	17.25	PASS
4	1.1670	9.91	25.82	35.73	56.00	20.27	13.05	22.96	46.00	23.04	PASS
5	1.6620	9.92	25.04	34.96	56.00	21.04	13.32	23.24	46.00	22.76	PASS
6	2.9400	10.38	26.60	36.98	56.00	19.02	14.58	24.96	46.00	21.04	PASS

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4-2014 +C63.4a-2017
Measurement Distance: 3m

Limit:

Class B

Test Distance: 3m
30MHz -88MHz 40.0(dBμV/m) quasi-peak
88MHz-216MHz 43.5(dBμV/m) quasi-peak
216MHz-960MHz 46.0(dBμV/m) quasi-peak
960MHz-1000MHz 54.0(dBμV/m) quasi-peak
Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

Class B

Test Distance: 10m
30MHz -88MHz 29.5(dBμV/m) quasi-peak
88MHz-216MHz 33.1(dBμV/m) quasi-peak
216MHz-960MHz 35.6(dBμV/m) quasi-peak
960MHz-1000MHz 43.5(dBμV/m) quasi-peak
Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 44 % RH Atmospheric Pressure: 1001 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+WCDMA Band 5(RX)Low
Pre-scan	01	Sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+LTE Band 5 (RX) Mid
Pre-scan	02	Sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+MP4+LTE Band 12 (RX) High
Pre-scan	03	Sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+NFC ON+LTE Band 14 (RX) Low
Pre-scan	04	Sample(1)+adapter+usb Cable+BT(Idle)+GNSS+2.4GWLAN(Idle)+GNSS+LTE Band 17 (RX) Mid
Final test	05	Sample(1)+Transfer data between the EUT and the PC via USB port
Final test	06	Sample(2)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+WCDMA Band 5(RX)Low

6.2.3 Test Setup Diagram

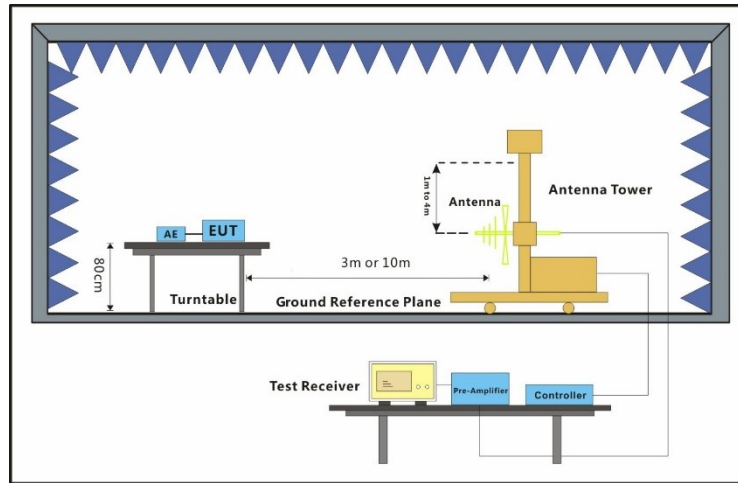


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Test Mode: 00; Polarity: Horizontal

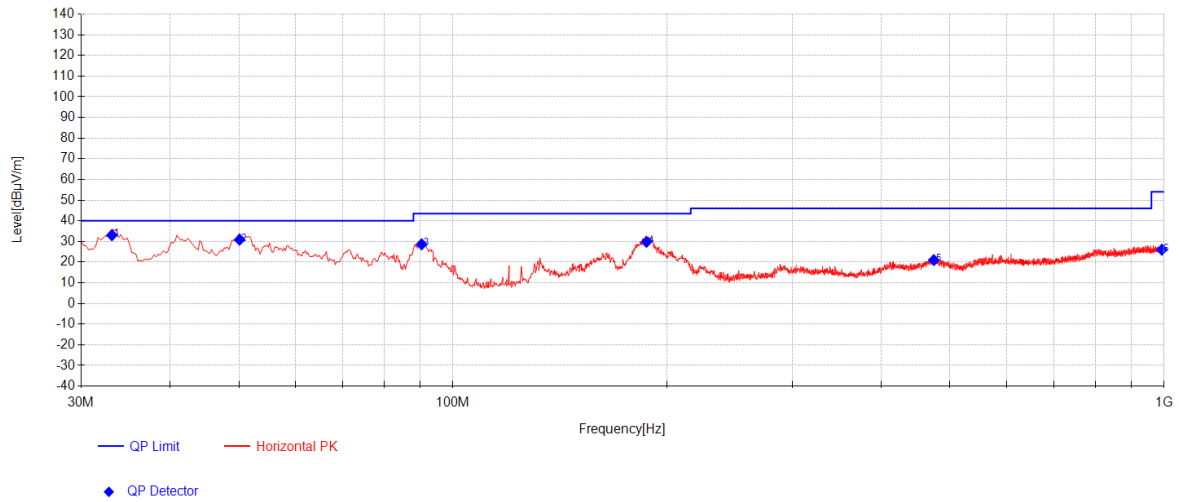

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.1525	54.32	12.69	-33.98	33.03	40.00	6.97	153	7	Horizontal
2	50.1275	51.05	13.48	-33.69	30.85	40.00	9.15	192	163	Horizontal
3	90.3825	52.97	8.91	-33.25	28.63	43.50	14.87	172	215	Horizontal
4	187.14	51.78	10.38	-32.34	29.82	43.50	13.68	158	184	Horizontal
5	474.5025	34.66	16.99	-30.69	20.97	46.00	25.03	162	132	Horizontal
6	992.725	29.44	24.44	-27.88	26.00	54.00	28.00	171	235	Horizontal


Test Mode: 00; Polarity: Vertical

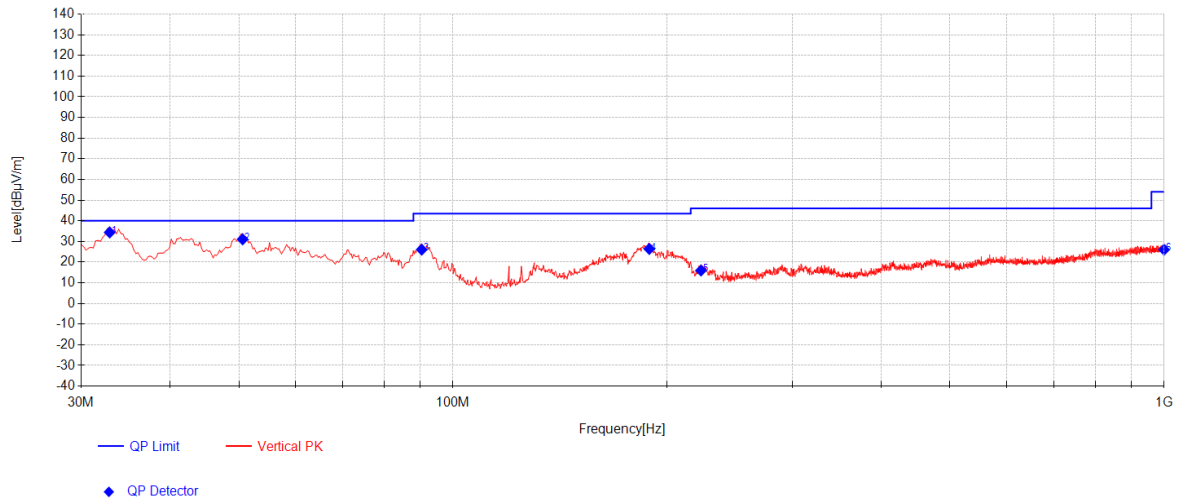

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	55.69	12.67	-33.98	34.38	40.00	5.62	133	21	Vertical
2	50.6125	51.31	13.43	-33.68	31.05	40.00	8.95	172	155	Vertical
3	90.3825	50.4	8.91	-33.25	26.06	43.50	17.44	186	240	Vertical
4	188.8375	48.43	10.30	-32.34	26.40	43.50	17.10	142	207	Vertical
5	223.2725	37.44	10.65	-32.12	15.96	46.00	30.04	183	207	Vertical
6	1000	29.34	24.50	-27.80	26.04	54.00	27.96	146	155	Vertical


Test Mode: 05; Polarity: Horizontal

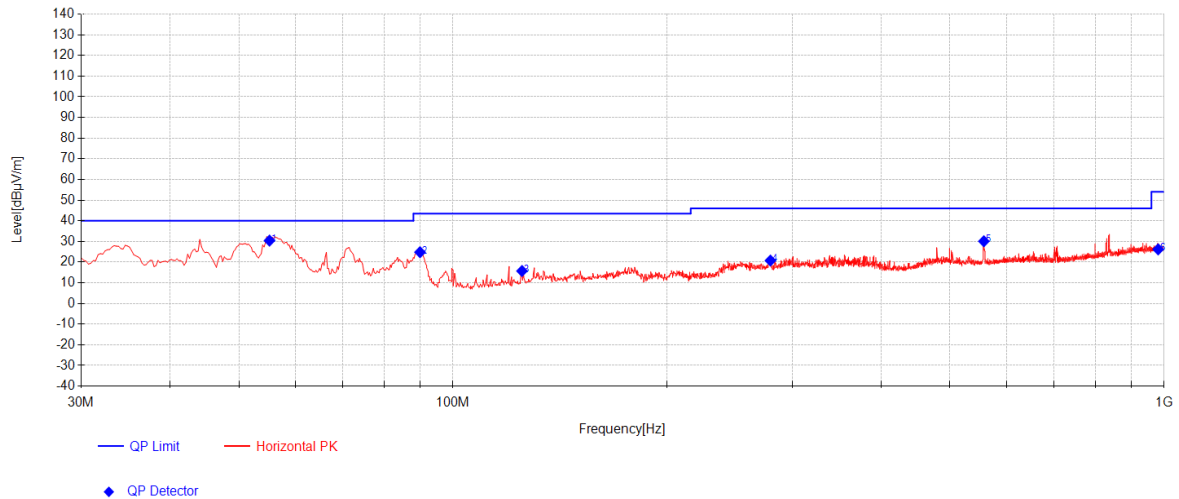

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.22	51.17	12.87	-33.62	30.42	40.00	9.58	135	0	Horizontal
2	89.8975	49.16	8.90	-33.26	24.80	43.50	18.70	176	203	Horizontal
3	125.06	36.78	11.80	-32.88	15.71	43.50	27.79	188	224	Horizontal
4	279.5325	40.12	12.38	-31.74	20.76	46.00	25.24	147	167	Horizontal
5	557.9225	41.55	18.79	-30.24	30.10	46.00	15.90	162	328	Horizontal
6	981.085	29.81	24.35	-27.97	26.19	54.00	27.81	138	114	Horizontal


Test Mode: 05; Polarity: Vertical

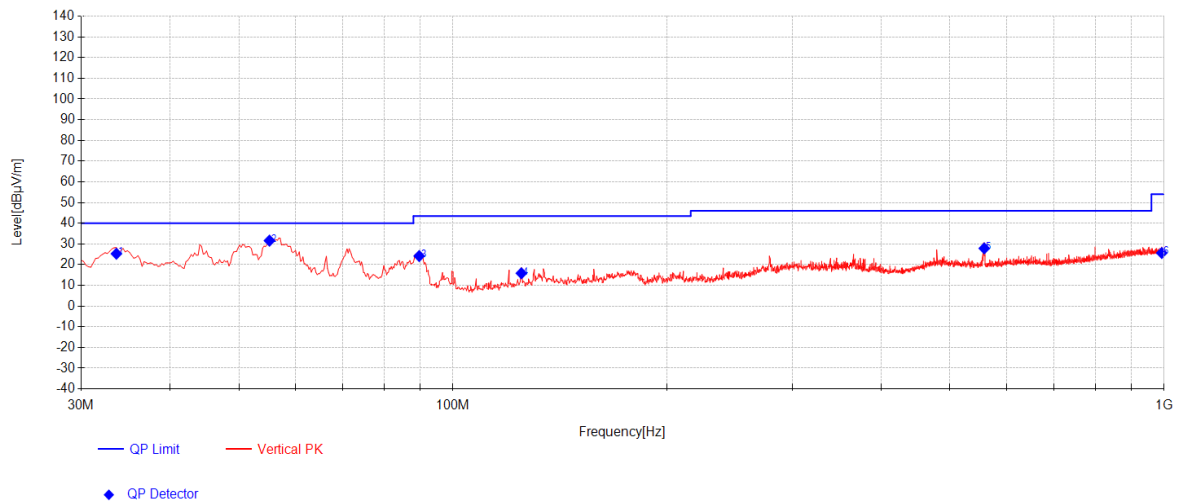

Final Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.6375	46.52	12.72	-33.97	25.27	40.00	14.73	132	227	Vertical
2	55.22	52.35	12.87	-33.62	31.60	40.00	8.40	148	359	Vertical
3	89.655	48.52	8.91	-33.26	24.17	43.50	19.33	182	186	Vertical
4	124.8175	36.93	11.79	-32.88	15.84	43.50	27.66	192	311	Vertical
5	558.65	39.3	18.81	-30.24	27.87	46.00	18.13	138	311	Vertical
6	992.4825	29.08	24.44	-27.88	25.64	54.00	28.36	186	207	Vertical

Test Mode: 06; Polarity: Horizontal

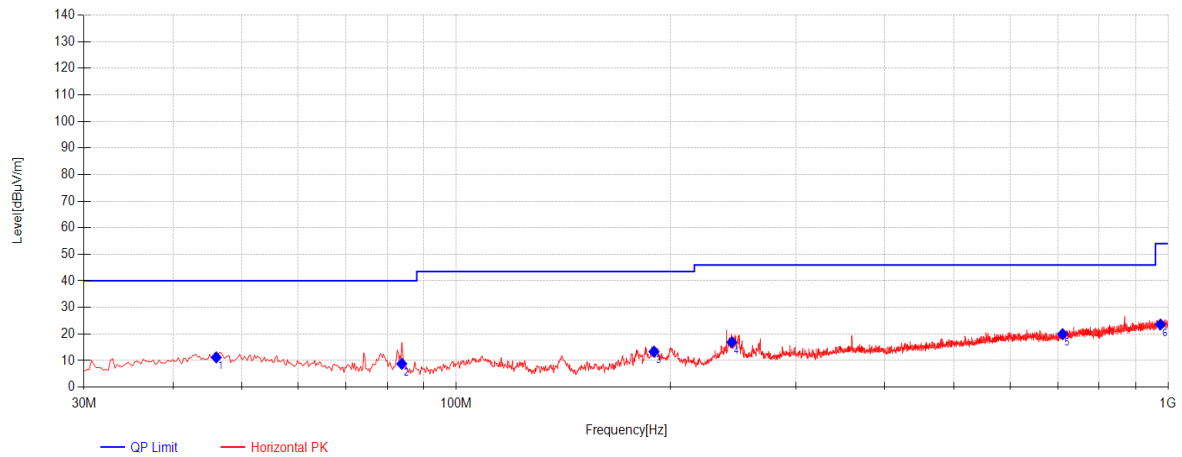

Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.005	37.94	14.30	-41.06	11.18	40.00	28.82	137	78	Horizontal
2	83.835	40.15	9.15	-40.52	8.78	40.00	31.22	126	176	Horizontal
3	189.565	42.13	10.60	-39.36	13.37	43.50	30.13	155	191	Horizontal
4	243.885	43.01	12.58	-38.68	16.91	46.00	29.09	140	176	Horizontal
5	710.94	36.87	18.66	-35.60	19.93	46.00	26.07	168	109	Horizontal
6	975.75	35.63	21.73	-33.78	23.58	54.00	30.42	119	257	Horizontal

Test Mode: 06; Polarity: Vertical

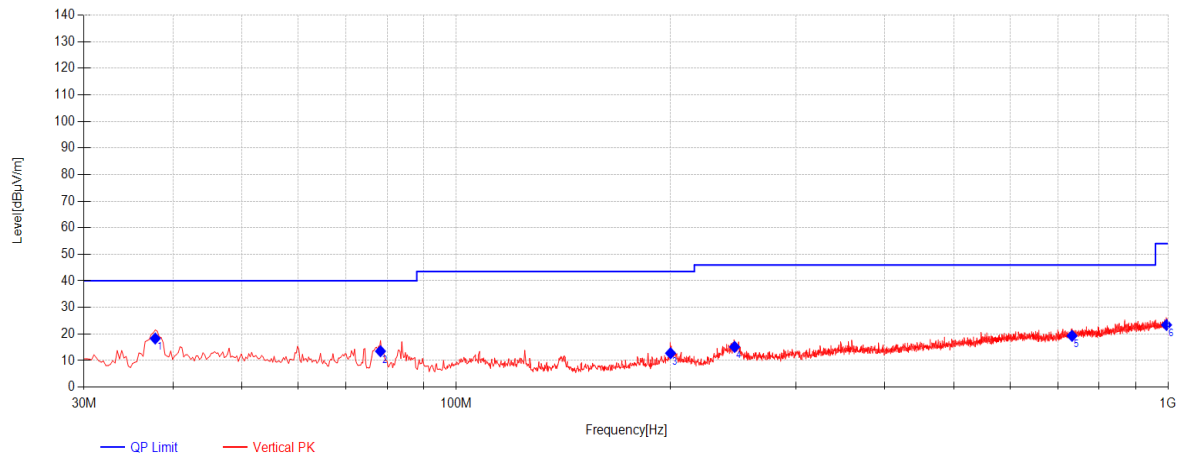

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.76	47.15	12.38	-41.23	18.30	40.00	21.70	106	105	Vertical
2	78.2575	45.81	8.33	-40.62	13.52	40.00	26.48	133	119	Vertical
3	199.9925	35.57	16.47	-39.27	12.77	43.50	30.73	121	196	Vertical
4	246.0675	41.2	12.60	-38.65	15.15	46.00	30.85	157	173	Vertical
5	733.0075	35.16	19.56	-35.42	19.30	46.00	26.70	148	234	Vertical
6	995.15	35.14	22.00	-33.74	23.40	54.00	30.60	173	211	Vertical

6.3 Radiated Emissions (Above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
Test Method: ANSI C63.4-2014 +C63.4a-2017
Measurement Distance: 3m

Limit:

Class B

Above 1GHz 74(dBμV/m) peak, 54(dBμV/m) average

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to18000MHz

6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 43 % RH Atmospheric Pressure: 1001 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+WCDMA Band 5(RX)Low
Pre-scan	01	Sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+LTE Band 5 (RX) Mid
Pre-scan	02	Sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+MP4+LTE Band 12 (RX) High
Pre-scan	03	Sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+NFC ON+LTE Band 14 (RX) Low
Pre-scan	04	Sample(1)+adapter+usb Cable+BT(Idle)+GNSS+2.4GWLAN(Idle)+GNSS+LTE Band 17 (RX) Mid
Final test	05	Sample(1)+Transfer data between the EUT and the PC via USB port
Final test	06	Sample(2)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+WCDMA Band 5(RX)Low

6.3.3 Test Setup Diagram

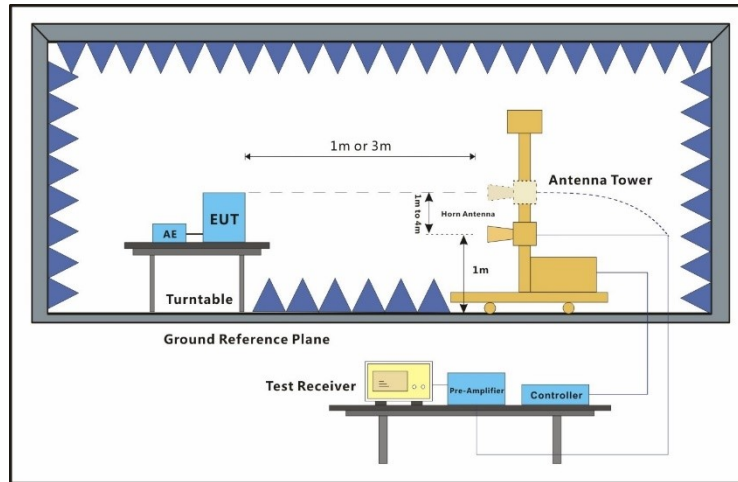


6.3.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.


Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Test Mode: 00; Polarity: Horizontal

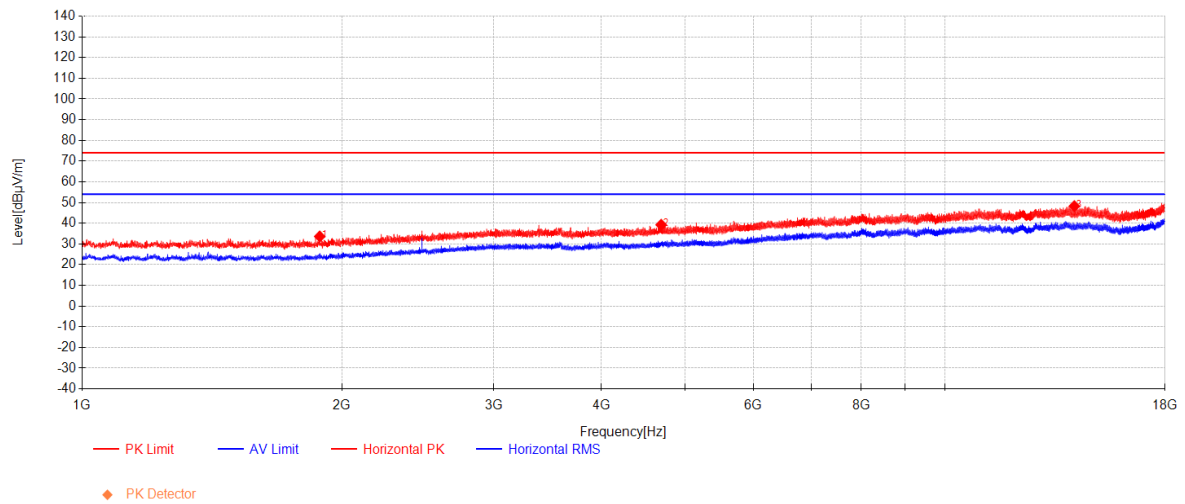


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1885.7	57.17	25.51	-49.06	33.62	74.00	40.38	Horizontal
2	4690.275	51.99	32.36	-45.11	39.24	74.00	34.76	Horizontal
3	14128.675	43.45	40.32	-35.53	48.24	74.00	25.76	Horizontal

Test Mode: 00; Polarity: Vertical

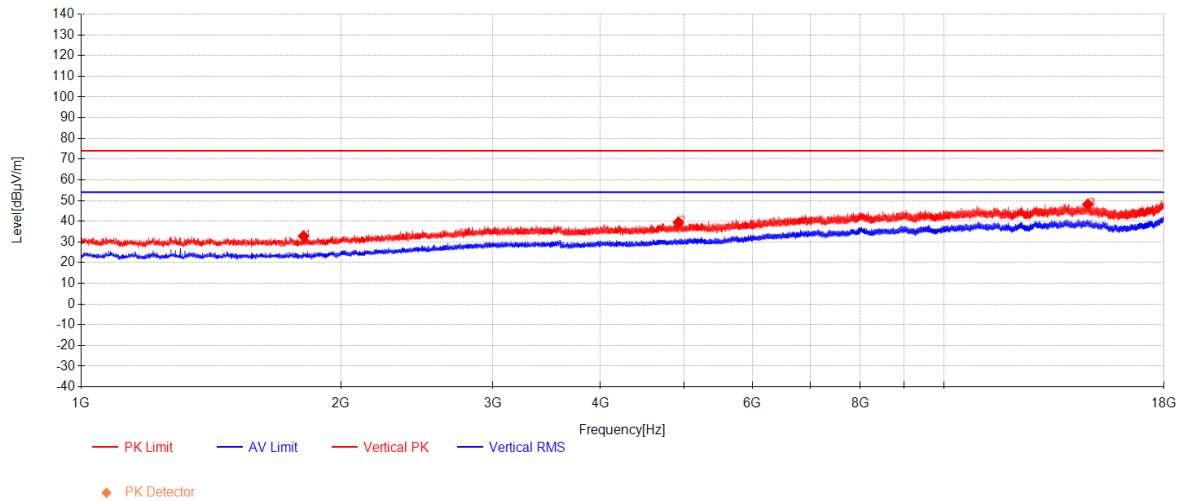


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1810.9	56.72	25.07	-49.03	32.75	74.00	41.25	Vertical
2	4924.875	51.62	32.92	-45.06	39.48	74.00	34.52	Vertical
3	14689.25	42.12	39.99	-33.95	48.16	74.00	25.84	Vertical

Test Mode: 05; Polarity: Horizontal

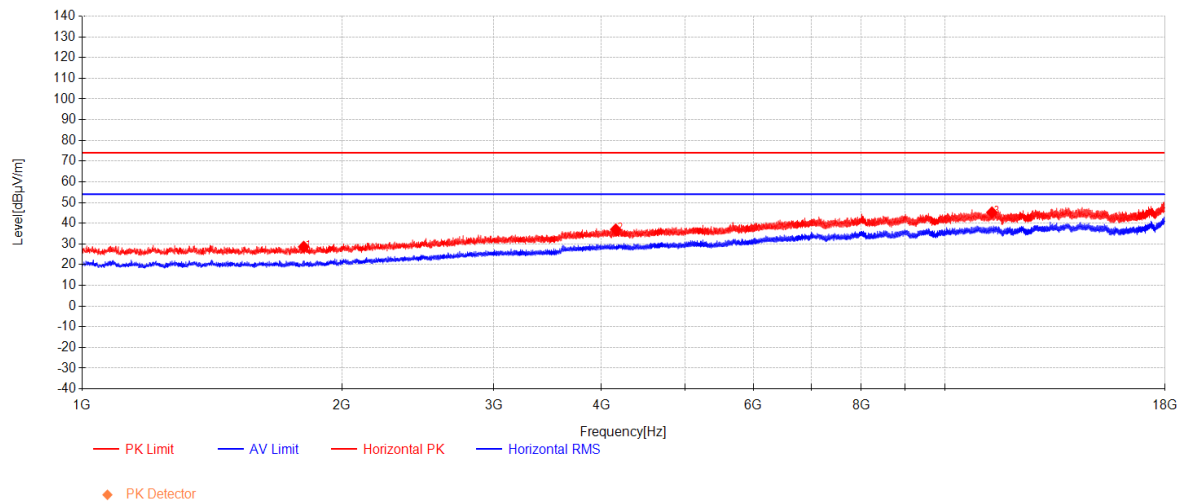

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1806.65	52.63	25.04	-49.03	28.64	74.00	45.36	Horizontal
2	4155.2	50.93	31.35	-45.26	37.01	74.00	36.99	Horizontal
3	11339.4	42.30	39.10	-36.17	45.23	74.00	28.77	Horizontal


Test Mode: 05; Polarity: Vertical

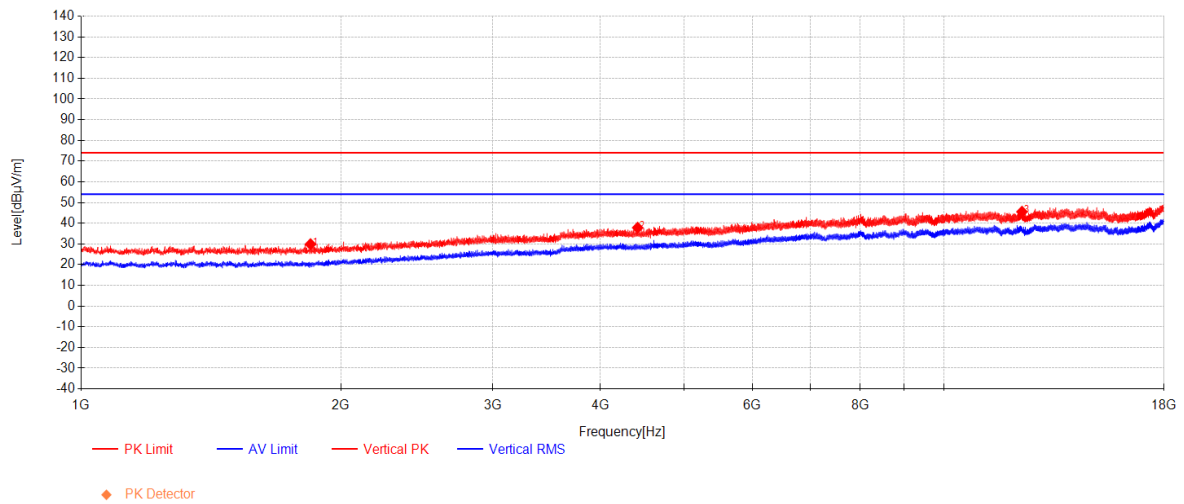

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1844.9	53.65	25.27	-49.05	29.87	74.00	44.13	Vertical
2	4417	51.59	31.77	-45.52	37.84	74.00	36.16	Vertical
3	12319.45	41.25	39.08	-34.81	45.53	74.00	28.47	Vertical




Test Mode: 06; Polarity: Horizontal

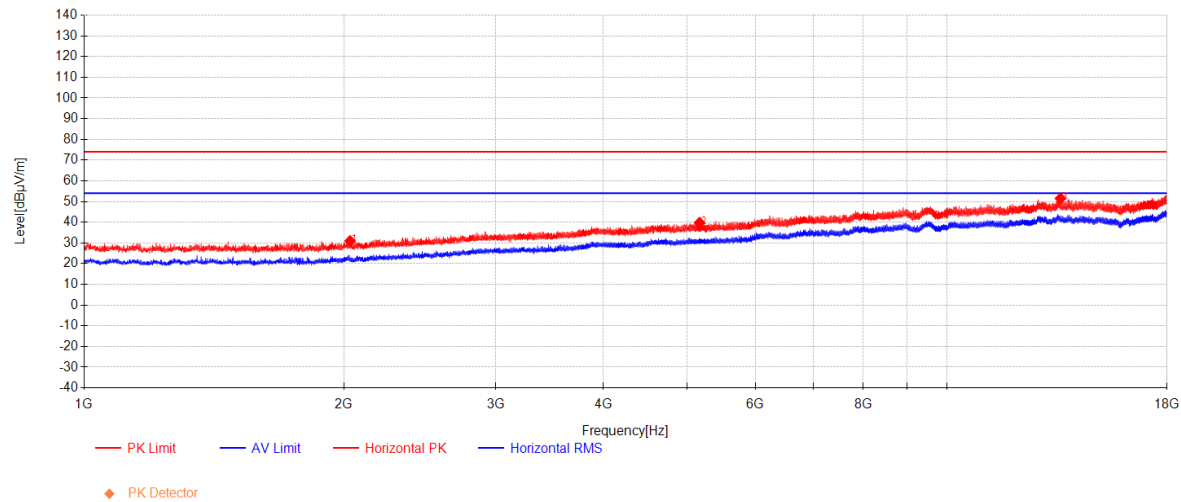

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2033.6	53.36	26.29	-48.71	30.94	74.00	43.06	Horizontal
2	5168.4	51.73	33.07	-45.04	39.75	74.00	34.25	Horizontal
3	13540.9	46.18	40.17	-34.86	51.49	74.00	22.51	Horizontal



Test Mode: 06; Polarity: Vertical

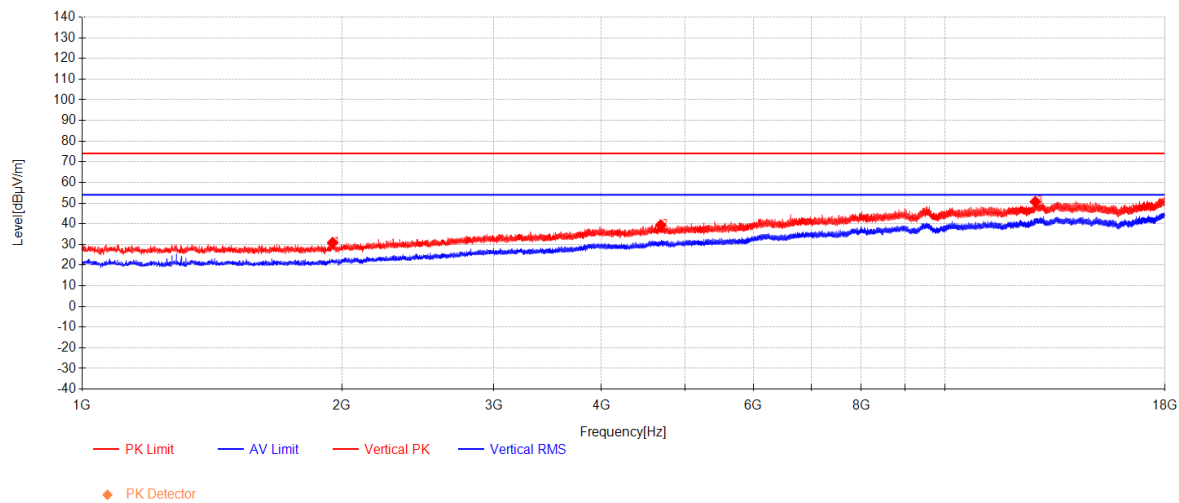

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1951.575	53.78	25.91	-48.87	30.82	74.00	43.18	Vertical
2	4684.75	52.10	32.34	-45.12	39.33	74.00	34.67	Vertical
3	12732.125	46.11	39.58	-35.07	50.62	74.00	23.38	Vertical



Report No.: SUCR251000102701

Page: 30 of 30

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2510001027WM

8 EUT Constructional Details (EUT Photos)

Refer to Appendix - External Photos for SUCR2510001027WM and Appendix - Internal Photos for SUCR2510001027WM

- End of the Report -