

TEST REPORT

Application No.: KSCR2604000800AT
FCC ID: 2BSUT-XCOMM
Applicant: CROSSCALL
Address of Applicant: 245, Rue Paul Langevin 13290, Aix-en-Provence, France
Manufacturer: CROSSCALL
Address of Manufacturer: 245, Rue Paul Langevin 13290, Aix-en-Provence, France
Factory: SICHUAN DOOV PTY CO., LTD.
Address of Factory: NO.35 Guangyuan Road, West Section, Guoxing Avenue, Lingang Jingkai District, Yibin City, Sichuan, P.R.China

Equipment Under Test (EUT):

EUT Name: Bluetooth and Wired Speaker
Model No.: X-COMM
Trade Mark: CROSSCALL
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-04-13
Date of Test: 2026-04-16 to 2026-04-22
Date of Issue: 2026-04-23

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2026-04-23	/

Authorized for issue by:			
Tested By		Maker Qi	
		Maker_Qi/Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 7.8.8	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 7.8.8	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9.2	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2020) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2020) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2020) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 7.8.7.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(d)	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Power level setting using in test.....	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty	6
4.5 Test Location.....	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence.....	11
7 Radio Spectrum Matter Test Results	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Radiated Emissions which fall in the restricted bands	16
7.3 Radiated Spurious Emissions Below 1GHz	30
7.4 Radiated Spurious Emissions Above 1GHz.....	34
7.5 Maximum Conducted Output Power	54
7.6 20dB Bandwidth	56
7.7 Carrier Frequencies Separation	57
7.8 Hopping Channel Number.....	58
7.9 Dwell Time.....	59
7.10 Conducted Band Edges Measurement	60
7.11 Conducted Spurious Emissions	62
8 Test Setup Photo	63
9 EUT Constructional Details (EUT Photos).....	63
10 Appendix.....	64

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 5V/2A by Battery: Battery model: LPN370224 2240mAh/8.29Wh Rated voltage: 3.7V
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Type:	PIFA Antenna
Antenna Gain:	-1dBi (Provided by the manufacturer)

Note: The EUT has two different power modes: power adapter power and battery power, both of which are pre-tested. The power adapter power supply is listed as a worst-case scenario and only the worst-case results are reflected in the report.

4.2 Power level setting using in test

Channel	DH	2DH	3DH
	Ant 1	Ant 1	Ant 1
1	1	1	1
3	1	1	1
5	1	1	1

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645
AC Adapter	/	/	/

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

- **VCCI (Member No:1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301196	07/09/2025	07/08/2026
2	LISN	R&S	ENV216	KS301197	01/08/2026	01/07/2027
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/08/2026	01/07/2027
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/18/2025	12/17/2026
5	CE test Cable	Thermax	/	CZ301102	12/18/2025	12/17/2026
6	Software	Faratronic	E3	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	07/09/2025	07/08/2026
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	07/09/2025	07/08/2026
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	12/17/2025	12/16/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	12/17/2025	12/16/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	07/09/2025	07/08/2026
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	07/08/2025	07/07/2026
7	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	07/09/2025	07/08/2026
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	12/17/2025	12/16/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	07/08/2025	07/07/2026
11	Switcher	TST	FY562	KUS2001M001-4	12/17/2025	12/16/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	12/17/2025	12/16/2026
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	07/15/2025	07/14/2026
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	12/30/2025	12/29/2026
15	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	07/09/2025	07/08/2026
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	12/17/2025	12/16/2026
3	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
4	Loop Antenna (9KHz-30MHz)	COM-POWER	AL-130R	KUS1806E001	07/11/2025	07/10/2026
5	Bilog Antenna (30MHz-1GHz)	TESEQ	CBL 6112D	KUS1806E005	07/12/2025	07/11/2026
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	01/11/2026	01/10/2028
7	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/11/2026	01/10/2028

8	Amplifier(30MHz~1GHz)	TST	LNA009100G30	KSEM061	12/18/2025	12/17/2026
9	Amplifier(400MHz~8GHz)	TST	LNA004080G30	KSEM062	12/18/2025	12/17/2026
10	Amplifier(1GHz~18GHz)	TST	LNA010180G45	KSEM039	07/09/2025	07/08/2026
11	Amplifier(18~40GHz)	TST	LNA180400G40	KSEM038	07/09/2025	07/08/2026
12	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	12/30/2025	12/29/2026
13	Software	ESE	E3_V 6.111221a	/	NCR	NCR
14	Measurement Software	Tonscend	JS32-RE V5.0.0.1	/	NCR	NCR
15	Measurement Software	Tonscend	JS32-RSE V5.0.0.0	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is -1dBi.

Antenna location: Refer to internal photo.

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement: The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted. Compliance for section 15.247(a)(1): According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. > Number of shift register stages: 9 > Length of pseudo-random sequence: $2^9 - 1 = 511$ bits > Longest sequence of zeros: 8 (non-inverted signal) Linear Feedback Shift Register for Generation of the PRBS sequence An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals. Compliance for section 15.247(g): According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system. Compliance for section 15.247(h): According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

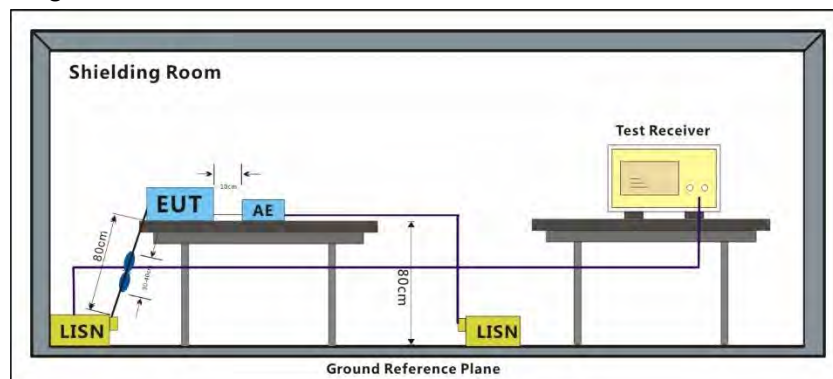


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 03; Line: Live line

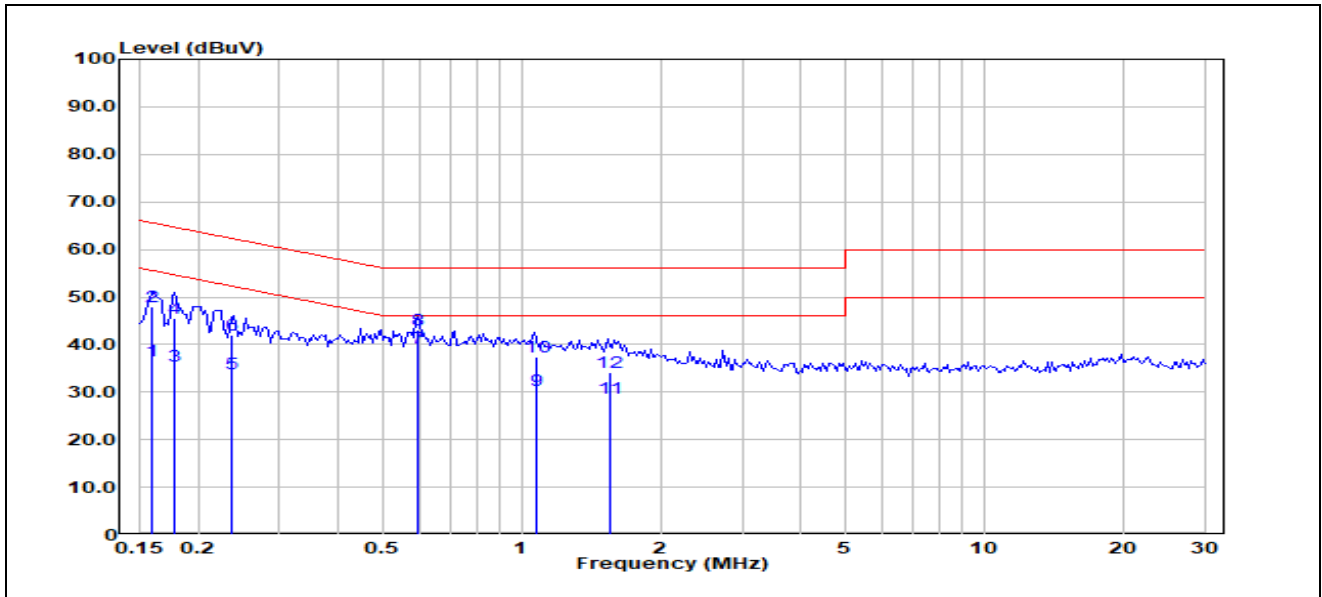

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1589	16.29	20.34	36.63	55.52	-18.89	Average
2	0.1589	27.67	20.34	48.01	65.52	-17.51	QP
3	0.1772	15.14	20.28	35.42	54.62	-19.20	Average
4	0.1772	25.32	20.28	45.60	64.62	-19.02	QP
5	0.2374	13.79	20.14	33.93	52.19	-18.26	Average
6	0.2374	21.82	20.14	41.96	62.19	-20.23	QP
7	0.5969	19.01	20.20	39.21	46.00	-6.79	Average
8	0.5969	22.83	20.20	43.03	56.00	-12.97	QP
9	1.0750	10.47	19.97	30.44	46.00	-15.56	Average
10	1.0750	17.41	19.97	37.38	56.00	-18.62	QP
11	1.5480	8.58	20.03	28.61	46.00	-17.39	Average
12	1.5480	14.01	20.03	34.04	56.00	-21.96	QP

Test Mode: 03; Line: Neutral Line

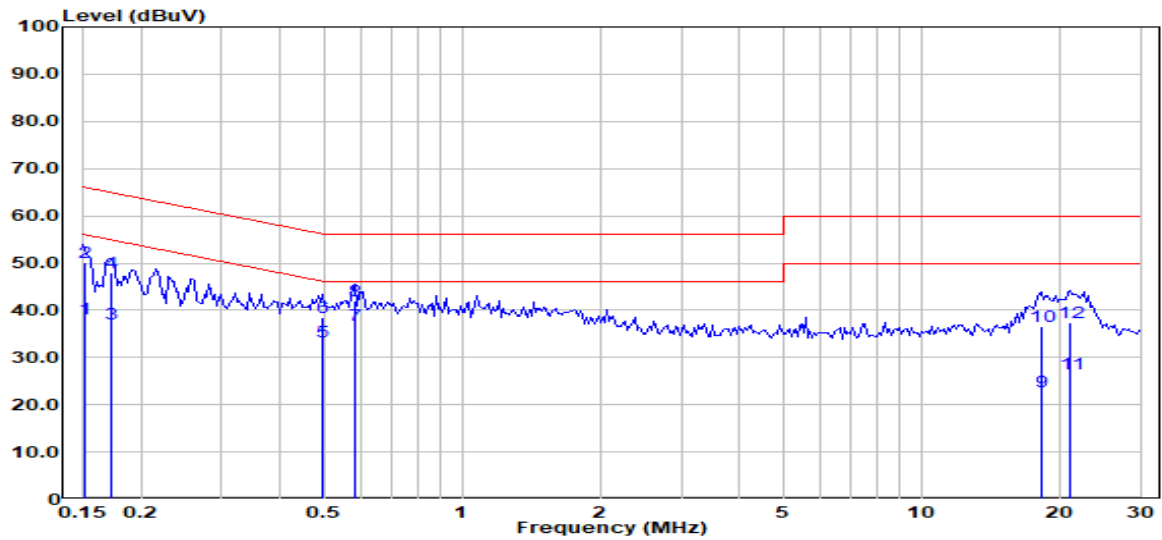

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	17.86	20.44	38.30	55.96	-17.66	Average
2	0.1508	29.76	20.44	50.20	65.96	-15.76	QP
3	0.1720	16.72	20.38	37.10	54.86	-17.76	Average
4	0.1720	27.67	20.38	48.05	64.86	-16.81	QP
5	0.4980	13.04	20.18	33.22	46.03	-12.81	Average
6	0.4980	18.40	20.18	38.58	56.03	-17.45	QP
7	0.5840	16.70	20.19	36.89	46.00	-9.11	Average
8	0.5840	21.81	20.19	42.00	56.00	-14.00	QP
9	18.3010	2.32	20.38	22.70	50.00	-27.30	Average
10	18.3010	16.22	20.38	36.60	60.00	-23.40	QP
11	21.1840	6.08	20.46	26.54	50.00	-23.46	Average
12	21.1840	16.94	20.46	37.40	60.00	-22.60	QP

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 7.8.8

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

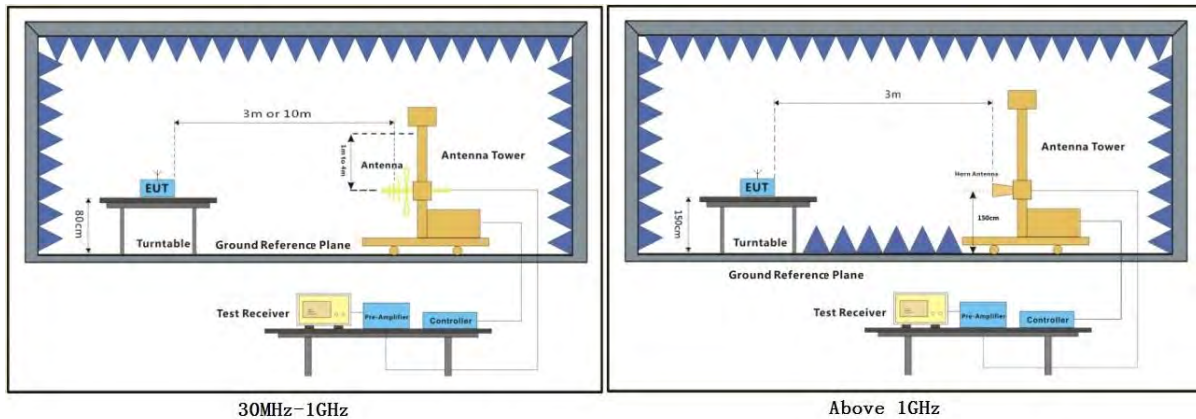


7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor




BT_DH5_TX_CH_00_Horizontal

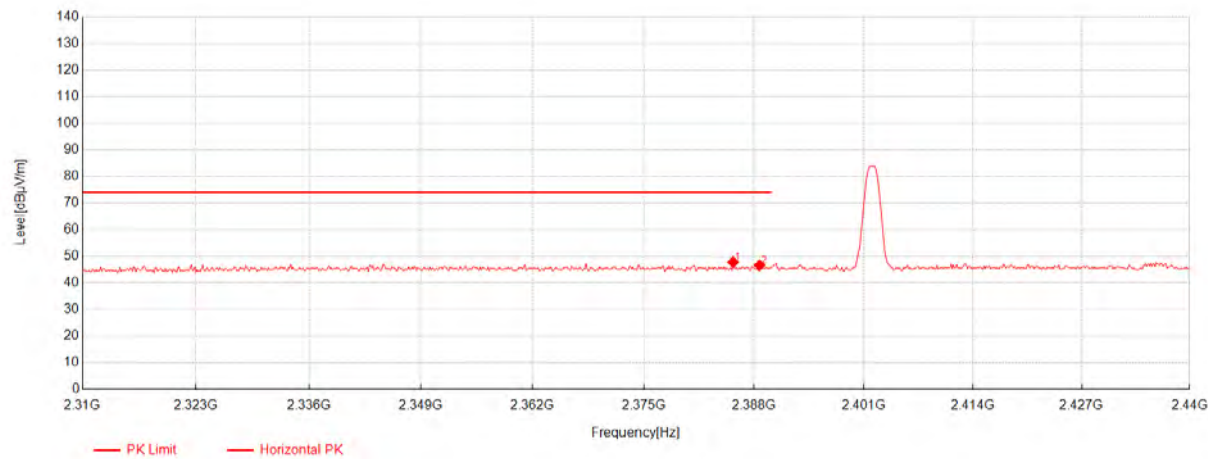

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.53	47.23	26.66	-26.15	47.74	74.00	26.26	Horizontal
-	-	-	-	-	29.04	54.00	24.96	-
2	2388.65	46.04	26.69	-26.13	46.60	74.00	27.40	Horizontal
-	-	-	-	-	27.90	54.00	26.10	-




BT_DH5_TX_CH_00_Vertical

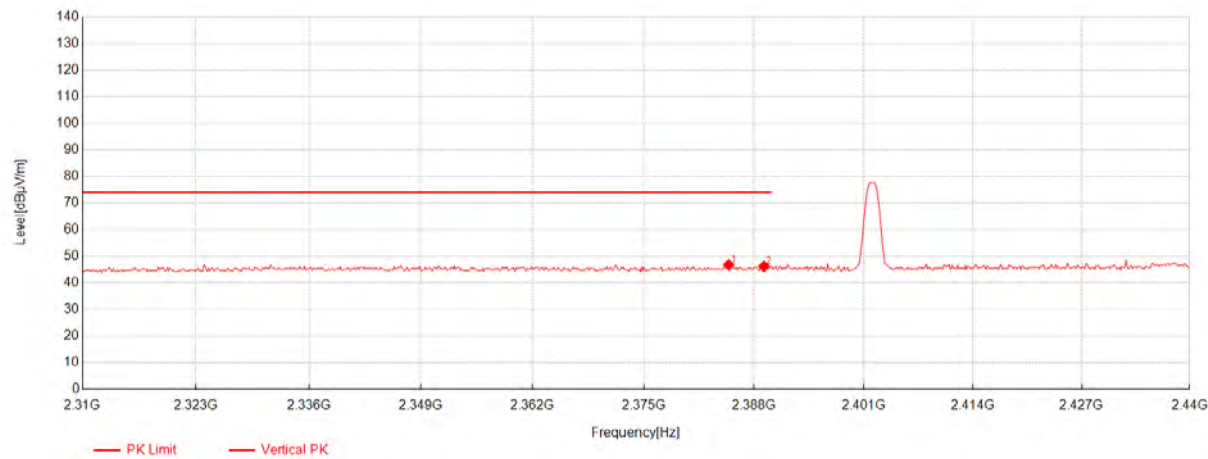

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.01	46.28	26.65	-26.15	46.78	74.00	27.22	Vertical
-	-	-	-	-	28.08	54.00	25.92	-
2	2389.17	45.60	26.69	-26.13	46.16	74.00	27.84	Vertical
-	-	-	-	-	18.08	54.00	35.92	-




BT_DH5_TX_CH_78_Horizontal

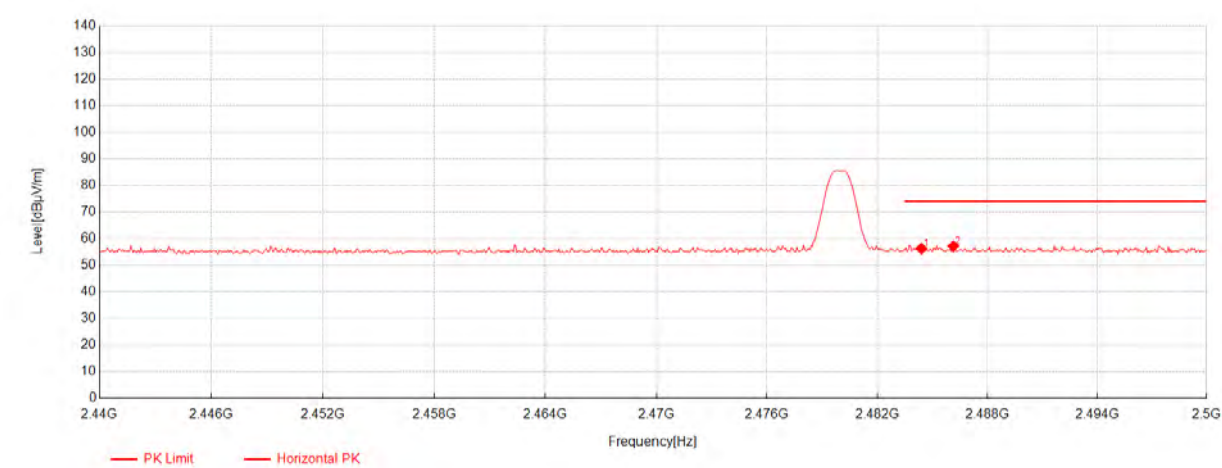

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.4	55.34	27.16	-26.24	56.26	74.00	17.74	Horizontal
-	-	-	-	-	37.56	54.00	16.44	-
2	2486.14	56.23	27.14	-26.24	57.13	74.00	16.87	Horizontal
-	-	-	-	-	38.43	54.00	15.57	-

BT_DH5_TX_CH_78_Vertical

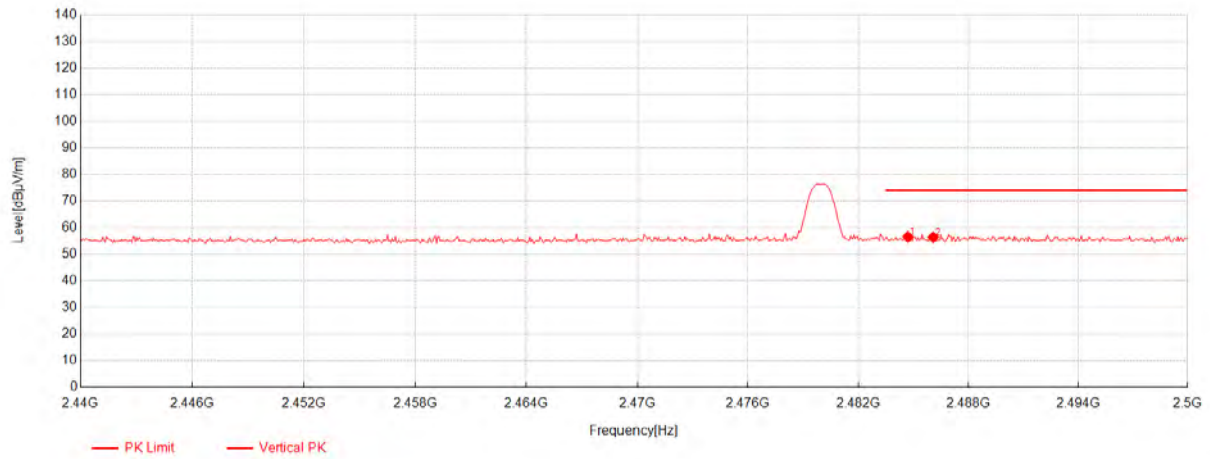


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.7	55.66	27.15	-26.24	56.57	74.00	17.43	Vertical
-	-	-	-	-	37.87	54.00	16.13	-
2	2486.08	55.48	27.14	-26.24	56.38	74.00	17.62	Vertical
-	-	-	-	-	37.68	54.00	16.32	-



Report No.: KSCR260400080002

Page: 22 of 121


BT_2DH5_TX_CH_00_Horizontal

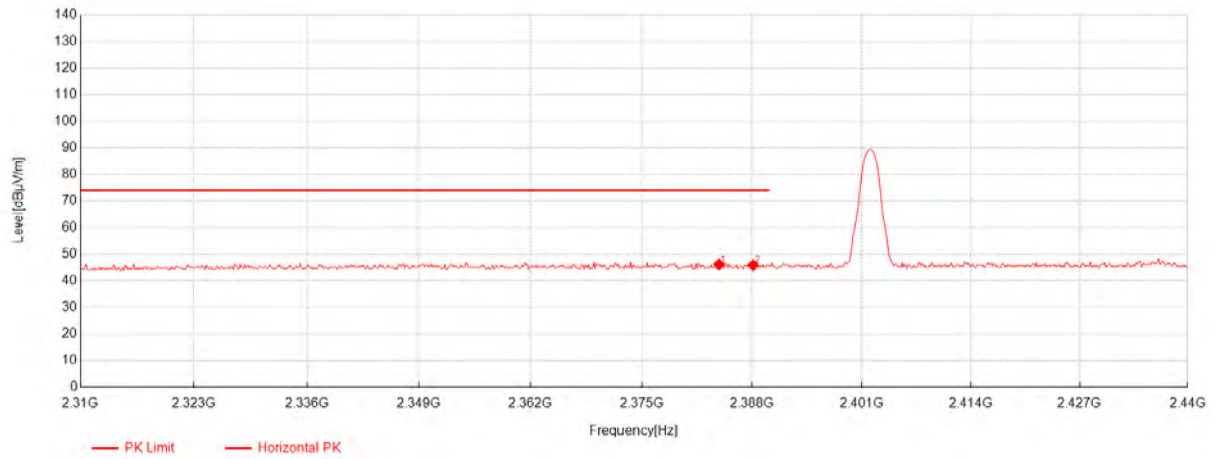

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.1	45.65	26.64	-26.15	46.14	74.00	27.86	Horizontal
-	-	-	-	-	27.44	54.00	26.56	-
2	2388.13	45.33	26.68	-26.14	45.87	74.00	28.13	Horizontal
-	-	-	-	-	27.17	54.00	26.83	-




BT_2DH5_TX_CH_00_Vertical

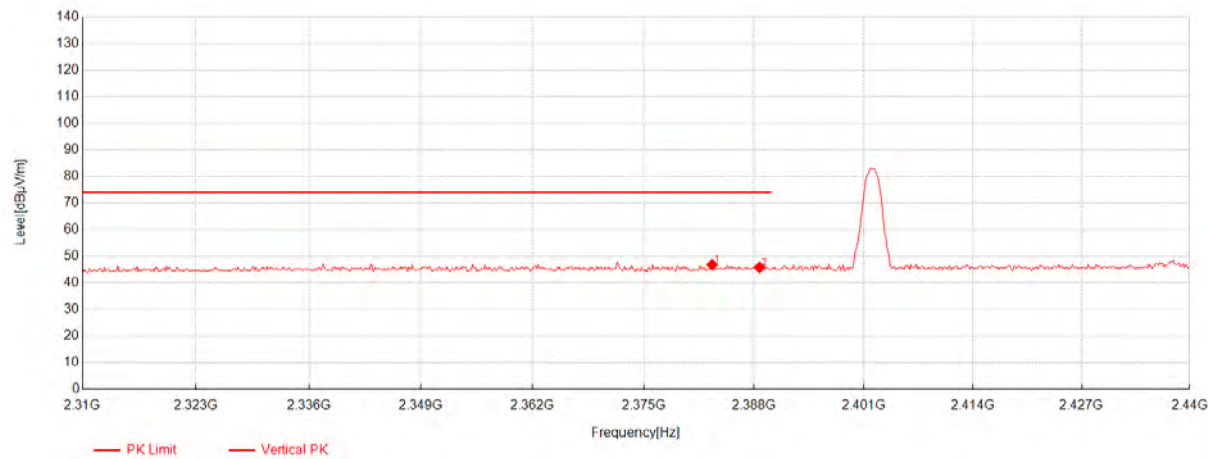

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.06	46.32	26.63	-26.16	46.79	74.00	27.21	Vertical
-	-	-	-	-	28.09	54.00	25.91	-
2	2388.65	45.22	26.69	-26.13	45.78	74.00	28.22	Vertical
-	-	-	-	-	27.08	54.00	26.92	-


BT_2DH5_TX_CH_78_Horizontal

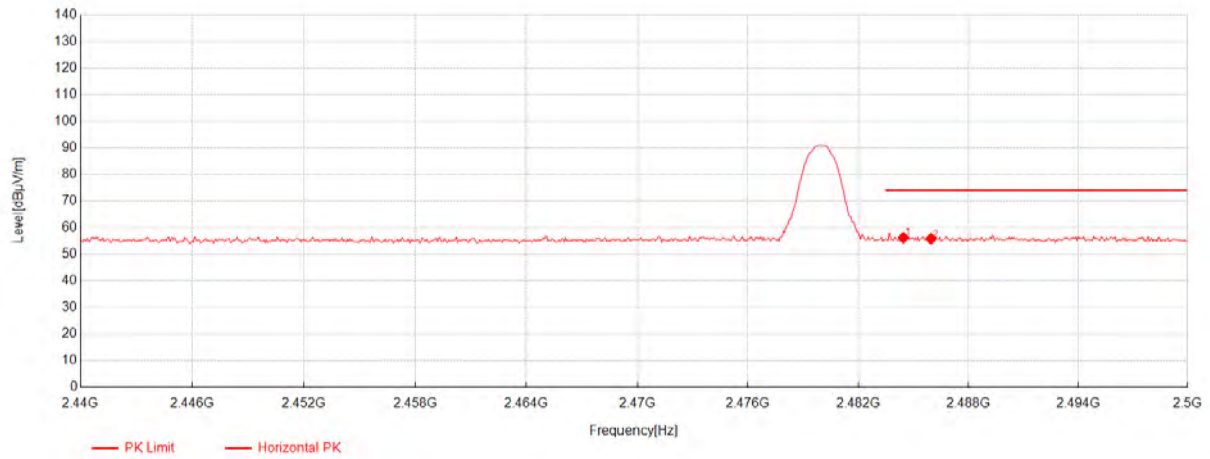

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.46	55.30	27.16	-26.24	56.22	74.00	17.78	Horizontal
-	-	-	-	-	37.52	54.00	16.48	-
2	2485.96	54.89	27.14	-26.24	55.79	74.00	18.21	Horizontal
-	-	-	-	-	37.09	54.00	16.91	-




BT_2DH5_TX_CH_78_Vertical

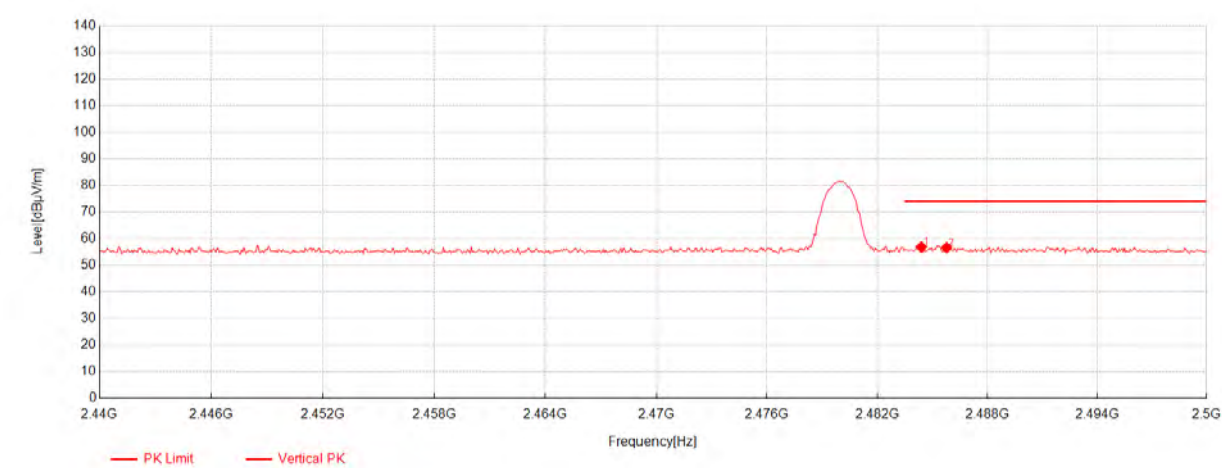

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2484.4	55.92	27.16	-26.24	56.84	74.00	17.16	Vertical
-	-	-	-	-	38.14	54.00	15.86	-
2	2485.78	55.70	27.14	-26.24	56.60	74.00	17.40	Vertical
-	-	-	-	-	37.90	54.00	16.10	-




BT_3DH5_TX_CH_00_Horizontal

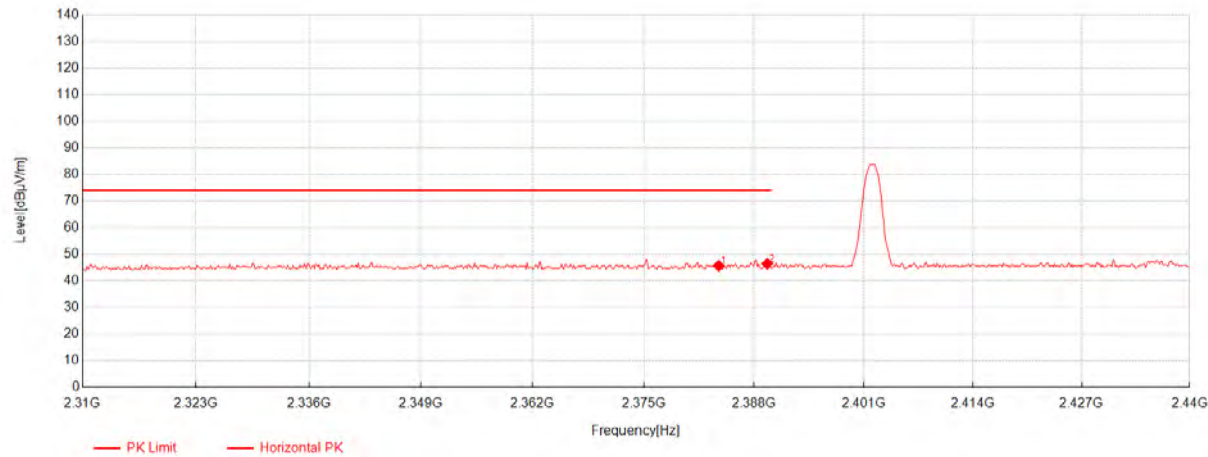

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.84	45.20	26.64	-26.16	45.68	74.00	28.32	Horizontal
-	-	-	-	-	26.98	54.00	27.02	-
2	2389.56	45.85	26.70	-26.13	46.42	74.00	27.58	Horizontal
-	-	-	-	-	27.72	54.00	26.28	-




BT_3DH5_TX_CH_00_Vertical

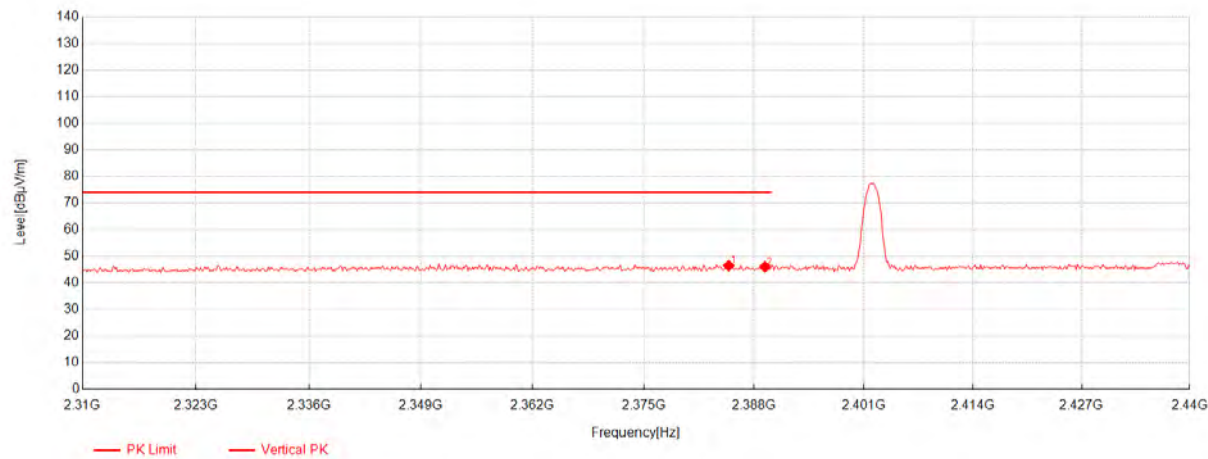

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.01	45.98	26.65	-26.15	46.48	74.00	27.52	Vertical
-	-	-	-	-	27.78	54.00	26.22	-
2	2389.3	45.45	26.69	-26.13	46.01	74.00	27.99	Vertical
-	-	-	-	-	27.31	54.00	26.69	-


BT_3DH5_TX_CH_78_Horizontal

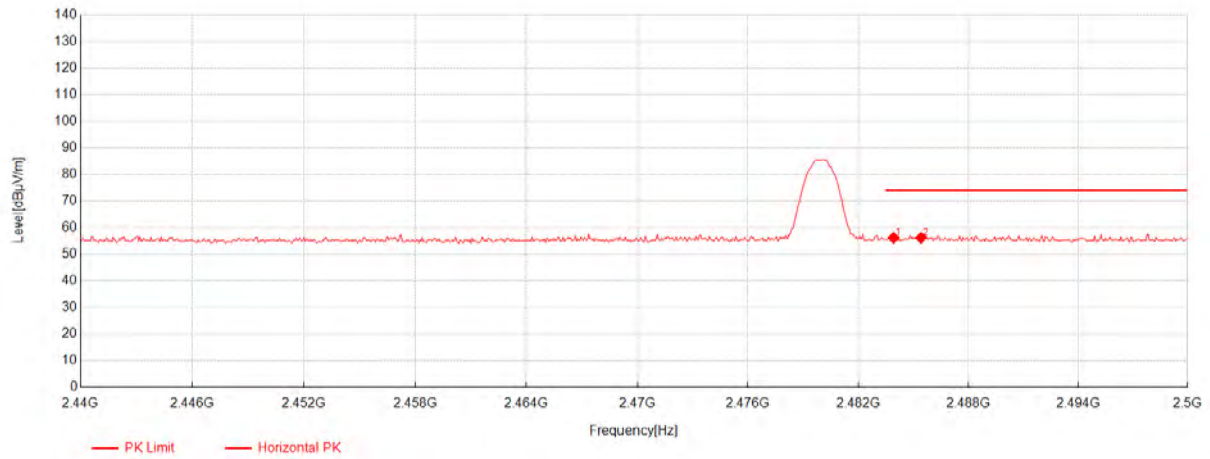

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.92	55.27	27.16	-26.24	56.19	74.00	17.81	Horizontal
-	-	-	-	-	37.49	54.00	16.51	-
2	2485.42	55.27	27.15	-26.24	56.18	74.00	17.82	Horizontal
-	-	-	-	-	37.48	54.00	16.52	-



BT_3DH5_TX_CH_78_Vertical

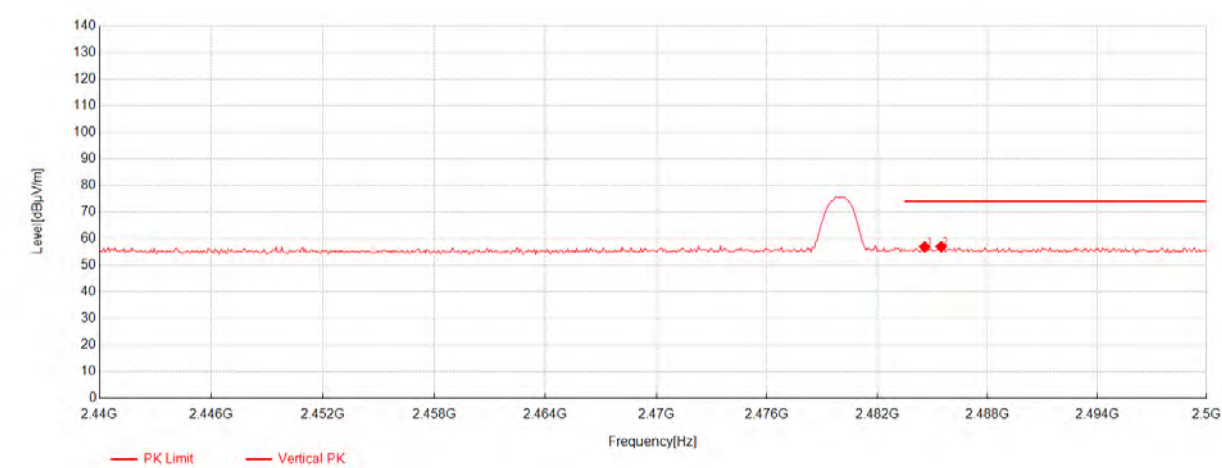

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.58	55.97	27.15	-26.24	56.88	74.00	17.12	Vertical
-	-	-	-	-	38.18	54.00	15.82	-
2	2485.48	56.07	27.15	-26.24	56.98	74.00	17.02	Vertical
-	-	-	-	-	38.28	54.00	15.72	-

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dBμV/m@3m)
0.009-0.490	2400/F(kHz)	300	128.5 to 93.8
0.490-1.705	24000/F(kHz)	30	73.8 to 62.9
1.705-30.0	30	30	69.60
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
960-1000	500	3	54.0

Note : The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

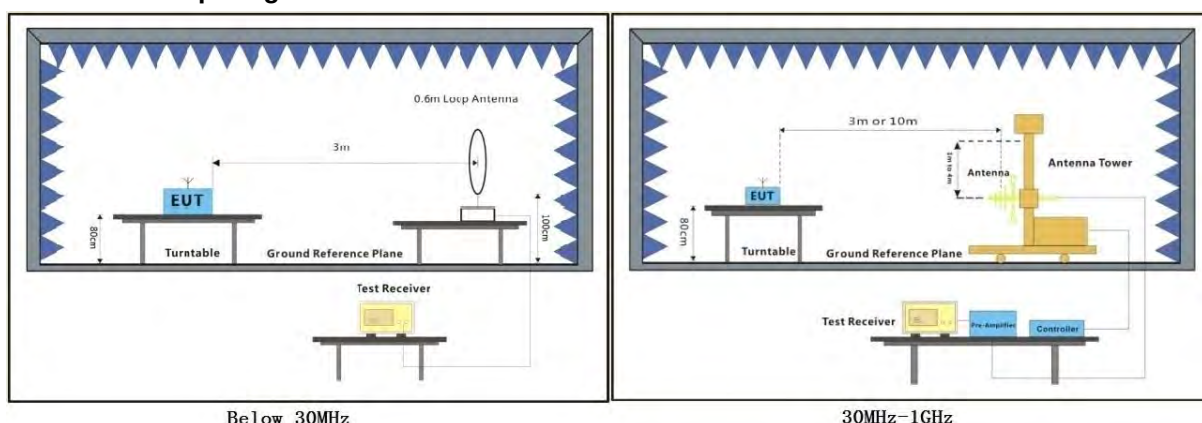


7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


Test Mode: 00; Polarity: Horizontal

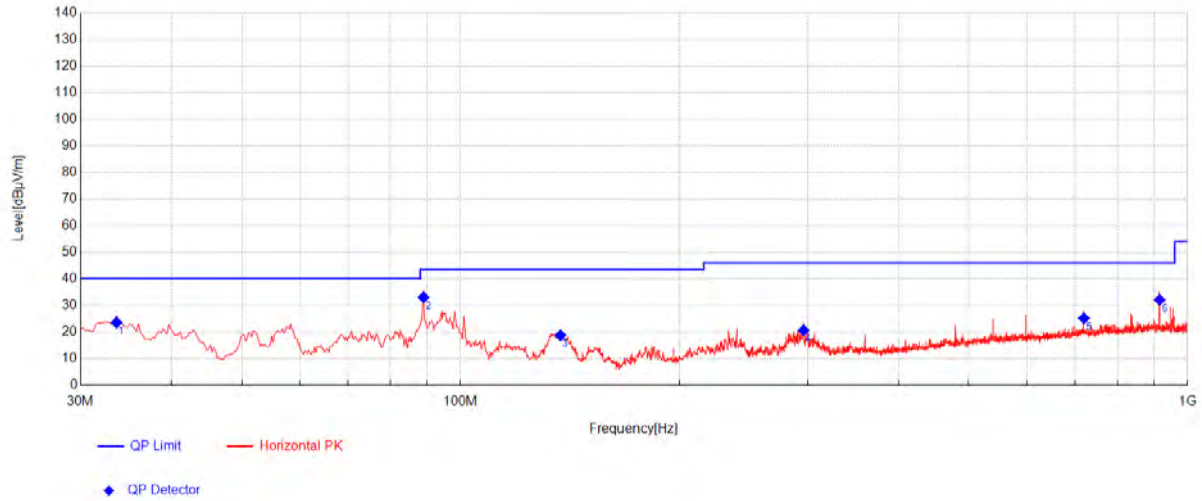

Final Data List

NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.6375	16.82	-32.49	23.56	40.00	16.44	255	238	Horizontal
2	88.9275	10.78	-31.92	33.05	43.50	10.45	255	238	Horizontal
3	137.185	13.78	-31.56	18.78	43.50	24.72	255	40	Horizontal
4	296.265	14.58	-31.04	20.64	46.00	25.36	255	225	Horizontal
5	719.9125	21.90	-29.72	25.16	46.00	20.84	255	81	Horizontal
6	915.125	23.39	-29.09	32.07	46.00	13.93	255	346	Horizontal

Test Mode: 00; Polarity: Vertical

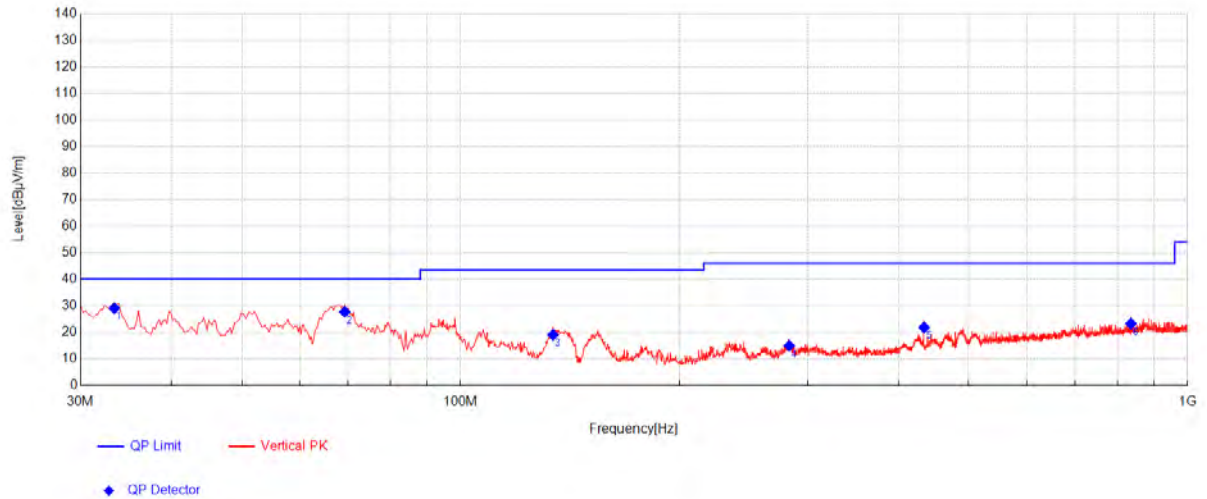

Final Data List

NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.395	16.96	-32.50	29.06	40.00	10.94	255	214	Vertical
2	69.285	6.99	-32.09	27.72	40.00	12.28	255	359	Vertical
3	134.0325	13.79	-31.60	19.12	43.50	24.38	255	360	Vertical
4	283.17	14.36	-30.98	14.95	46.00	31.05	255	267	Vertical
5	434.005	17.58	-30.42	21.89	46.00	24.11	255	146	Vertical
6	835.585	22.72	-29.12	23.27	46.00	22.73	255	360	Vertical

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 7.8.8

Measurement Distance: 3M

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

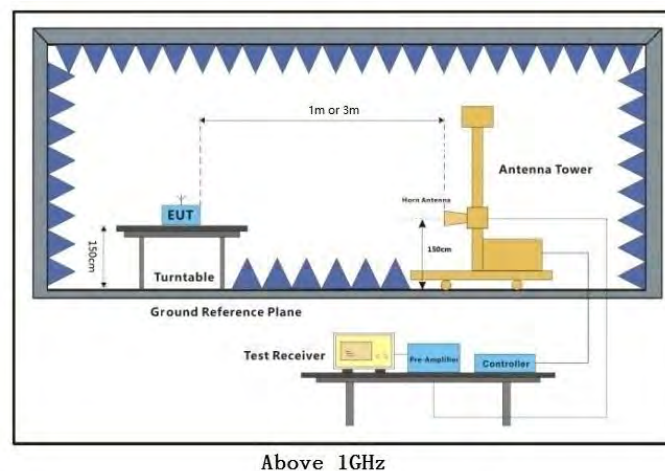


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:


1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

BT_DH5_TX_CH_00_Horizontal

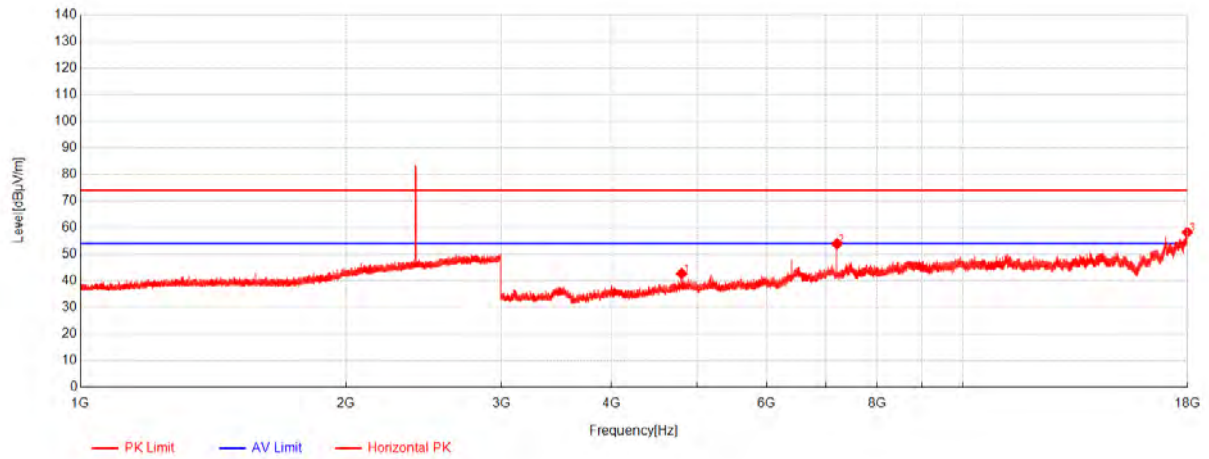


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4803.5	61.24	31.49	-50.04	42.69	74.00	31.31	Horizontal
-	-	-	-	-	23.99	54.00	30.01	-
2	7205.5	66.27	36.22	-48.61	53.88	74.00	20.12	Horizontal
-	-	-	-	-	35.18	54.00	18.82	-
3	17981	56.49	43.20	-41.49	58.20	74.00	15.80	Horizontal
-	-	-	-	-	39.50	54.00	14.50	-

BT_DH5_TX_CH_00_Vertical

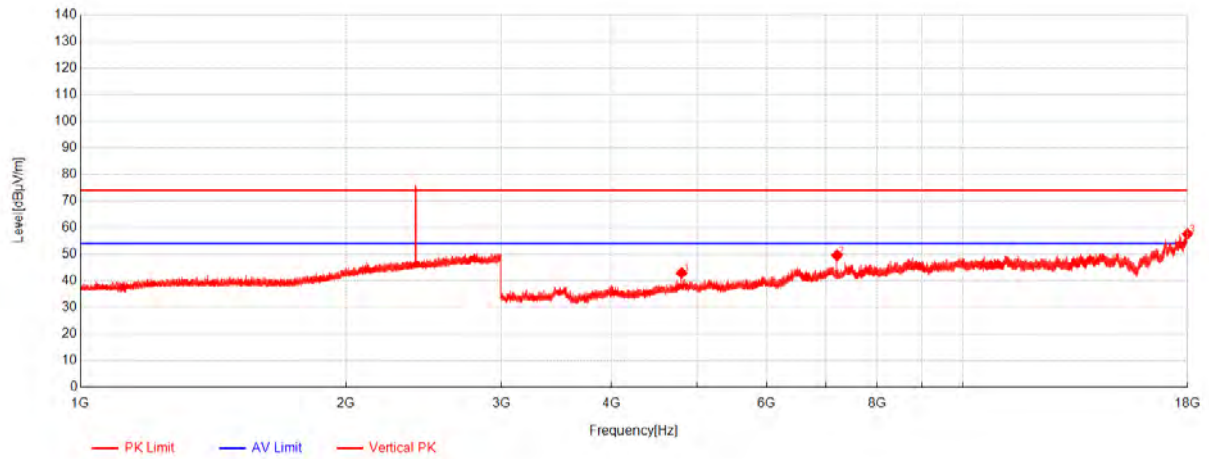


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4803.5	61.48	31.49	-50.04	42.93	74.00	31.07	Vertical
-	-	-	-	-	24.23	54.00	29.77	-
2	7206.5	61.96	36.23	-48.61	49.58	74.00	24.42	Vertical
-	-	-	-	-	30.88	54.00	23.12	-
3	17991.5	55.73	43.20	-41.31	57.62	74.00	16.38	Vertical
-	-	-	-	-	38.92	54.00	15.08	-

BT_DH5_TX_CH_39_Horizontal

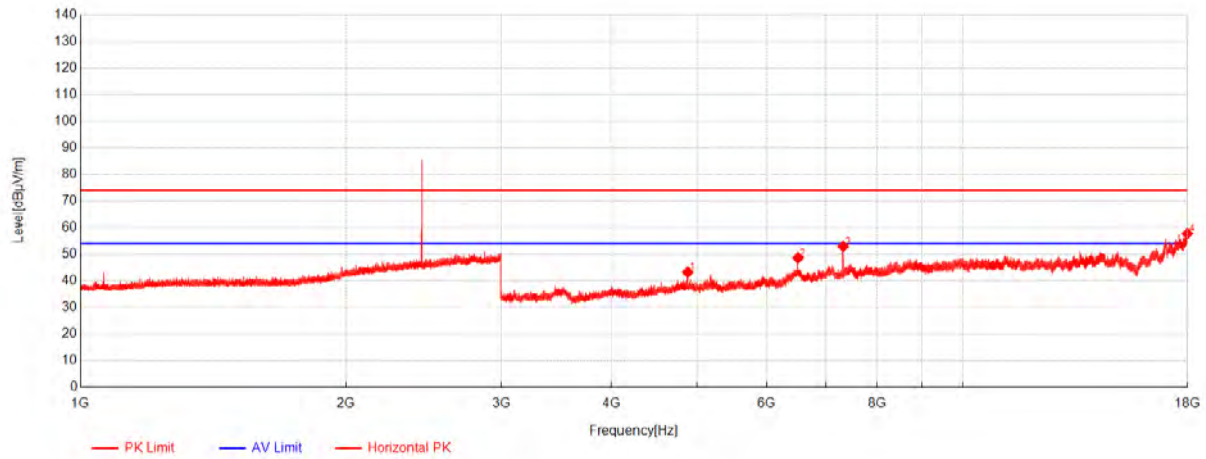


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4881.5	62.42	31.46	-50.61	43.27	74.00	30.73	Horizontal
-	-	-	-	-	24.57	54.00	29.43	-
2	6509	60.75	34.29	-46.41	48.63	74.00	25.37	Horizontal
-	-	-	-	-	29.93	54.00	24.07	-
3	7323	65.04	36.35	-48.49	52.90	74.00	21.10	Horizontal
-	-	-	-	-	34.20	54.00	19.80	-
4	17986	55.93	43.20	-41.40	57.73	74.00	16.27	Horizontal
-	-	-	-	-	39.03	54.00	14.97	-

BT_DH5_TX_CH_39_Vertical

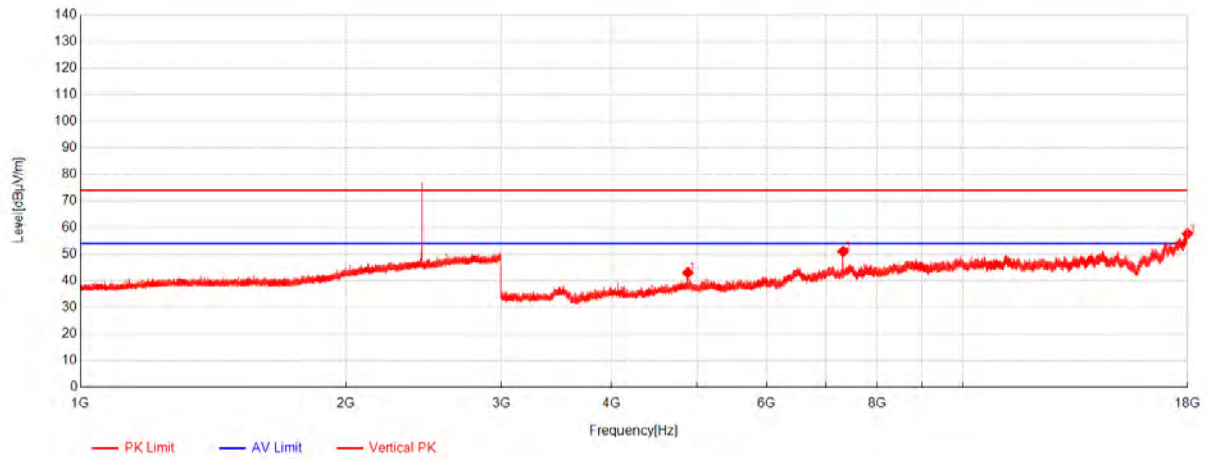


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4882	62.20	31.46	-50.62	43.04	74.00	30.96	Vertical
-	-	-	-	-	24.34	54.00	29.66	-
2	7322.5	63.16	36.35	-48.49	51.02	74.00	22.98	Vertical
-	-	-	-	-	32.32	54.00	21.68	-
3	17992.5	55.76	43.20	-41.29	57.67	74.00	16.33	Vertical
-	-	-	-	-	38.97	54.00	15.03	-

BT_DH5_TX_CH_78_Horizontal

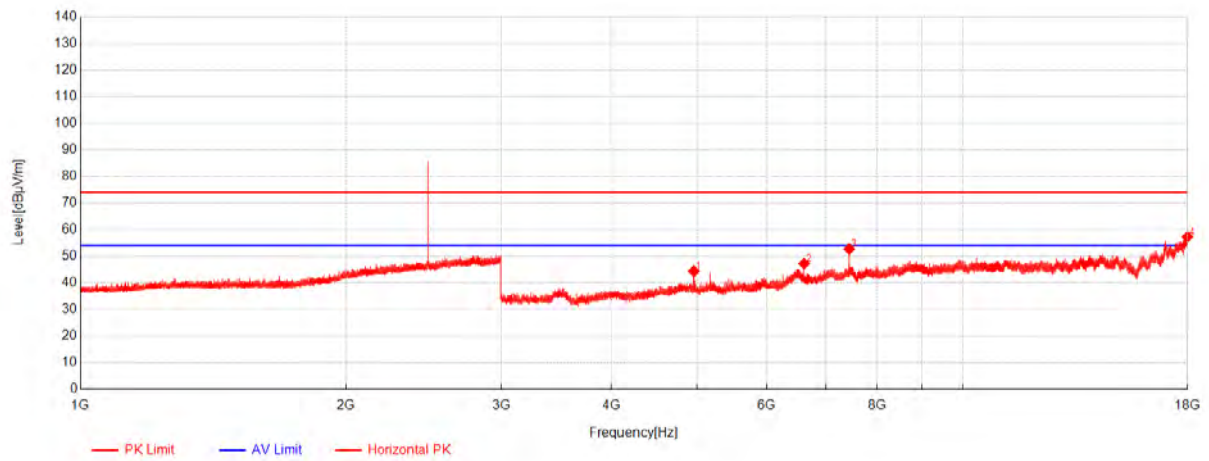


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4959.5	63.51	31.56	-50.71	44.36	74.00	29.64	Horizontal
-	-	-	-	-	25.66	54.00	28.34	-
2	6613	61.24	34.75	-48.78	47.21	74.00	26.79	Horizontal
-	-	-	-	-	28.51	54.00	25.49	-
3	7439.5	63.98	36.22	-47.47	52.73	74.00	21.27	Horizontal
-	-	-	-	-	34.03	54.00	19.97	-
4	17987	55.46	43.20	-41.38	57.28	74.00	16.72	Horizontal
-	-	-	-	-	38.58	54.00	15.42	-

BT_DH5_TX_CH_78_Vertical

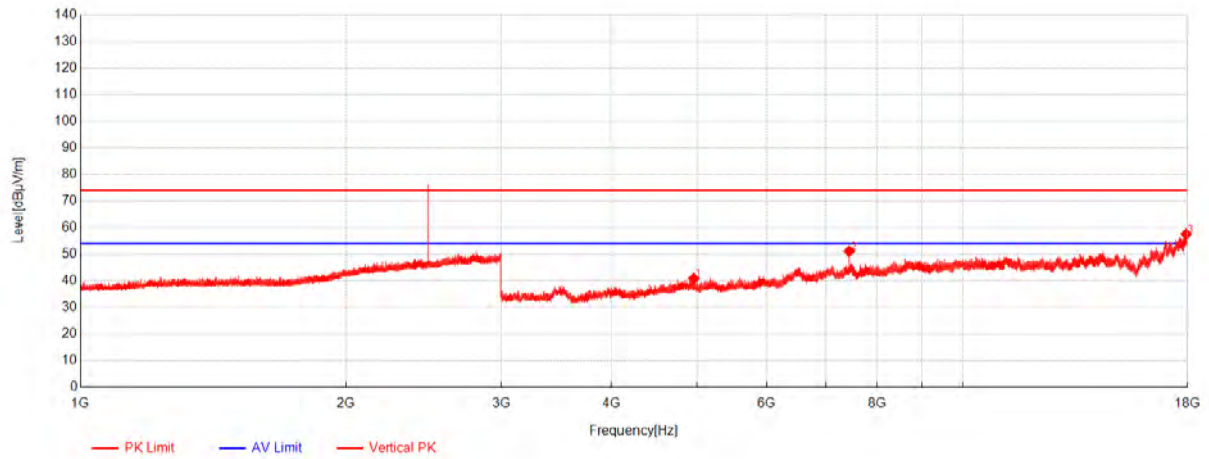


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4959.5	60.00	31.56	-50.71	40.85	74.00	33.15	Vertical
-	-	-	-	-	22.15	54.00	31.85	-
2	7439.5	62.38	36.22	-47.47	51.13	74.00	22.87	Vertical
-	-	-	-	-	32.43	54.00	21.57	-
3	17931	56.89	43.01	-42.35	57.55	74.00	16.45	Vertical
-	-	-	-	-	38.85	54.00	15.15	-

BT_2DH5_TX_CH_00_Horizontal

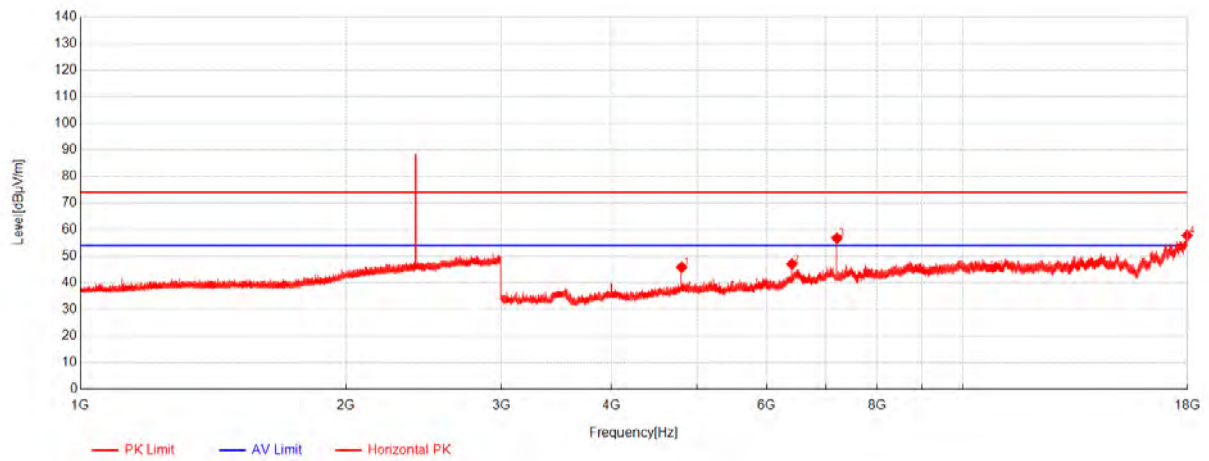


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4804	64.41	31.49	-50.04	45.86	74.00	28.14	Horizontal
-	-	-	-	-	27.16	54.00	26.84	-
2	6405	60.81	33.93	-47.70	47.04	74.00	26.96	Horizontal
-	-	-	-	-	28.34	54.00	25.66	-
3	7205.5	69.17	36.22	-48.61	56.78	74.00	17.22	Horizontal
-	-	-	-	-	38.08	54.00	15.92	-
4	17974	56.20	43.20	-41.61	57.79	74.00	16.21	Horizontal
-	-	-	-	-	39.09	54.00	14.91	-

BT_2DH5_TX_CH_00_Vertical

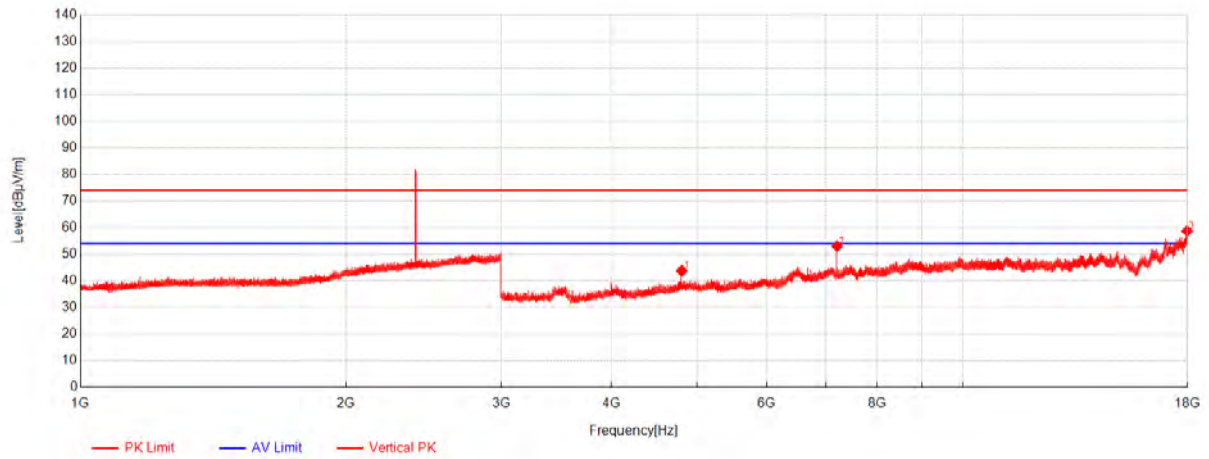


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4804	62.32	31.49	-50.04	43.77	74.00	30.23	Vertical
-	-	-	-	-	25.07	54.00	28.93	-
2	7206.5	65.37	36.23	-48.61	52.99	74.00	21.01	Vertical
-	-	-	-	-	34.29	54.00	19.71	-
3	17968.5	57.19	43.20	-41.70	58.69	74.00	15.31	Vertical
-	-	-	-	-	39.99	54.00	14.01	-

BT_2DH5_TX_CH_39_Horizontal

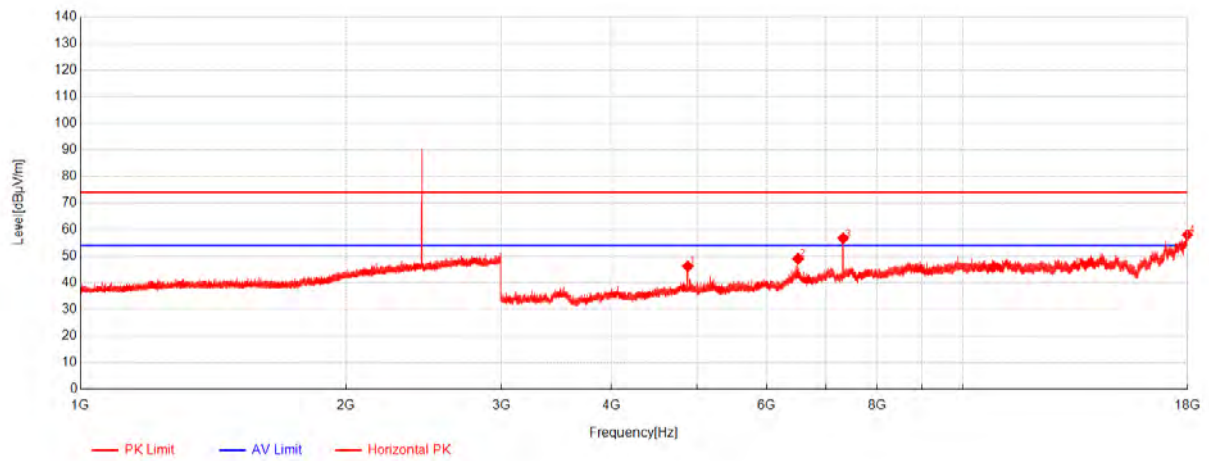


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4882	65.38	31.46	-50.62	46.22	74.00	27.78	Horizontal
-	-	-	-	-	27.52	54.00	26.48	-
2	6509.5	61.15	34.30	-46.42	49.03	74.00	24.97	Horizontal
-	-	-	-	-	30.33	54.00	23.67	-
3	7323.5	68.87	36.35	-48.48	56.74	74.00	17.26	Horizontal
-	-	-	-	-	38.04	54.00	15.96	-
4	17991	56.15	43.20	-41.31	58.04	74.00	15.96	Horizontal
-	-	-	-	-	39.34	54.00	14.66	-

BT_2DH5_TX_CH_39_Vertical

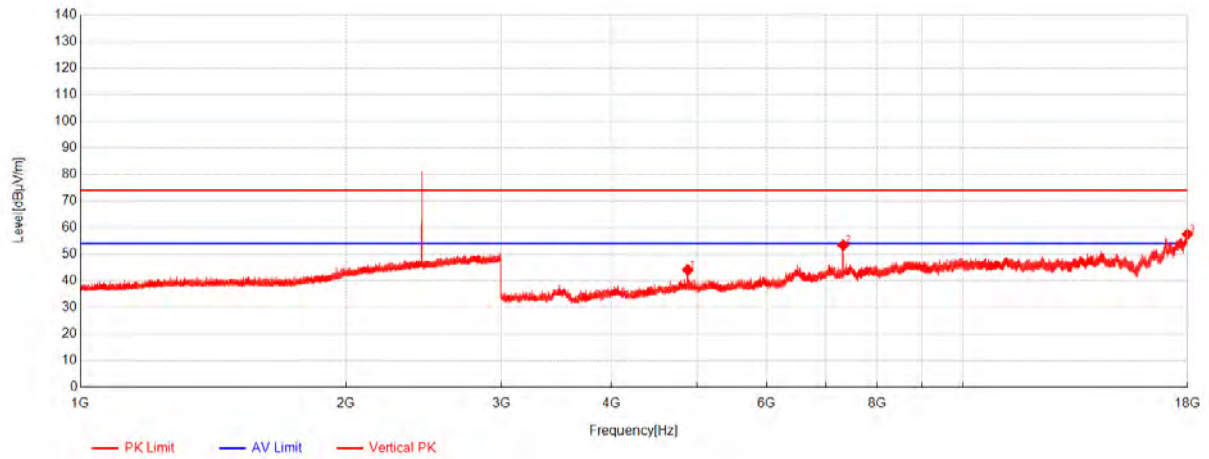


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4881.5	63.27	31.46	-50.61	44.12	74.00	29.88	Vertical
-	-	-	-	-	25.42	54.00	28.58	-
2	7323	65.49	36.35	-48.49	53.35	74.00	20.65	Vertical
-	-	-	-	-	34.65	54.00	19.35	-
3	17987	55.66	43.20	-41.38	57.48	74.00	16.52	Vertical
-	-	-	-	-	38.78	54.00	15.22	-

BT_2DH5_TX_CH_78_Horizontal

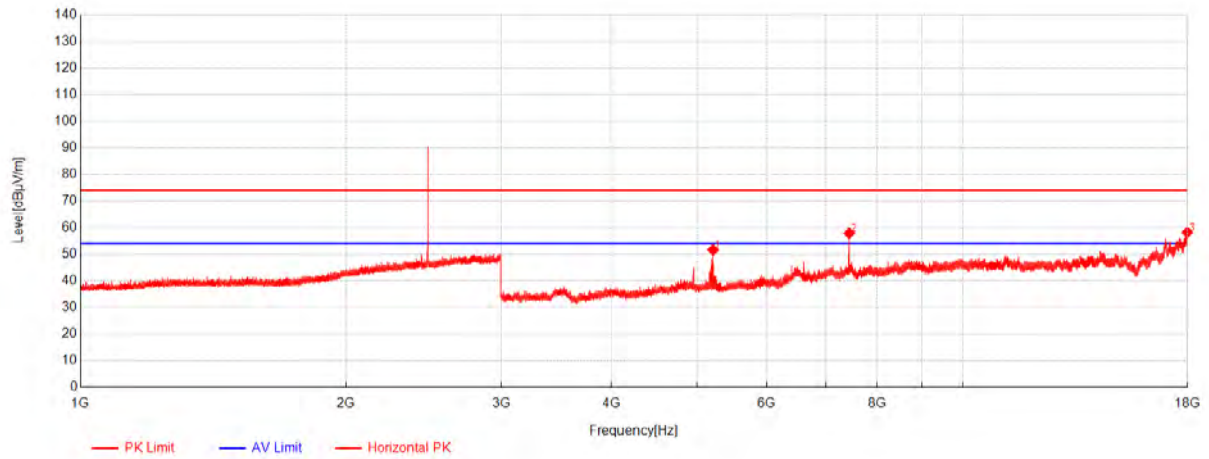


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5214.5	69.35	31.73	-49.47	51.61	74.00	22.39	Horizontal
-	-	-	-	-	32.91	54.00	21.09	-
2	7440	69.10	36.22	-47.46	57.86	74.00	16.14	Horizontal
-	-	-	-	-	39.16	54.00	14.84	-
3	17980.5	56.49	43.20	-41.50	58.19	74.00	15.81	Horizontal
-	-	-	-	-	39.49	54.00	14.51	-

BT_2DH5_TX_CH_78_Vertical

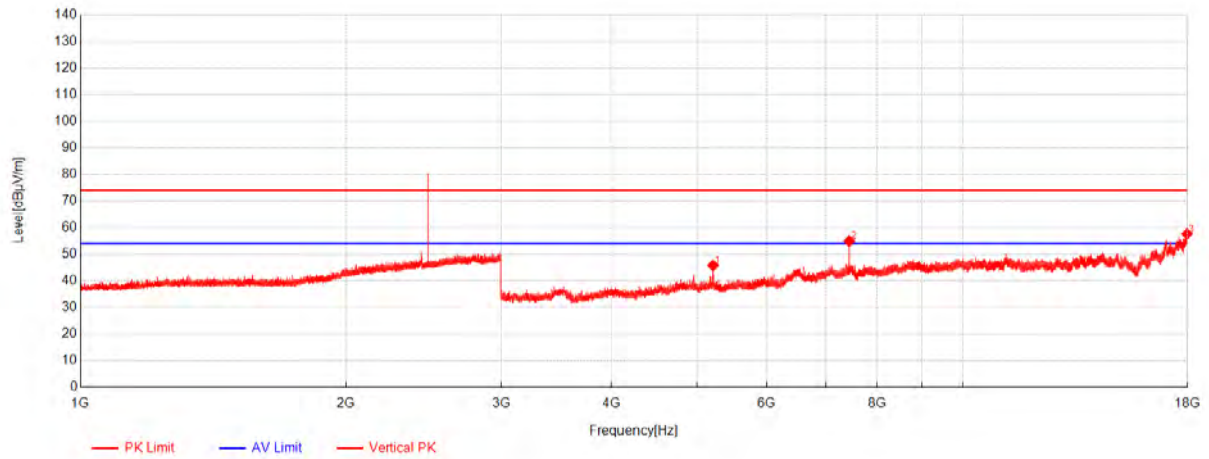


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5215	63.53	31.73	-49.47	45.79	74.00	28.21	Vertical
-	-	-	-	-	27.09	54.00	26.91	-
2	7440.5	66.13	36.22	-47.46	54.89	74.00	19.11	Vertical
-	-	-	-	-	36.19	54.00	17.81	-
3	17970	56.08	43.20	-41.68	57.60	74.00	16.40	Vertical
-	-	-	-	-	38.90	54.00	15.10	-

BT_3DH5_TX_CH_00_Horizontal

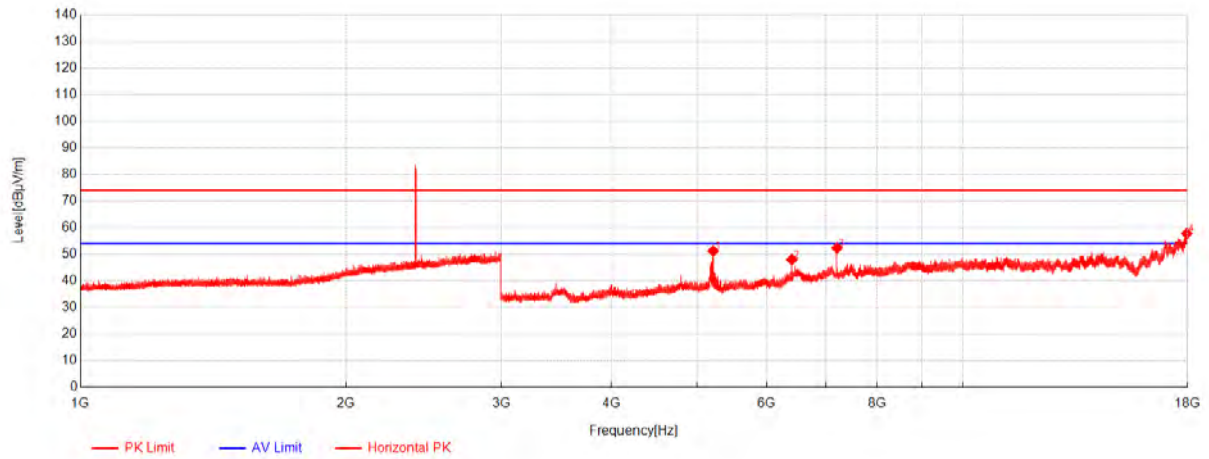

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5216	68.98	31.73	-49.48	51.23	74.00	22.77	Horizontal
-	-	-	-	-	32.53	54.00	21.47	-
2	6405	61.75	33.93	-47.70	47.98	74.00	26.02	Horizontal
-	-	-	-	-	29.28	54.00	24.72	-
3	7206	64.71	36.22	-48.61	52.32	74.00	21.68	Horizontal
-	-	-	-	-	33.62	54.00	20.38	-
4	17961	56.38	43.20	-41.83	57.75	74.00	16.25	Horizontal
-	-	-	-	-	39.05	54.00	14.95	-


BT_3DH5_TX_CH_00_Vertical

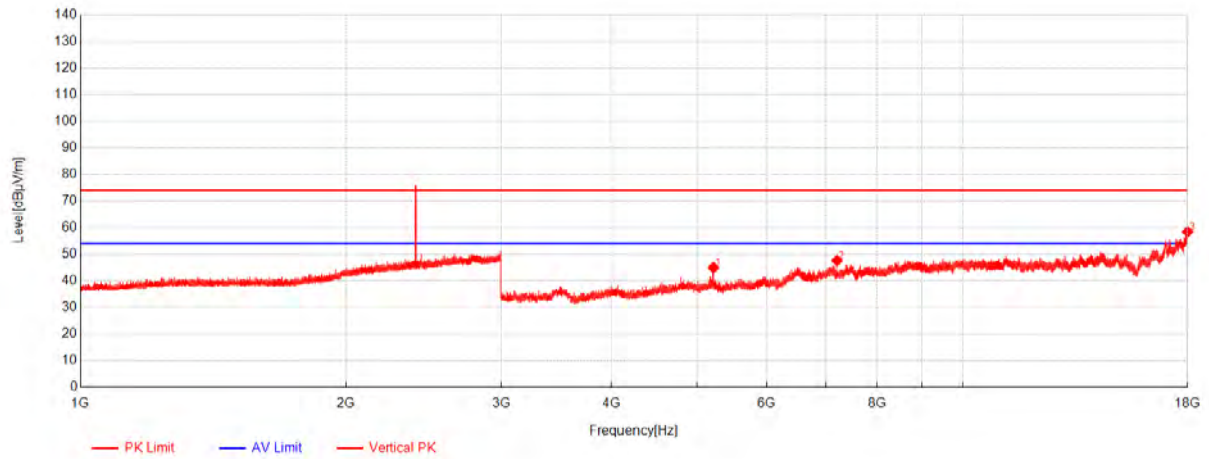

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5220.5	62.72	31.74	-49.53	44.93	74.00	29.07	Vertical
-	-	-	-	-	26.23	54.00	27.77	-
2	7205.5	59.97	36.22	-48.61	47.58	74.00	26.42	Vertical
-	-	-	-	-	28.88	54.00	25.12	-
3	17995.5	56.41	43.20	-41.24	58.37	74.00	15.63	Vertical
-	-	-	-	-	39.67	54.00	14.33	-

BT_3DH5_TX_CH_39_Horizontal

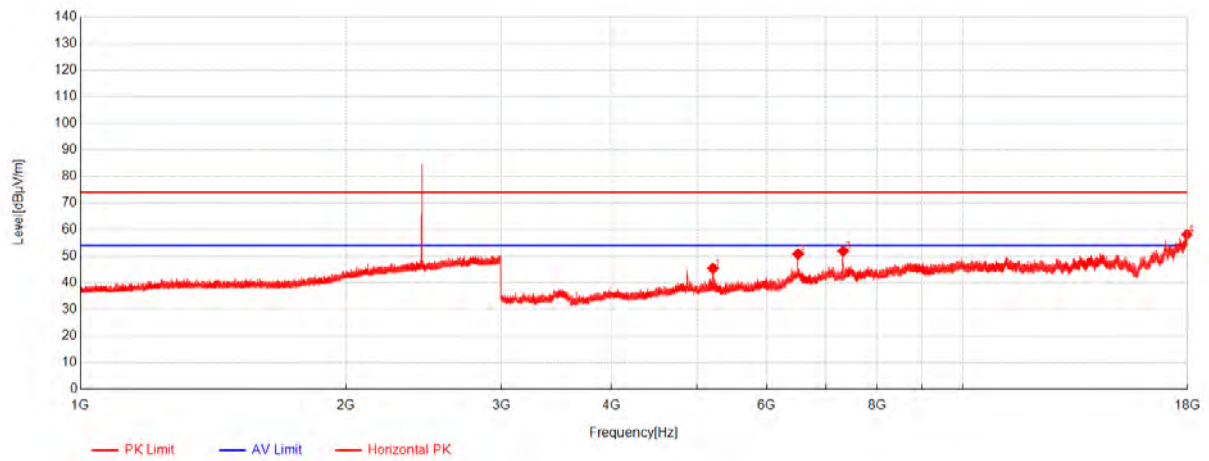

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5212.5	63.09	31.73	-49.44	45.38	74.00	28.62	Horizontal
-	-	-	-	-	26.68	54.00	27.32	-
2	6509	62.88	34.29	-46.41	50.76	74.00	23.24	Horizontal
-	-	-	-	-	32.06	54.00	21.94	-
3	7323	64.06	36.35	-48.49	51.92	74.00	22.08	Horizontal
-	-	-	-	-	33.22	54.00	20.78	-
4	17964.5	56.70	43.20	-41.77	58.13	74.00	15.87	Horizontal
-	-	-	-	-	39.43	54.00	14.57	-


BT_3DH5_TX_CH_39_Veritical

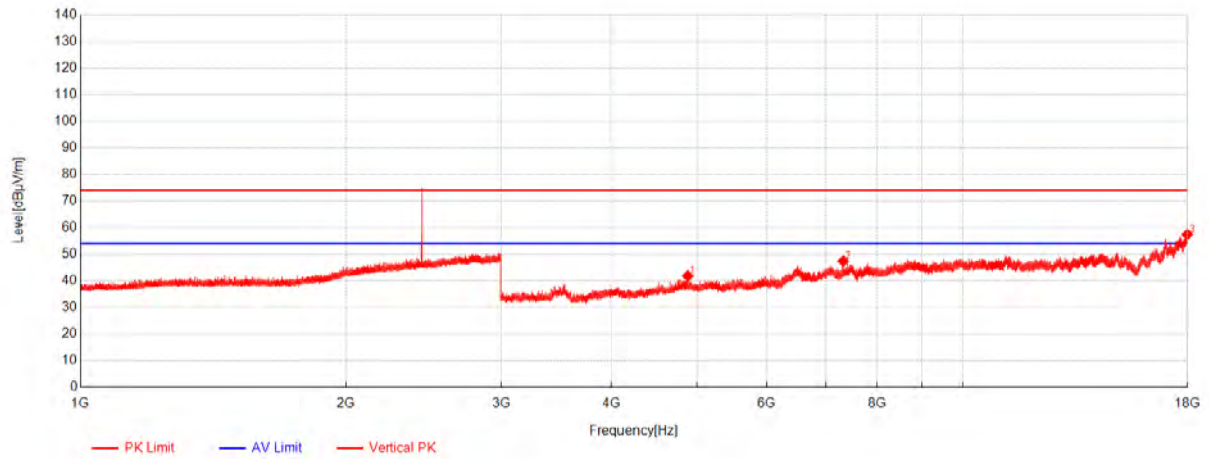

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4882	60.95	31.46	-50.62	41.79	74.00	32.21	Vertical
-	-	-	-	-	23.09	54.00	30.91	-
2	7323.5	59.53	36.35	-48.48	47.40	74.00	26.60	Vertical
-	-	-	-	-	28.70	54.00	25.30	-
3	17977	55.78	43.20	-41.56	57.42	74.00	16.58	Vertical
-	-	-	-	-	38.72	54.00	15.28	-

BT_3DH5_TX_CH_78_Horizontal

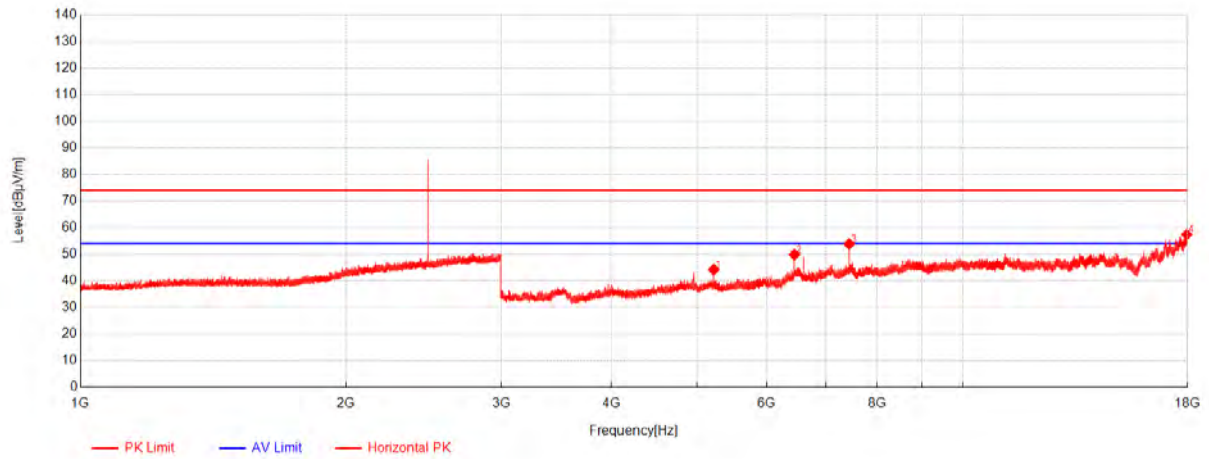

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5223.5	62.05	31.75	-49.57	44.23	74.00	29.77	Horizontal
-	-	-	-	-	25.53	54.00	28.47	-
2	6448.5	62.66	34.19	-47.00	49.85	74.00	24.15	Horizontal
-	-	-	-	-	31.15	54.00	22.85	-
3	7439.5	65.08	36.22	-47.47	53.83	74.00	20.17	Horizontal
-	-	-	-	-	35.13	54.00	18.87	-
4	17957	56.09	43.20	-41.90	57.39	74.00	16.61	Horizontal
-	-	-	-	-	38.69	54.00	15.31	-

BT_3DH5_TX_CH_78_Vertical

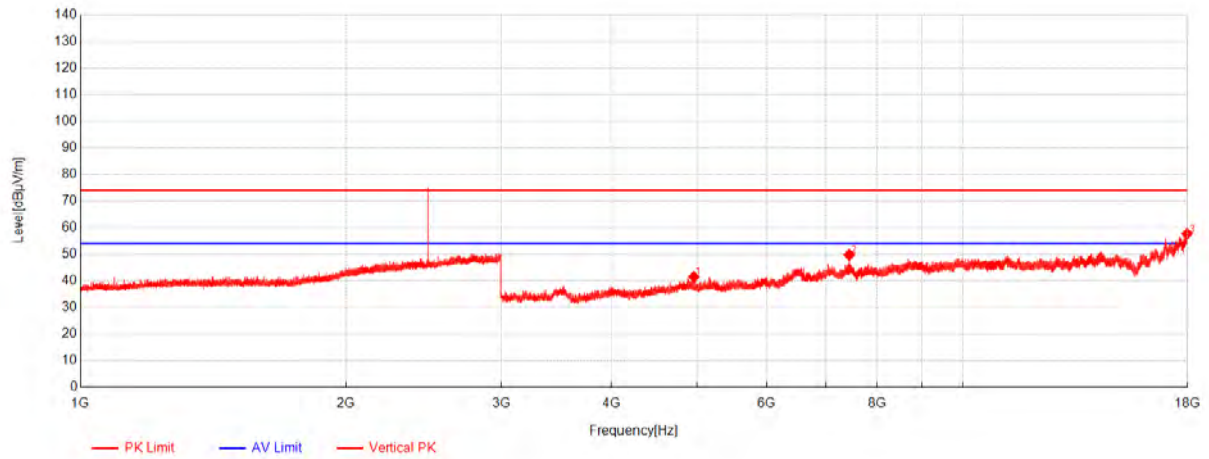

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4960	60.65	31.56	-50.71	41.50	74.00	32.50	Vertical
-	-	-	-	-	22.80	54.00	31.20	-
2	7439.5	61.01	36.22	-47.47	49.76	74.00	24.24	Vertical
-	-	-	-	-	31.06	54.00	22.94	-
3	17973	56.11	43.20	-41.62	57.69	74.00	16.31	Vertical
-	-	-	-	-	38.99	54.00	15.01	-

7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2020) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

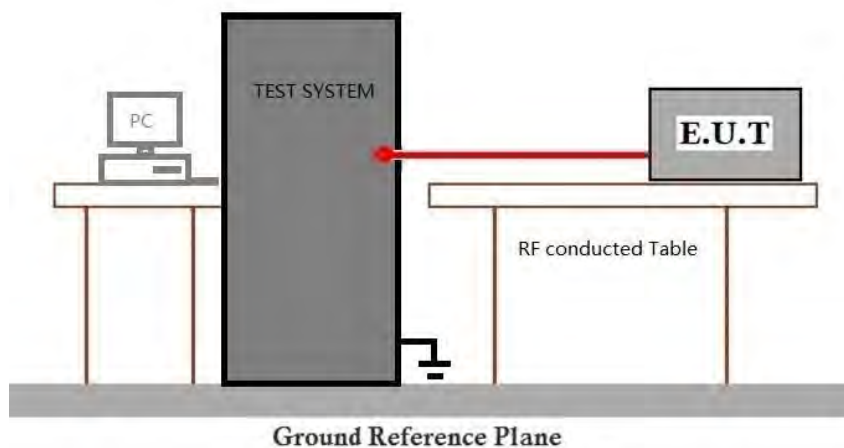



Report No.: KSCR260400080002

Page: 55 of 121

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2020) Section 6.9.2

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

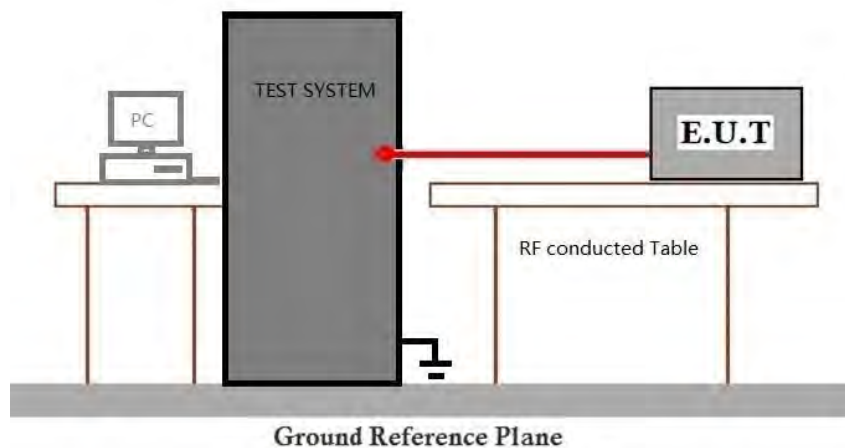

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2020) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4QPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

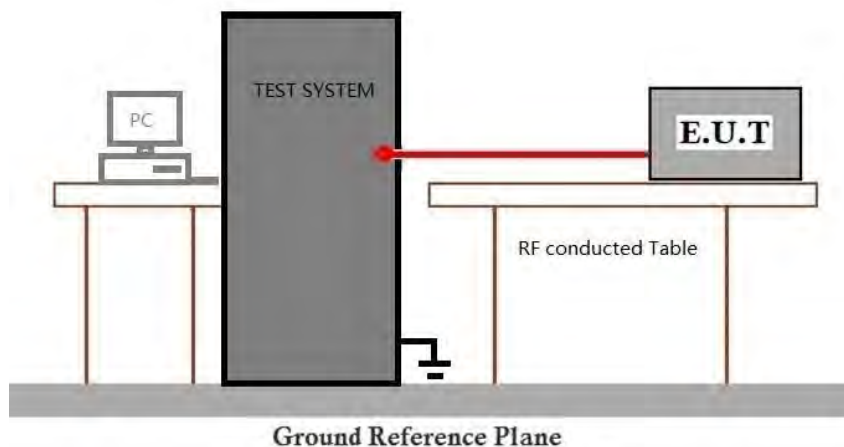

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2020) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

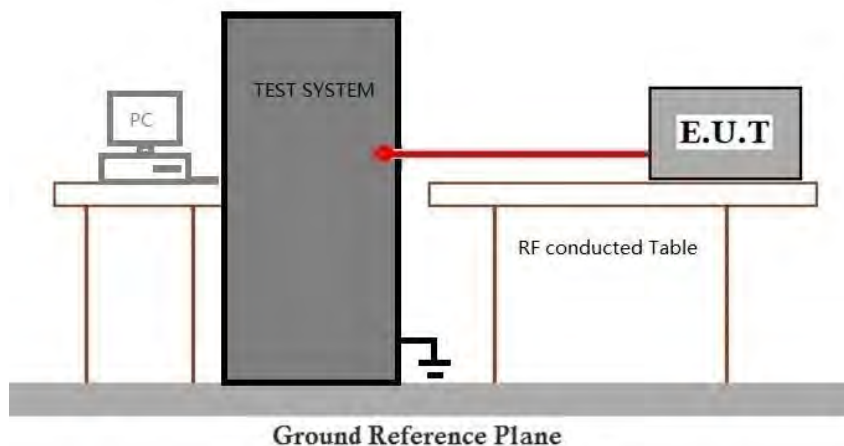

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2020) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

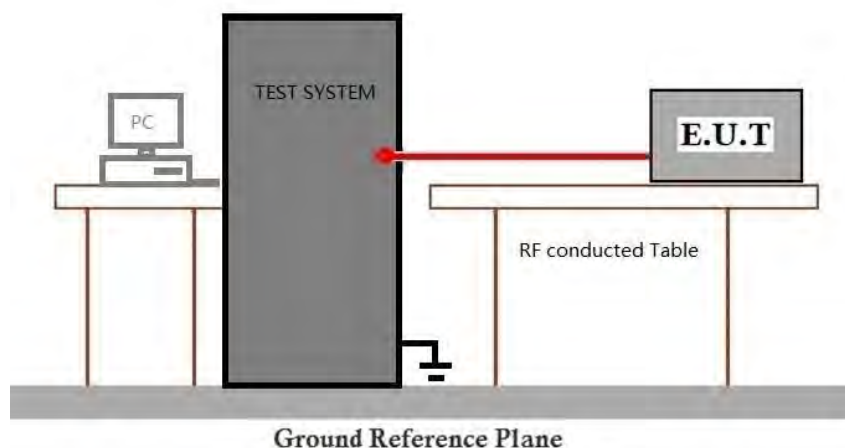

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.10 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 7.8.7.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

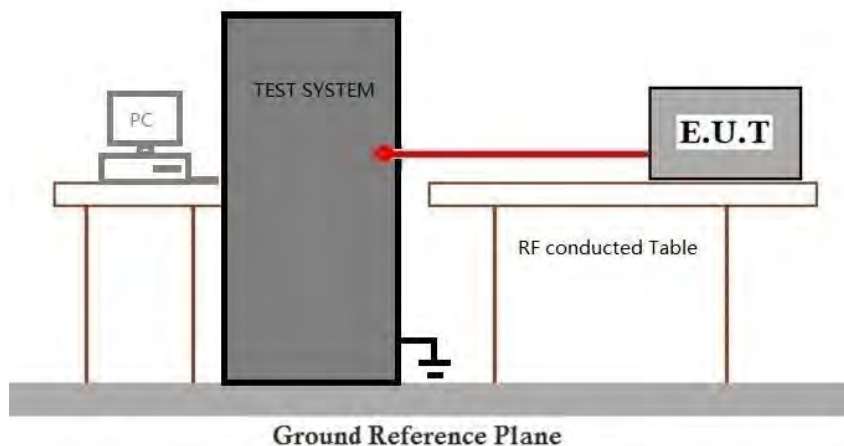



Report No.: KSCR260400080002

Page: 61 of 121

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.11 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 7.8.7

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 55.4 % RH

Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

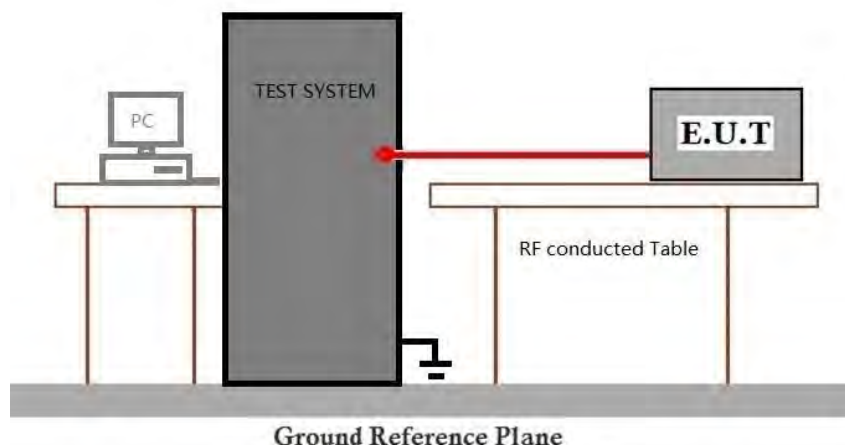

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: KSCR260400080002

Page: 63 of 121

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2604000800AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2604000800AT



10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.903	3.750	77.41	1.11	0.03
		2441	DH5	2.903	3.751	77.39	1.11	0.05
		2480	DH5	2.903	3.751	77.39	1.11	0.06
Pi/4DQPSK	SISO	2402	2DH5	2.897	3.751	77.23	1.12	0.03
		2441	2DH5	2.895	3.749	77.22	1.12	0.04
		2480	2DH5	2.898	3.751	77.26	1.12	0.06
8DPSK	SISO	2402	3DH5	2.898	3.751	77.26	1.12	0.03
		2441	3DH5	2.896	3.749	77.25	1.12	0.07
		2480	3DH5	2.898	3.750	77.28	1.12	0.03

1.2 Test Graph


1.2.1 Ant1

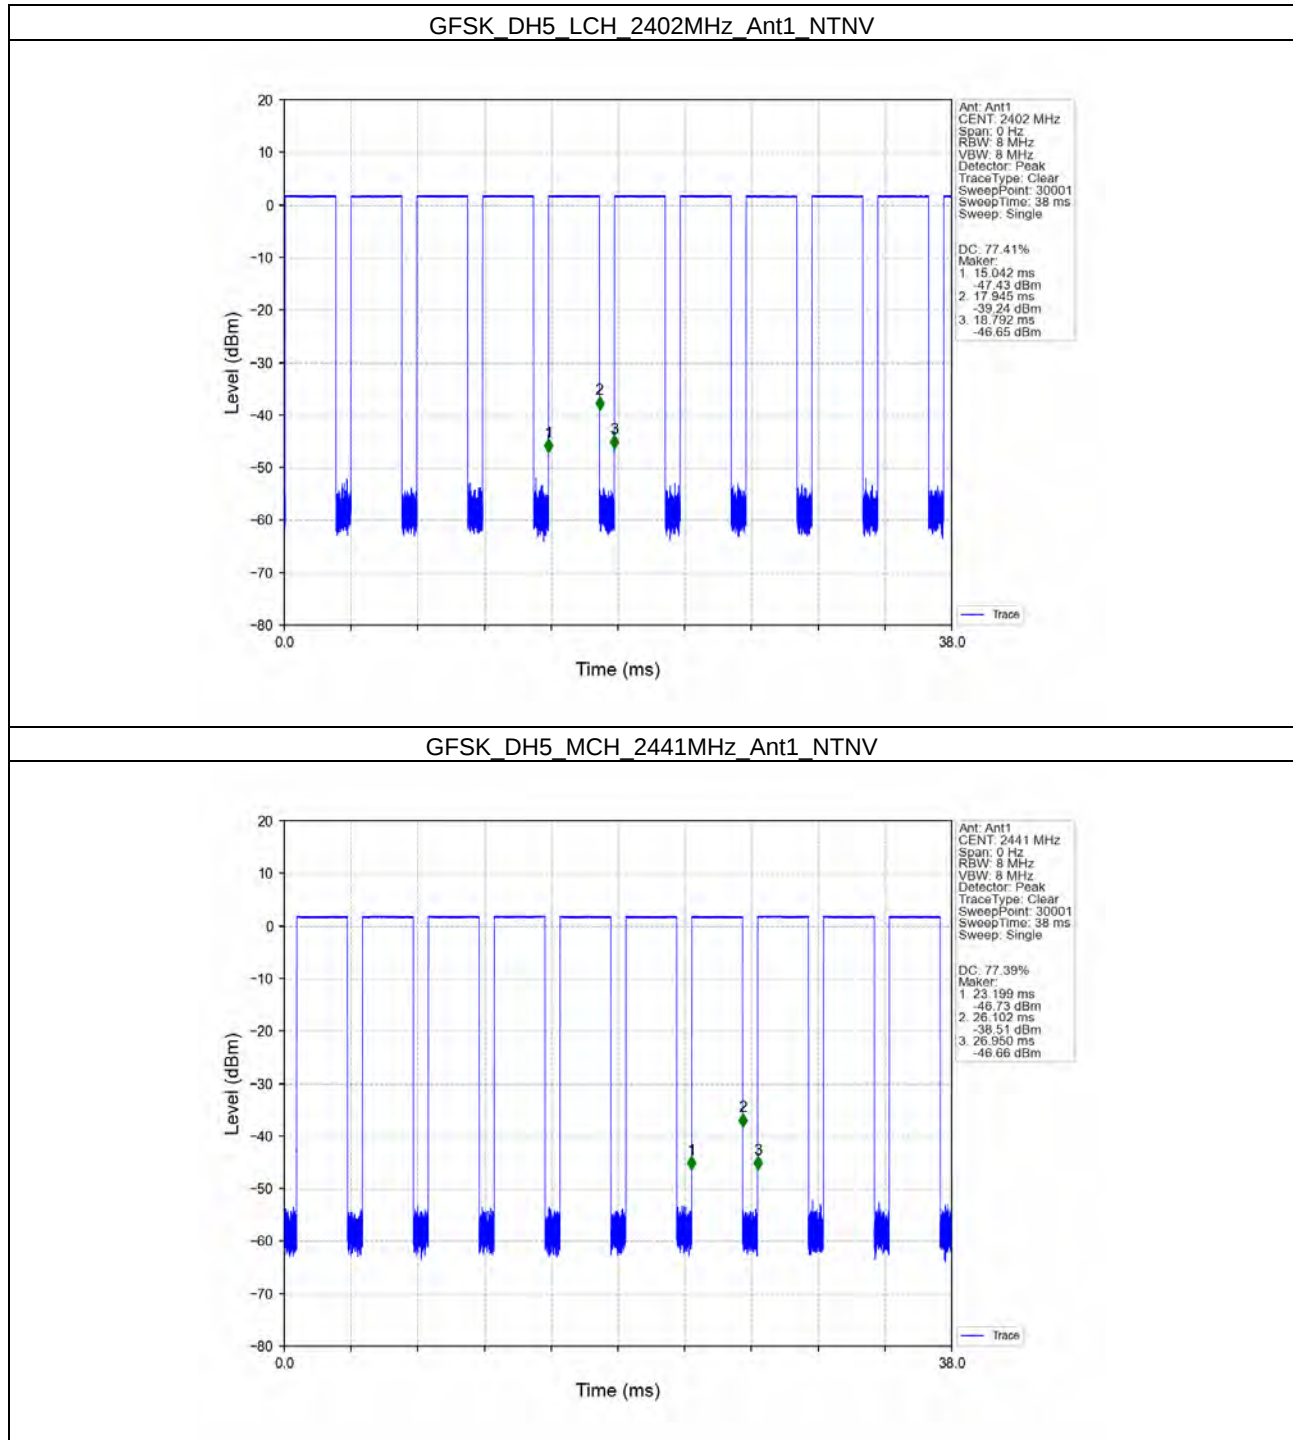


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

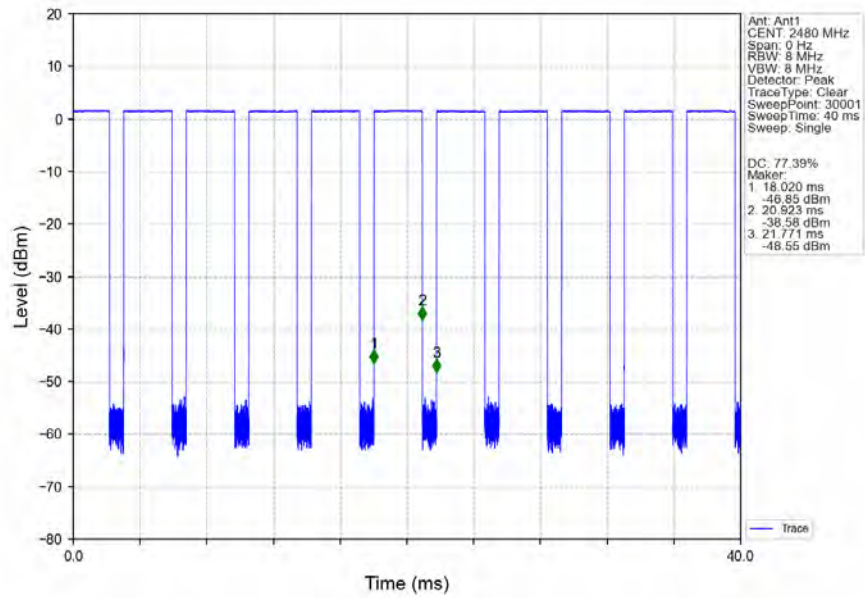


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

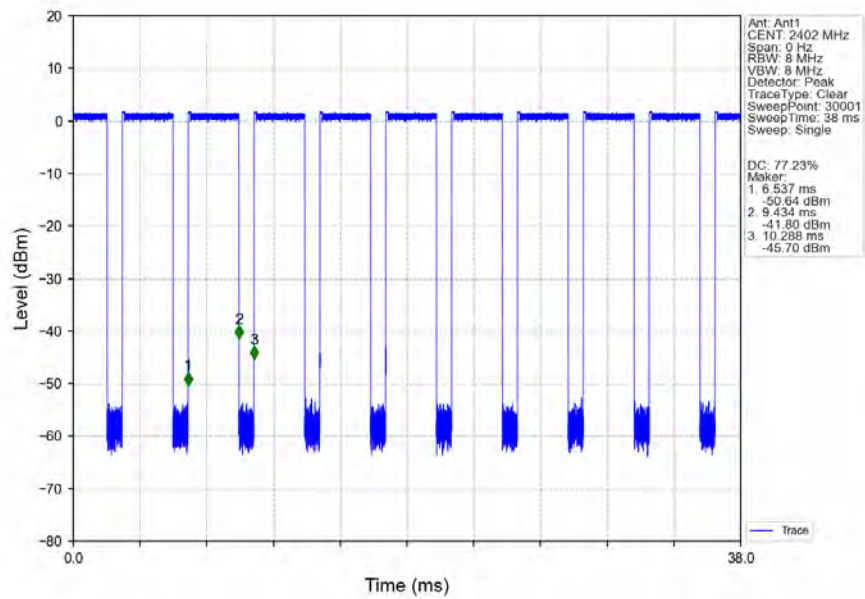


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

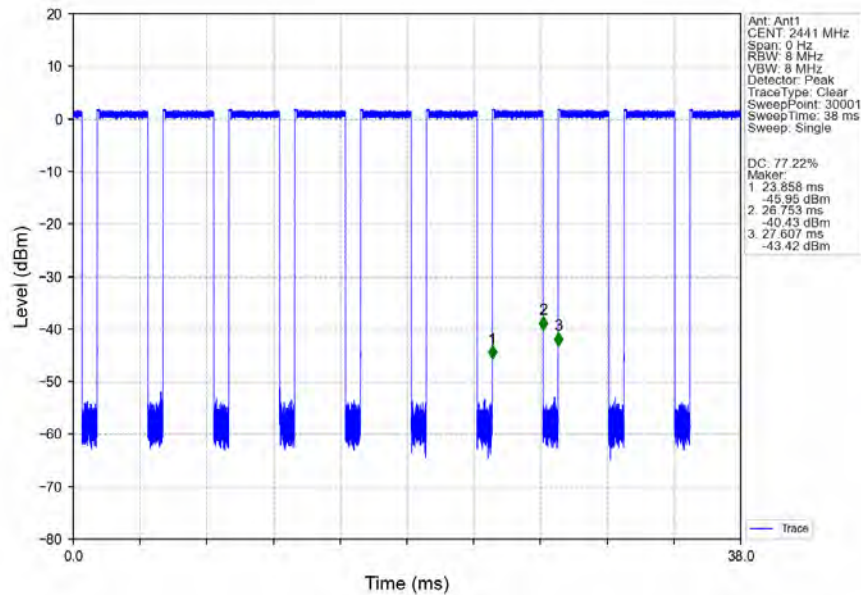


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

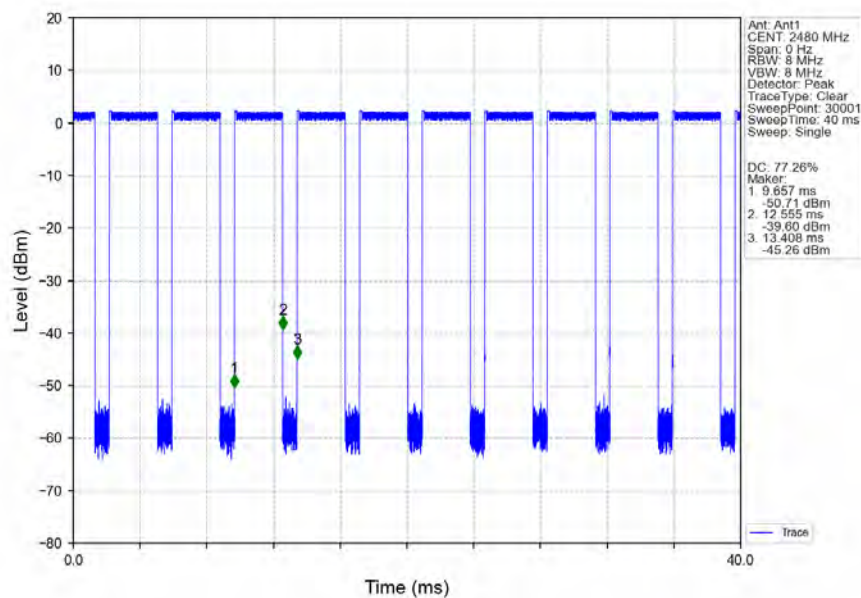


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

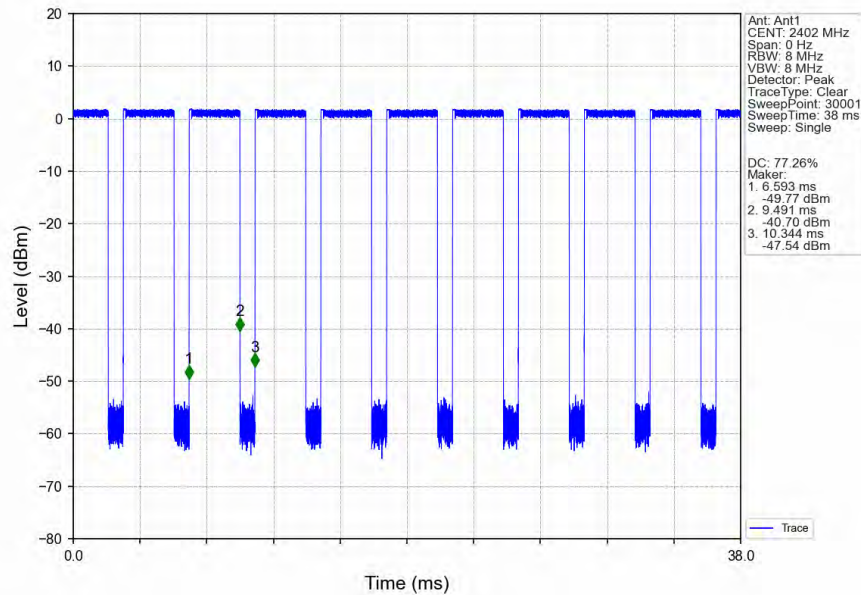

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

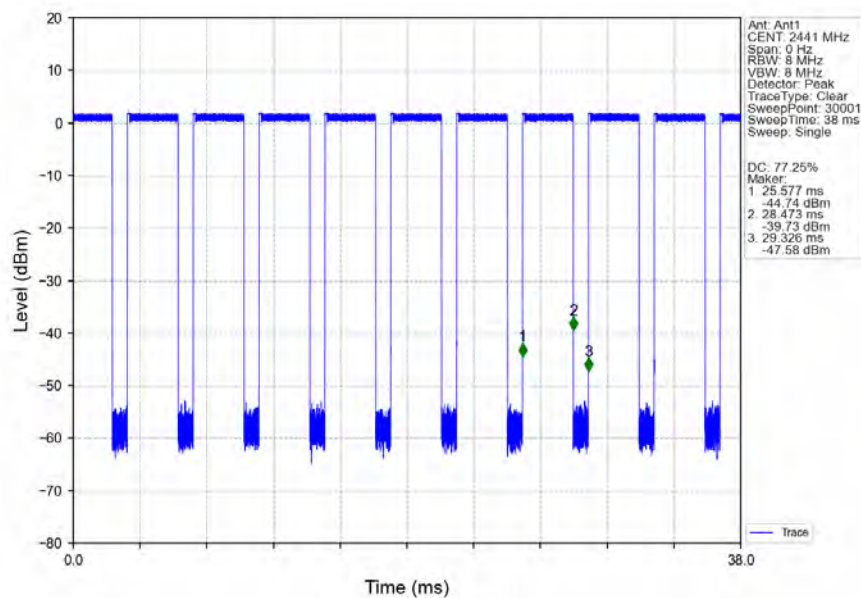

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

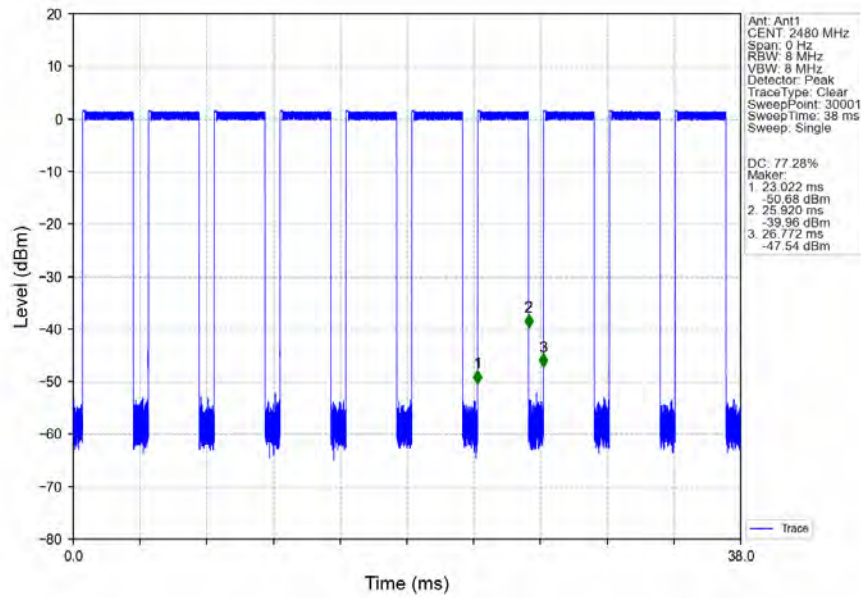

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.963	/	Pass
		2441	DH5	1	0.965	/	Pass
		2480	DH5	1	0.963	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.208	/	Pass
		2441	2DH5	1	1.206	/	Pass
		2480	2DH5	1	1.203	/	Pass
8DPSK	SISO	2402	3DH5	1	1.187	/	Pass
		2441	3DH5	1	1.182	/	Pass
		2480	3DH5	1	1.176	/	Pass


2.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.043	/	Pass
		2441	DH5	1	0.941	/	Pass
		2480	DH5	1	0.942	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.291	/	Pass
		2441	2DH5	1	1.297	/	Pass
		2480	2DH5	1	1.285	/	Pass
8DPSK	SISO	2402	3DH5	1	1.289	/	Pass
		2441	3DH5	1	1.290	/	Pass
		2480	3DH5	1	1.280	/	Pass


2.2 Test Graph

2.2.1 OBW


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

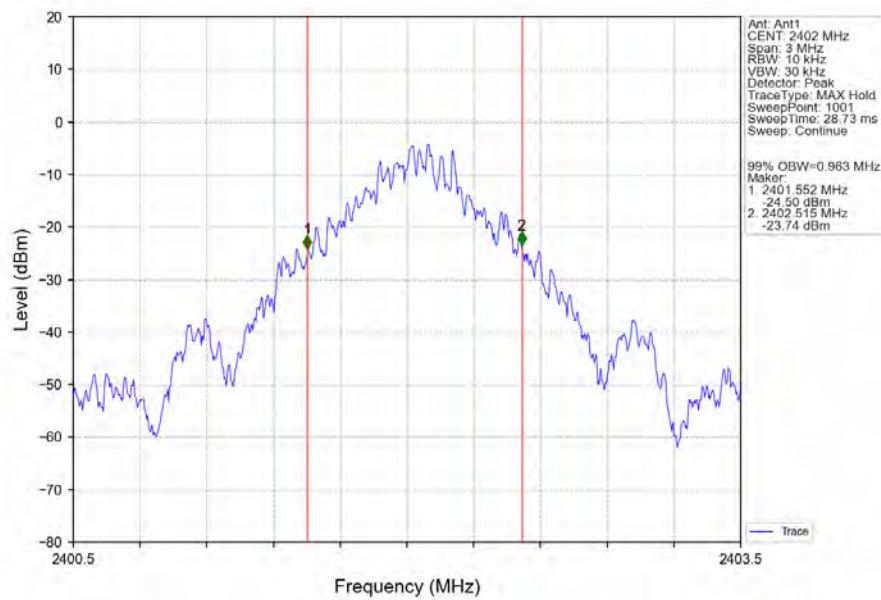


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

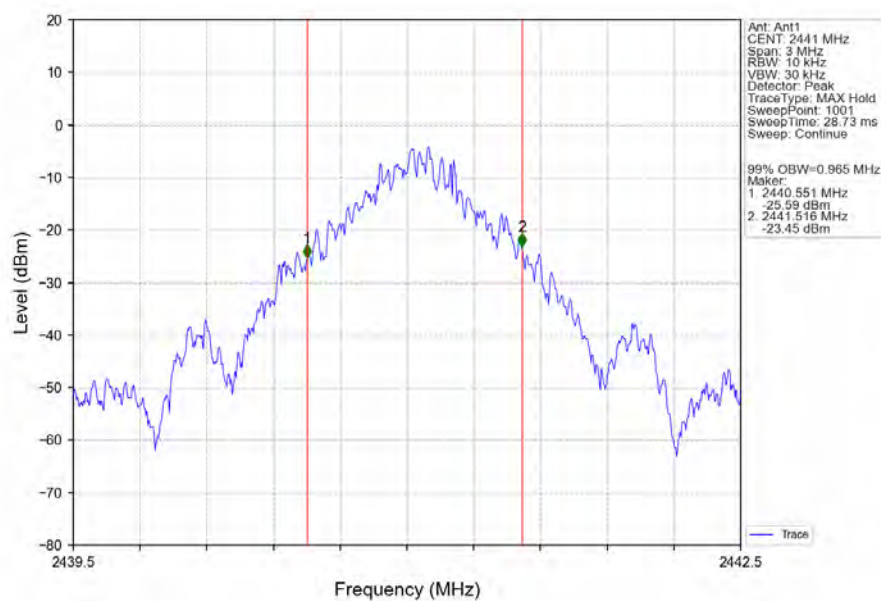


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

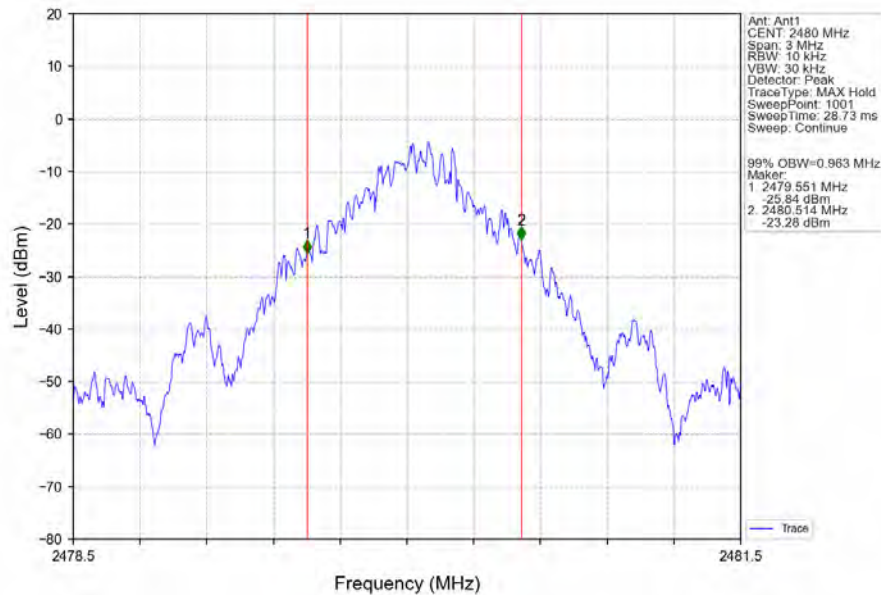


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

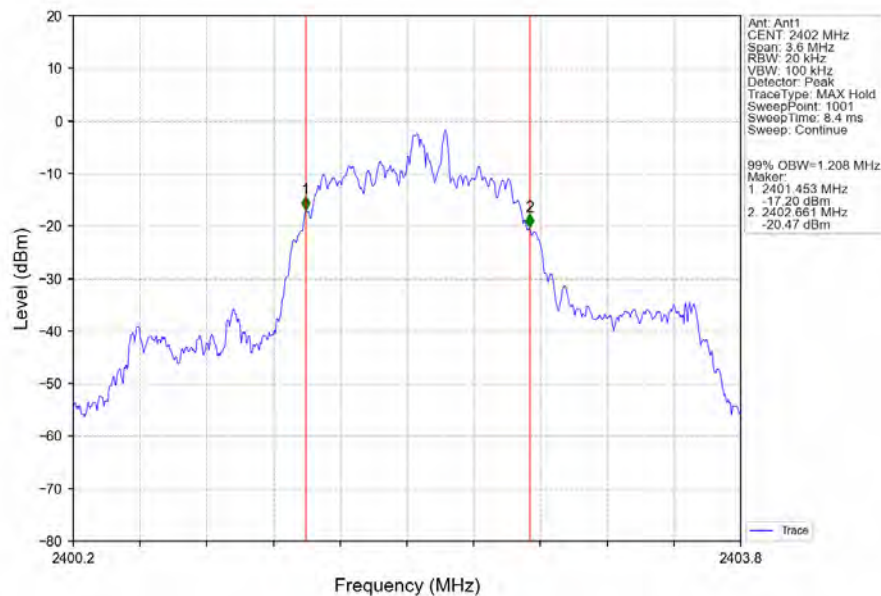


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

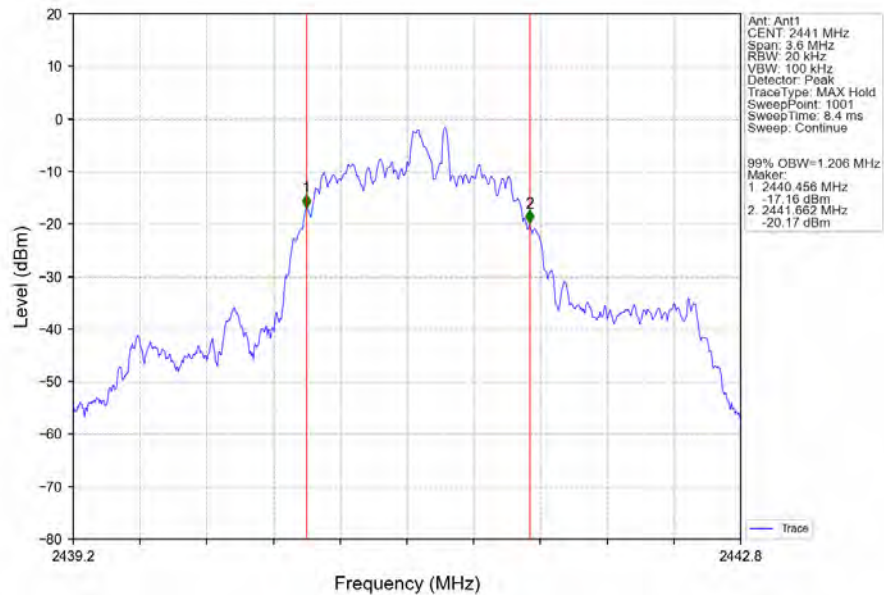


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

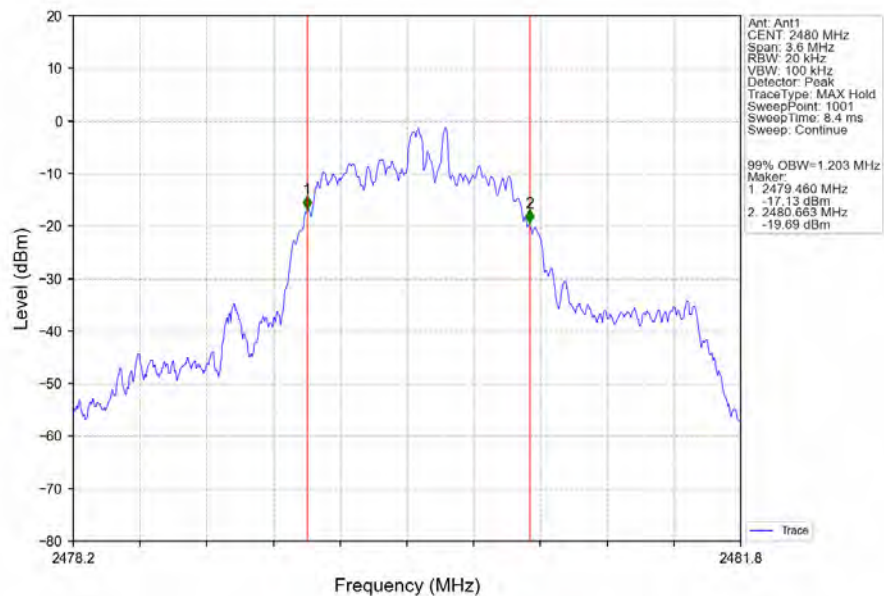


8DPSK 3DH5_LCH_2402MHz_Ant1_NTNV

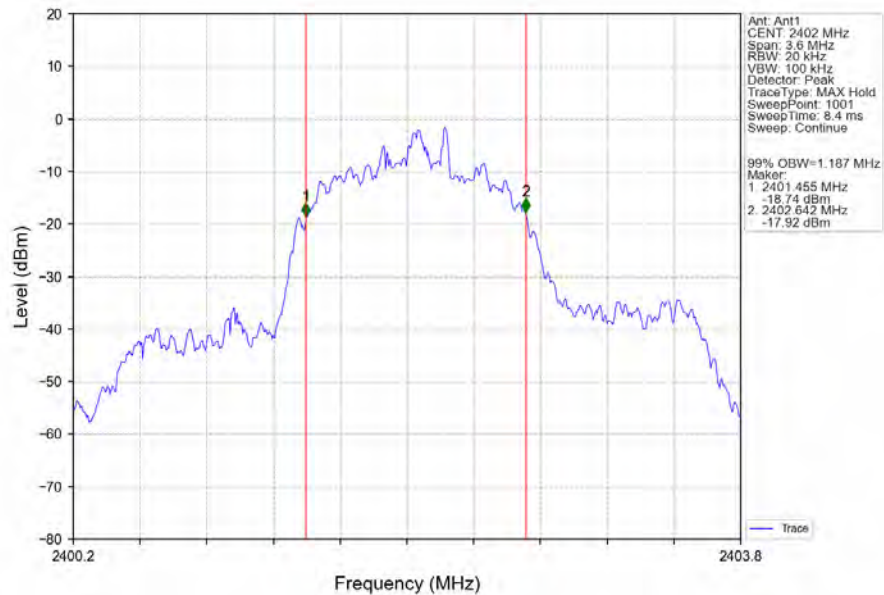

8DPSK 3DH5_MCH_2441MHz_Ant1_NTNV

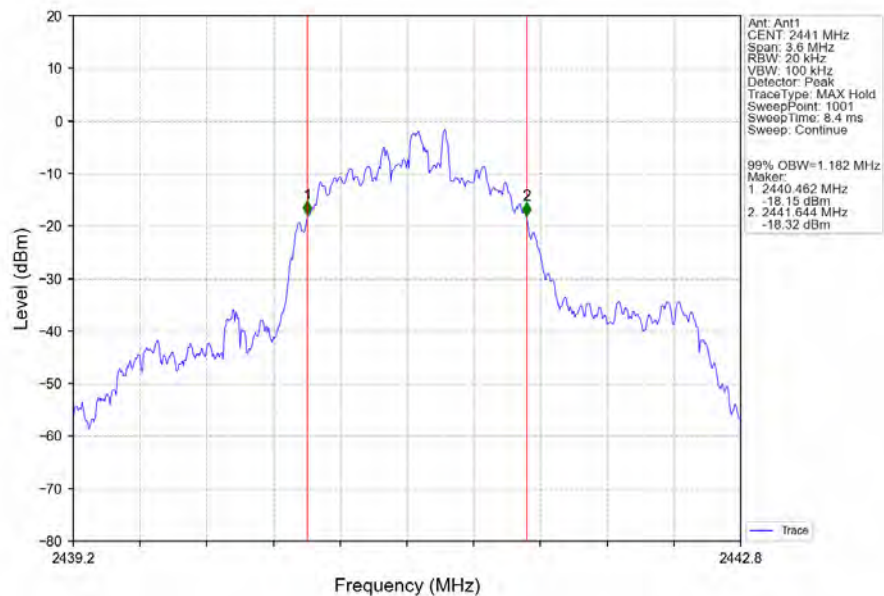


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

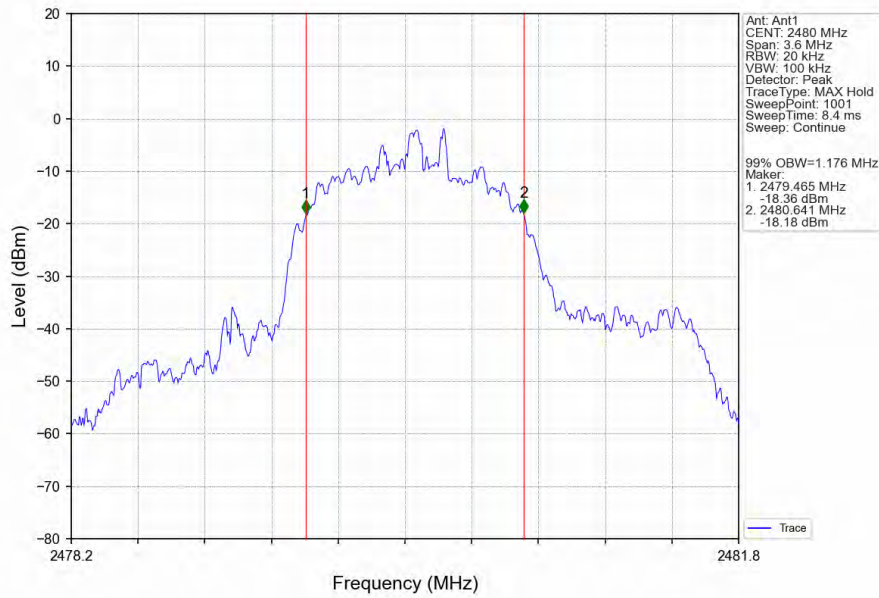


2.2.2 20dB BW


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

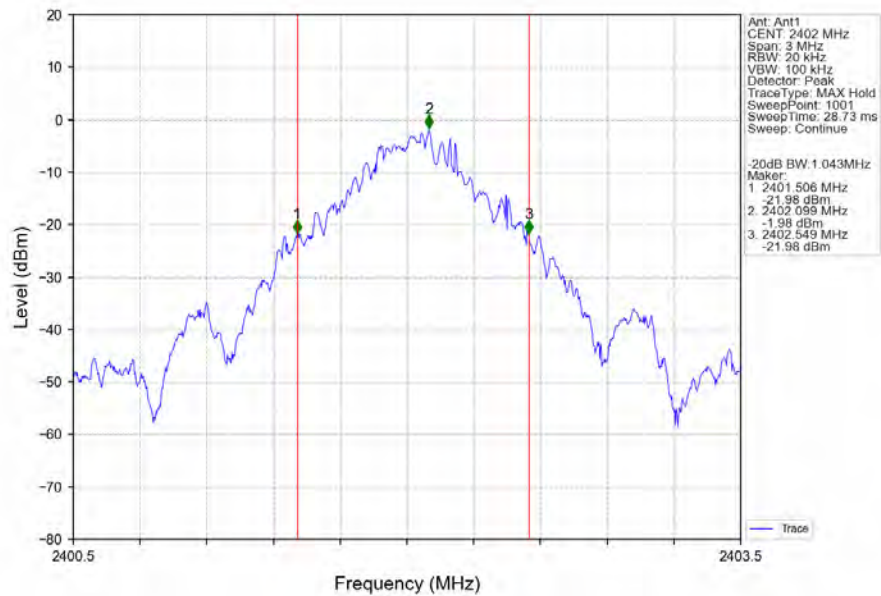


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

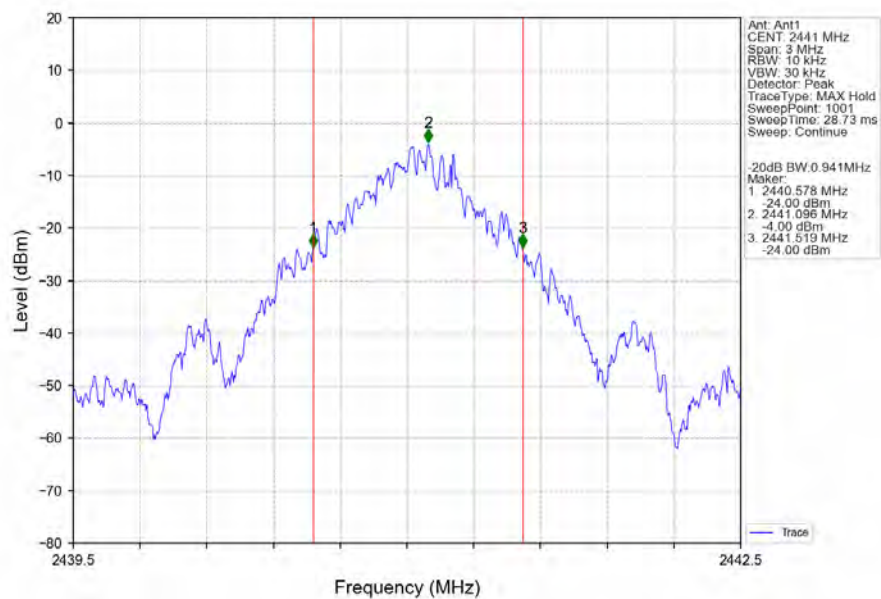


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

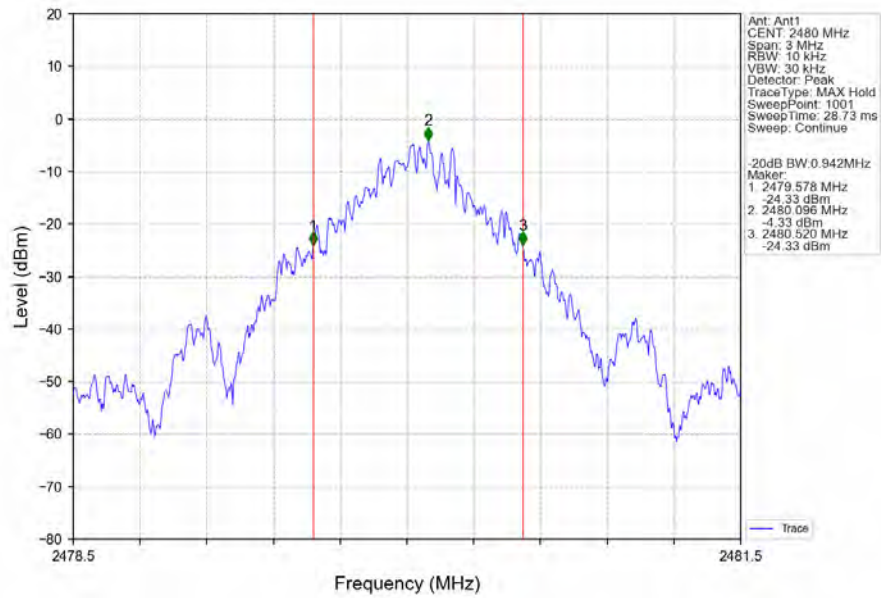


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

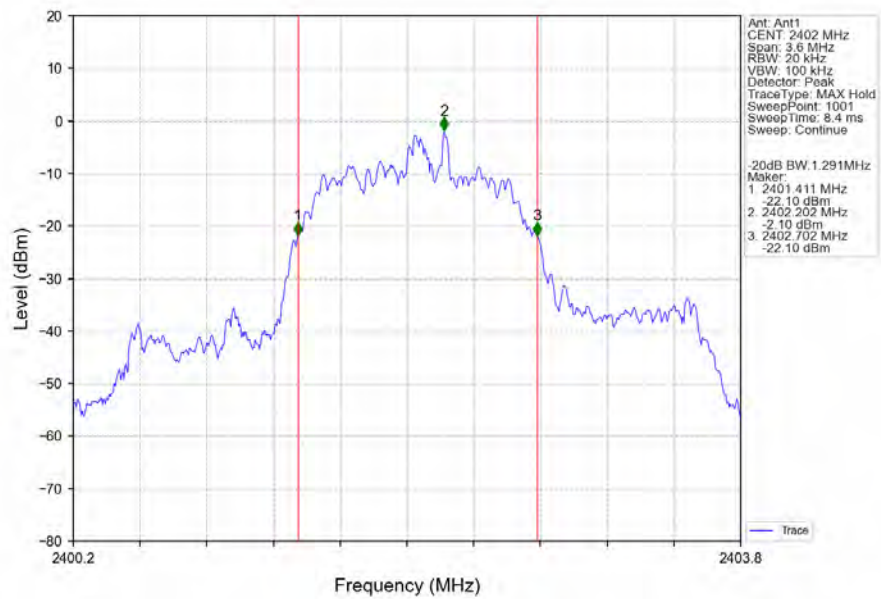


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

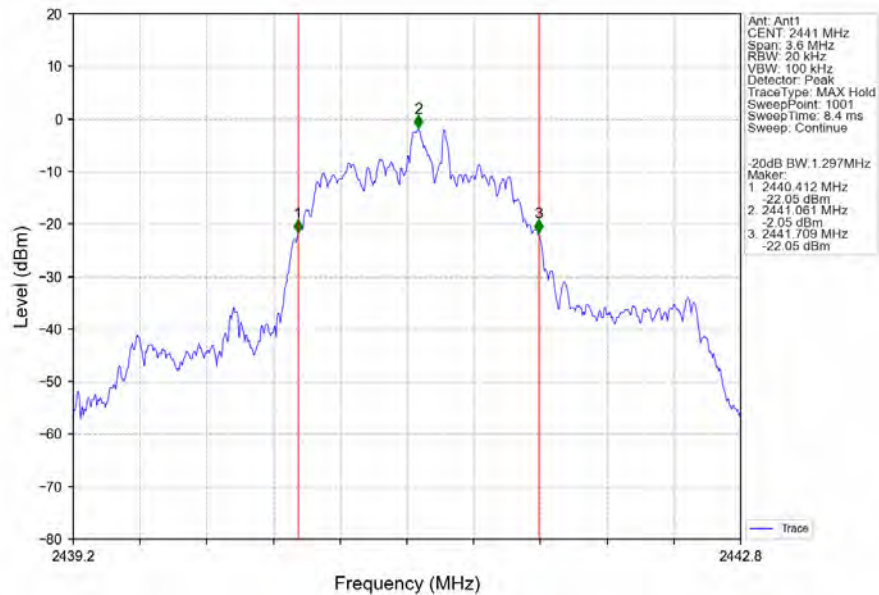


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

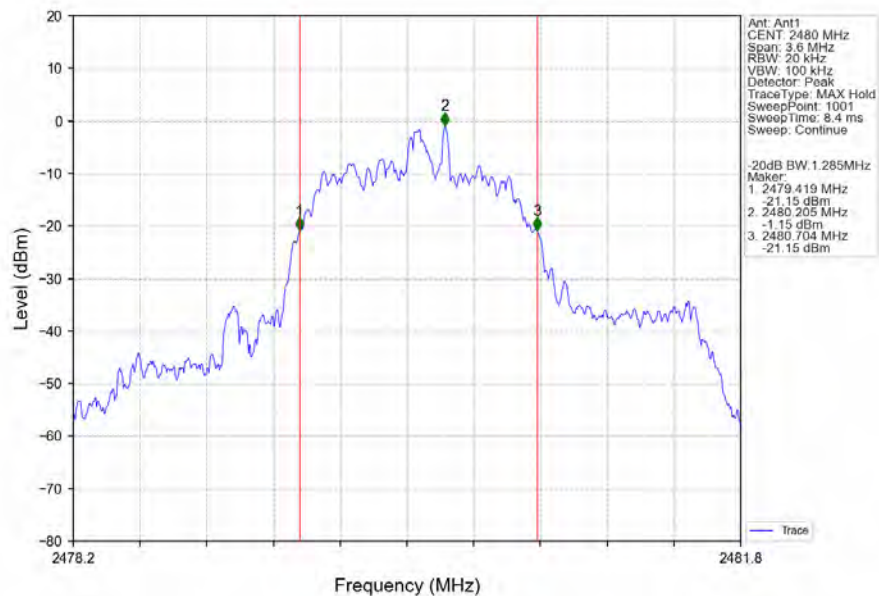


8DPSK 3DH5_LCH_2402MHz_Ant1_NTNV

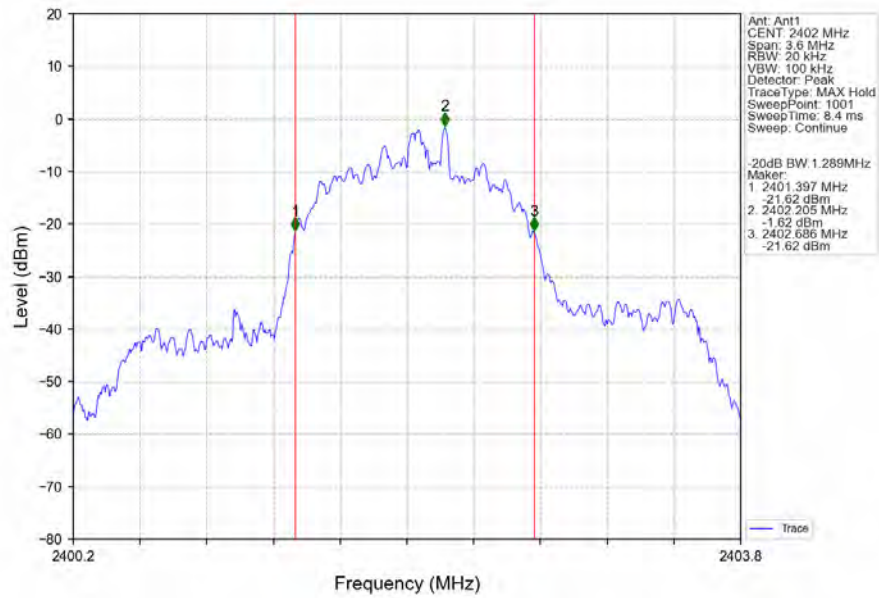

8DPSK 3DH5_MCH_2441MHz_Ant1_NTNV

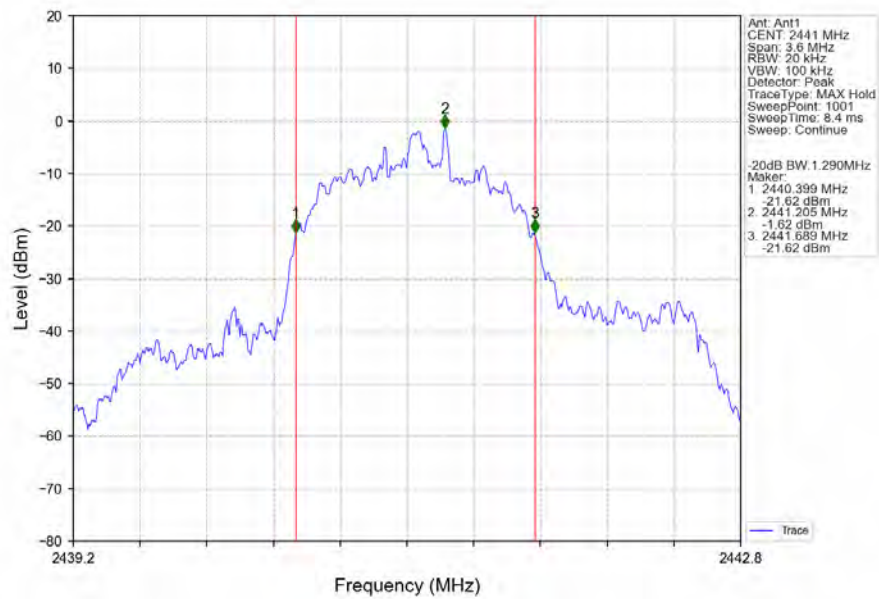

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

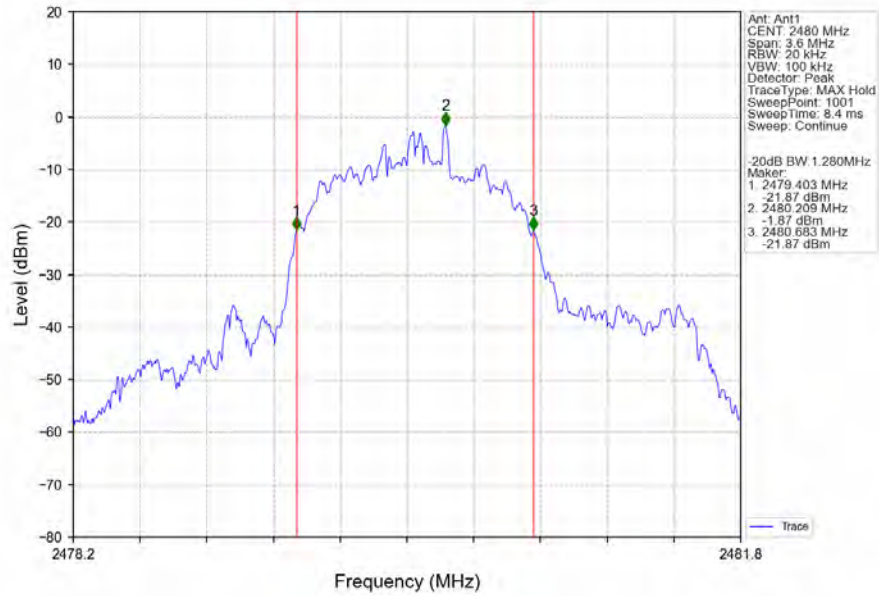



3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	1.78	≤ 20.97	Pass
		2441	DH5	1.80	≤ 20.97	Pass
		2480	DH5	1.57	≤ 20.97	Pass
Pi/4DQPSK	SISO	2402	2DH5	1.78	≤ 20.97	Pass
		2441	2DH5	1.85	≤ 20.97	Pass
		2480	2DH5	2.33	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	1.79	≤ 20.97	Pass
		2441	3DH5	1.88	≤ 20.97	Pass
		2480	3DH5	1.58	≤ 20.97	Pass

Note1: Antenna Gain: Ant1: -1dBi;


3.2 Test Graph

3.2.1 Power


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

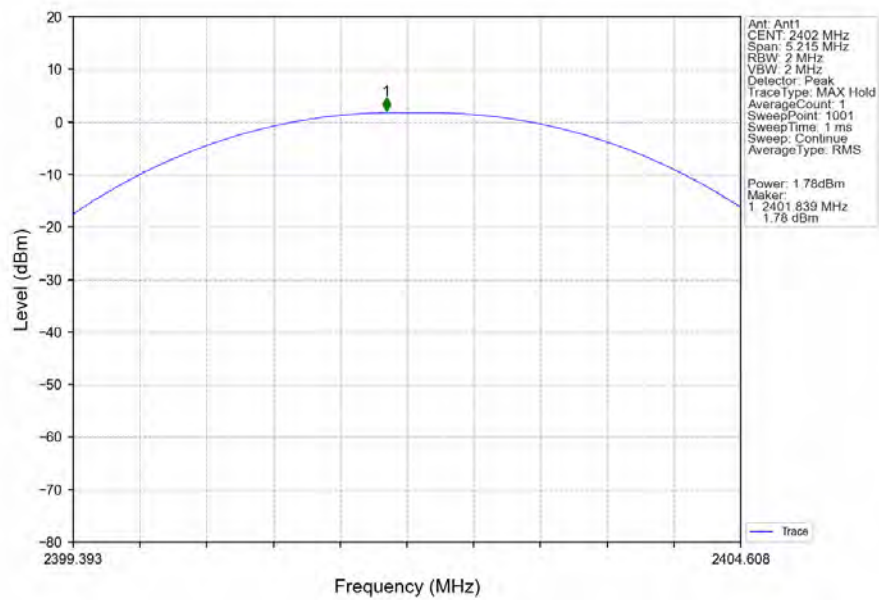


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

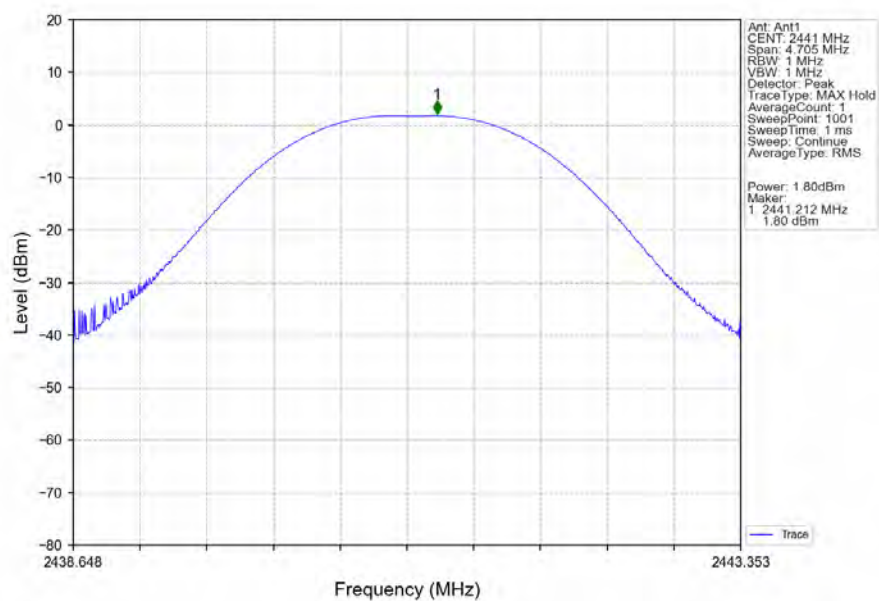


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

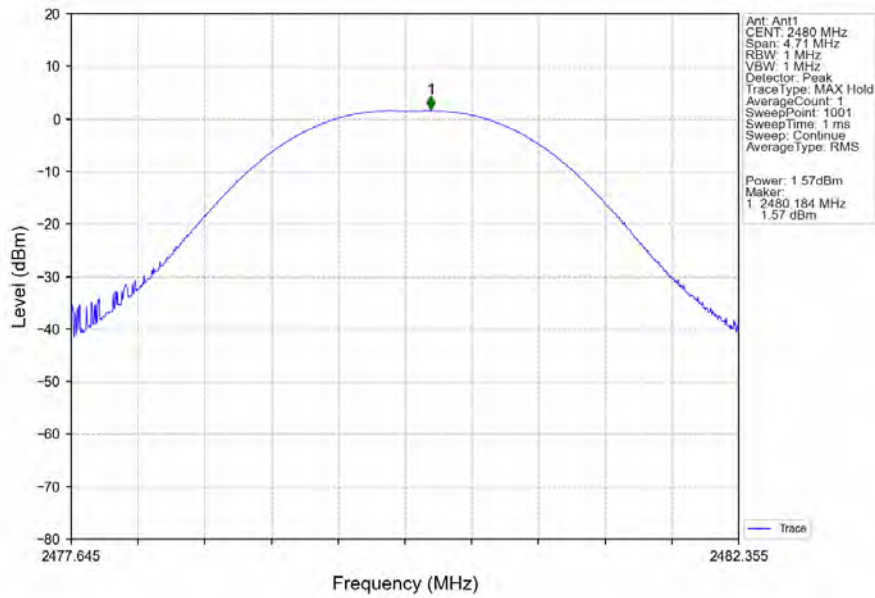


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

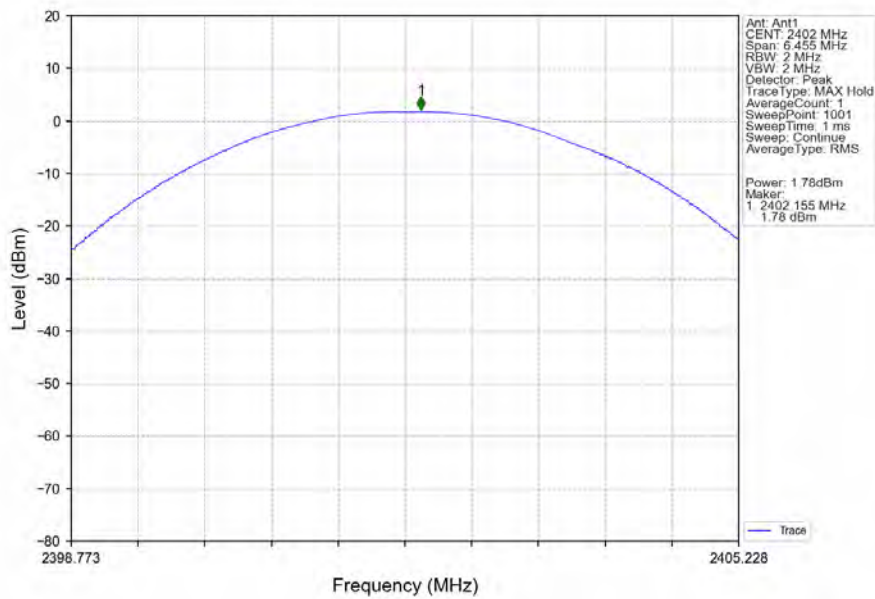


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

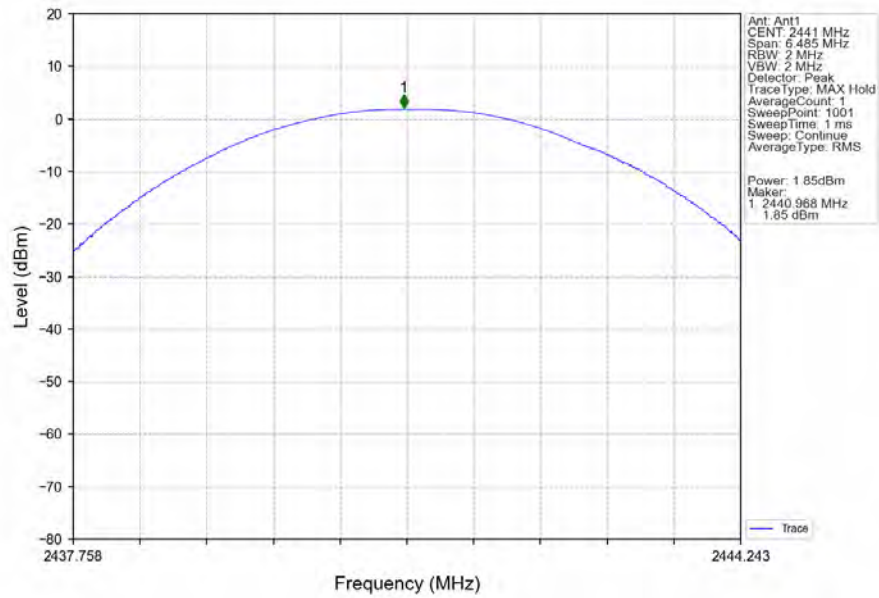


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

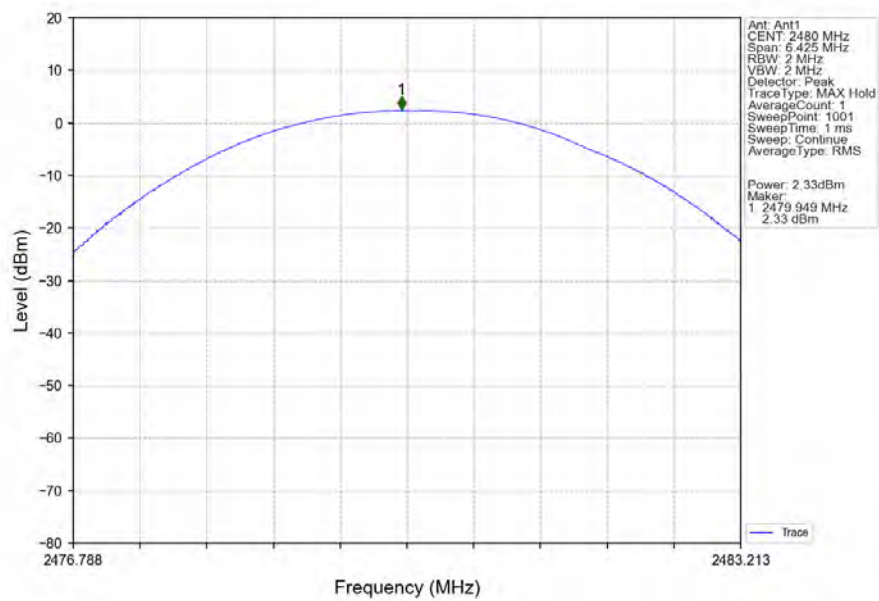


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

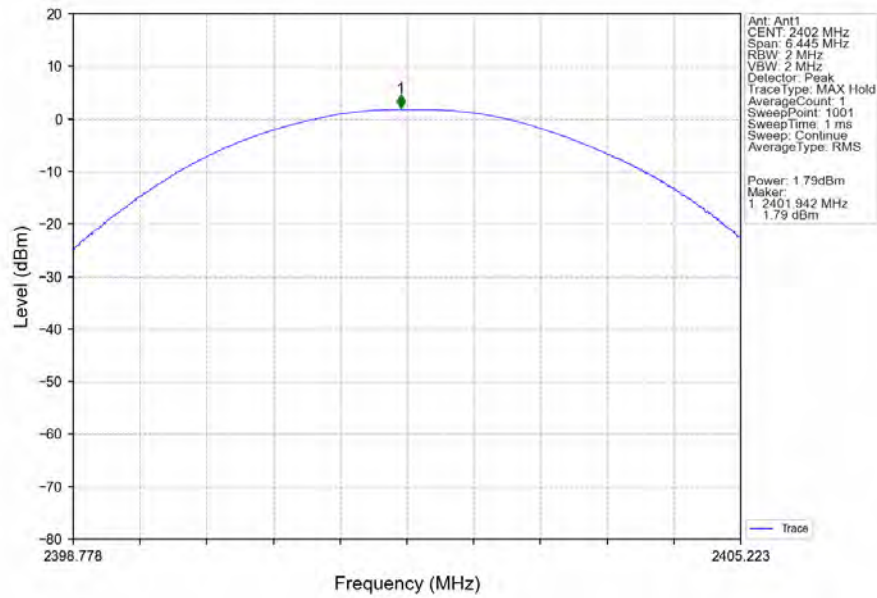

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

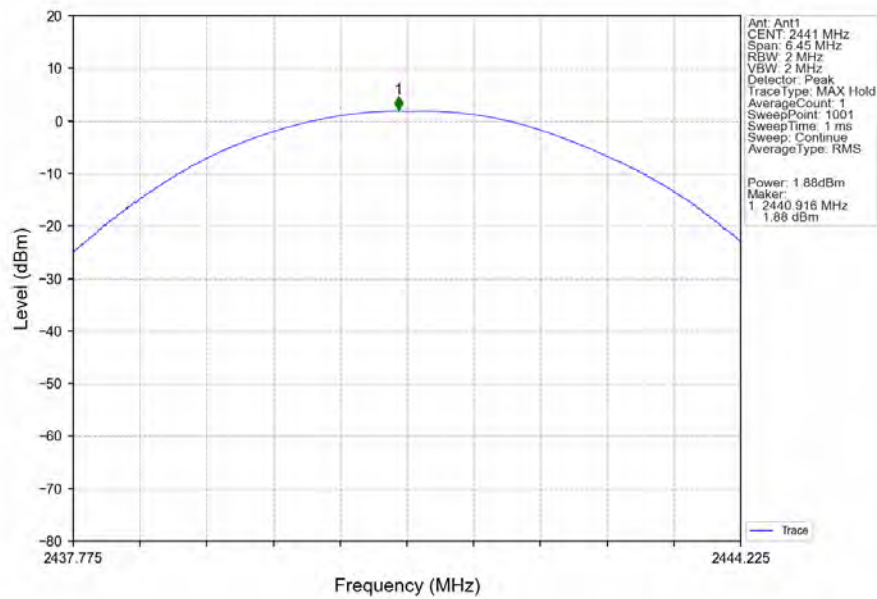

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

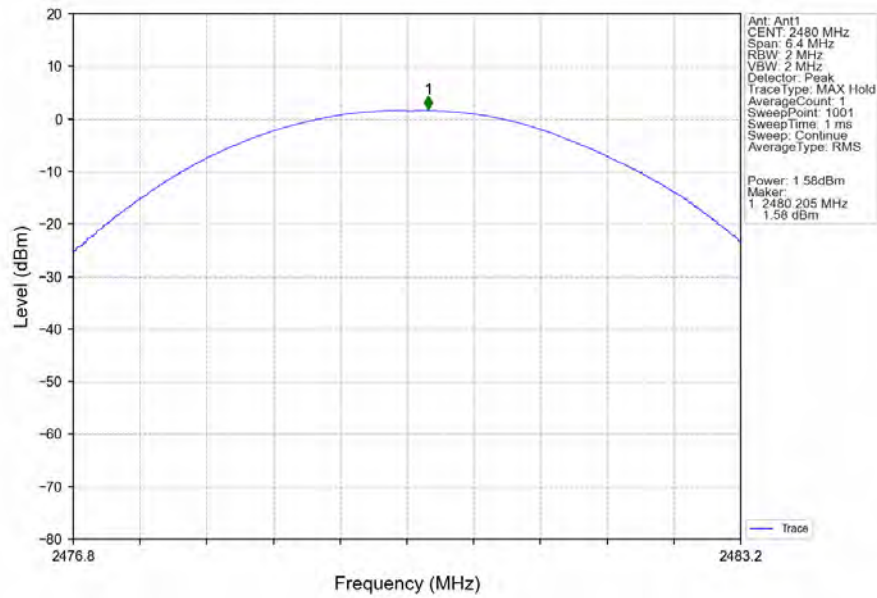



4. Carrier Frequency Separation


4.1 Test Result

4.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.043	≥ 0.695	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.034	1.297	≥ 0.865	Pass
8DPSK	SISO	HOPP	3DH5	1.037	1.290	≥ 0.86	Pass

4.2 Test Graph

4.2.1 Ant1

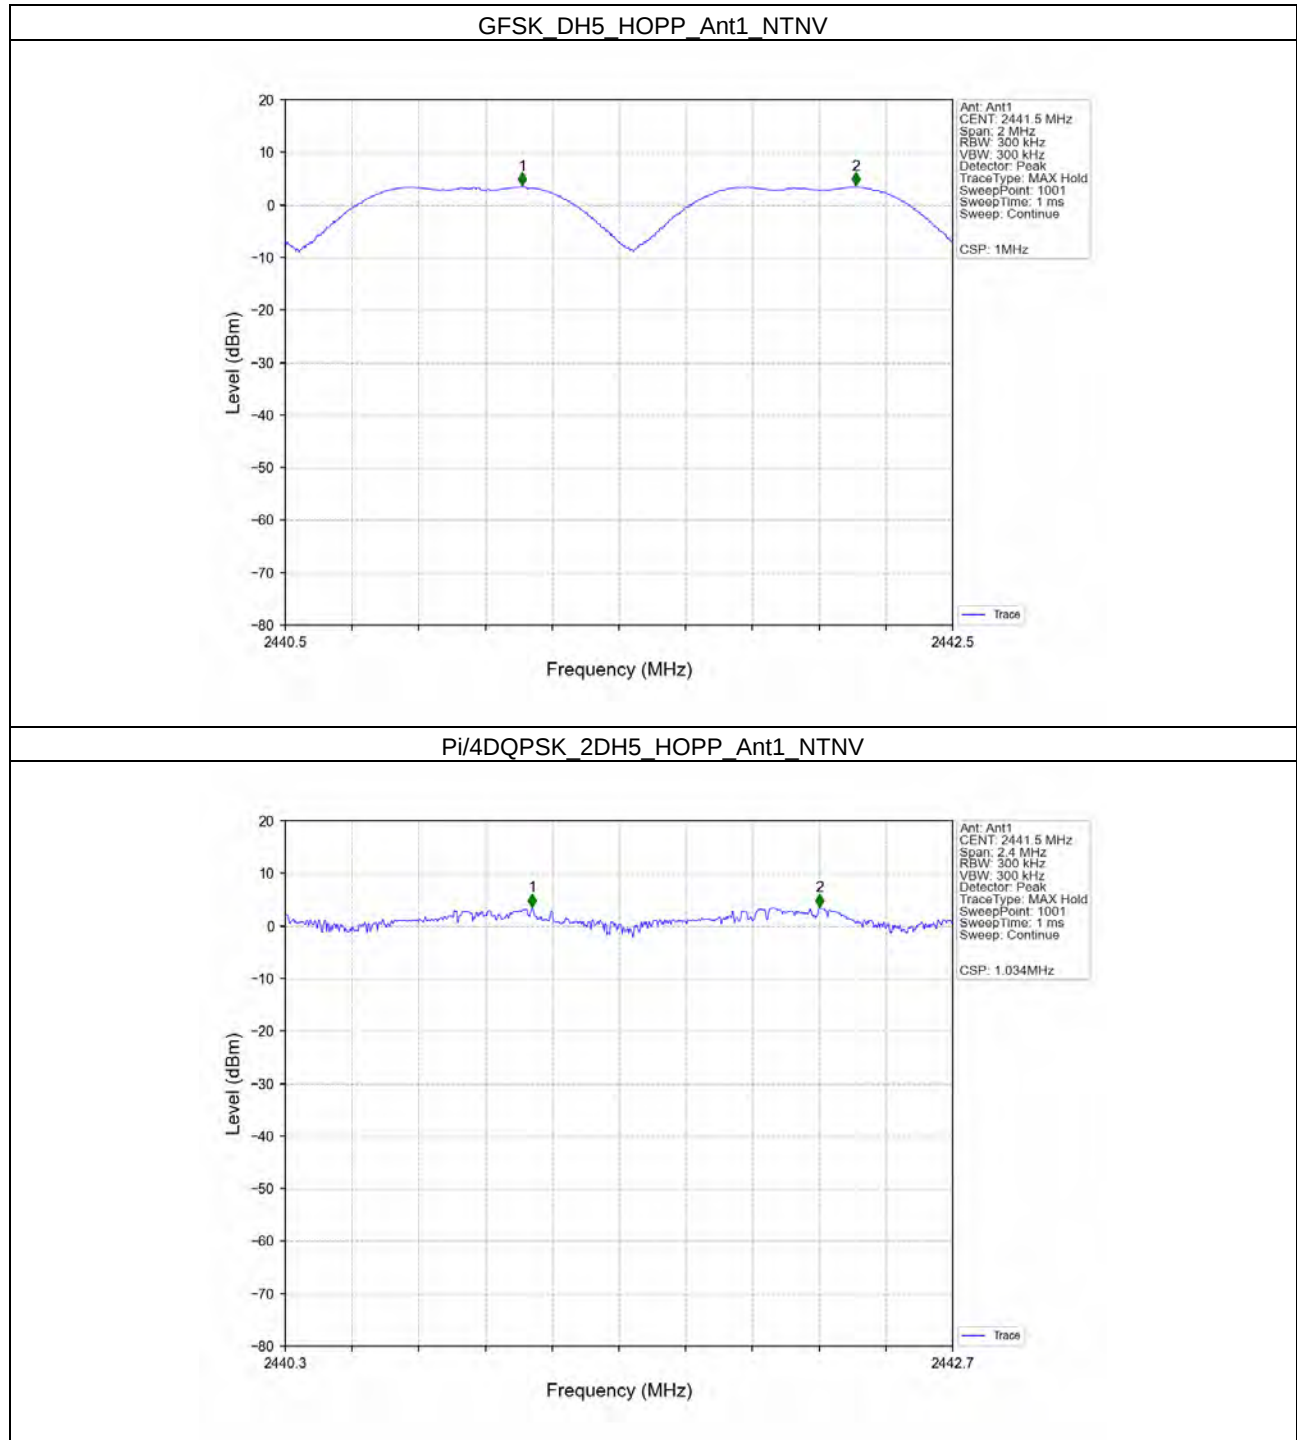

8DPSK 3DH5_HOPP_Ant1_NTNV

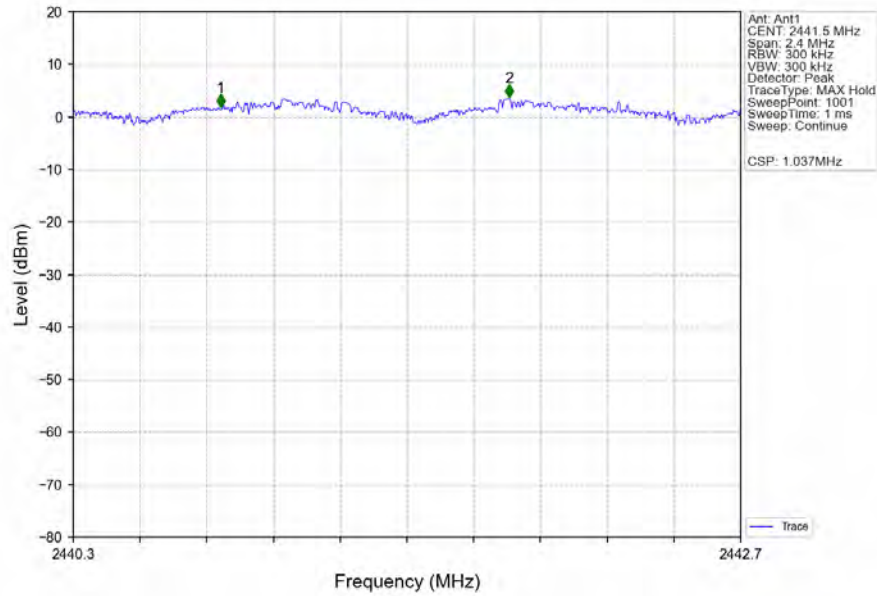



Report No.: KSCR260400080002

Page: 90 of 121

5. Number of Hopping Frequencies


5.1 Test Result

5.1.1 HoppNum


Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

5.2 Test Graph

5.2.1 HoppNum

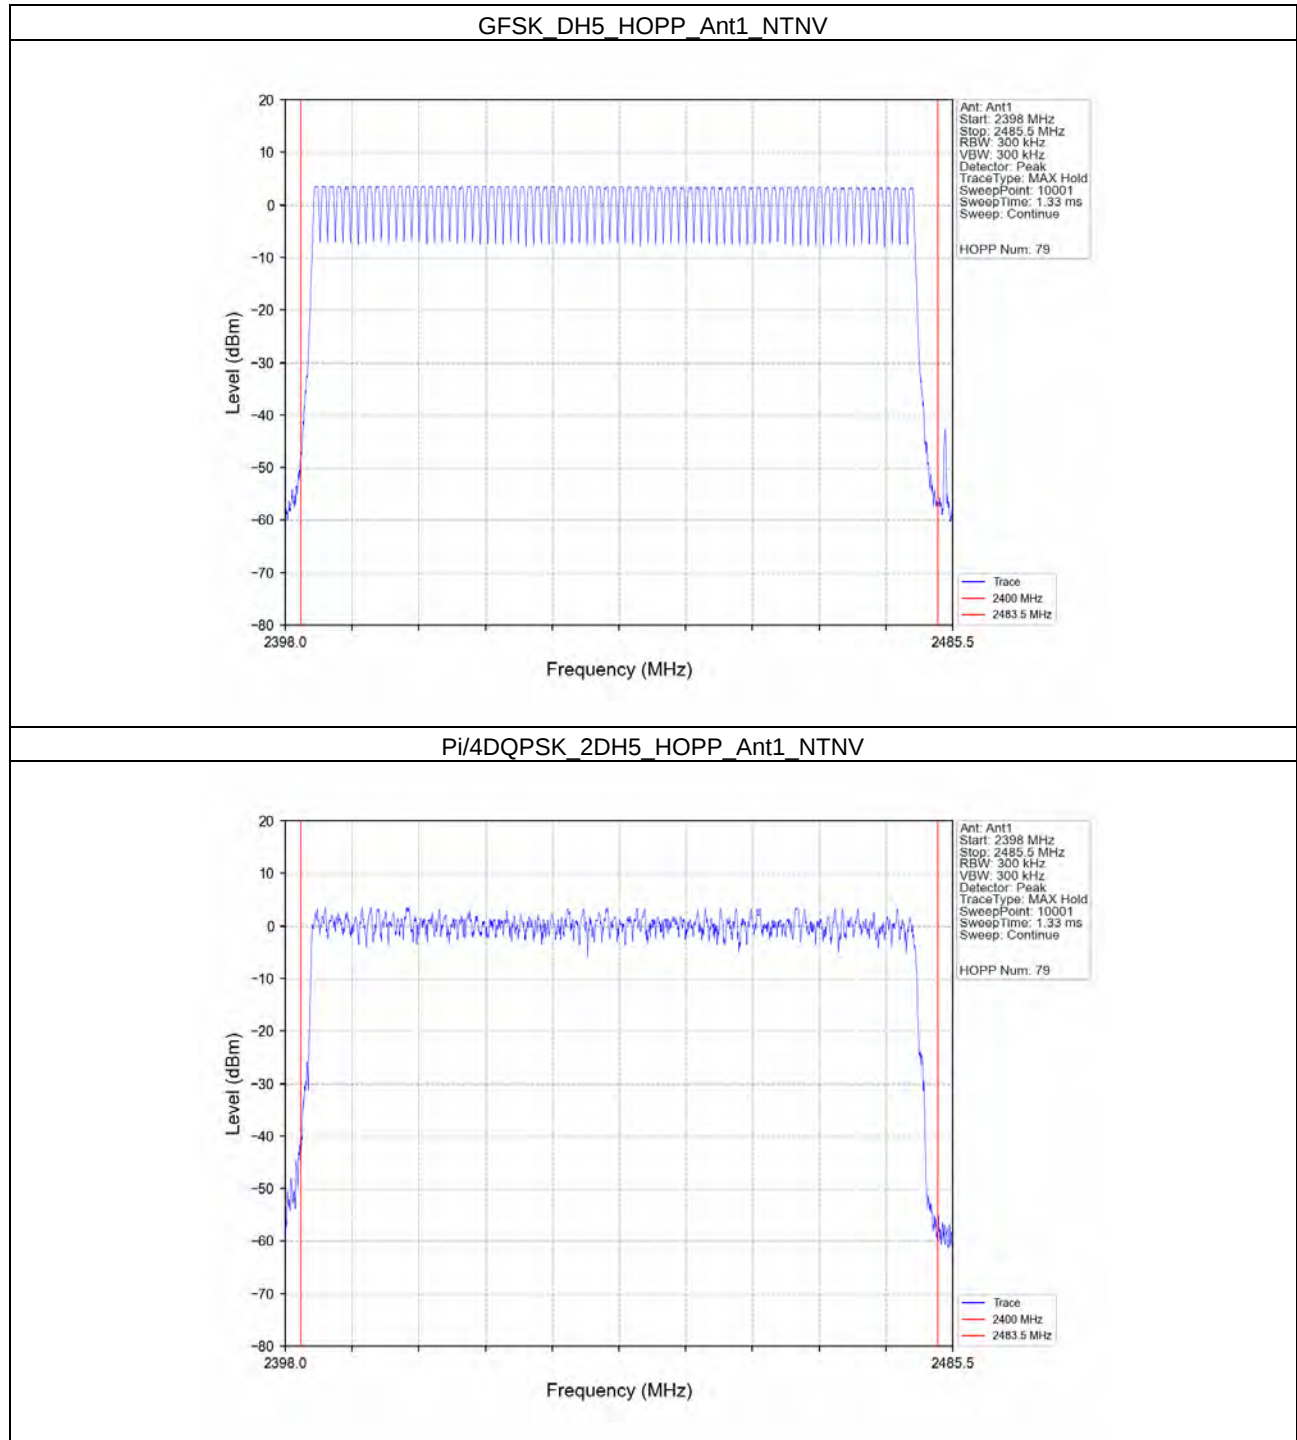

8DPSK 3DH5_HOPP_Ant1_NTNV

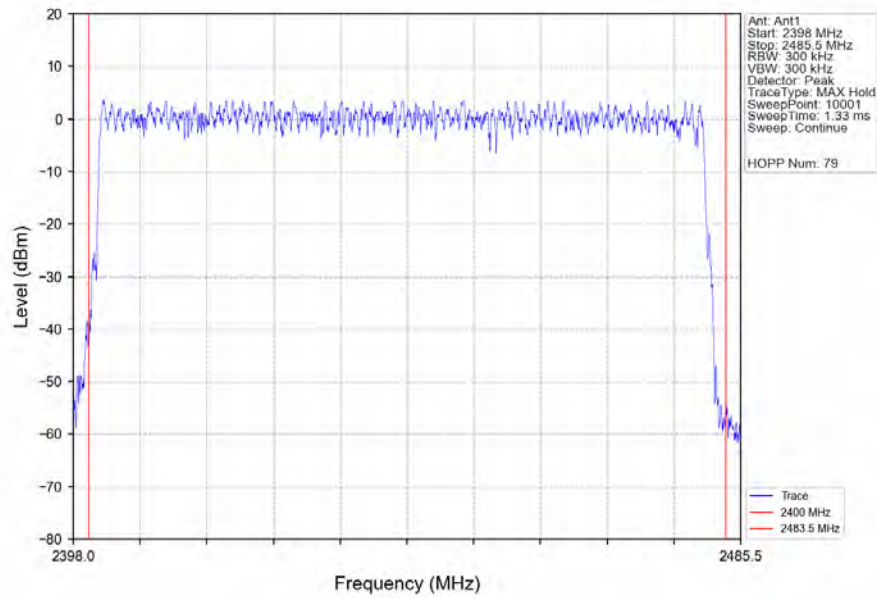



6. Time of Occupancy (Dwell Time)

6.1 Test Result


6.1.1 Ant1

Ant1									
Mode	Tx Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.398	31.600	320	127.360	<=400	Pass
			DH3	1.656	31.600	150	248.400	<=400	Pass
			DH5	2.910	31.600	92	267.720	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.390	31.600	320	124.800	<=400	Pass
			2DH3	1.642	31.600	160	262.720	<=400	Pass
			2DH5	2.890	31.600	103	297.670	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.390	31.600	320	124.800	<=400	Pass
			3DH3	1.642	31.600	157	257.794	<=400	Pass
			3DH5	2.892	31.600	92	266.064	<=400	Pass


6.2 Test Graph

6.2.1 Ant1


GFSK_DH1_HOPP_Ant1_NTNV

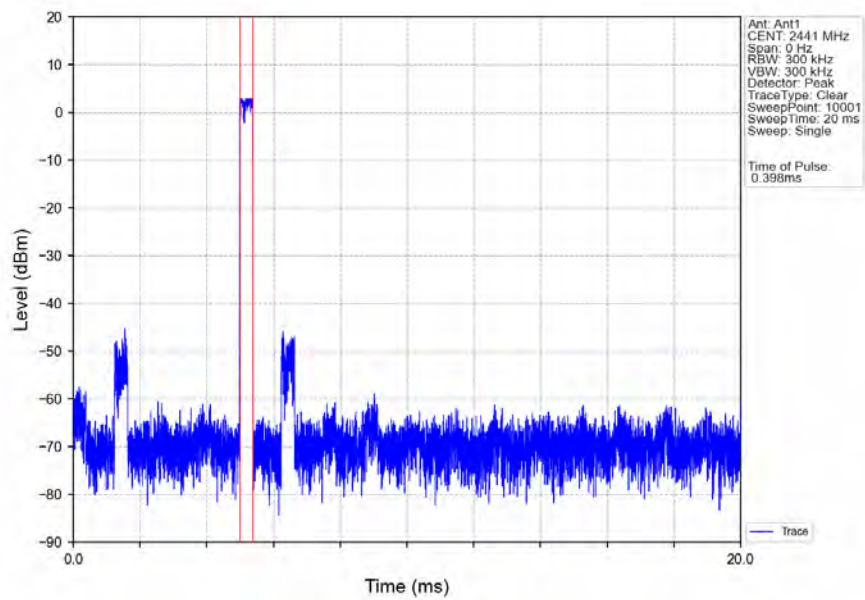


GFSK_DH1_HOPP_Ant1_NTNV

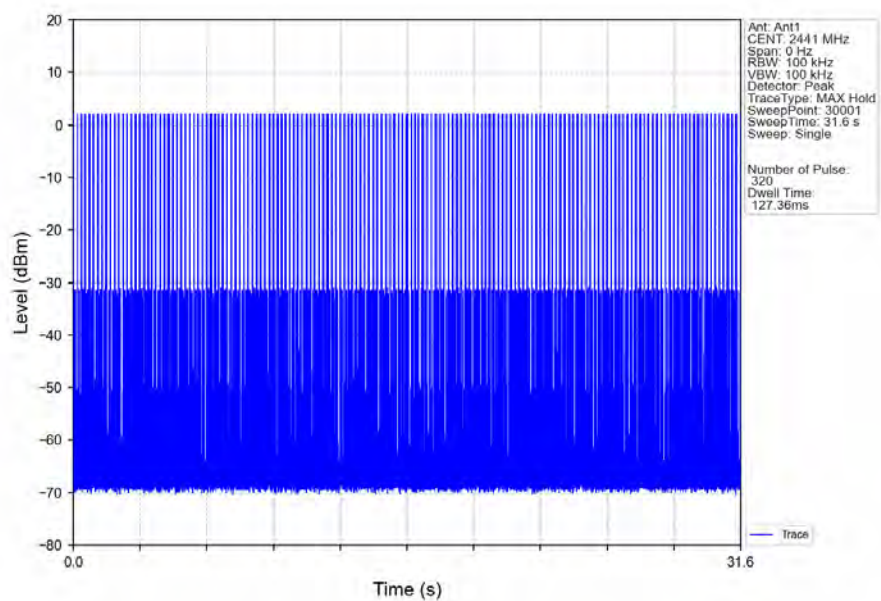


GFSK DH3 HOPP Ant1 NTN

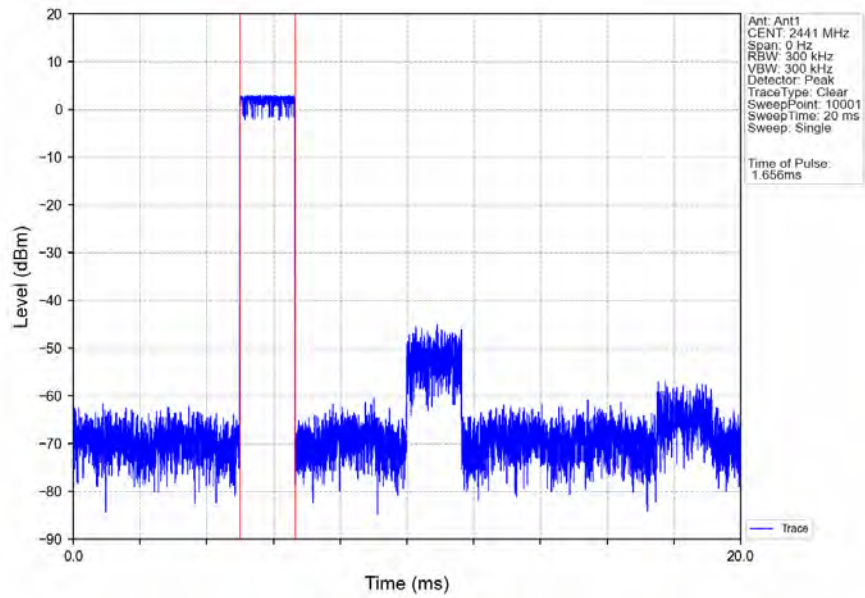


GFSK DH3 HOPP Ant1 NTN

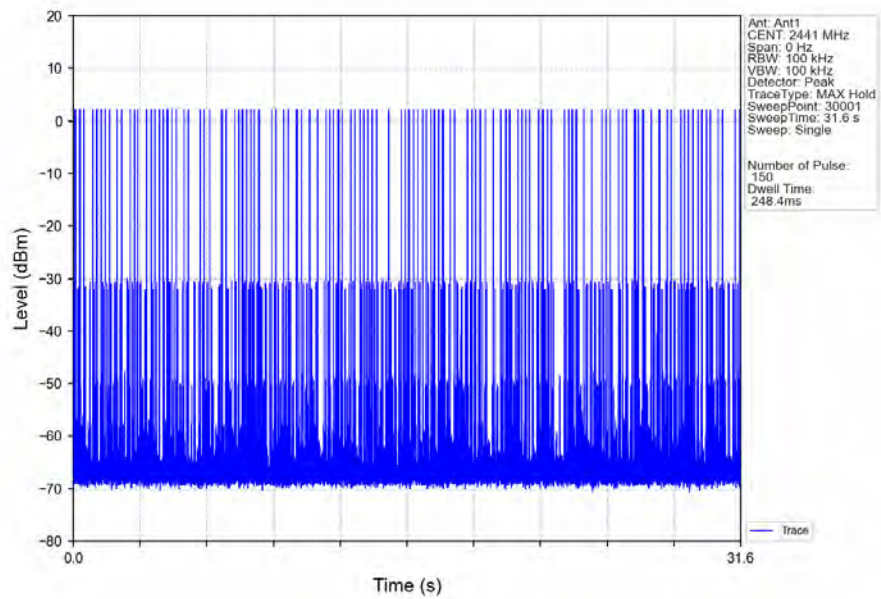


GFSK DH5 HOPP Ant1 NTN

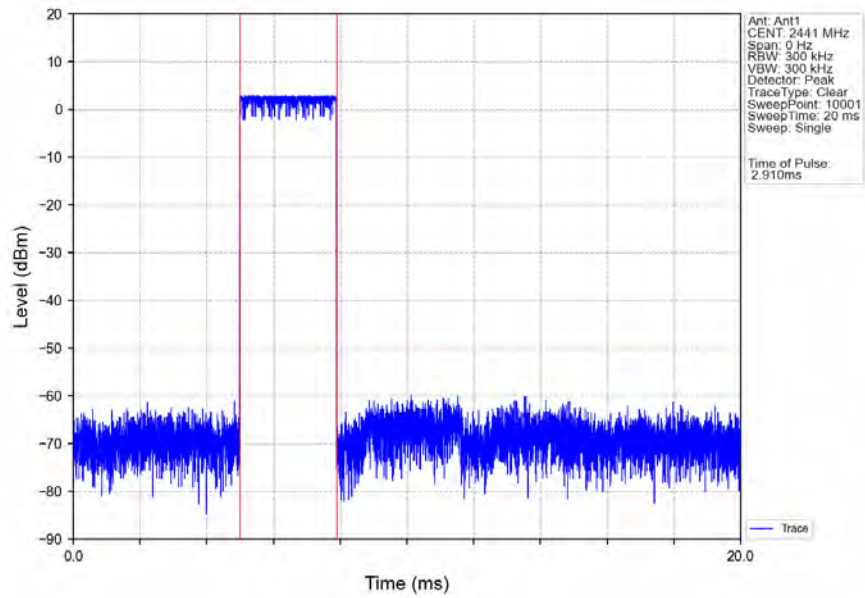


GFSK DH5 HOPP Ant1 NTN

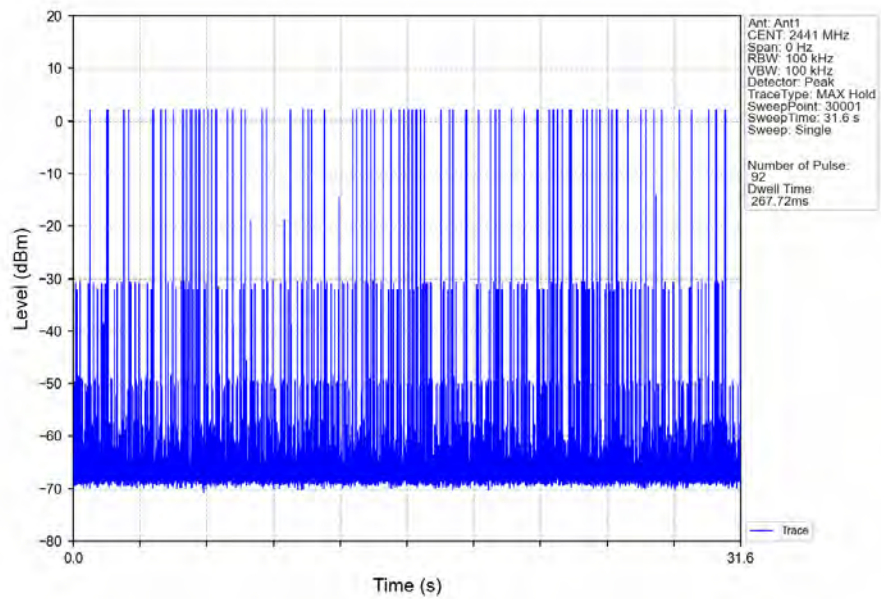


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

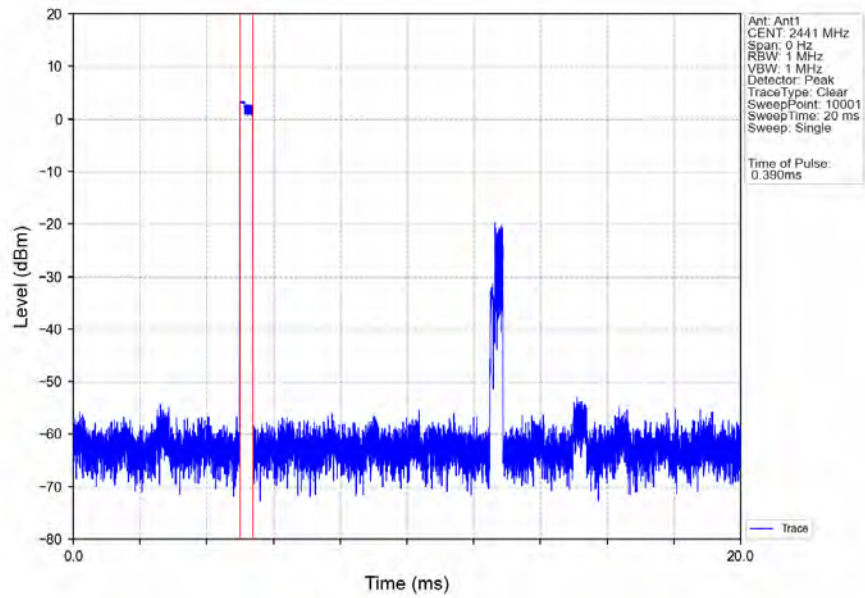


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

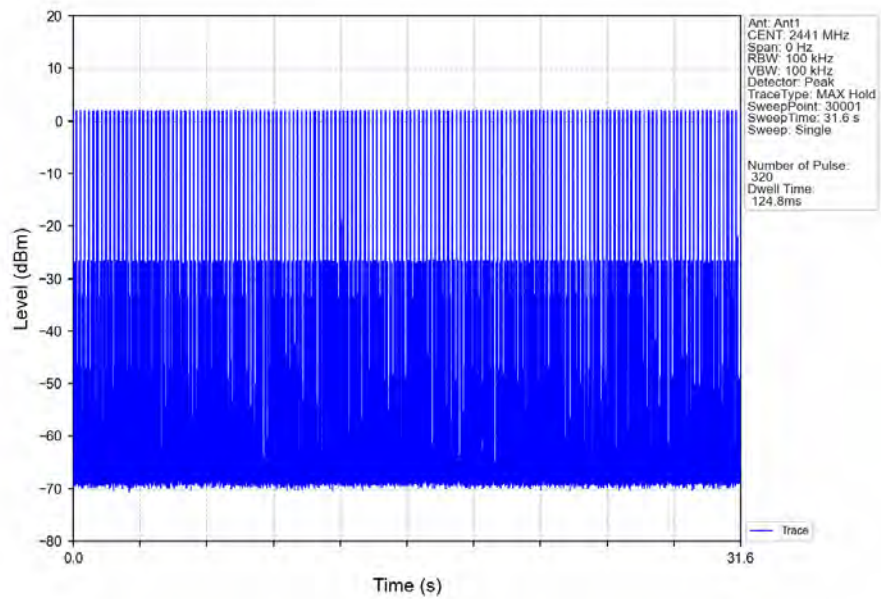


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

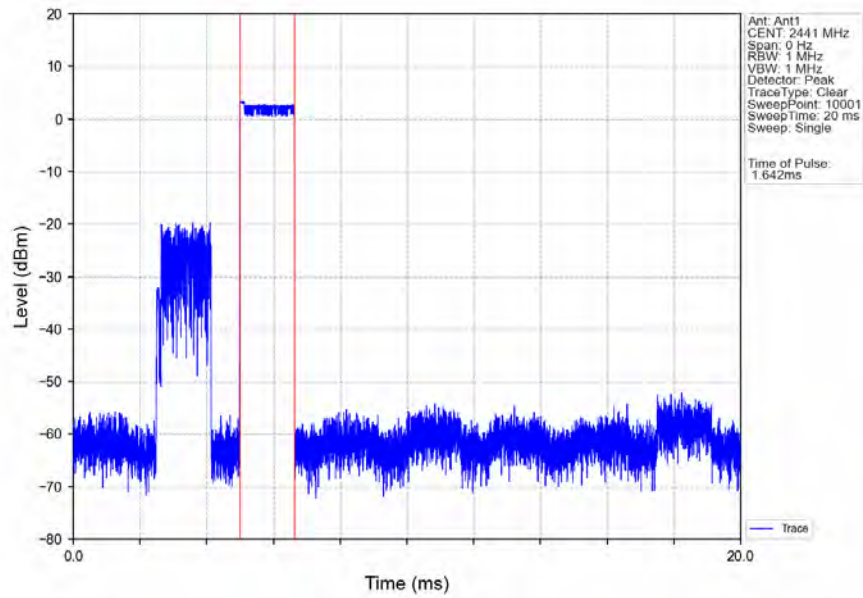


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

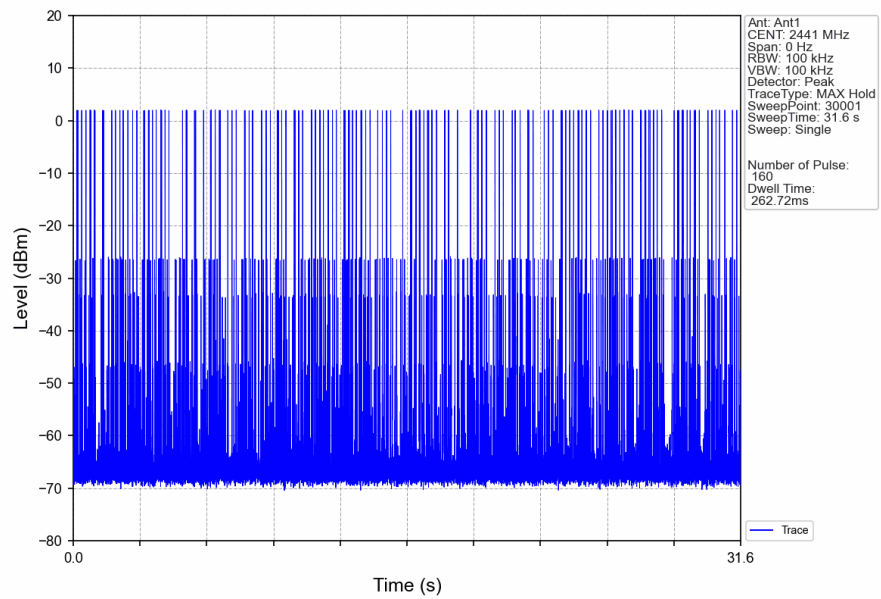


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

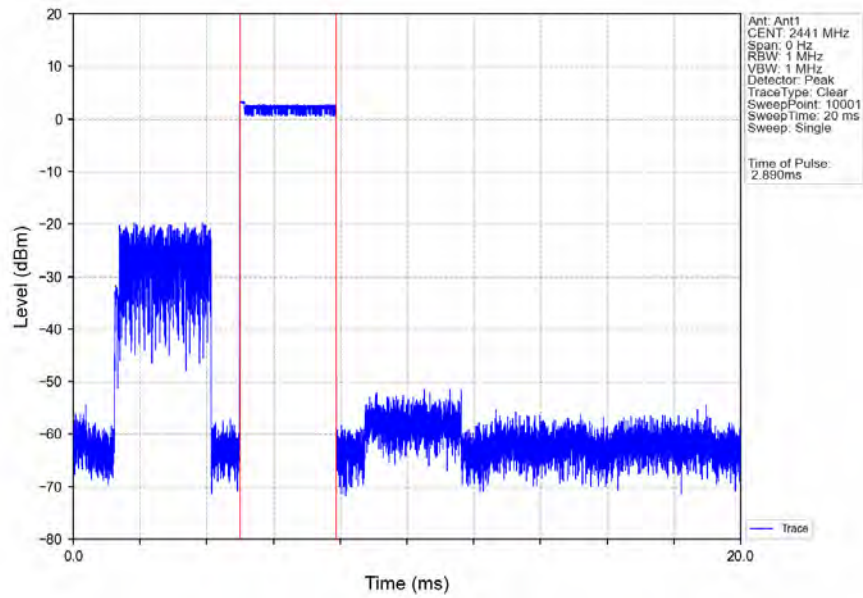


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

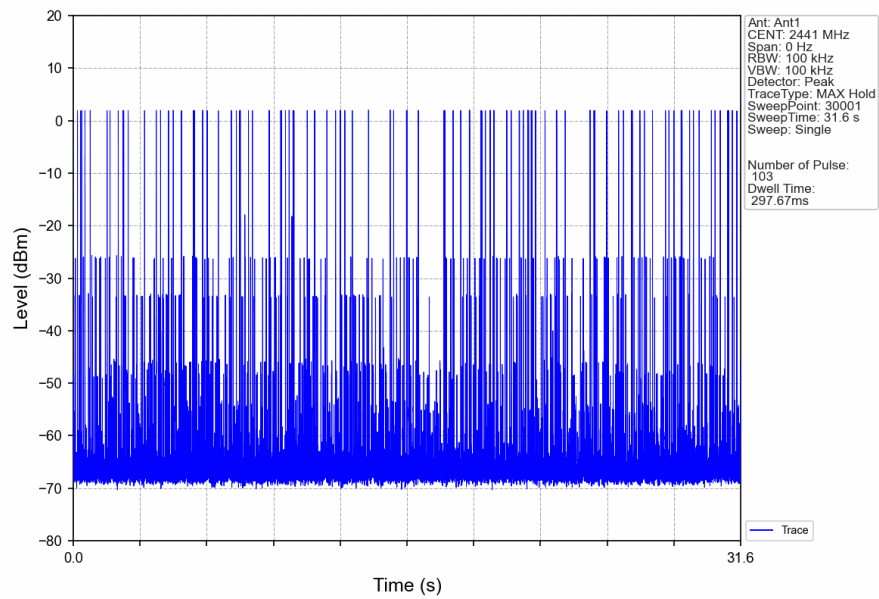


8DPSK 3DH1_HOPP_Ant1_NTNV

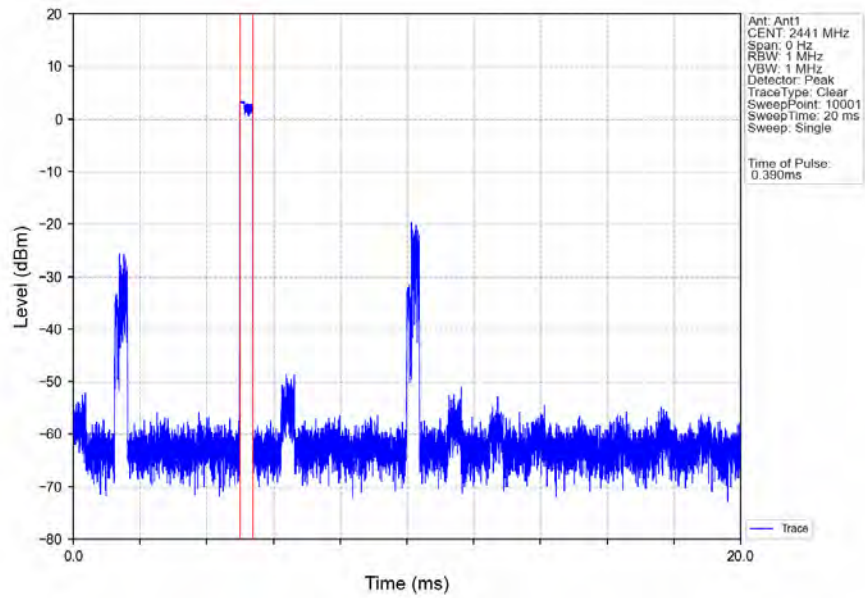


8DPSK 3DH1_HOPP_Ant1_NTNV

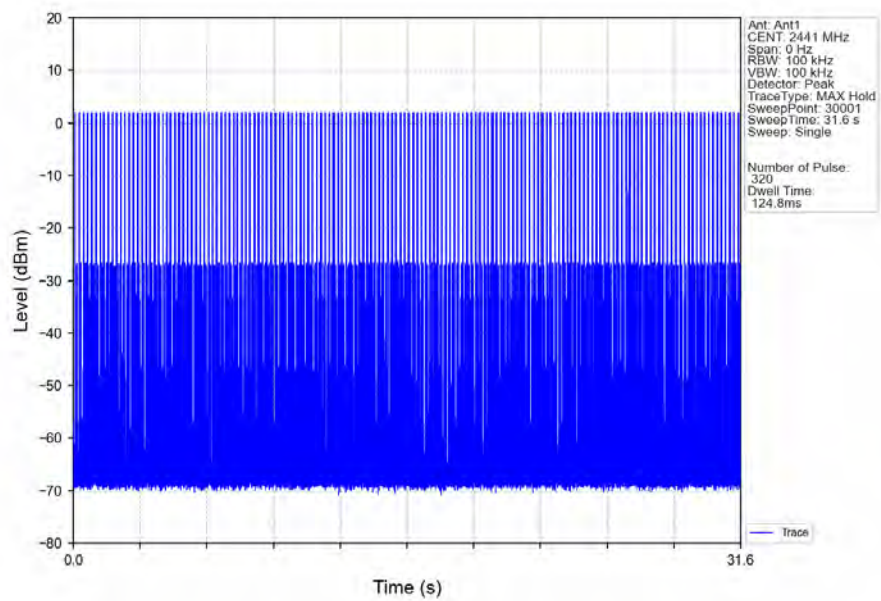


8DPSK 3DH3 HOPP Ant1 NTN

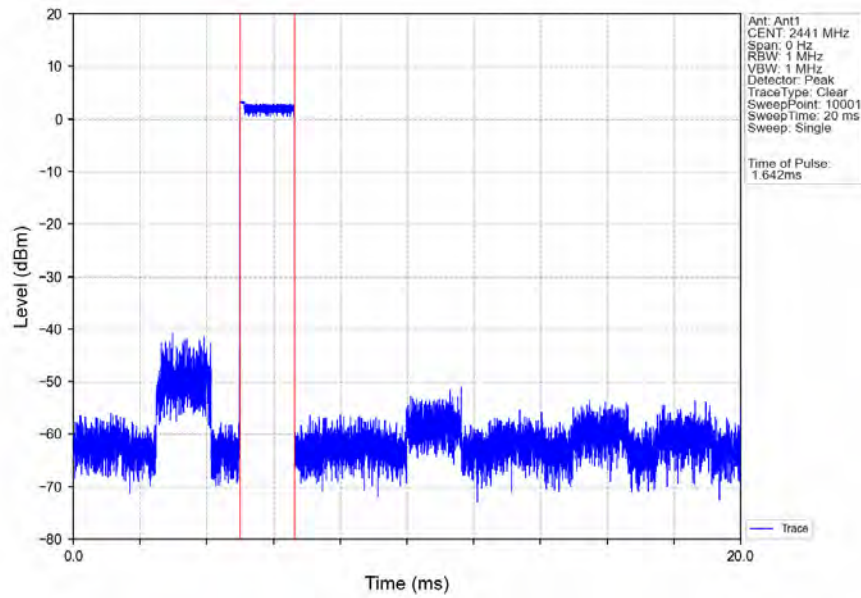


8DPSK 3DH3 HOPP Ant1 NTN

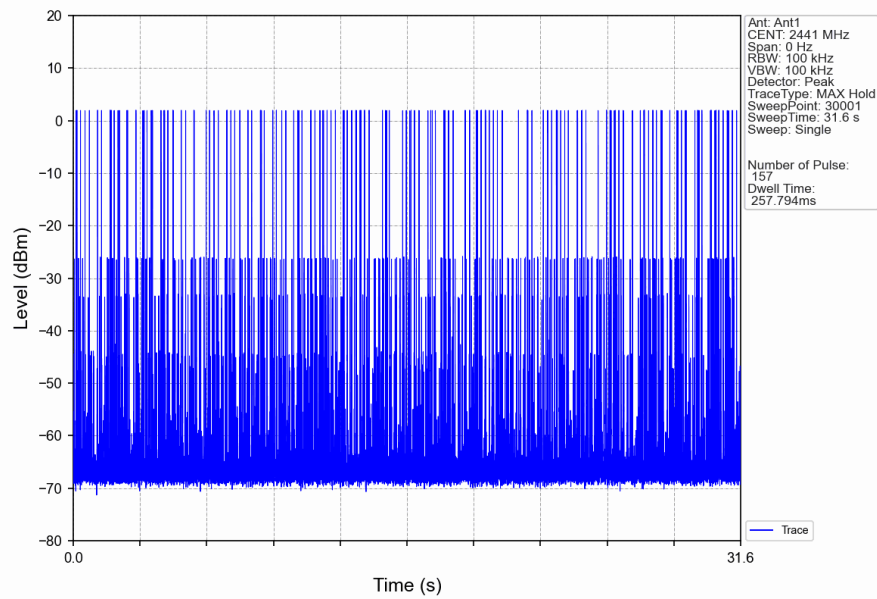

8DPSK 3DH5_HOPP_Ant1_NTNV

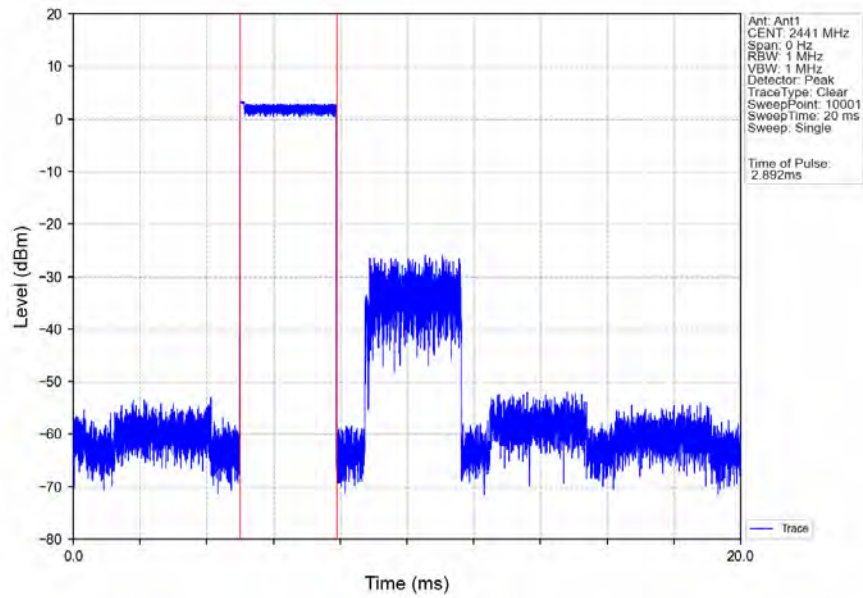

8DPSK 3DH5_HOPP_Ant1_NTNV

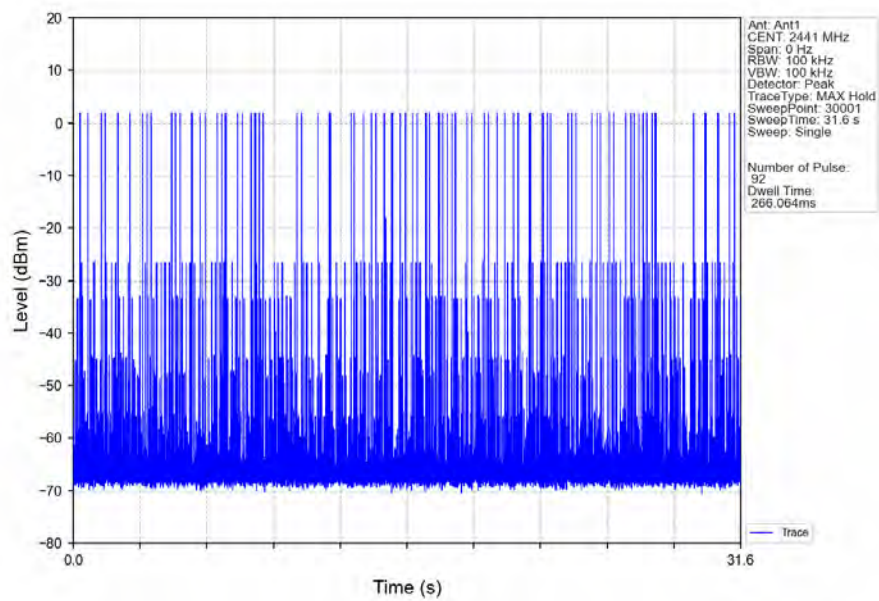

7. Unwanted Emissions In Non-restricted Frequency Bands

7.1 Test Result

7.1.1 Ref


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	1.47
		2441	DH5	1	1.58
		2480	DH5	1	1.27
Pi/4DQPSK	SISO	2402	2DH5	1	1.35
		2441	2DH5	1	1.49
		2480	2DH5	1	1.95
8DPSK	SISO	2402	3DH5	1	1.47
		2441	3DH5	1	1.67
		2480	3DH5	1	1.34

7.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	1.58	-18.42	Pass
		2441	DH5	1	1.58	-18.42	Pass
		2480	DH5	1	1.58	-18.42	Pass
		HOPP	DH5	1	1.58	-18.42	Pass
					1.58	-18.42	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.95	-18.05	Pass
		2441	2DH5	1	1.95	-18.05	Pass
		2480	2DH5	1	1.95	-18.05	Pass
		HOPP	2DH5	1	1.95	-18.05	Pass
					1.95	-18.05	Pass
8DPSK	SISO	2402	3DH5	1	1.67	-18.33	Pass
		2441	3DH5	1	1.67	-18.33	Pass
		2480	3DH5	1	1.67	-18.33	Pass
		HOPP	3DH5	1	1.67	-18.33	Pass
					1.67	-18.33	Pass

7.2 Test Graph


7.2.1 Ref

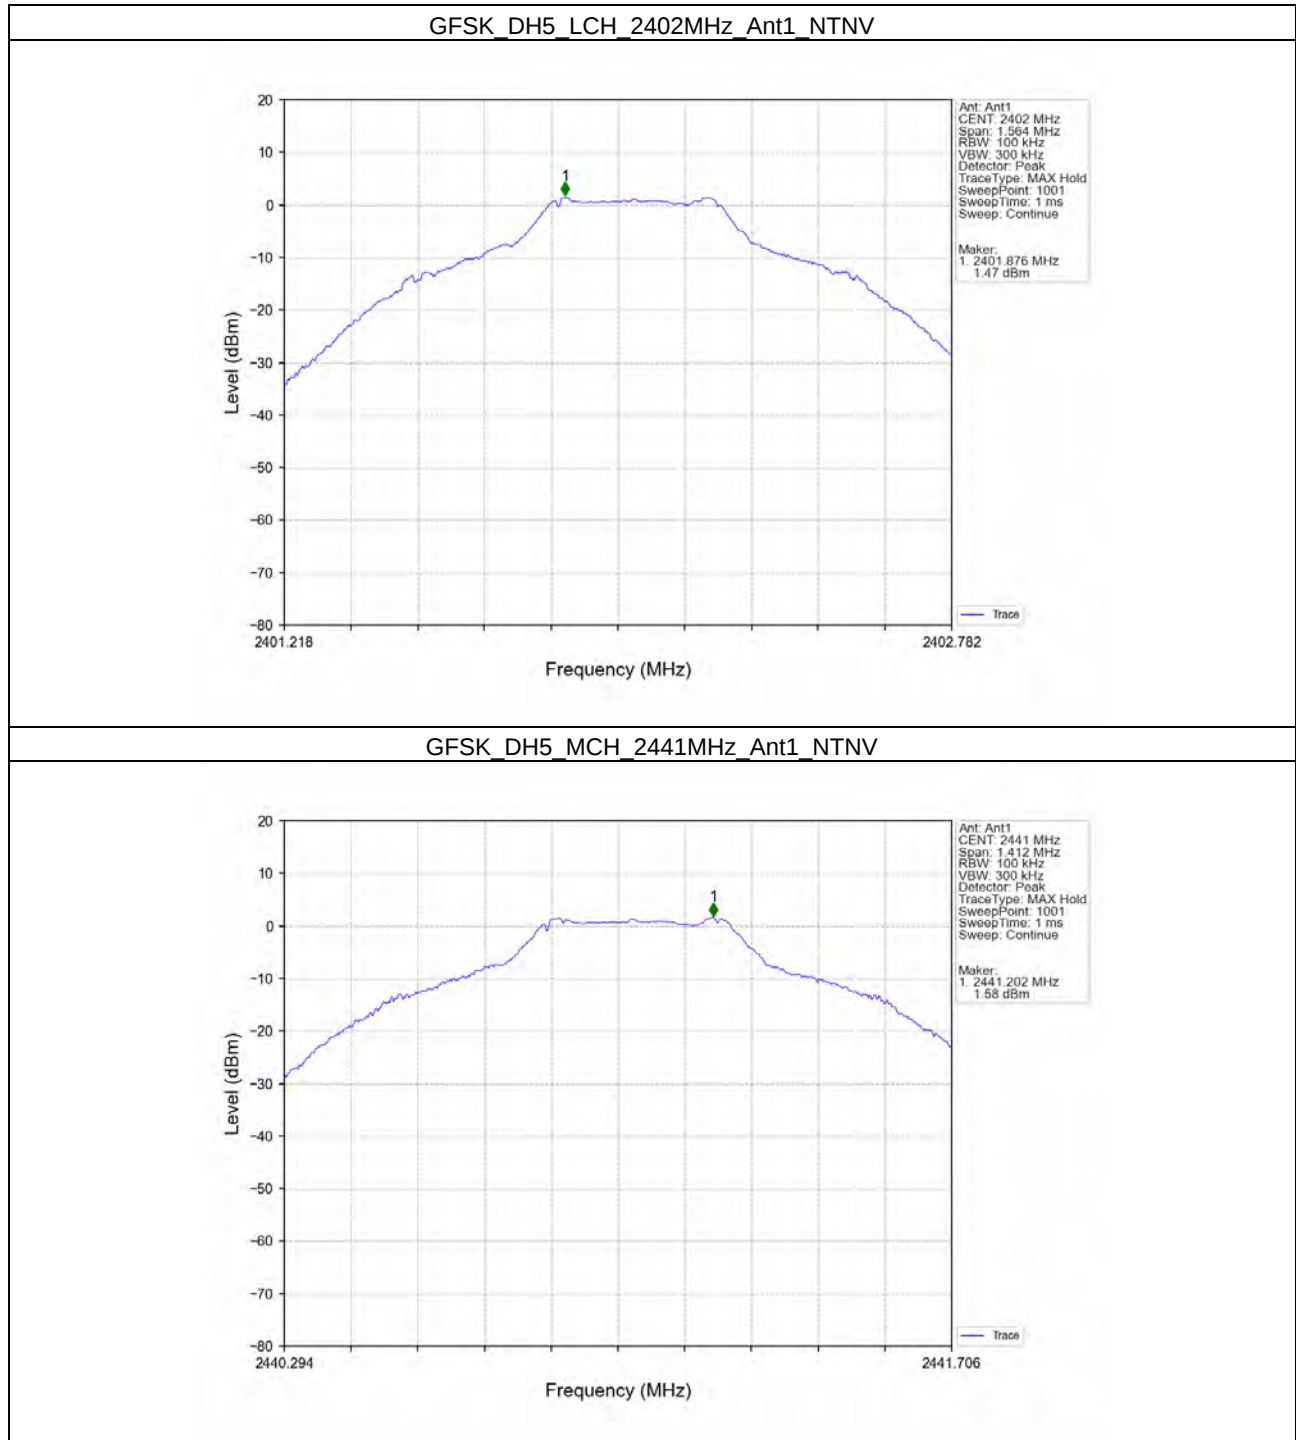


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

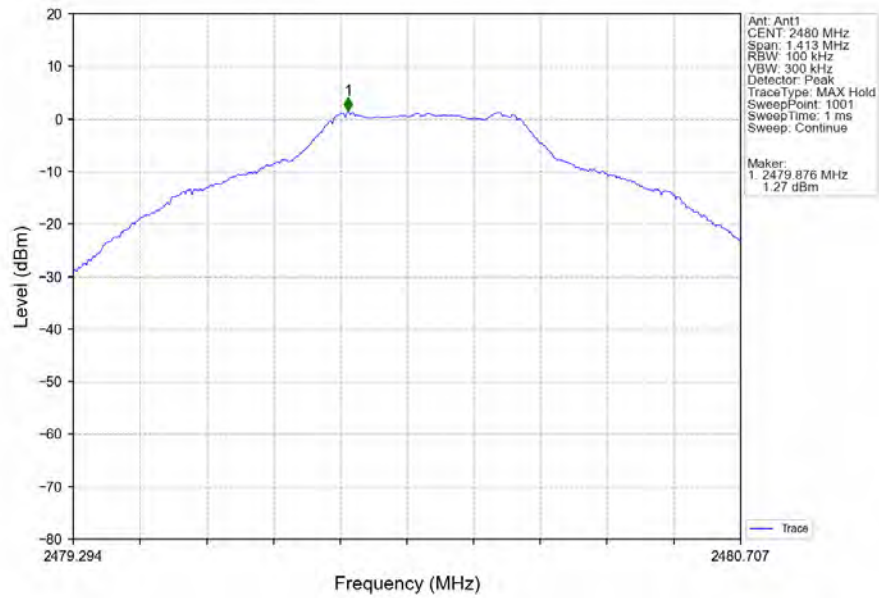


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

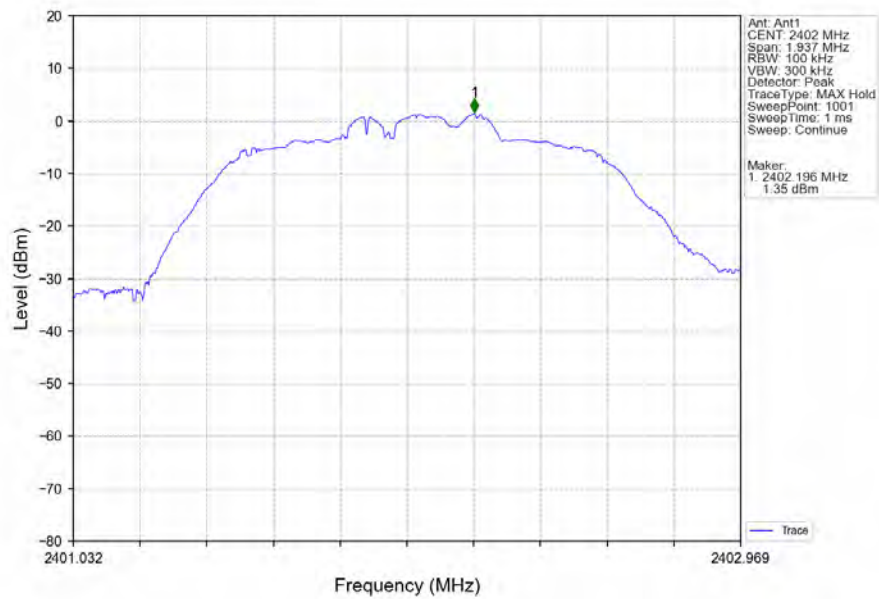


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

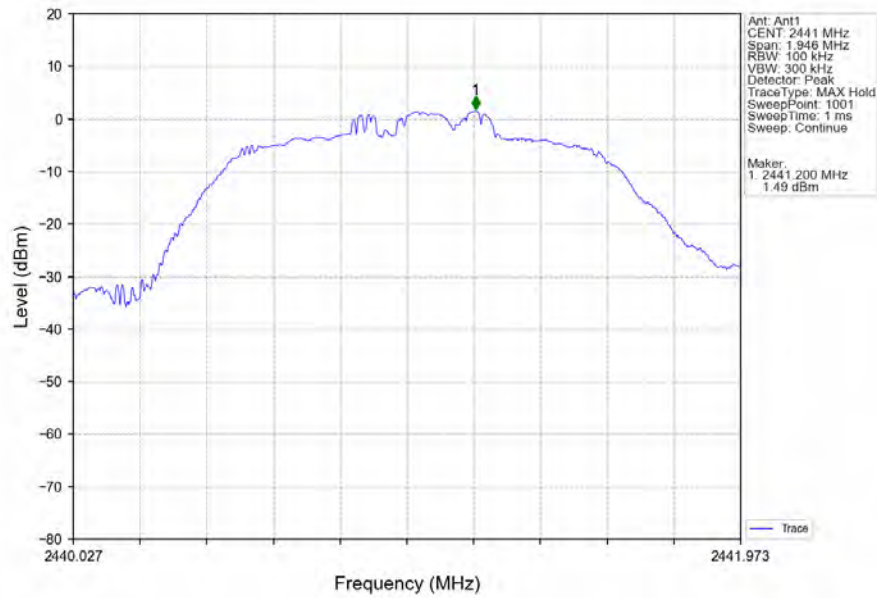


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

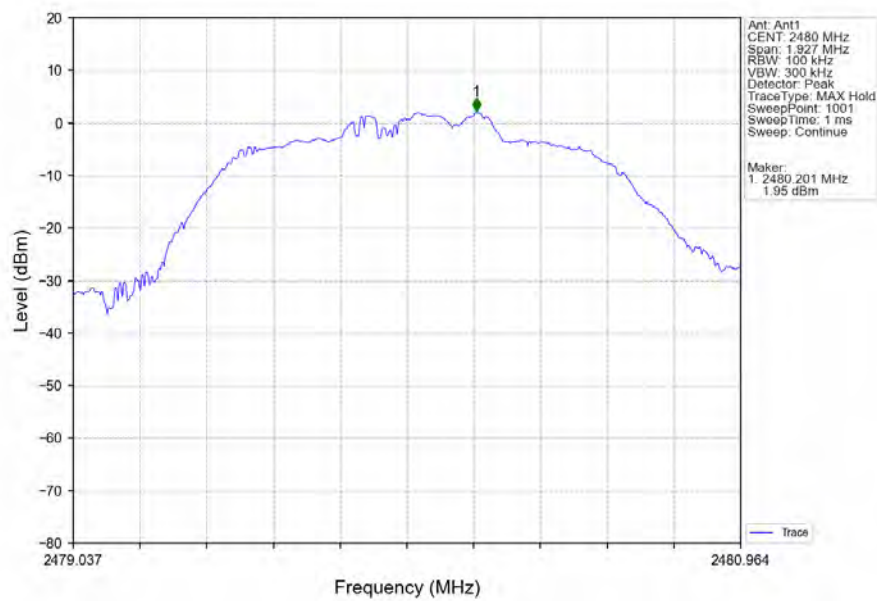


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

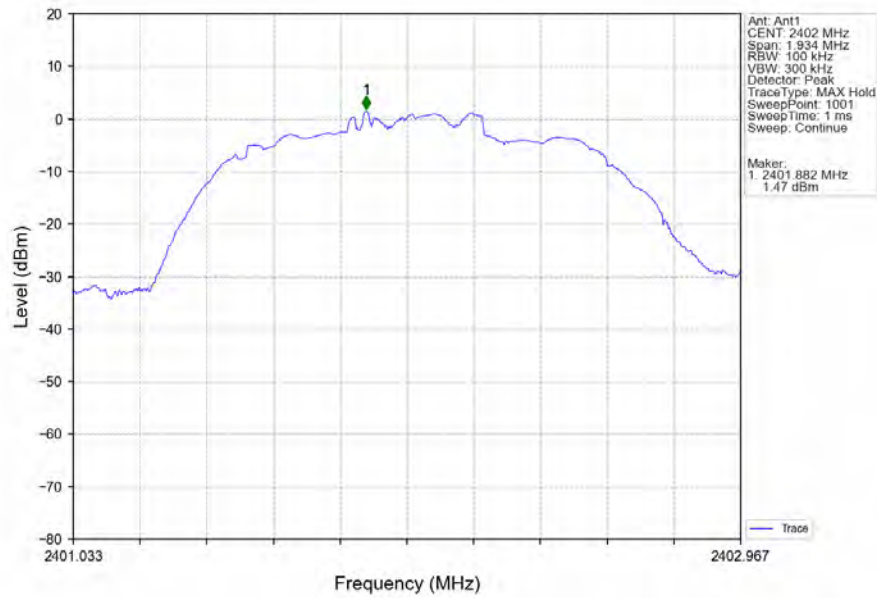

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

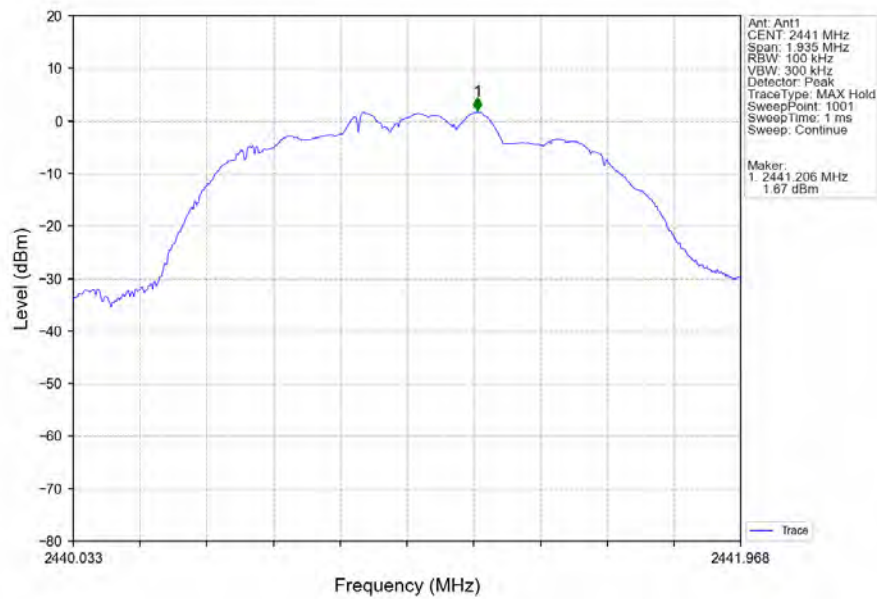


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

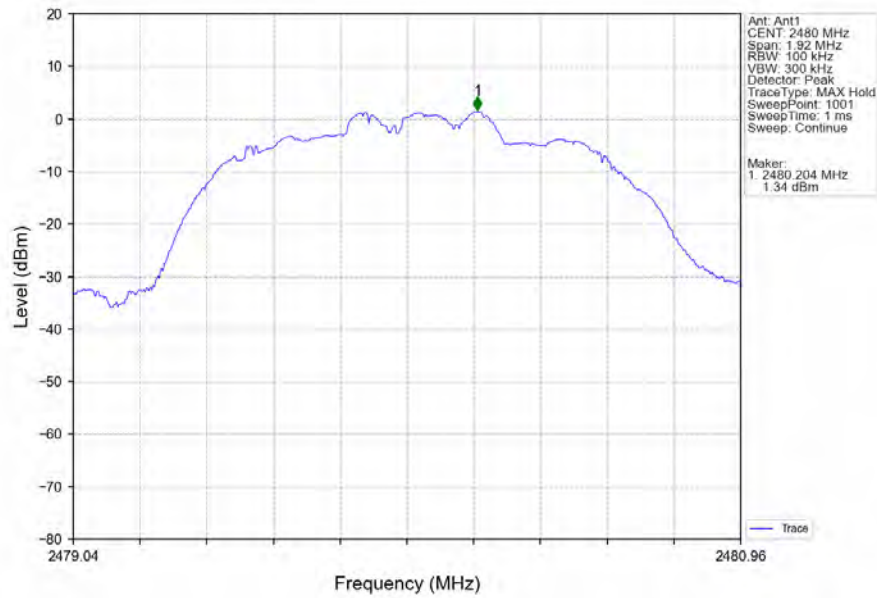


7.2.2 CSE


GFSK DH5 LCH 2402MHz Ant1 NTN

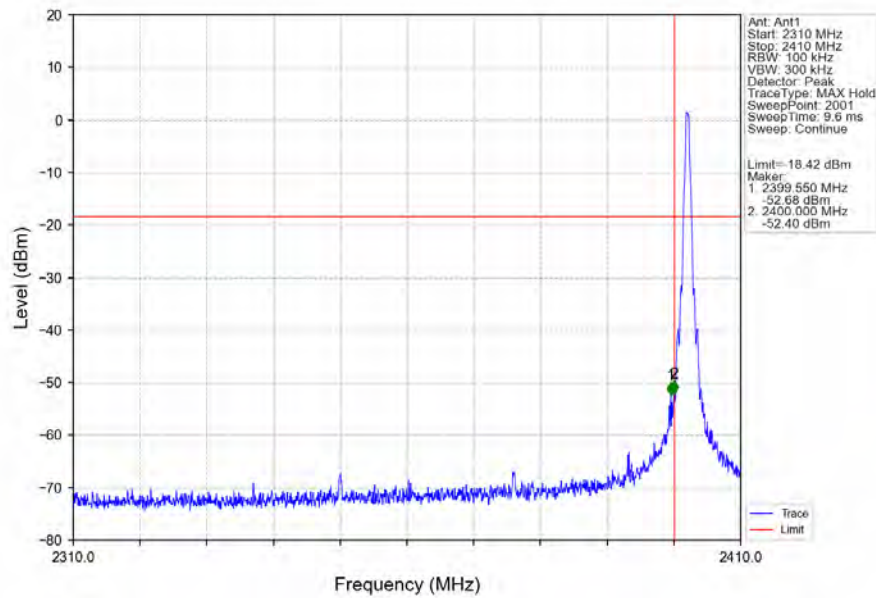


GFSK DH5 LCH 2402MHz Ant1 NTN

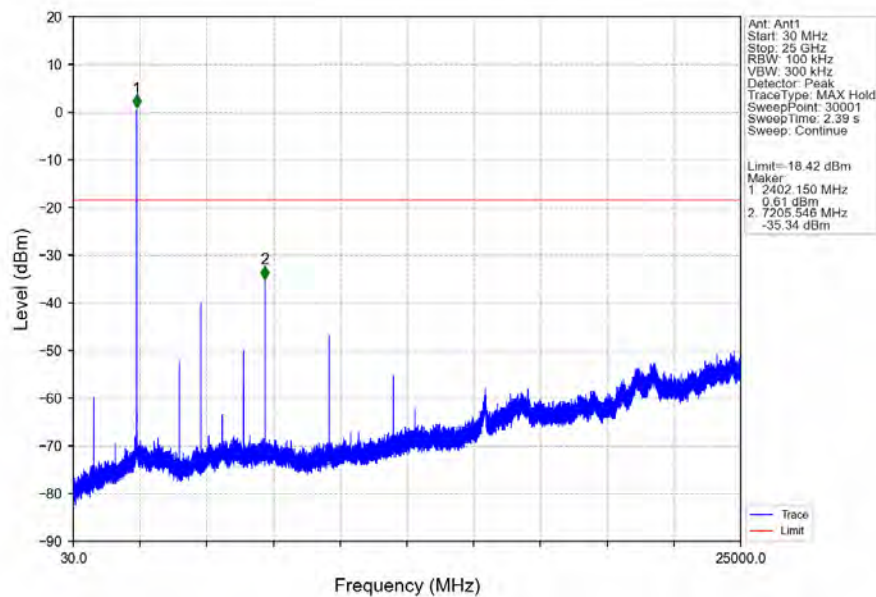


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

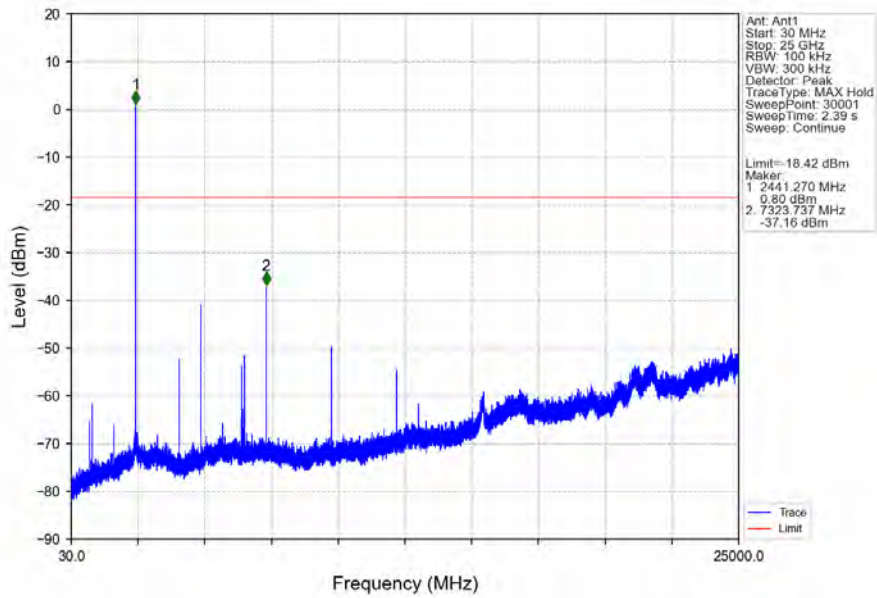


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

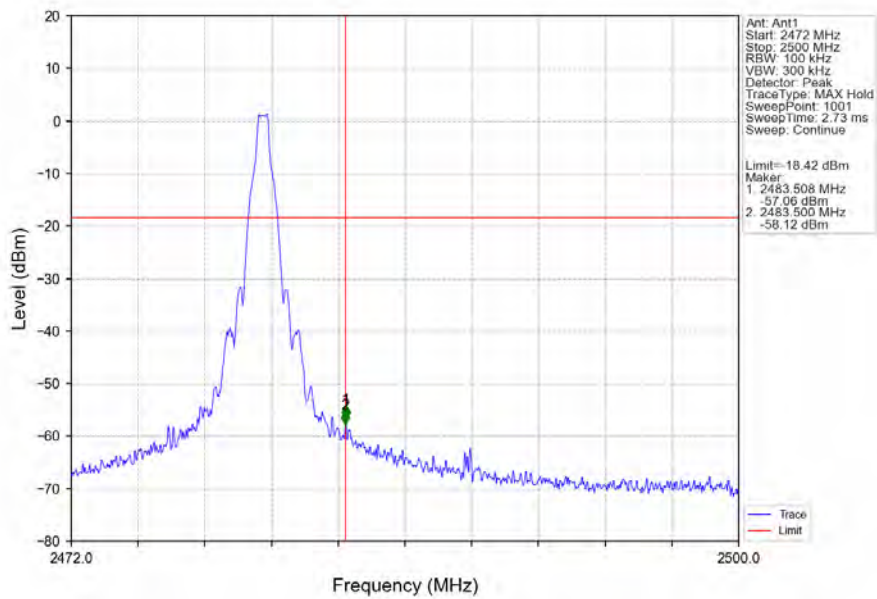


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

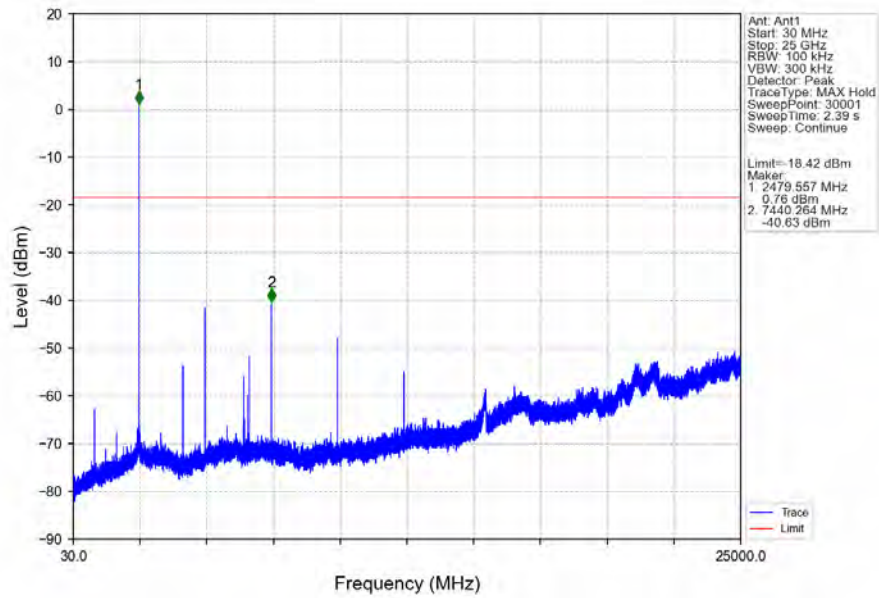


GFSK_DH5_HOPP_Ant1_NTNV

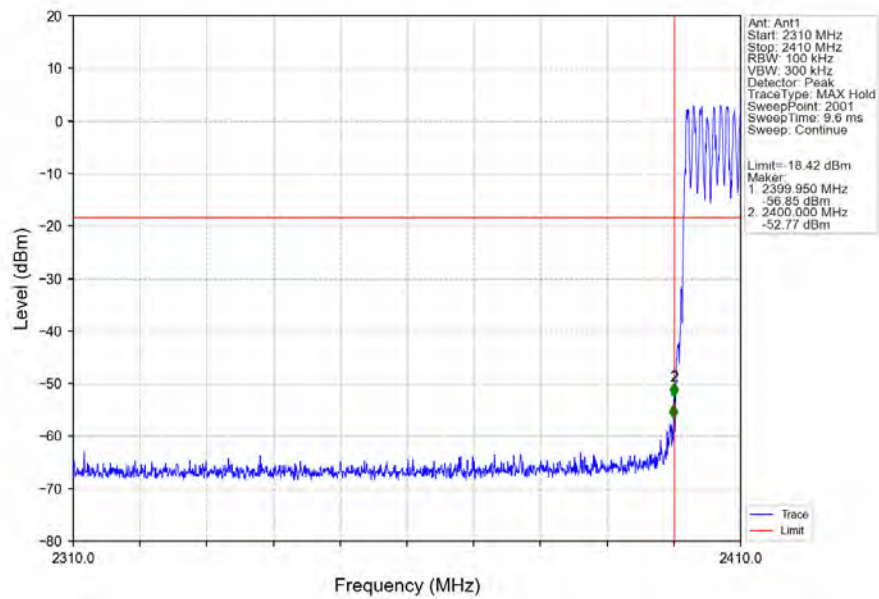


GFSK DH5 HOPP Ant1 NTN

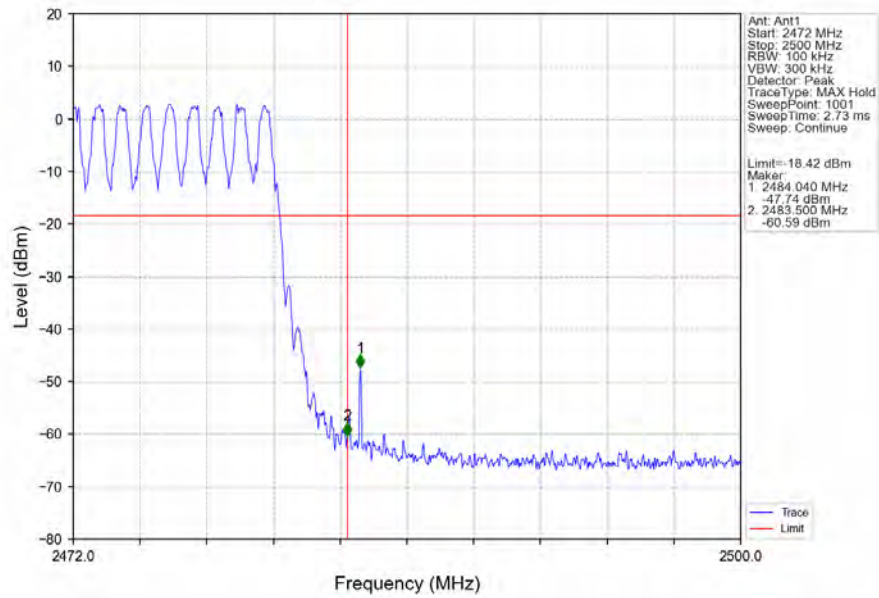


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

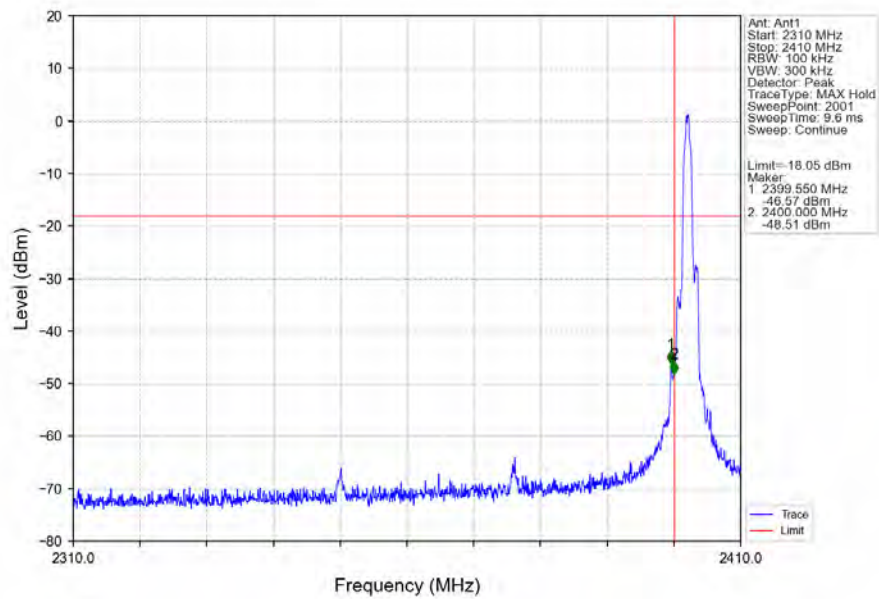


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

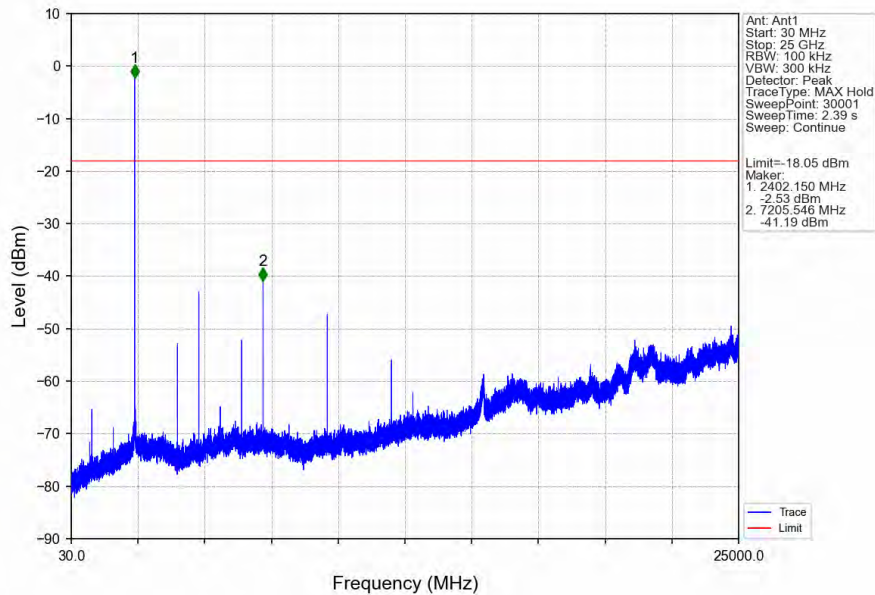


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

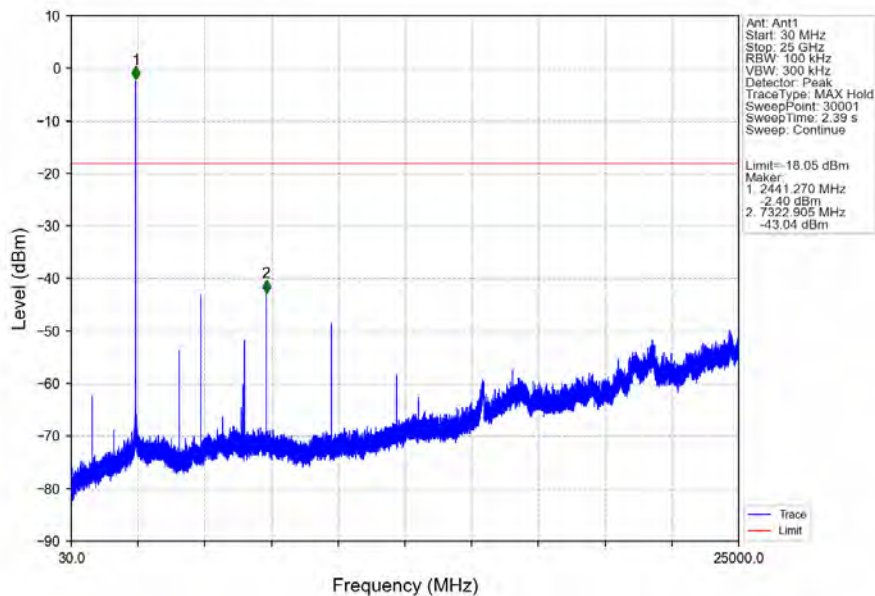


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

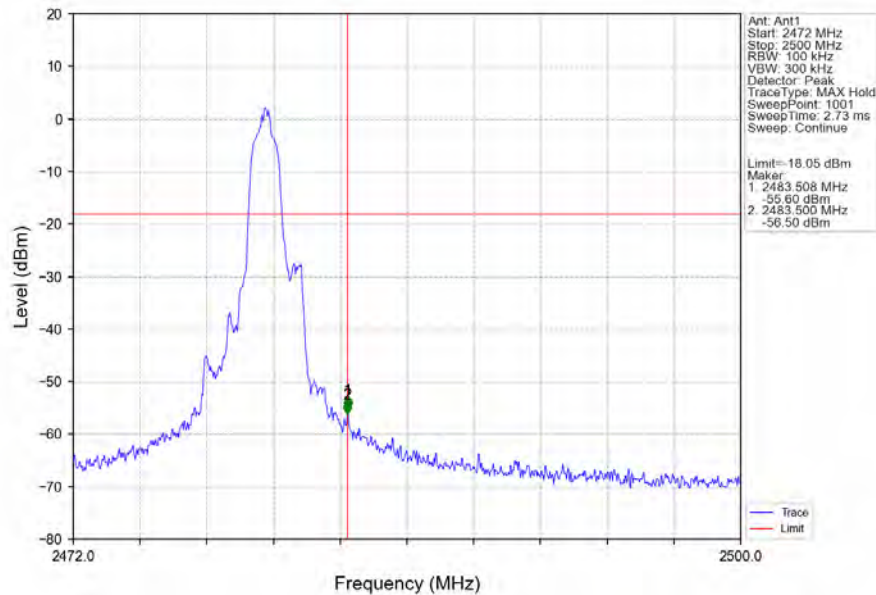


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

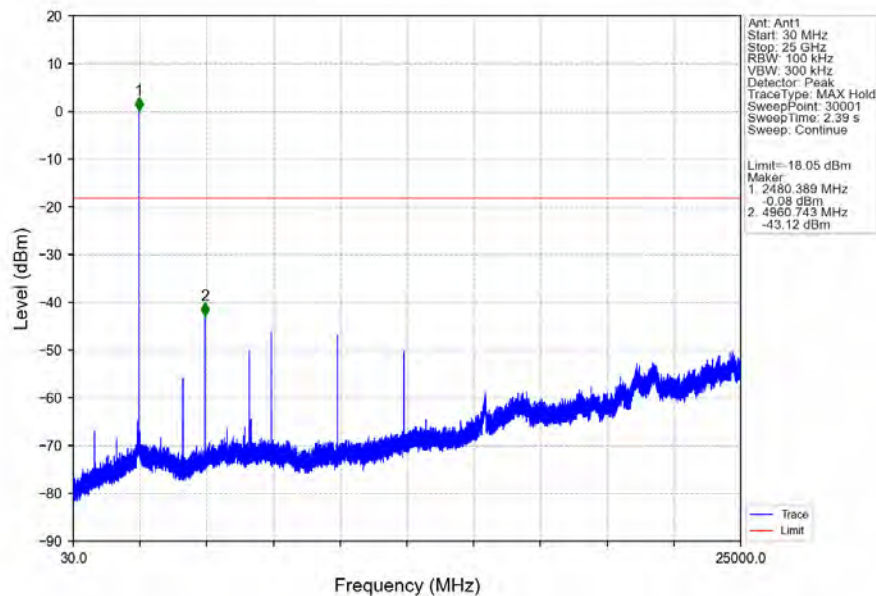


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

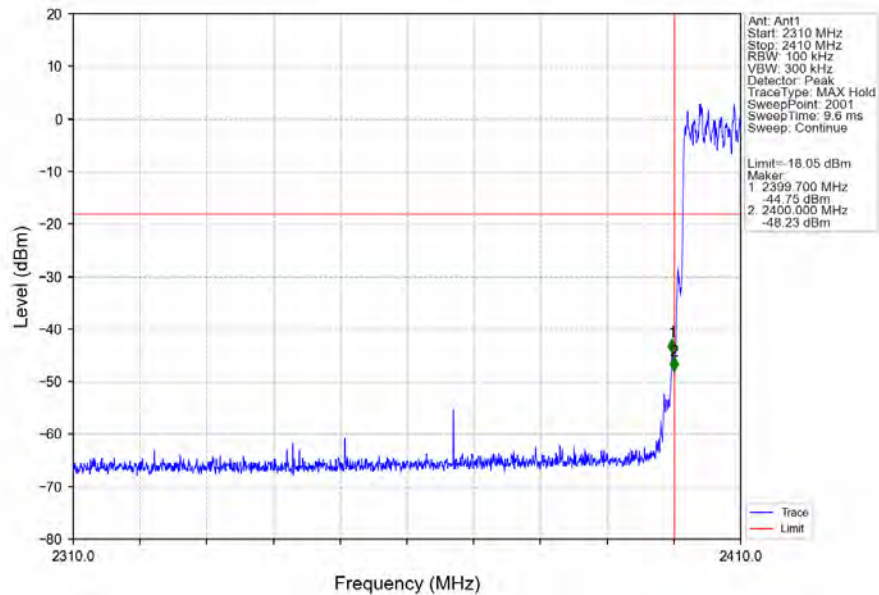


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

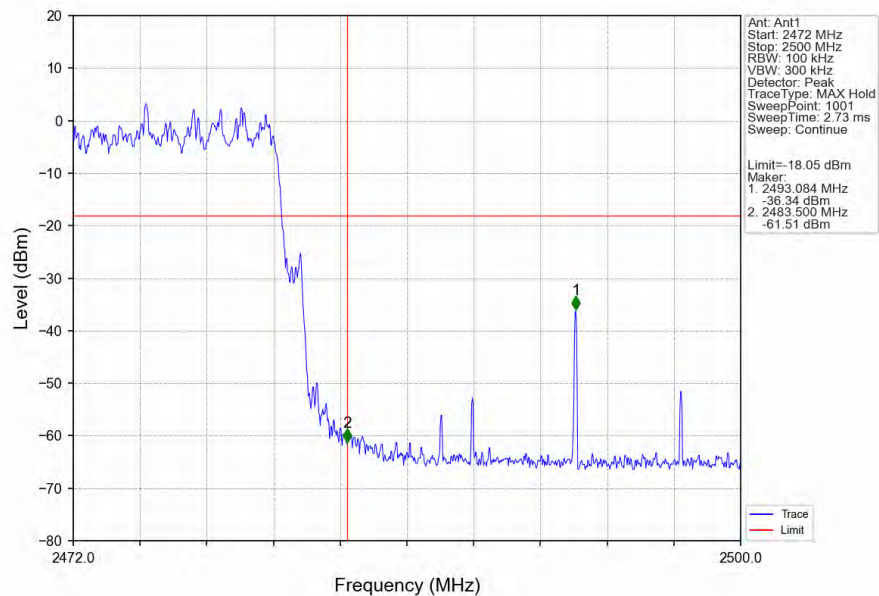


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

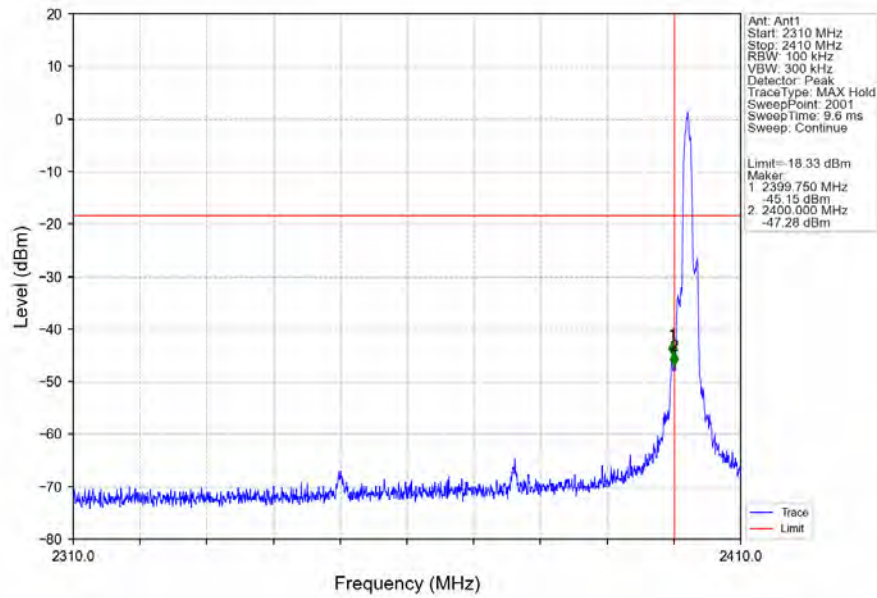


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

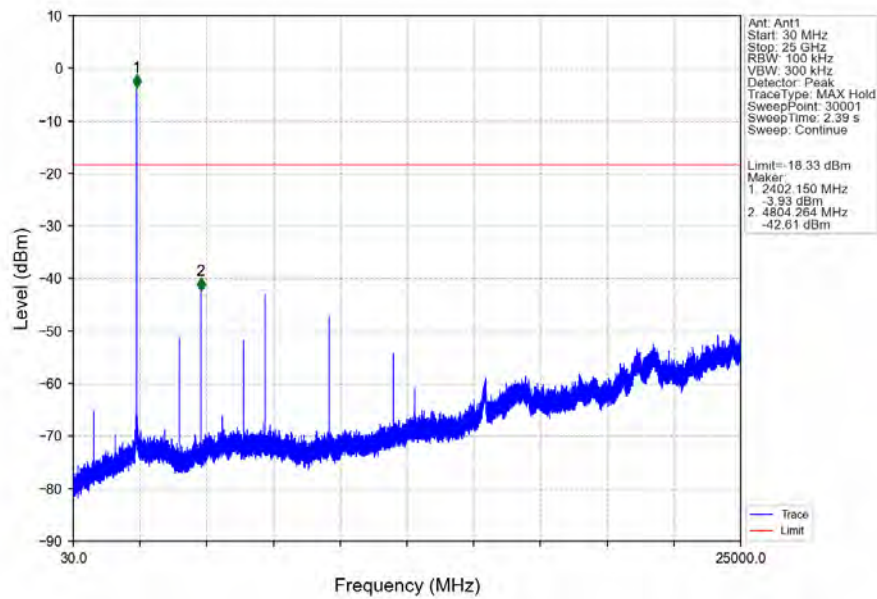


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

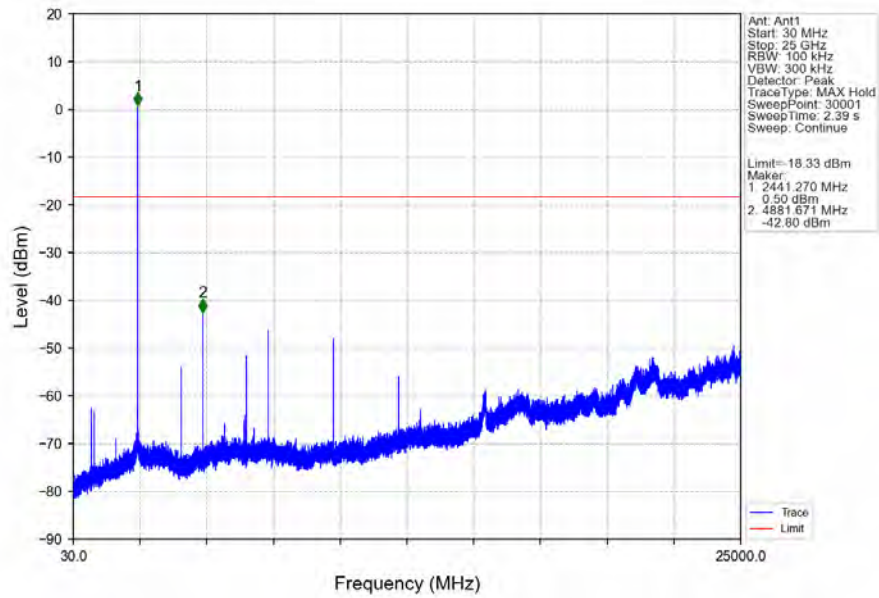


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

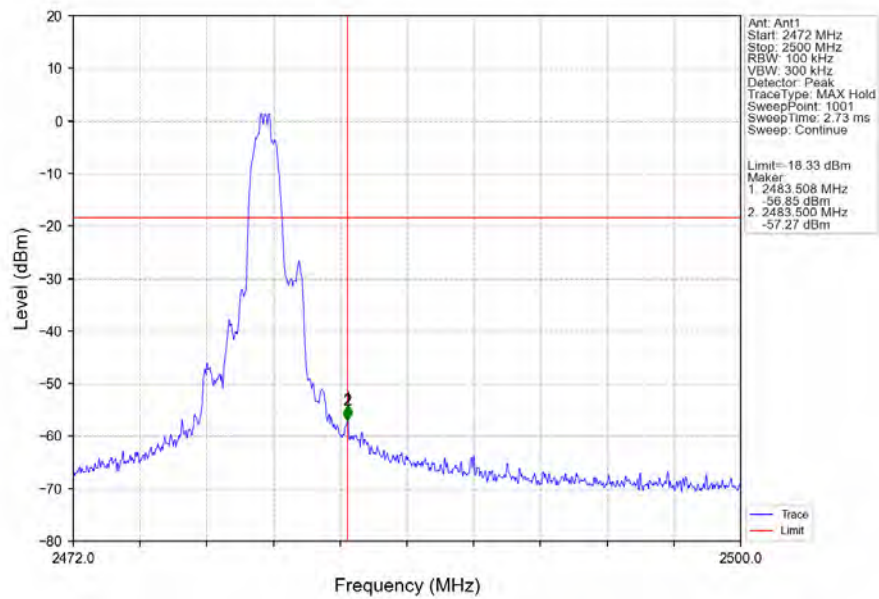


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

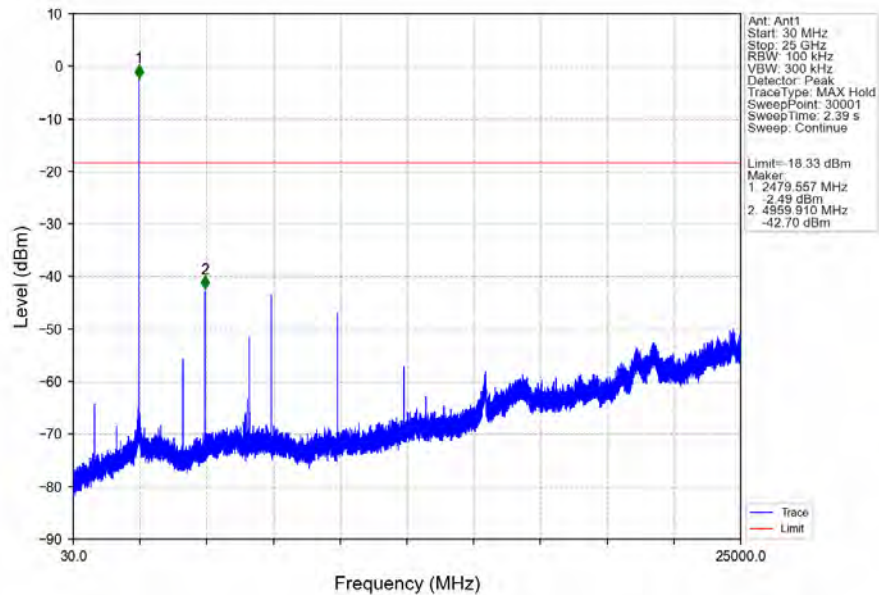

8DPSK_3DH5_HOPP_Ant1_NTNV

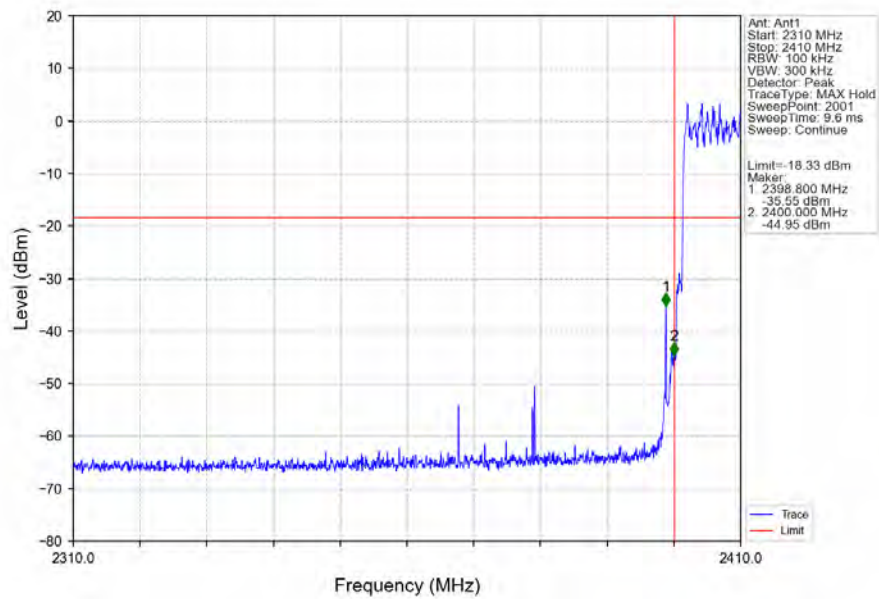


8DPSK 3DH5_HOPP_Ant1_NTNV

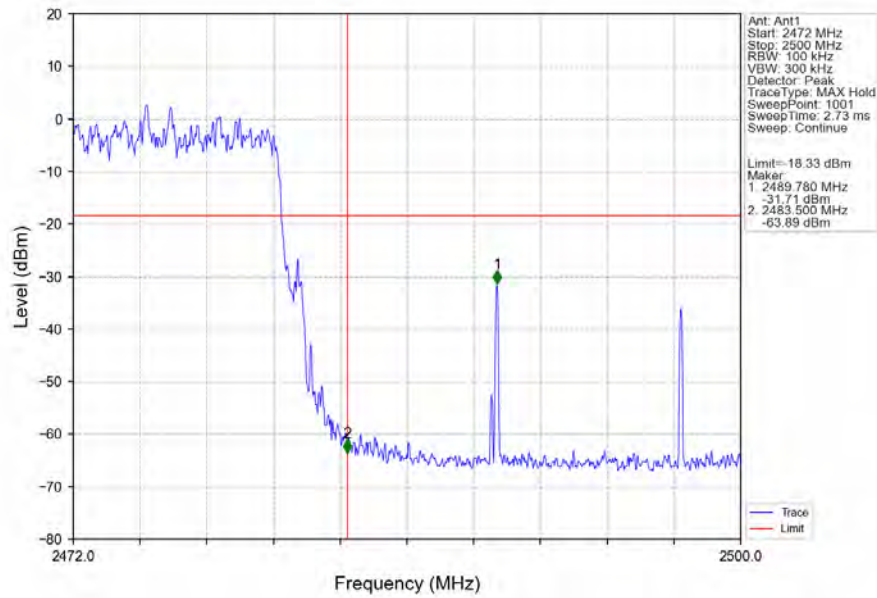




Duty Cycle Plots

DH5 on time(One Pules)Plot on channel 39

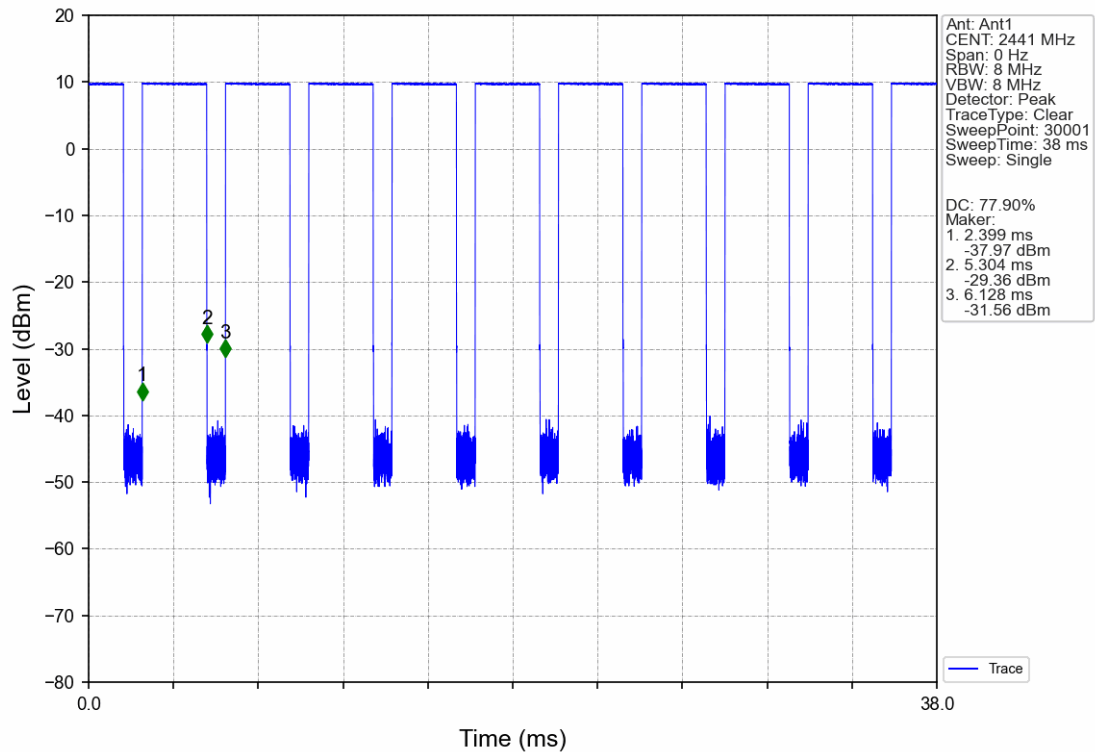

DH5 on time(Count Pulses)Plot on channel 39

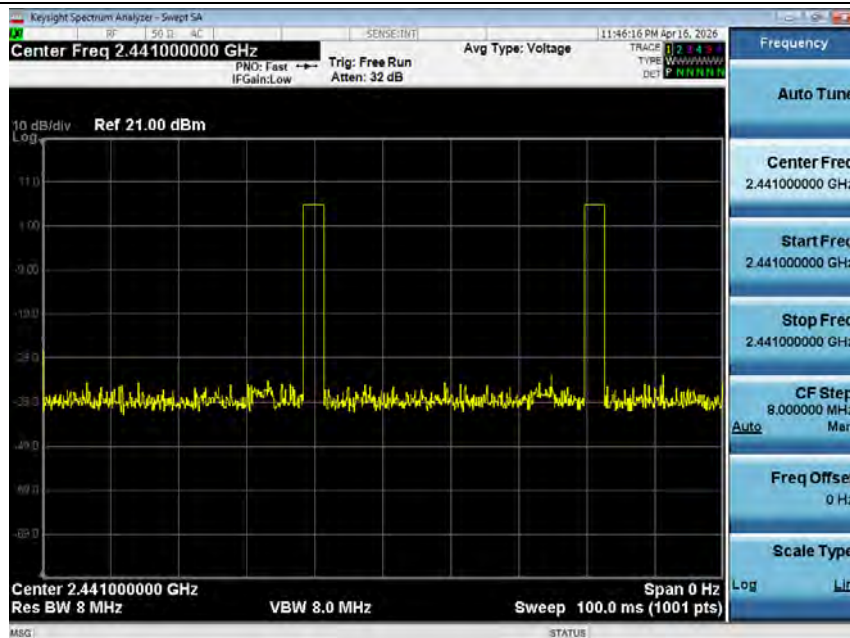

The process and drawings of RSE-AVG

Ant1							
Test Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.043	≥ 0.695	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.034	1.297	≥ 0.865	Pass
8DPSK	SISO	HOPP	3DH5	1.037	1.290	≥ 0.86	Pass

Note:

Channel separation correction

DH5: Channel Separation ≥ 1 MHz, Channel separation correction=1

2DH5: Channel Separation ≥ 1 MHz, Channel separation correction=1

3DH5: Channel Separation ≥ 1 MHz, Channel separation correction=1

Overlapping channel correction

DH5: Overlapping channel correction = 1

2DH5: Overlapping channel correction = 1

3DH5: Overlapping channel correction = 1

Test mode	Dwell time per 100 ms	Channel separation correction	Overlapping channel correction	Maximum dwell time
DH5	$2 \times 2.903 = 5.806$	1.000	1	11.612
2DH5	$2 \times 2.903 = 5.806$	1.000	1	11.612
3DH5	$2 \times 2.903 = 5.806$	1.000	1	11.612

Note: Maximum dwell time per 1MHz= Dwell time per 100 ms per Channel*(Channel separation correction+ Overlapping channel correction)

Test Mode	Factor
DH5	-18.70
2DH5	-18.70
3DH5	-18.70

Factor= $20 \times \log(\text{Maximum dwell time in 100 ms}/100)$

- End of the Report -