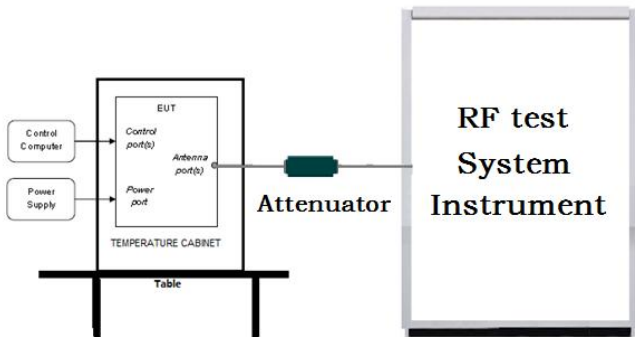
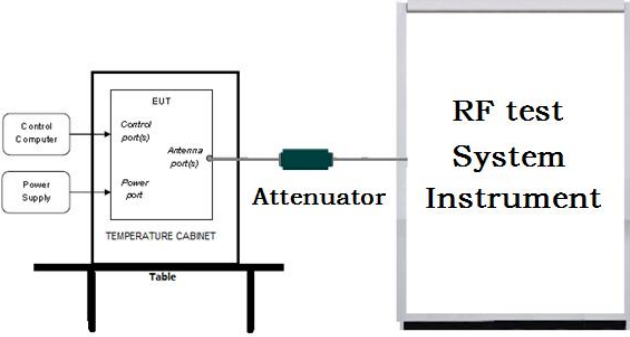



5.3 Maximum Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020
Test Setup:	
Test Procedure:	1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector. 2. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01. Method (a): Measure and sum the spectra across the outputs. The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.
Limit:	30dBm
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A


5.4 DTS Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density



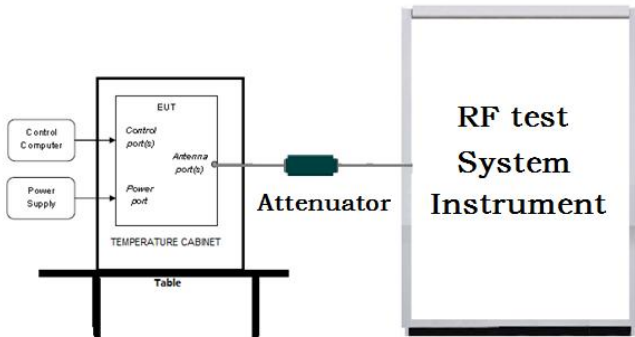
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. d) Set the VBW $> [3 \times \text{RBW}]$. e) Detector = power averaging (rms) or sample detector (when rms not available). f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$. g) Sweep time = auto couple. h) Employ trace averaging (rms) mode over a minimum of 100 traces.. i) Use the peak marker function to determine the maximum amplitude level. j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced). K) For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01. Method (a): Measure and sum the spectra across the outputs.The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.
Limit:	$\leq 8.00 \text{ dBm}/3 \text{ kHz}$
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.6 Band Edge Measurements and Conducted Spurious Emission

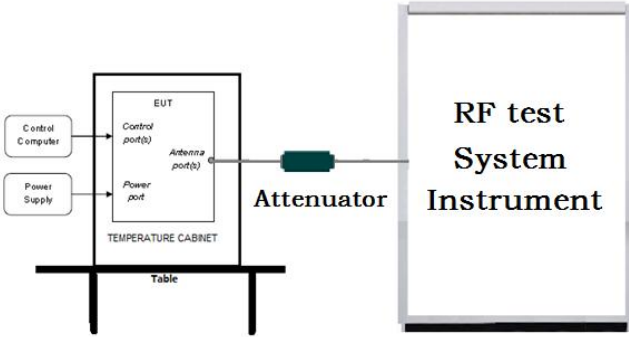Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

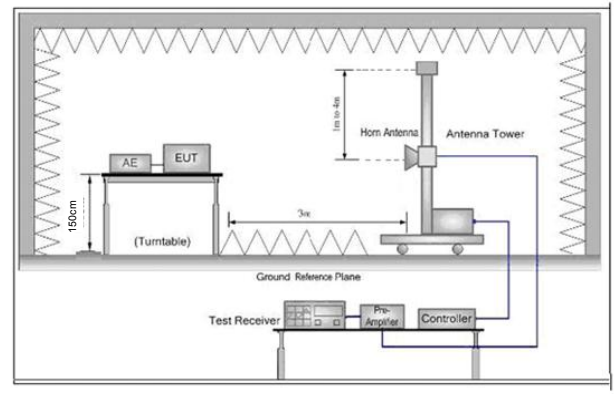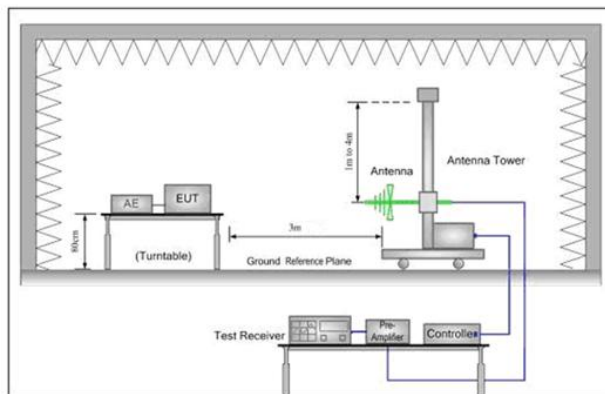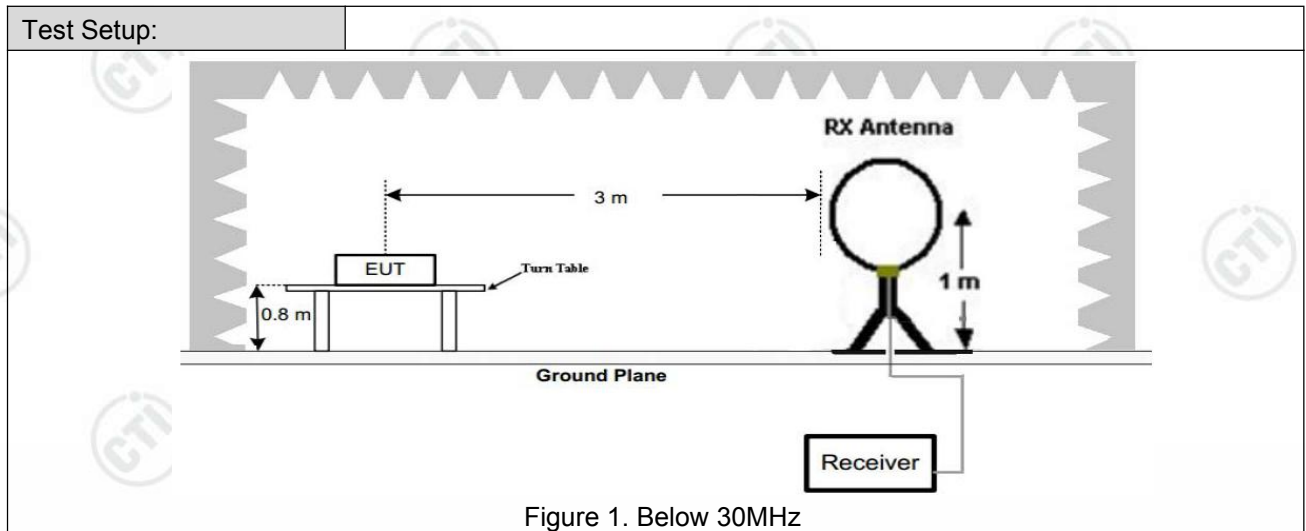

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both


	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 3.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

Test Graph

Horizontal:

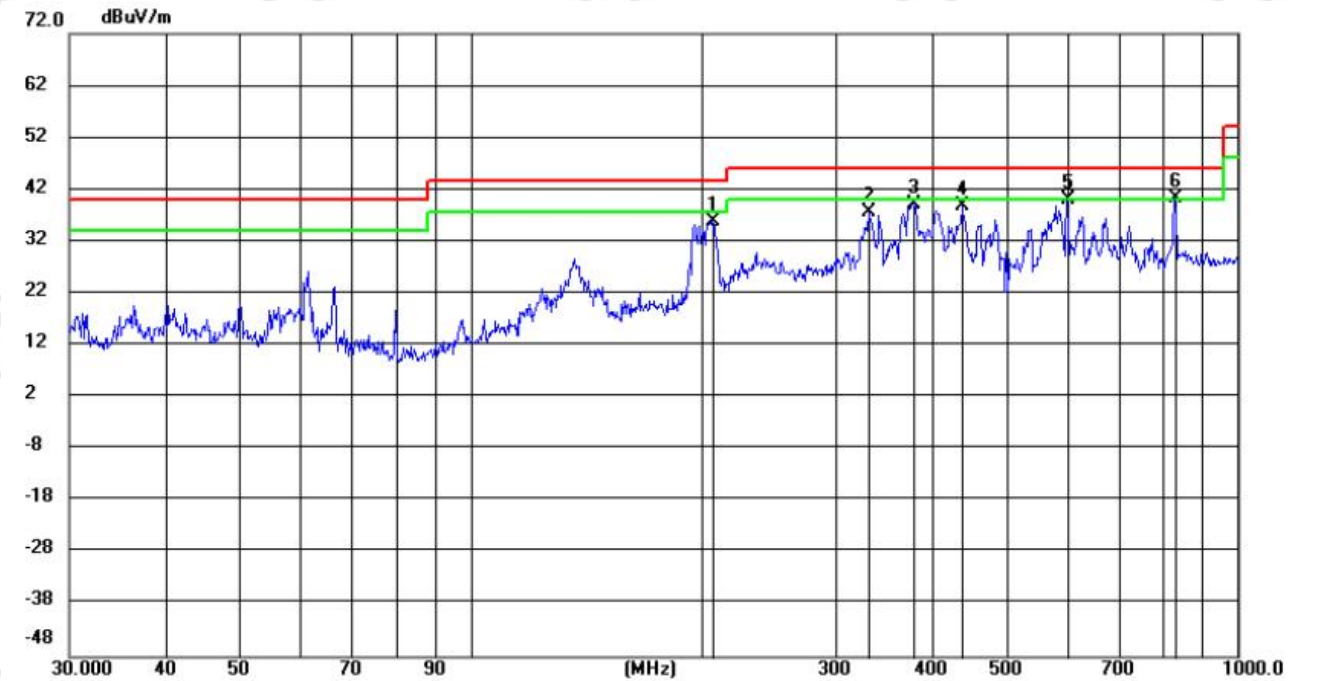


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		206.9773	23.04	12.81	35.85	43.50	-7.65	QP	100	162
2		330.6583	20.22	17.35	37.57	46.00	-8.43	QP	100	298
3		378.1200	20.38	18.81	39.19	46.00	-6.81	QP	100	235
4		438.0405	19.19	19.79	38.98	46.00	-7.02	QP	100	138
5	!	600.0571	17.06	22.97	40.03	46.00	-5.97	QP	100	98
6	*	828.9455	14.89	25.44	40.33	46.00	-5.67	QP	100	162

Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Vertical:

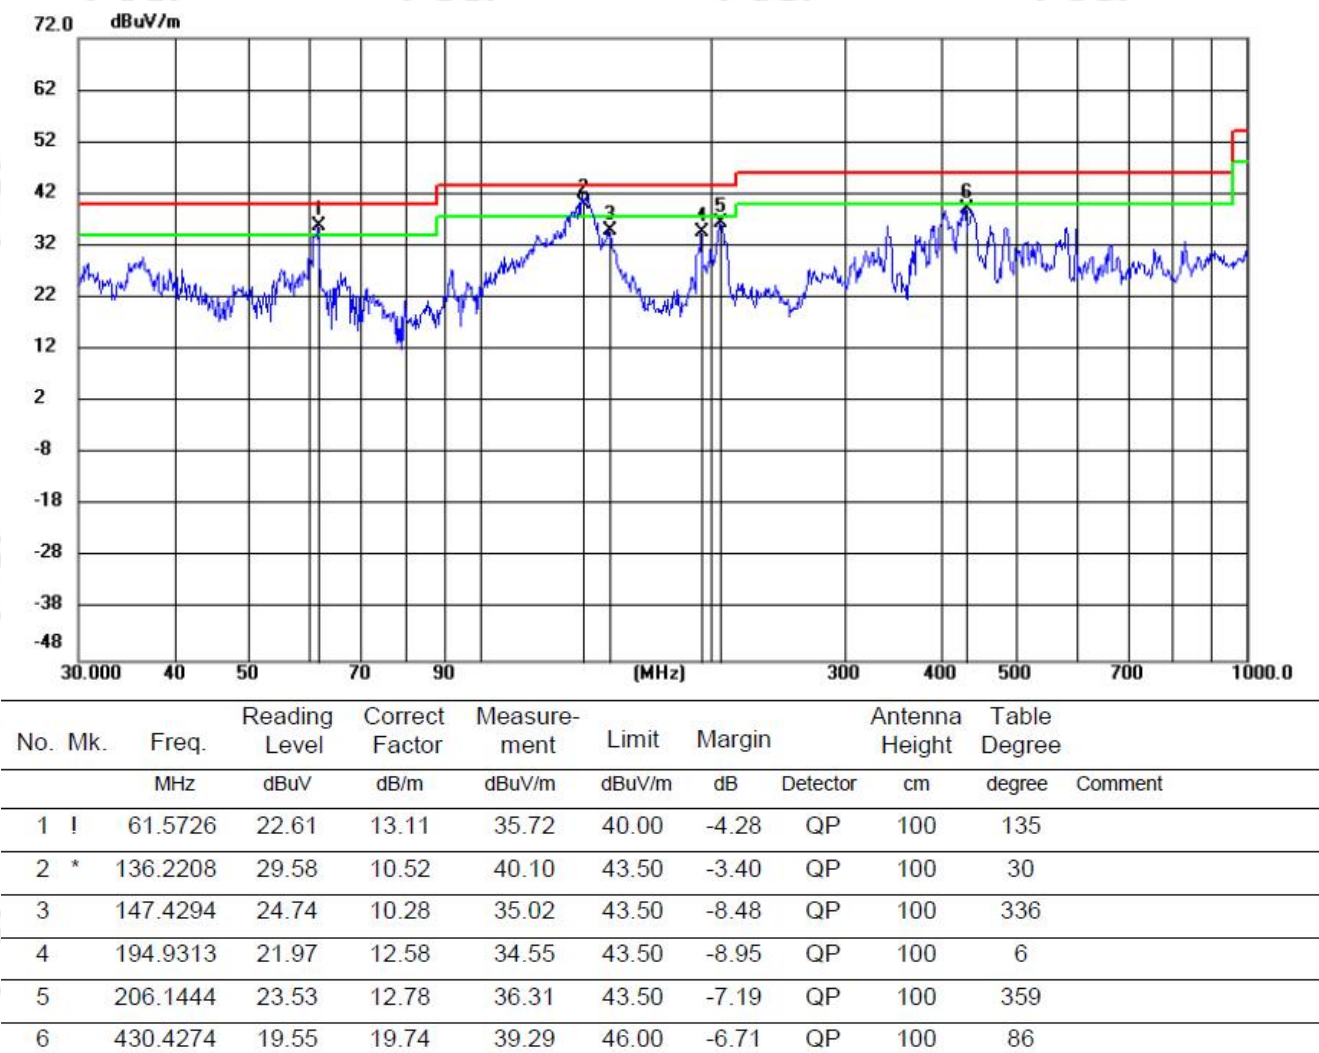

Remark:


1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 b mode was the worst case; only the worst case of was recorded in the report.

Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

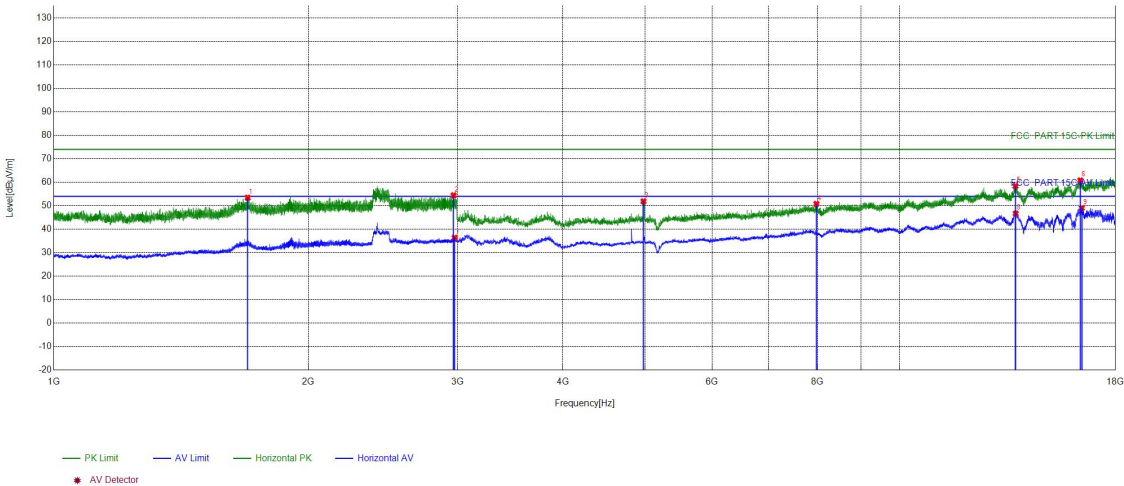

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1695.2464	14.05	39.40	53.45	74.00	20.55	PASS	Horizontal	PK
2	2969.7313	17.94	36.52	54.46	74.00	19.54	PASS	Horizontal	PK
3	4980.132	-8.10	59.99	51.89	74.00	22.11	PASS	Horizontal	PK
4	7974.3316	-1.38	52.19	50.81	74.00	23.19	PASS	Horizontal	PK
5	13710.714	7.24	51.15	58.39	74.00	15.61	PASS	Horizontal	PK
6	16359.8907	11.26	49.55	60.81	74.00	13.19	PASS	Horizontal	PK
7	2978.1319	17.89	18.49	36.38	54.00	17.62	PASS	Horizontal	AV
8	13719.7146	7.22	39.46	46.68	54.00	7.32	PASS	Horizontal	AV
9	16423.8949	10.45	38.56	49.01	54.00	4.99	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

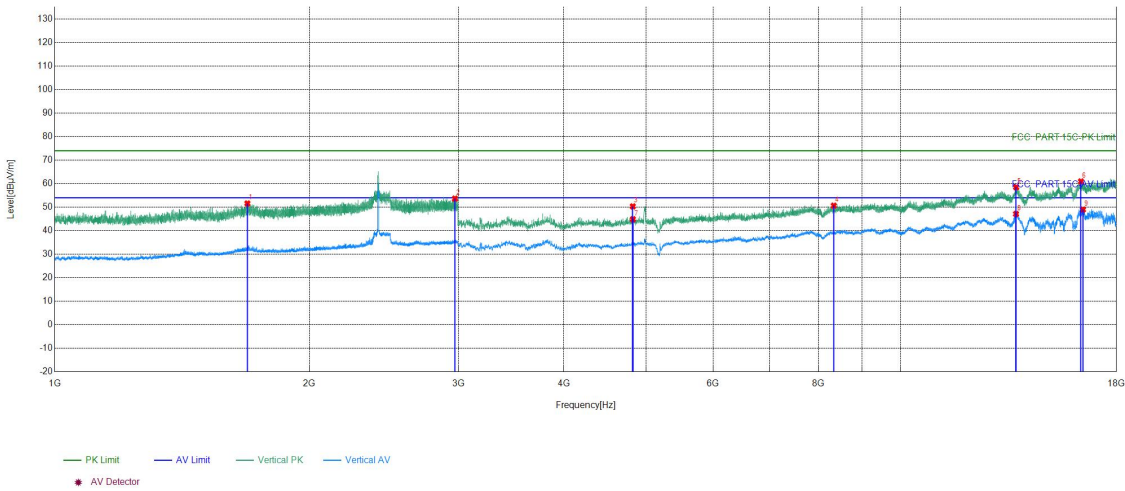

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1689.3793	14.01	37.59	51.60	74.00	22.40	PASS	Vertical	PK
2	2972.6648	17.93	35.74	53.67	74.00	20.33	PASS	Vertical	PK
3	4824.1216	-8.55	58.91	50.36	74.00	23.64	PASS	Vertical	PK
4	8338.3559	-1.08	51.76	50.68	74.00	23.32	PASS	Vertical	PK
5	13697.7132	7.27	51.22	58.49	74.00	15.51	PASS	Vertical	PK
6	16344.8897	11.52	49.44	60.96	74.00	13.04	PASS	Vertical	PK
7	4825.1217	-8.53	53.41	44.88	54.00	9.12	PASS	Vertical	AV
8	13693.7129	7.28	39.86	47.14	54.00	6.86	PASS	Vertical	AV
9	16431.8955	10.62	38.38	49.00	54.00	5.00	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

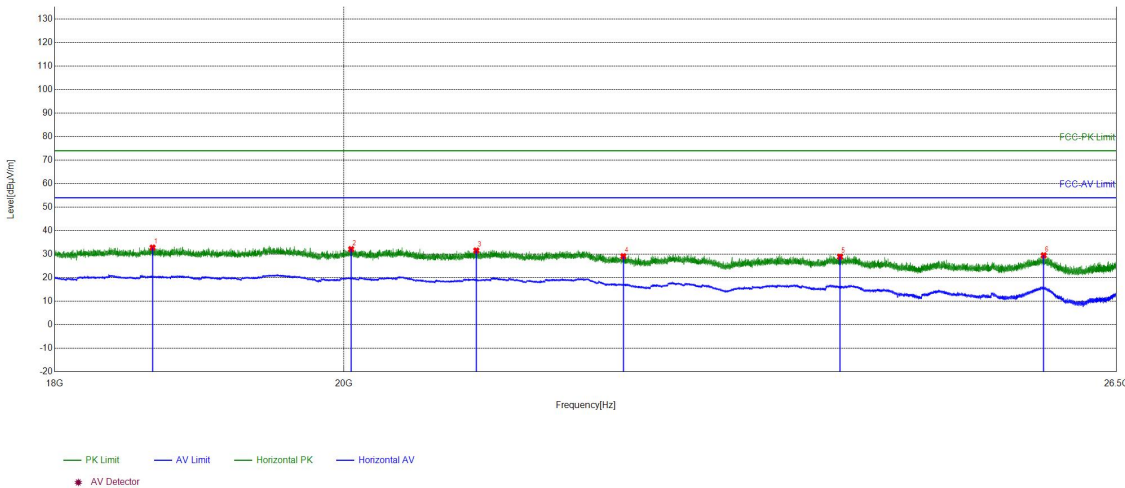

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18652.8261	-26.58	59.41	32.83	74.00	41.17	PASS	Horizontal	PK
2	20052.3221	-24.85	57.01	32.16	74.00	41.84	PASS	Horizontal	PK
3	20987.6995	-25.98	57.56	31.58	74.00	42.42	PASS	Horizontal	PK
4	22142.3857	-25.51	54.67	29.16	74.00	44.84	PASS	Horizontal	PK
5	23962.4785	-22.02	50.98	28.96	74.00	45.04	PASS	Horizontal	PK
6	25807.3923	-20.82	50.34	29.52	74.00	44.48	PASS	Horizontal	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

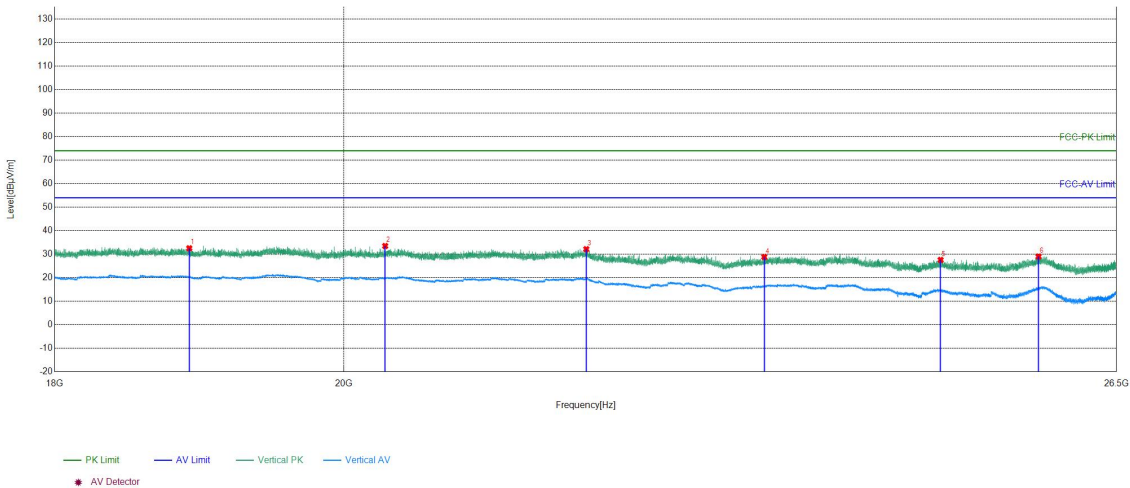

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18903.7562	-26.28	58.83	32.55	74.00	41.45	PASS	Vertical	PK
2	20302.2321	-25.49	59.01	33.52	74.00	40.48	PASS	Vertical	PK
3	21845.5538	-25.59	57.76	32.17	74.00	41.83	PASS	Vertical	PK
4	23308.9724	-23.89	52.75	28.86	74.00	45.14	PASS	Vertical	PK
5	24855.6942	-22.01	49.61	27.60	74.00	46.40	PASS	Vertical	PK
6	25758.7704	-20.80	49.85	29.05	74.00	44.95	PASS	Vertical	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2437Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

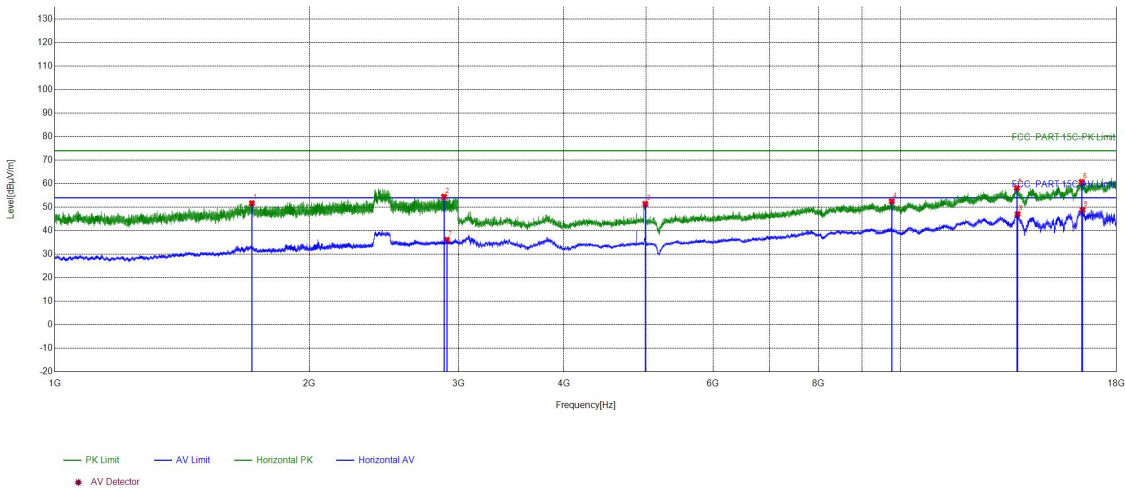

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1710.0473	14.12	37.56	51.68	74.00	22.32	PASS	Horizontal	PK
2	2885.5924	17.52	36.94	54.46	74.00	19.54	PASS	Horizontal	PK
3	4992.1328	-8.13	59.50	51.37	74.00	22.63	PASS	Horizontal	PK
4	9764.451	1.24	51.25	52.49	74.00	21.51	PASS	Horizontal	PK
5	13725.715	7.21	50.92	58.13	74.00	15.87	PASS	Horizontal	PK
6	16373.8916	10.81	49.92	60.73	74.00	13.27	PASS	Horizontal	PK
7	2908.2606	17.76	18.39	36.15	54.00	17.85	PASS	Horizontal	AV
8	13754.717	7.22	39.83	47.05	54.00	6.95	PASS	Horizontal	AV
9	16416.8945	10.31	38.54	48.85	54.00	5.15	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2437Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

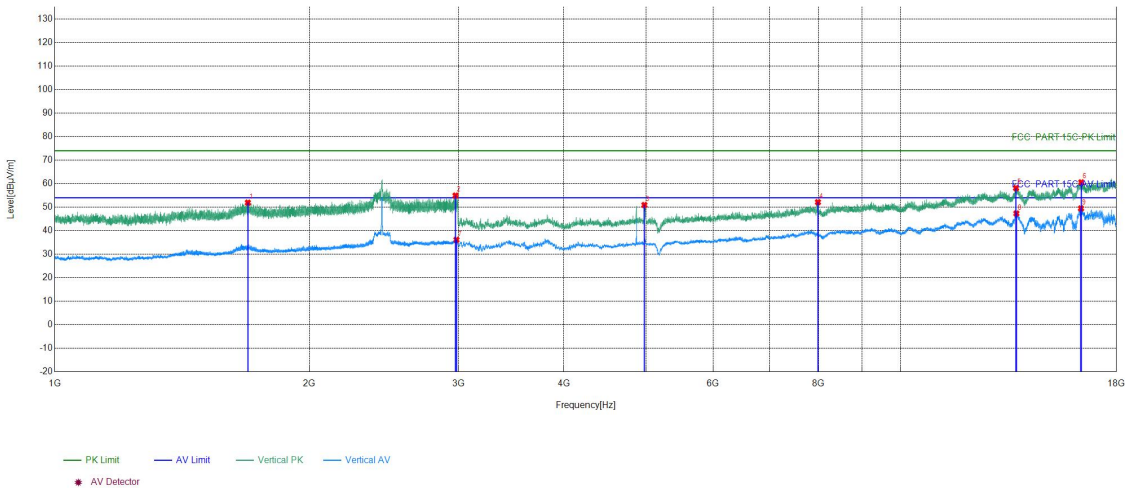

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1691.5128	14.03	37.92	51.95	74.00	22.05	PASS	Vertical	PK
2	2977.1985	17.89	37.07	54.96	74.00	19.04	PASS	Vertical	PK
3	4979.1319	-8.09	59.02	50.93	74.00	23.07	PASS	Vertical	PK
4	7986.3324	-1.37	53.52	52.15	74.00	21.85	PASS	Vertical	PK
5	13694.713	7.28	50.87	58.15	74.00	15.85	PASS	Vertical	PK
6	16358.8906	11.30	49.28	60.58	74.00	13.42	PASS	Vertical	PK
7	2984.9323	17.89	18.26	36.15	54.00	17.85	PASS	Vertical	AV
8	13706.7138	7.25	40.08	47.33	54.00	6.67	PASS	Vertical	AV
9	16343.8896	11.51	37.97	49.48	54.00	4.52	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2437Mhz
Tset_Engineer	\	Test_Date	2026/8/28


Test Graph

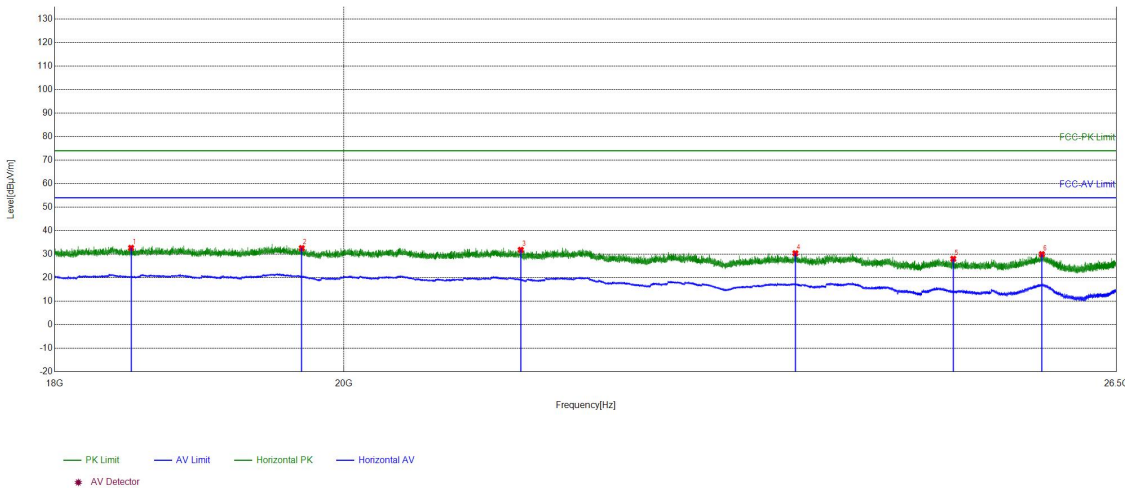

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18507.3003	-26.69	59.40	32.71	74.00	41.29	PASS	Horizontal	PK
2	19694.6278	-25.42	58.02	32.60	74.00	41.40	PASS	Horizontal	PK
3	21330.4332	-25.83	57.70	31.87	74.00	42.13	PASS	Horizontal	PK
4	23575.203	-23.12	53.55	30.43	74.00	43.57	PASS	Horizontal	PK
5	24970.6188	-22.11	50.16	28.05	74.00	45.95	PASS	Horizontal	PK
6	25789.7116	-20.81	50.84	30.03	74.00	43.97	PASS	Horizontal	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2437Mhz
Tset_Engineer	\	Test_Date	2026/8/28

Test Graph

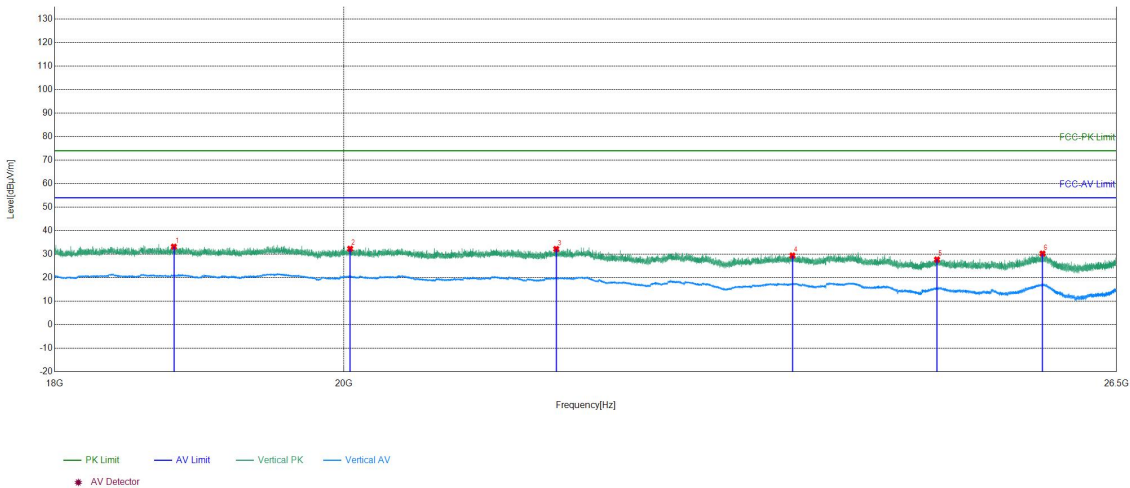

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18798.0119	-26.29	59.50	33.21	74.00	40.79	PASS	Vertical	PK
2	20044.8418	-24.82	57.15	32.33	74.00	41.67	PASS	Vertical	PK
3	21607.8843	-25.73	57.95	32.22	74.00	41.78	PASS	Vertical	PK
4	23549.362	-23.19	52.62	29.43	74.00	44.57	PASS	Vertical	PK
5	24823.3929	-21.98	49.72	27.74	74.00	46.26	PASS	Vertical	PK
6	25795.8318	-20.82	51.10	30.28	74.00	43.72	PASS	Vertical	PK