

Shenzhen Yishengbang Technology Co., LTD

Sample acceptance letter

SPECIFICATION FOR APPROVAL

The name of the company: Shenzhen NaSida Industry and Trade Co., LTD

The material code: _____

specifications: NM10062

Admitted to date: _____

The name of the supplier: Shenzhen Yishengbang Technology Co., LTD

Supplier standard type number: 5G/BT:SLK-NSD-3124-R-375IV-B-0.81

2. 4G:SLK-NSD-3023A-L-140IV-G-0.81

Admit signature

For acceptance by the contractor			Shenzhen NaSida Industry and Trade Co., LTD		
Rf Engineer	audit	approval	Rf Engineer	audit	approval
Xuwen	Zhen	Mei Cai			
Hu	Huang	Lin			
Signed and sealed			Signed and sealed		
date		2026-05-23	date		
instructions: ☐ accept ☐ Conditional acceptance					
note:					

The name of the supplier: Shenzhen Yishengbang Technology Co., LTD

Supplier address: 101, Building C, Shenzhen Qianwan Hard Technology Industrial Park, Bao 'an District, Shenzhen

telephone: 18025305599

telephone: 18666299104

5G/BT Antenna (3124)

1. Explanation of Product number :

SLK - NSD - 3124 - R - 375 IV - B - 0.81


1

2

3

4

5

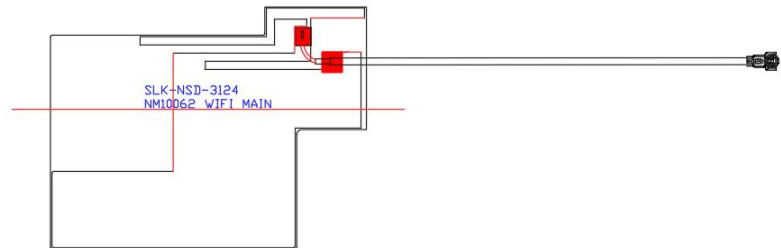

Product Code:

(1) Customer:

NSD:NaSida

(2) Project:

3124: SLK-3124(5G/BT antenna)

(3) Welding Position

R:Right

(4) Cable Length:

375IV: 375*0.81MM fourth generation terminals

(5)Cable Color

B:Black

2. Features

- *Stable and reliable in performances
- *Compact size
- *RoHS compliance

3. Applications

- * IEEE802.11 (a/b/g/n)
- * Hand-held devices when WIFI (802.11 a/b/g/n) functions are needed

4. Description

Holy bond's FPC antenna series are specially designed for WIFI (802.11 a/b/g/n) applications. Based on Holy bond's proprietary design and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications

5-1


Characteristics	Specifications	Unit
Outline Dimensions	30.99x23.71x 0.12	mm
Center Frequency	2.4-2.5-5.15-5.85	GHz
Bandwidth(under-10dB return loss)	130min	MHz
VSWR	3max	

5-2.

VSWR




S11

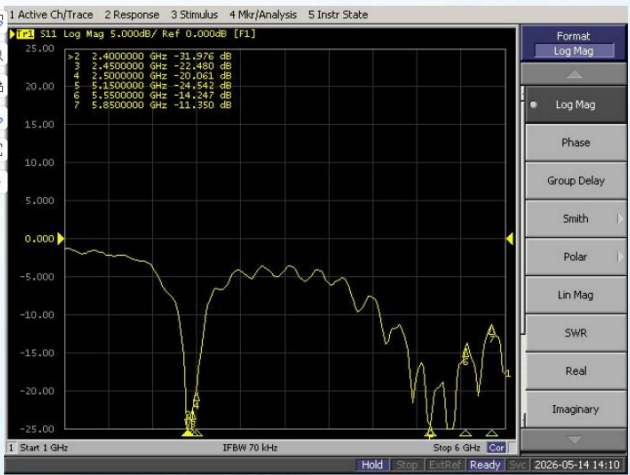


5-3. 5G/BT Antenna Gain/Efficiency/Radiation Pattern of 3D

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400	-2.99	1.43	50.23
2410	-2.99	1.34	50.29
2420	-2.75	1.43	53.12
2430	-2.73	1.27	53.28
2440	-2.77	1.23	52.84
2450	-2.85	1.90	51.93
2460	-2.66	1.21	54.23
2470	-2.91	1.78	51.20
2480	-2.85	1.12	51.92
2490	-2.75	1.35	53.14
2500	-2.81	1.32	52.32
5150	-4.57	0.58	44.89
5250	-4.54	0.92	45.14
5350	-4.25	1.81	47.59
5450	-3.85	2.85	51.19
5550	-4.60	2.27	44.66
5650	-4.21	1.35	47.95
5750	-4.22	2.02	47.84
5850	-4.58	1.91	44.85

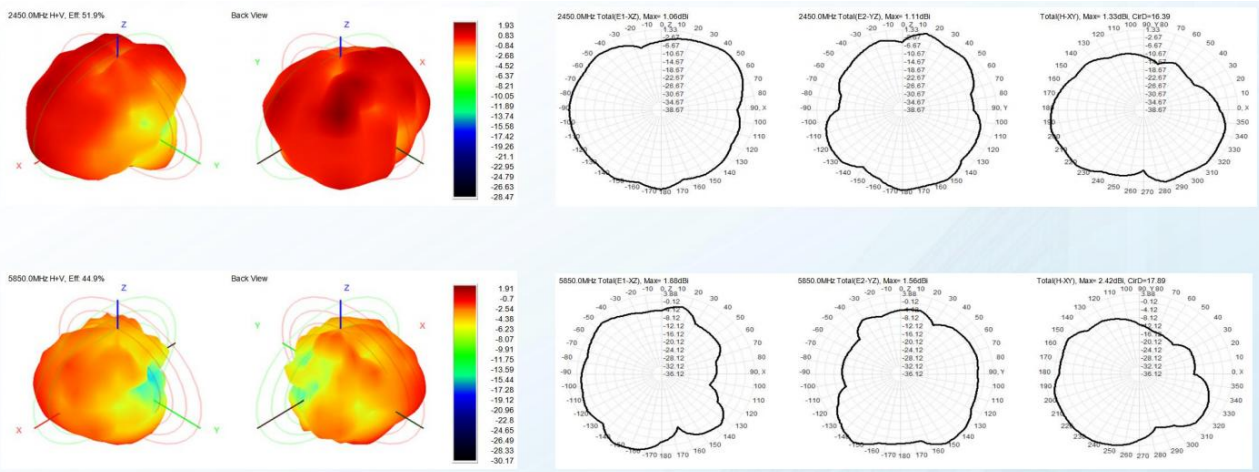

6. Antenna Dimensions (unit: mm)

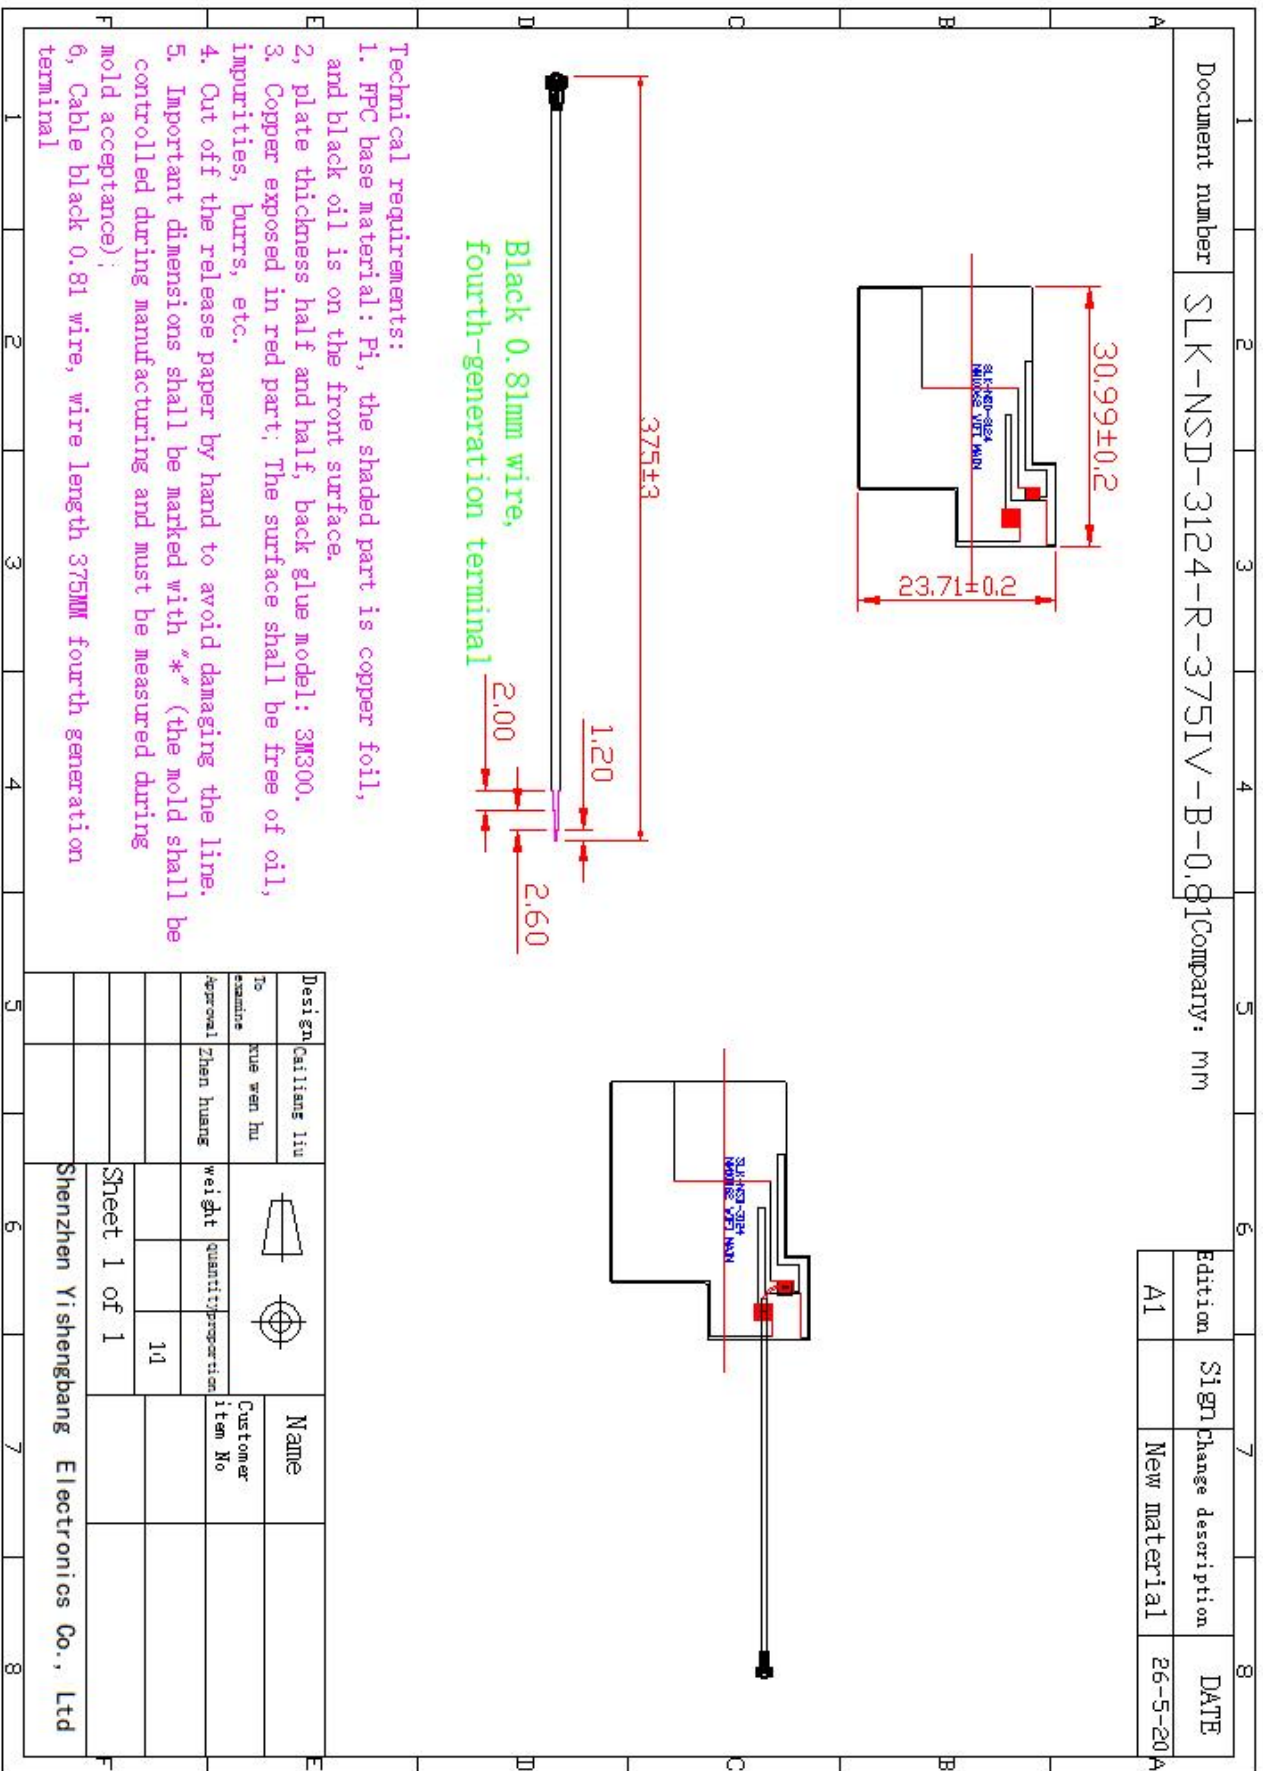


2.4G Antenna (3023A)

1.Explanation of Product number :

S L K - N S D - 3 0 2 3 A - L - 1 4 0 I V - G - 0 . 8 1

1 2 3 4 5

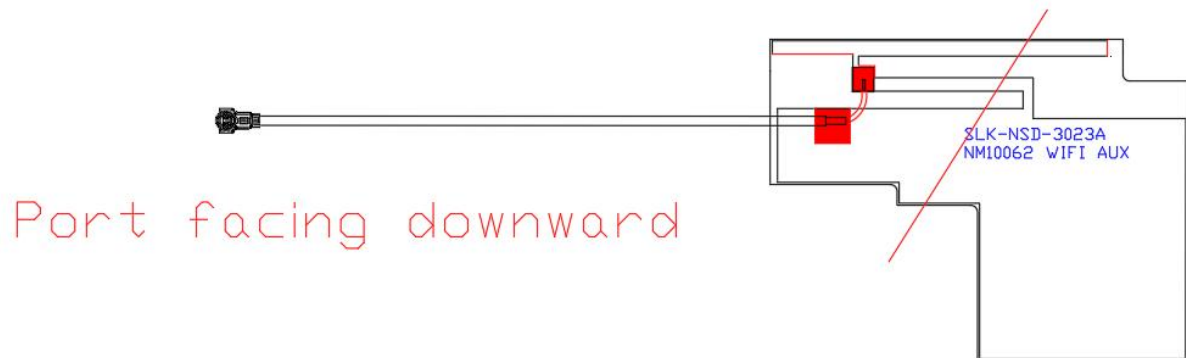

Product Code:

(1) Customer:

NSD:NaSida

(2) Project:

3023A: SLK-3023A(2.4G antenna)

(3) Welding Position

L:Left

(4) Cable Length:

140IV: 140*0.81MM fourth generation terminals

(5)Cable Color

G: Gray

2. Features

- *Stable and reliable in performances
- *Compact size
- *RoHS compliance

3. Applications

- * IEEE802.11 (a/b/g/n)
- * Hand-held devices when WIFI (802.11 a/b/g/n) functions are needed

4. Description

Holy bond's FPC antenna series are specially designed for WIFI (802.11 a/b/g/n) applications. Based on Holy bond's proprietary design and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications

5-1


Characteristics	Specifications	Unit
Outline Dimensions	30.12x23.15x 0.12	mm
Center Frequency	2.4-2.5-5.15-5.85	GHz
Bandwidth(under-10dB return loss)	130min	MHz
VSWR	3max	

5-2.

VSWR




S11

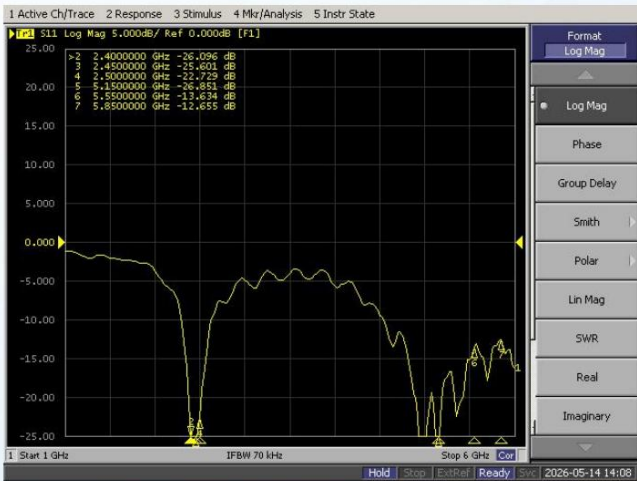

5-3. 2.4G Antenna Gain/Efficiency/Radiation Pattern of 3D

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400	-3.08	1.76	49.21
2410	-3.04	1.90	49.66
2420	-2.68	1.40	53.95
2430	-2.85	1.63	51.83
2440	-2.89	1.33	51.38
2450	-3.18	1.44	48.06
2460	-3.15	1.06	48.36
2470	-3.58	1.53	43.89
2480	-3.69	1.35	42.79
2490	-3.58	1.54	43.89
2500	-3.79	1.53	41.81
5150	-5.60	2.30	37.52
5250	-5.27	2.43	39.72
5350	-5.18	1.80	40.33
5450	-4.27	2.25	47.38
5550	-4.78	1.73	43.24
5650	-4.48	2.06	45.61
5750	-4.43	2.26	46.07
5850	-4.99	2.54	41.69

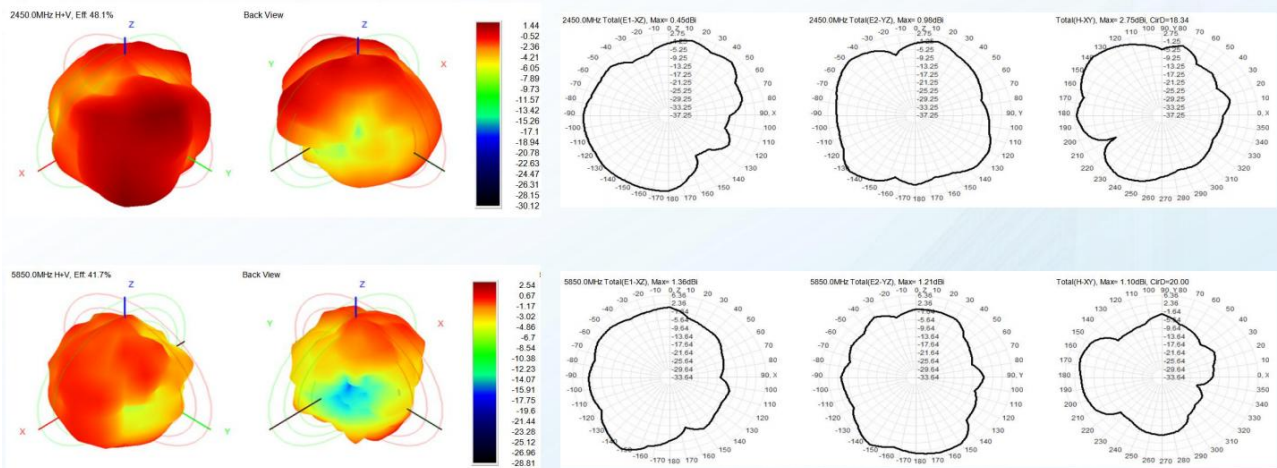

6. Antenna Dimensions (unit: mm)

[illegible]

Antenna Picture

