




Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 4/5/6 (Mode 4 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	241.4600	43.23	-17.73	25.50	46.00	-20.50	peak
2	339.4300	52.35	-13.43	38.92	46.00	-7.08	peak
3	493.6600	36.69	-8.15	28.54	46.00	-17.46	peak
4	666.3200	32.16	-4.66	27.50	46.00	-18.50	peak
5	840.9200	31.43	-0.38	31.05	46.00	-14.95	peak
6	951.5000	30.65	1.62	32.27	46.00	-13.73	peak

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

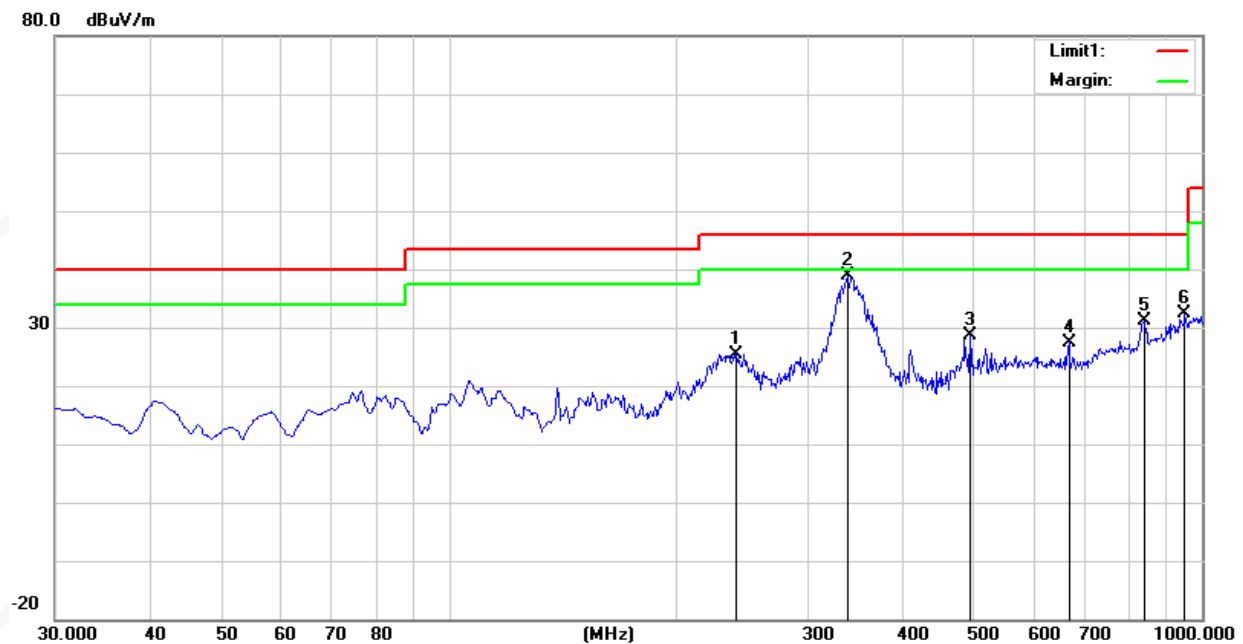



(1GHz-25GHz) Spurious emission Requirements

1M PHY

GFSK

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (GFSK/2402 MHz)										
3264.86	60.97	44.70	6.70	28.20	-9.80	51.17	74.00	-22.83	PK	Vertical
3264.86	50.79	44.70	6.70	28.20	-9.80	40.99	54.00	-13.01	AV	Vertical
3264.73	61.93	44.70	6.70	28.20	-9.80	52.13	74.00	-21.87	PK	Horizontal
3264.73	50.25	44.70	6.70	28.20	-9.80	40.45	54.00	-13.55	AV	Horizontal
4804.57	58.58	44.20	9.04	31.60	-3.56	55.02	74.00	-18.98	PK	Vertical
4804.57	50.14	44.20	9.04	31.60	-3.56	46.58	54.00	-7.42	AV	Vertical
4804.43	58.70	44.20	9.04	31.60	-3.56	55.14	74.00	-18.86	PK	Horizontal
4804.43	50.26	44.20	9.04	31.60	-3.56	46.70	54.00	-7.30	AV	Horizontal
5359.61	48.63	44.20	9.86	32.00	-2.34	46.29	74.00	-27.71	PK	Vertical
5359.61	39.08	44.20	9.86	32.00	-2.34	36.74	54.00	-17.26	AV	Vertical
5359.70	48.39	44.20	9.86	32.00	-2.34	46.05	74.00	-27.95	PK	Horizontal
5359.70	38.42	44.20	9.86	32.00	-2.34	36.08	54.00	-17.92	AV	Horizontal
7205.80	54.40	43.50	11.40	35.50	3.40	57.80	74.00	-16.20	PK	Vertical
7205.80	44.49	43.50	11.40	35.50	3.40	47.89	54.00	-6.11	AV	Vertical
7205.91	54.25	43.50	11.40	35.50	3.40	57.65	74.00	-16.35	PK	Horizontal
7205.91	43.92	43.50	11.40	35.50	3.40	47.32	54.00	-6.68	AV	Horizontal
Middle Channel (GFSK/2440 MHz)										
3263.17	61.49	44.70	6.70	28.20	-9.80	51.69	74.00	-22.31	PK	Vertical
3263.17	51.48	44.70	6.70	28.20	-9.80	41.68	54.00	-12.32	AV	Vertical
3263.09	61.73	44.70	6.70	28.20	-9.80	51.93	74.00	-22.07	PK	Horizontal
3263.09	50.14	44.70	6.70	28.20	-9.80	40.34	54.00	-13.66	AV	Horizontal
4879.89	58.95	44.20	9.04	31.60	-3.56	55.39	74.00	-18.61	PK	Vertical
4879.89	50.54	44.20	9.04	31.60	-3.56	46.98	54.00	-7.02	AV	Vertical
4880.12	58.18	44.20	9.04	31.60	-3.56	54.62	74.00	-19.38	PK	Horizontal
4880.12	49.98	44.20	9.04	31.60	-3.56	46.42	54.00	-7.58	AV	Horizontal
5357.12	49.11	44.20	9.86	32.00	-2.34	46.77	74.00	-27.23	PK	Vertical
5357.12	39.22	44.20	9.86	32.00	-2.34	36.88	54.00	-17.12	AV	Vertical
5357.39	48.14	44.20	9.86	32.00	-2.34	45.80	74.00	-28.20	PK	Horizontal
5356.95	39.35	44.20	9.86	32.00	-2.34	37.01	54.00	-16.99	AV	Horizontal
7320.85	54.20	43.50	11.40	35.50	3.40	57.60	74.00	-16.40	PK	Vertical
7320.85	44.55	43.50	11.40	35.50	3.40	47.95	54.00	-6.05	AV	Vertical
7320.51	53.96	43.50	11.40	35.50	3.40	57.36	74.00	-16.64	PK	Horizontal
7320.51	44.02	43.50	11.40	35.50	3.40	47.42	54.00	-6.58	AV	Horizontal



High Channel (GFSK/2480 MHz)										
3264.86	60.91	44.70	6.70	28.20	-9.80	51.11	74.00	-22.89	PK	Vertical
3264.86	50.56	44.70	6.70	28.20	-9.80	40.76	54.00	-13.24	AV	Vertical
3264.77	61.86	44.70	6.70	28.20	-9.80	52.06	74.00	-21.94	PK	Horizontal
3264.77	50.84	44.70	6.70	28.20	-9.80	41.04	54.00	-12.96	AV	Horizontal
4960.52	58.69	44.20	9.04	31.60	-3.56	55.13	74.00	-18.87	PK	Vertical
4960.52	50.01	44.20	9.04	31.60	-3.56	46.45	54.00	-7.55	AV	Vertical
4960.50	59.52	44.20	9.04	31.60	-3.56	55.96	74.00	-18.04	PK	Horizontal
4960.50	50.56	44.20	9.04	31.60	-3.56	47.00	54.00	-7.00	AV	Horizontal
5359.61	48.42	44.20	9.86	32.00	-2.34	46.08	74.00	-27.92	PK	Vertical
5359.61	39.39	44.20	9.86	32.00	-2.34	37.05	54.00	-16.95	AV	Vertical
5359.59	48.52	44.20	9.86	32.00	-2.34	46.18	74.00	-27.82	PK	Horizontal
5359.59	39.10	44.20	9.86	32.00	-2.34	36.76	54.00	-17.24	AV	Horizontal
7439.91	54.42	43.50	11.40	35.50	3.40	57.82	74.00	-16.18	PK	Vertical
7439.91	44.01	43.50	11.40	35.50	3.40	47.41	54.00	-6.59	AV	Vertical
7439.93	53.55	43.50	11.40	35.50	3.40	56.95	74.00	-17.05	PK	Horizontal
7439.93	43.68	43.50	11.40	35.50	3.40	47.08	54.00	-6.92	AV	Horizontal

Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor.
- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.

2M PHY
GFSK

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (GFSK/2402 MHz)										
3264.68	61.58	44.70	6.70	28.20	-9.80	51.78	74.00	-22.22	PK	Vertical
3264.68	50.78	44.70	6.70	28.20	-9.80	40.98	54.00	-13.02	AV	Vertical
3264.67	61.86	44.70	6.70	28.20	-9.80	52.06	74.00	-21.94	PK	Horizontal
3264.67	51.27	44.70	6.70	28.20	-9.80	41.47	54.00	-12.53	AV	Horizontal
4804.46	58.61	44.20	9.04	31.60	-3.56	55.05	74.00	-18.95	PK	Vertical
4804.46	50.53	44.20	9.04	31.60	-3.56	46.97	54.00	-7.03	AV	Vertical
4804.61	58.69	44.20	9.04	31.60	-3.56	55.13	74.00	-18.87	PK	Horizontal
4804.61	50.43	44.20	9.04	31.60	-3.56	46.87	54.00	-7.13	AV	Horizontal
5359.75	48.18	44.20	9.86	32.00	-2.34	45.84	74.00	-28.16	PK	Vertical
5359.75	39.65	44.20	9.86	32.00	-2.34	37.31	54.00	-16.69	AV	Vertical
5359.61	48.31	44.20	9.86	32.00	-2.34	45.97	74.00	-28.03	PK	Horizontal
5359.61	38.76	44.20	9.86	32.00	-2.34	36.42	54.00	-17.58	AV	Horizontal
7205.83	54.21	43.50	11.40	35.50	3.40	57.61	74.00	-16.39	PK	Vertical
7205.83	44.21	43.50	11.40	35.50	3.40	47.61	54.00	-6.39	AV	Vertical
7205.71	54.62	43.50	11.40	35.50	3.40	58.02	74.00	-15.98	PK	Horizontal
7205.71	44.56	43.50	11.40	35.50	3.40	47.96	54.00	-6.04	AV	Horizontal
Middle Channel (GFSK/2440 MHz)										
3264.68	61.58	44.70	6.70	28.20	-9.80	51.78	74.00	-22.22	PK	Vertical
3264.68	50.78	44.70	6.70	28.20	-9.80	40.98	54.00	-13.02	AV	Vertical
3264.67	61.86	44.70	6.70	28.20	-9.80	52.06	74.00	-21.94	PK	Horizontal
3264.67	51.27	44.70	6.70	28.20	-9.80	41.47	54.00	-12.53	AV	Horizontal
4804.46	58.61	44.20	9.04	31.60	-3.56	55.05	74.00	-18.95	PK	Vertical
4804.46	50.53	44.20	9.04	31.60	-3.56	46.97	54.00	-7.03	AV	Vertical
4804.61	58.69	44.20	9.04	31.60	-3.56	55.13	74.00	-18.87	PK	Horizontal
4804.61	50.43	44.20	9.04	31.60	-3.56	46.87	54.00	-7.13	AV	Horizontal
5359.75	48.18	44.20	9.86	32.00	-2.34	45.84	74.00	-28.16	PK	Vertical
5359.75	39.65	44.20	9.86	32.00	-2.34	37.31	54.00	-16.69	AV	Vertical
5359.61	48.31	44.20	9.86	32.00	-2.34	45.97	74.00	-28.03	PK	Horizontal
5359.61	38.76	44.20	9.86	32.00	-2.34	36.42	54.00	-17.58	AV	Horizontal
7205.83	54.21	43.50	11.40	35.50	3.40	57.61	74.00	-16.39	PK	Vertical
7205.83	44.21	43.50	11.40	35.50	3.40	47.61	54.00	-6.39	AV	Vertical
7205.71	54.62	43.50	11.40	35.50	3.40	58.02	74.00	-15.98	PK	Horizontal
7205.71	44.56	43.50	11.40	35.50	3.40	47.96	54.00	-6.04	AV	Horizontal



High Channel (GFSK/2480 MHz)										
3264.64	61.41	44.70	6.70	28.20	-9.80	51.61	74.00	-22.39	PK	Vertical
3264.64	50.42	44.70	6.70	28.20	-9.80	40.62	54.00	-13.38	AV	Vertical
3264.62	61.02	44.70	6.70	28.20	-9.80	51.22	74.00	-22.78	PK	Horizontal
3264.62	50.65	44.70	6.70	28.20	-9.80	40.85	54.00	-13.15	AV	Horizontal
4960.39	59.17	44.20	9.04	31.60	-3.56	55.61	74.00	-18.39	PK	Vertical
4960.39	49.83	44.20	9.04	31.60	-3.56	46.27	54.00	-7.73	AV	Vertical
4960.32	59.28	44.20	9.04	31.60	-3.56	55.72	74.00	-18.28	PK	Horizontal
4960.32	49.76	44.20	9.04	31.60	-3.56	46.20	54.00	-7.80	AV	Horizontal
5359.66	48.95	44.20	9.86	32.00	-2.34	46.61	74.00	-27.39	PK	Vertical
5359.66	39.57	44.20	9.86	32.00	-2.34	37.23	54.00	-16.77	AV	Vertical
5359.75	47.60	44.20	9.86	32.00	-2.34	45.26	74.00	-28.74	PK	Horizontal
5359.75	38.36	44.20	9.86	32.00	-2.34	36.02	54.00	-17.98	AV	Horizontal
7439.90	54.77	43.50	11.40	35.50	3.40	58.17	74.00	-15.83	PK	Vertical
7439.90	44.92	43.50	11.40	35.50	3.40	48.32	54.00	-5.68	AV	Vertical
7439.85	54.03	43.50	11.40	35.50	3.40	57.43	74.00	-16.57	PK	Horizontal
7439.85	44.95	43.50	11.40	35.50	3.40	48.35	54.00	-5.65	AV	Horizontal

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Emission Level = Reading + Factor.

2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




4.6 TEST RESULTS (Restricted Bands Requirements)

1M PHY
GFSK-Low
Horizontal

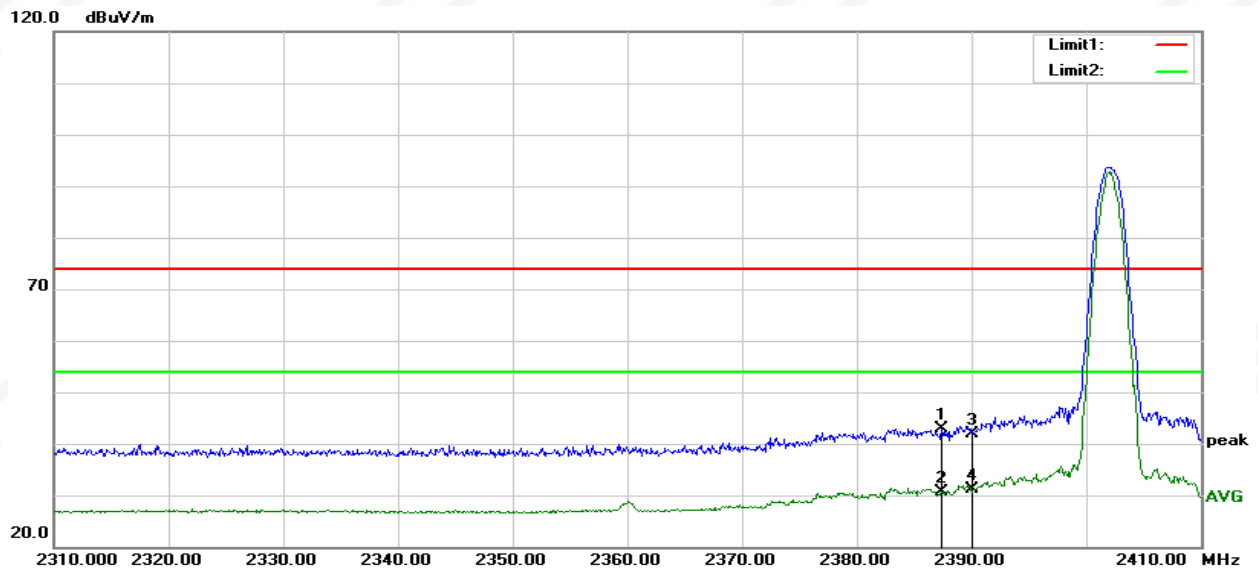

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.400	42.04	0.79	42.83	74.00	-31.17	peak
2	2387.400	29.80	0.79	30.59	54.00	-23.41	AVG
3	2390.000	40.96	0.81	41.77	74.00	-32.23	peak
4	2390.000	30.43	0.81	31.24	54.00	-22.76	AVG

Vertical

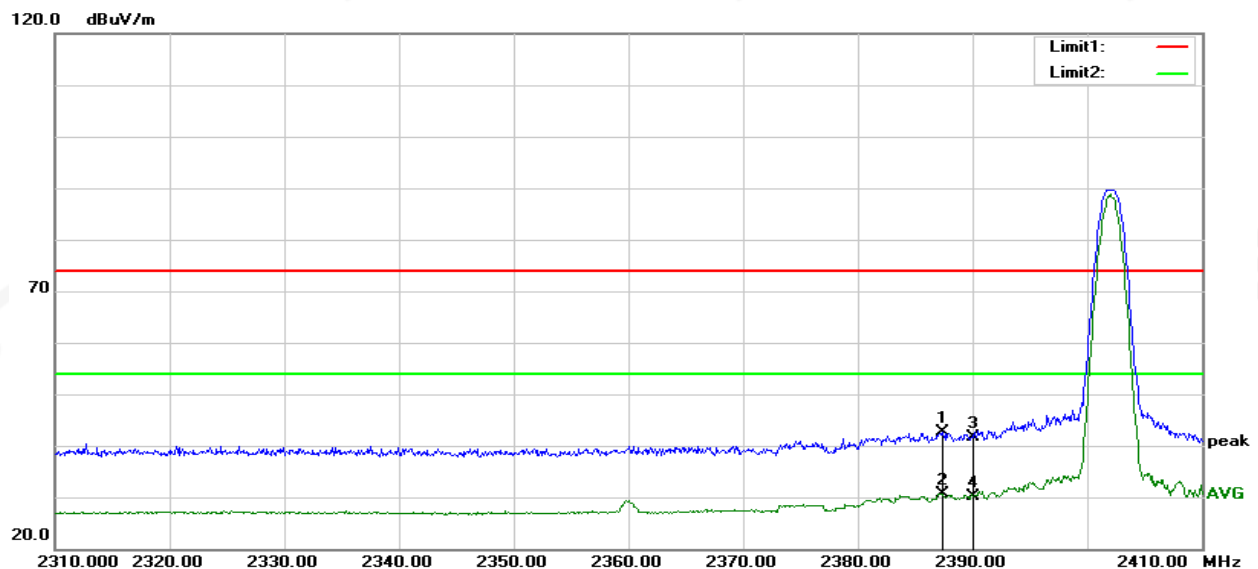


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.400	41.89	0.79	42.68	74.00	-31.32	peak
2	2387.400	29.85	0.79	30.64	54.00	-23.36	AVG
3	2390.000	40.72	0.81	41.53	74.00	-32.47	peak
4	2390.000	29.37	0.81	30.18	54.00	-23.82	AVG

GFSK-High




Horizontal

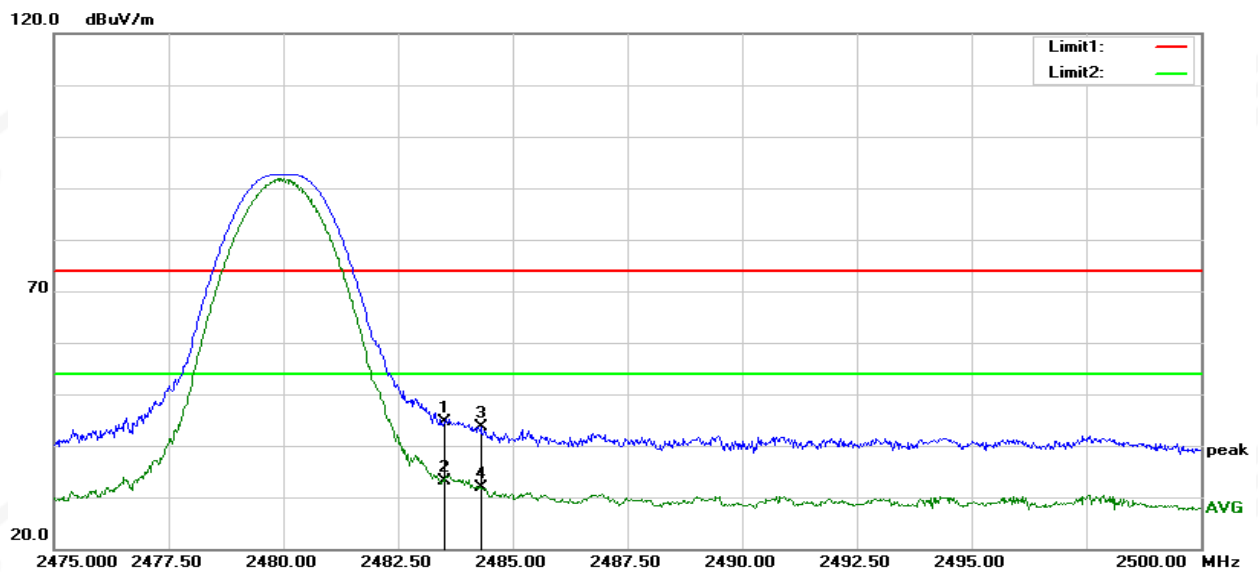


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	43.72	1.02	44.74	74.00	-29.26	peak
2	2483.500	32.23	1.02	33.25	54.00	-20.75	AVG
3	2484.300	42.65	1.03	43.68	74.00	-30.32	peak
4	2484.300	30.79	1.03	31.82	54.00	-22.18	AVG

Vertical

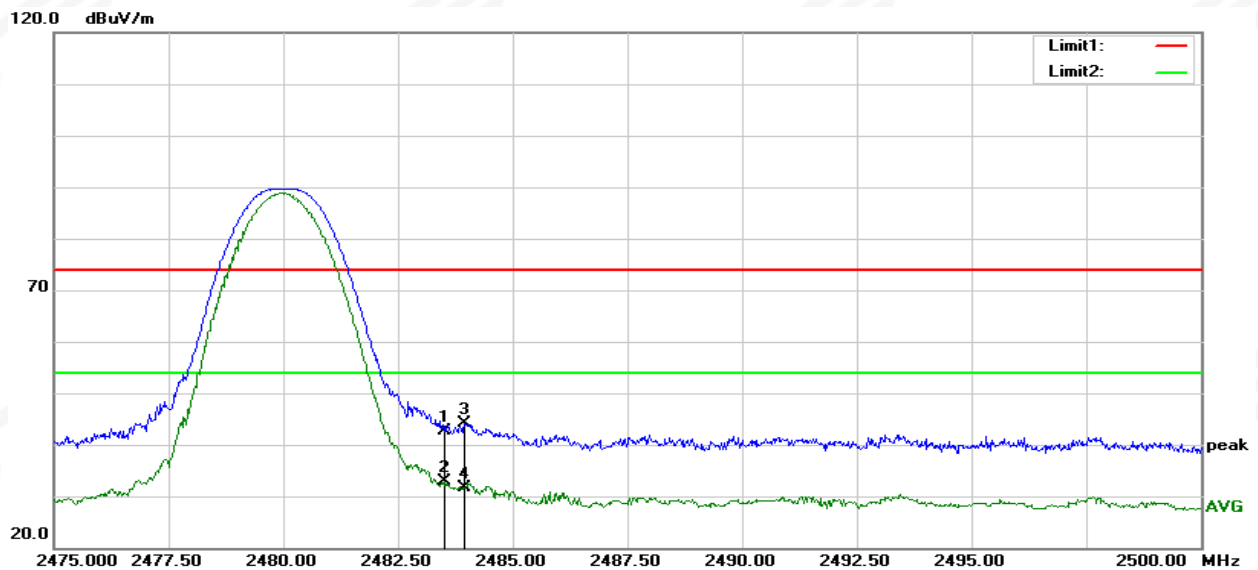


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	41.56	1.02	42.58	74.00	-31.42	peak
2	2483.525	31.78	1.02	32.80	54.00	-21.20	AVG
3	2483.950	43.05	1.03	44.08	74.00	-29.92	peak
4	2483.950	30.70	1.03	31.73	54.00	-22.27	AVG

2M PHY

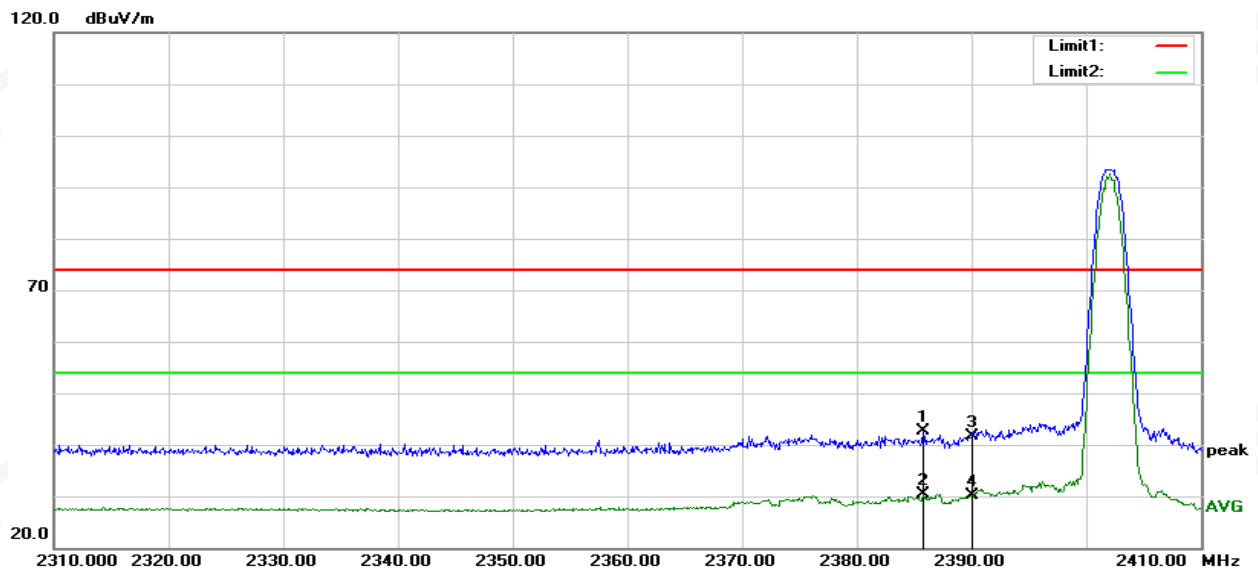
GFSK-Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.800	41.97	0.77	42.74	74.00	-31.26	peak
2	2385.800	29.61	0.77	30.38	54.00	-23.62	AVG
3	2390.000	40.90	0.81	41.71	74.00	-32.29	peak
4	2390.000	29.26	0.81	30.07	54.00	-23.93	AVG

Vertical

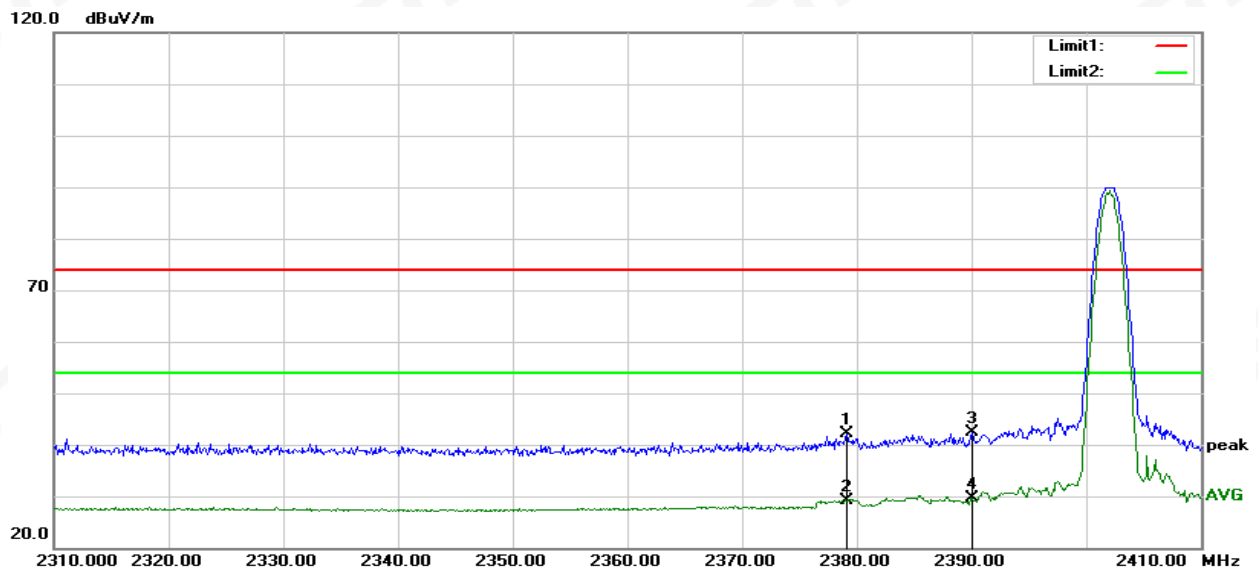


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.100	41.36	0.73	42.09	74.00	-31.91	peak
2	2379.100	28.50	0.73	29.23	54.00	-24.77	AVG
3	2390.000	41.52	0.81	42.33	74.00	-31.67	peak
4	2390.000	28.75	0.81	29.56	54.00	-24.44	AVG

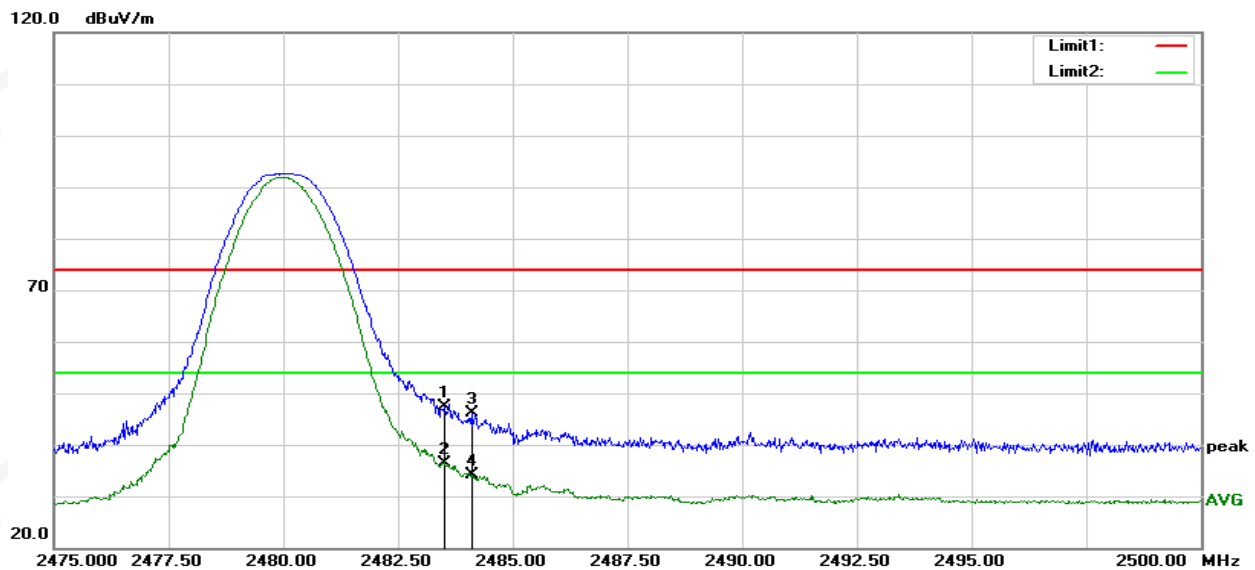GFSK-High
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.44	1.02	47.46	74.00	-26.54	peak
2	2483.500	35.48	1.02	36.50	54.00	-17.50	AVG
3	2484.100	44.98	1.03	46.01	74.00	-27.99	peak
4	2484.100	33.09	1.03	34.12	54.00	-19.88	AVG

Vertical

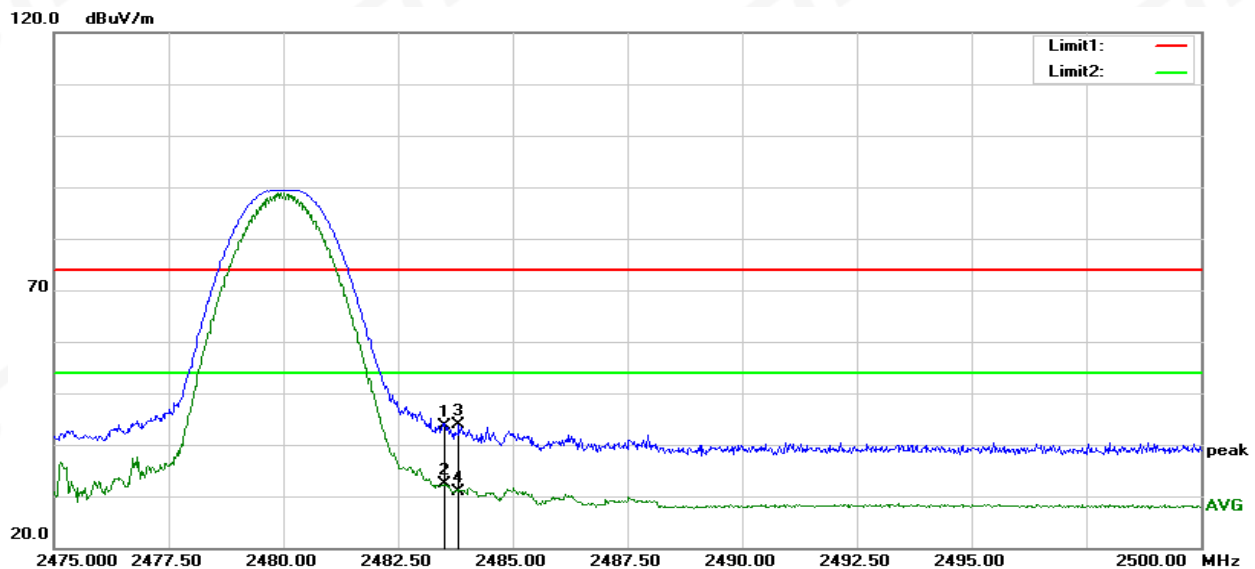

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	42.56	1.02	43.58	74.00	-30.42	peak
2	2483.500	31.37	1.02	32.39	54.00	-21.61	AVG
3	2483.825	42.83	1.03	43.86	74.00	-30.14	peak
4	2483.825	29.90	1.03	30.93	54.00	-23.07	AVG

5. DUTY CYCLE

5.1 TEST STANDARD

Please refer to ANSI C63.10-2020+Cor 1-2023 Section 11.6

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Zero
RB	set RBW to the largest available value
VB	$VBW \geq RBW$.
Detector	Peak
Trace	Clear Write
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

6. CONDUCTED SPURIOUS & BAND EDGE EMISSION

6.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

6.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

6.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminals is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



7. POWER SPECTRAL DENSITY TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. BANDWIDTH TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

8.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3\text{RBW}$, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



9. PEAK OUTPUT POWER TEST

9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

9.3 TEST SETUP



9.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

9.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is Chip Antenna. It comply with the standard requirement.


**APPENDIX 1-TEST DATA****Duty Cycle**

Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	0.38	0.62	61.29	2.13	2.63
NVNT	BLE 1M	2440	0.38	0.62	61.29	2.13	2.63
NVNT	BLE 1M	2480	0.4	0.64	62.5	2.04	2.5
NVNT	BLE 2M	2402	0.208	0.625	33.28	4.78	4.82
NVNT	BLE 2M	2440	0.207	0.625	33.12	4.8	4.82
NVNT	BLE 2M	2480	0.208	0.626	33.23	4.78	4.82

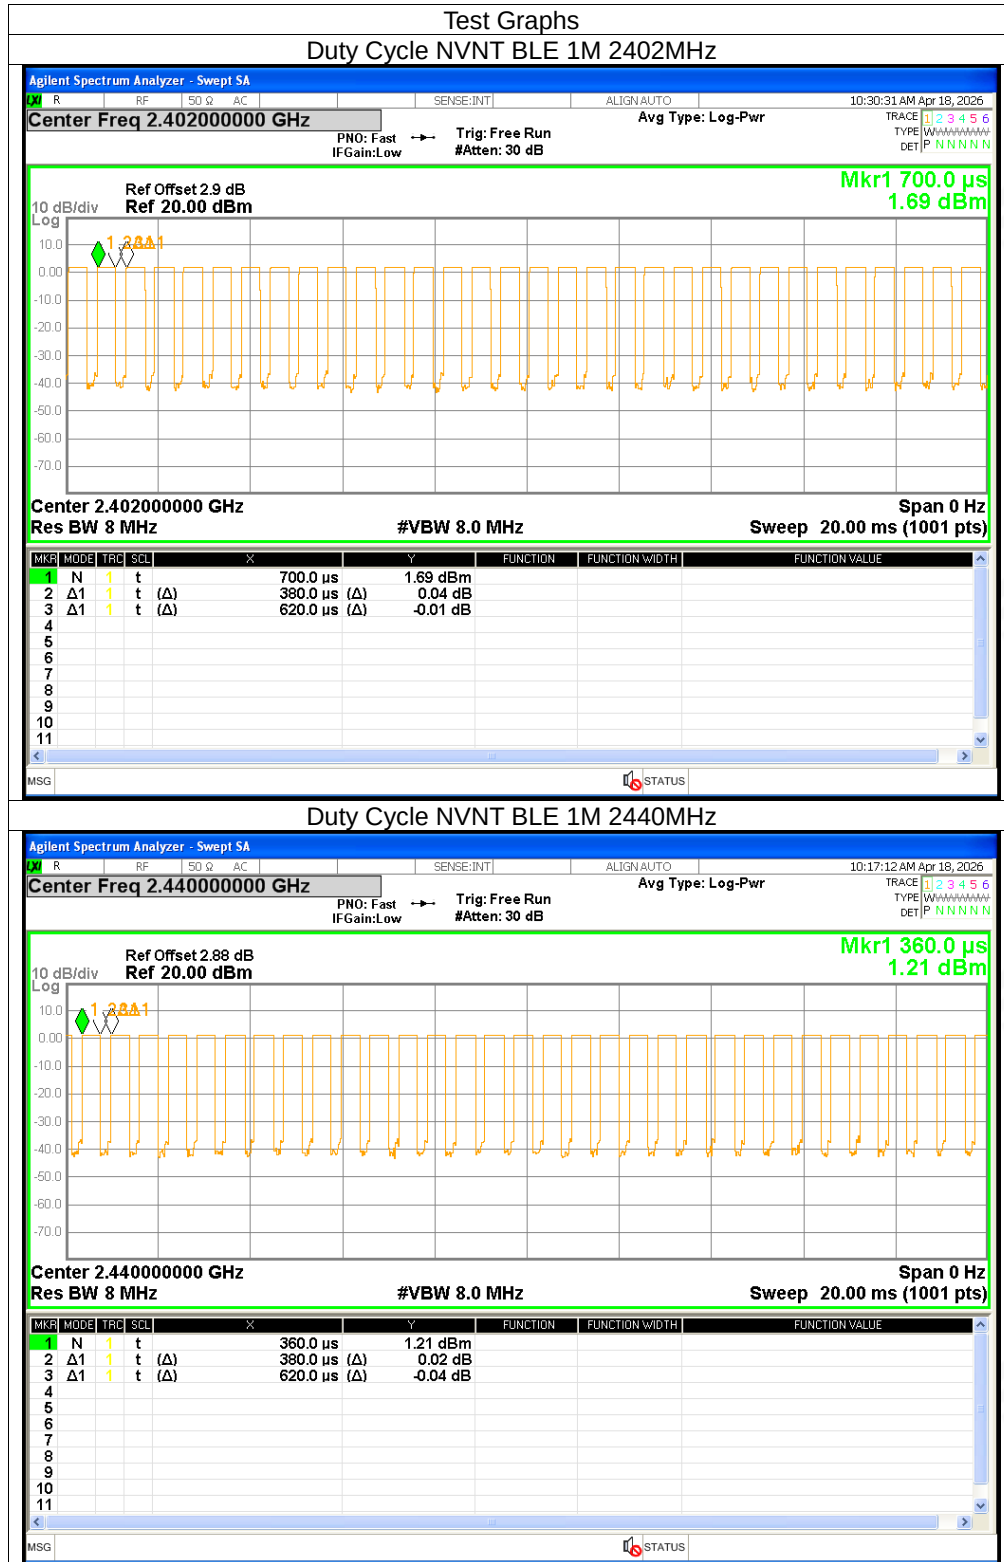




Duty Cycle NVNT BLE 1M 2480MHz

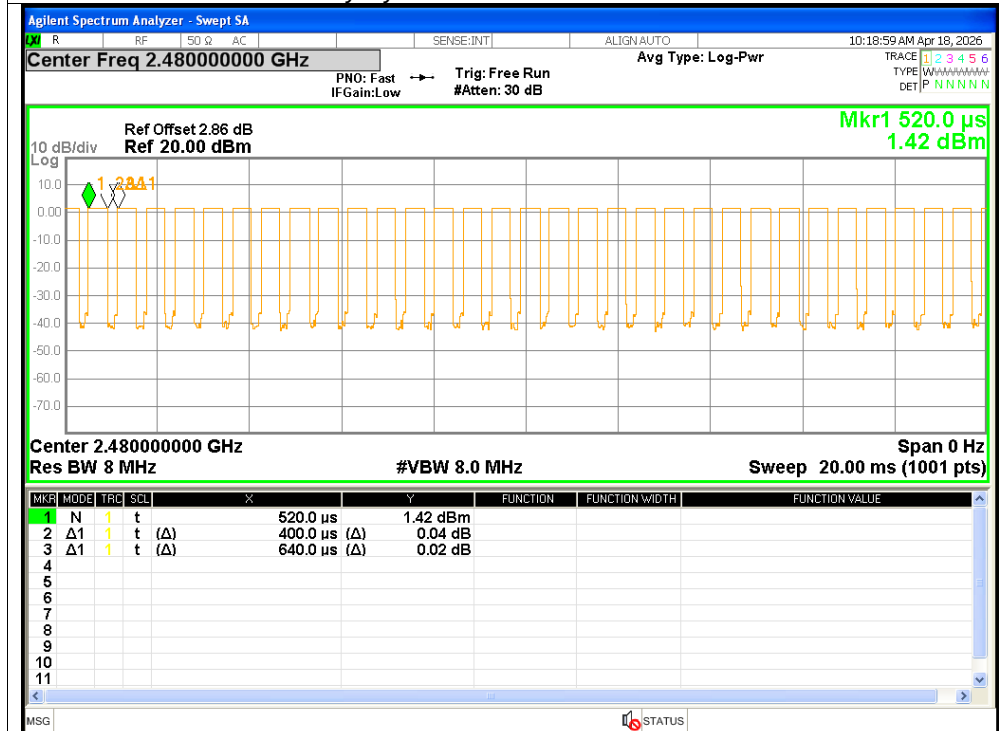


Duty Cycle NVNT BLE 2M 2402MHz

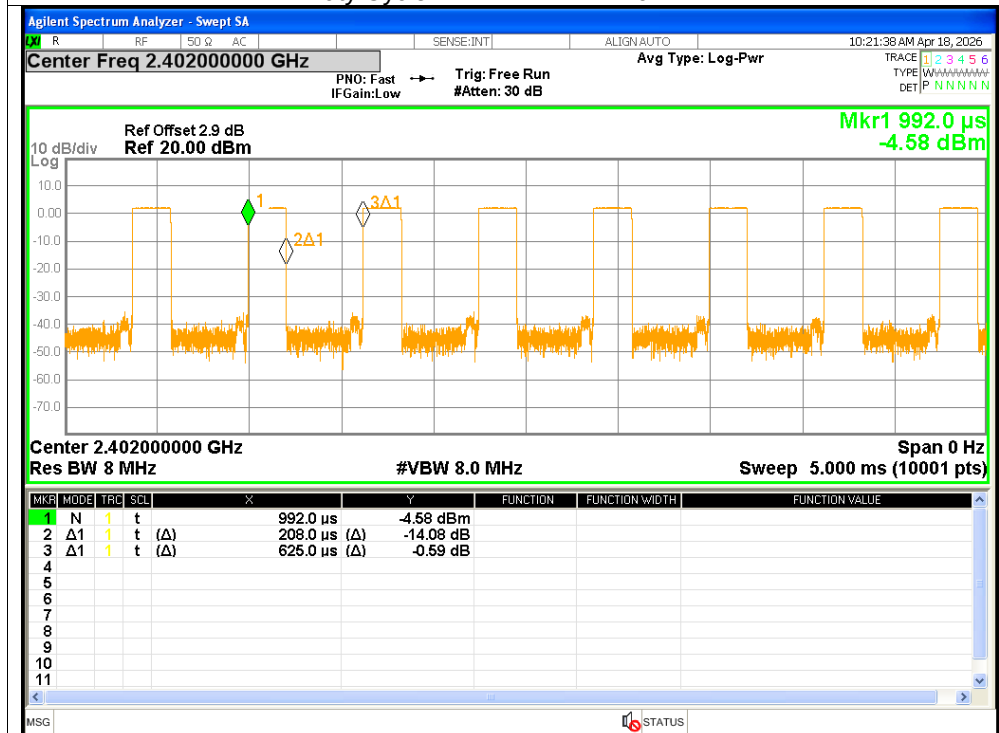




Duty Cycle NVNT BLE 2M 2440MHz

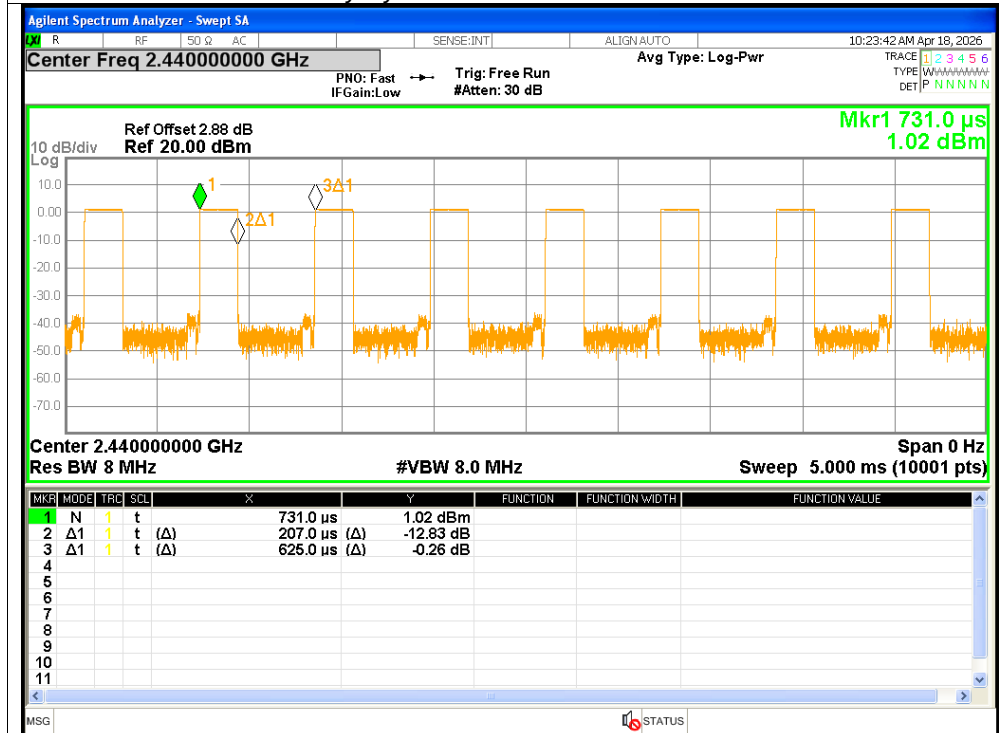


Duty Cycle NVNT BLE 2M 2480MHz

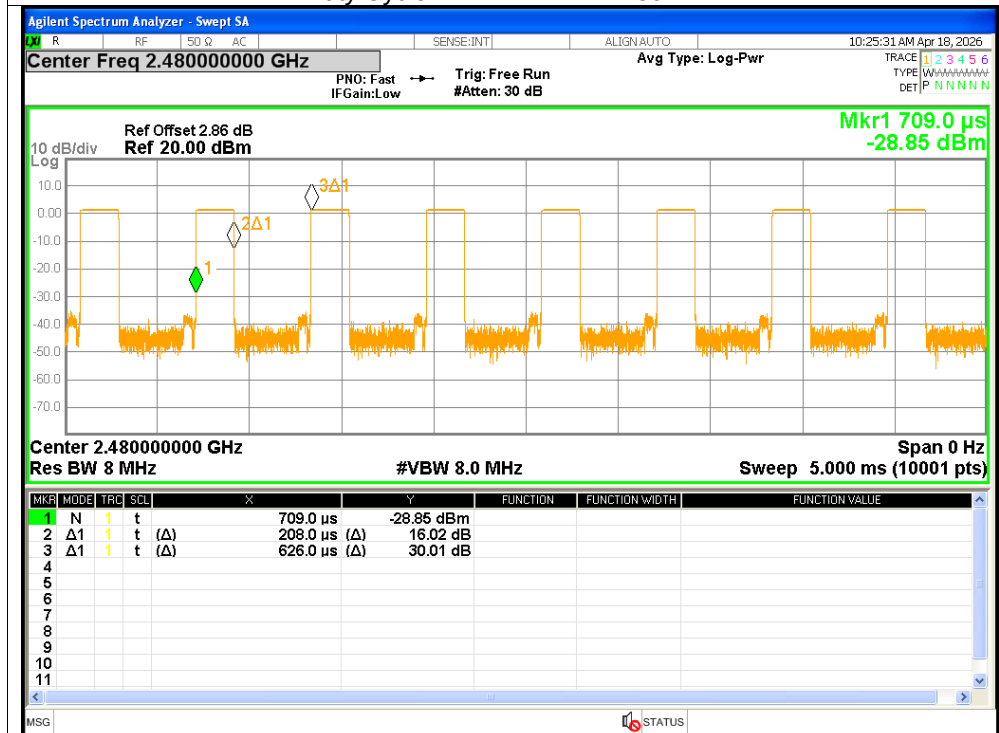





Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	1.69	<=30	Pass
NVNT	BLE 1M	2440	1.19	<=30	Pass
NVNT	BLE 1M	2480	1.41	<=30	Pass
NVNT	BLE 2M	2402	1.92	<=30	Pass
NVNT	BLE 2M	2440	1.08	<=30	Pass
NVNT	BLE 2M	2480	1.28	<=30	Pass

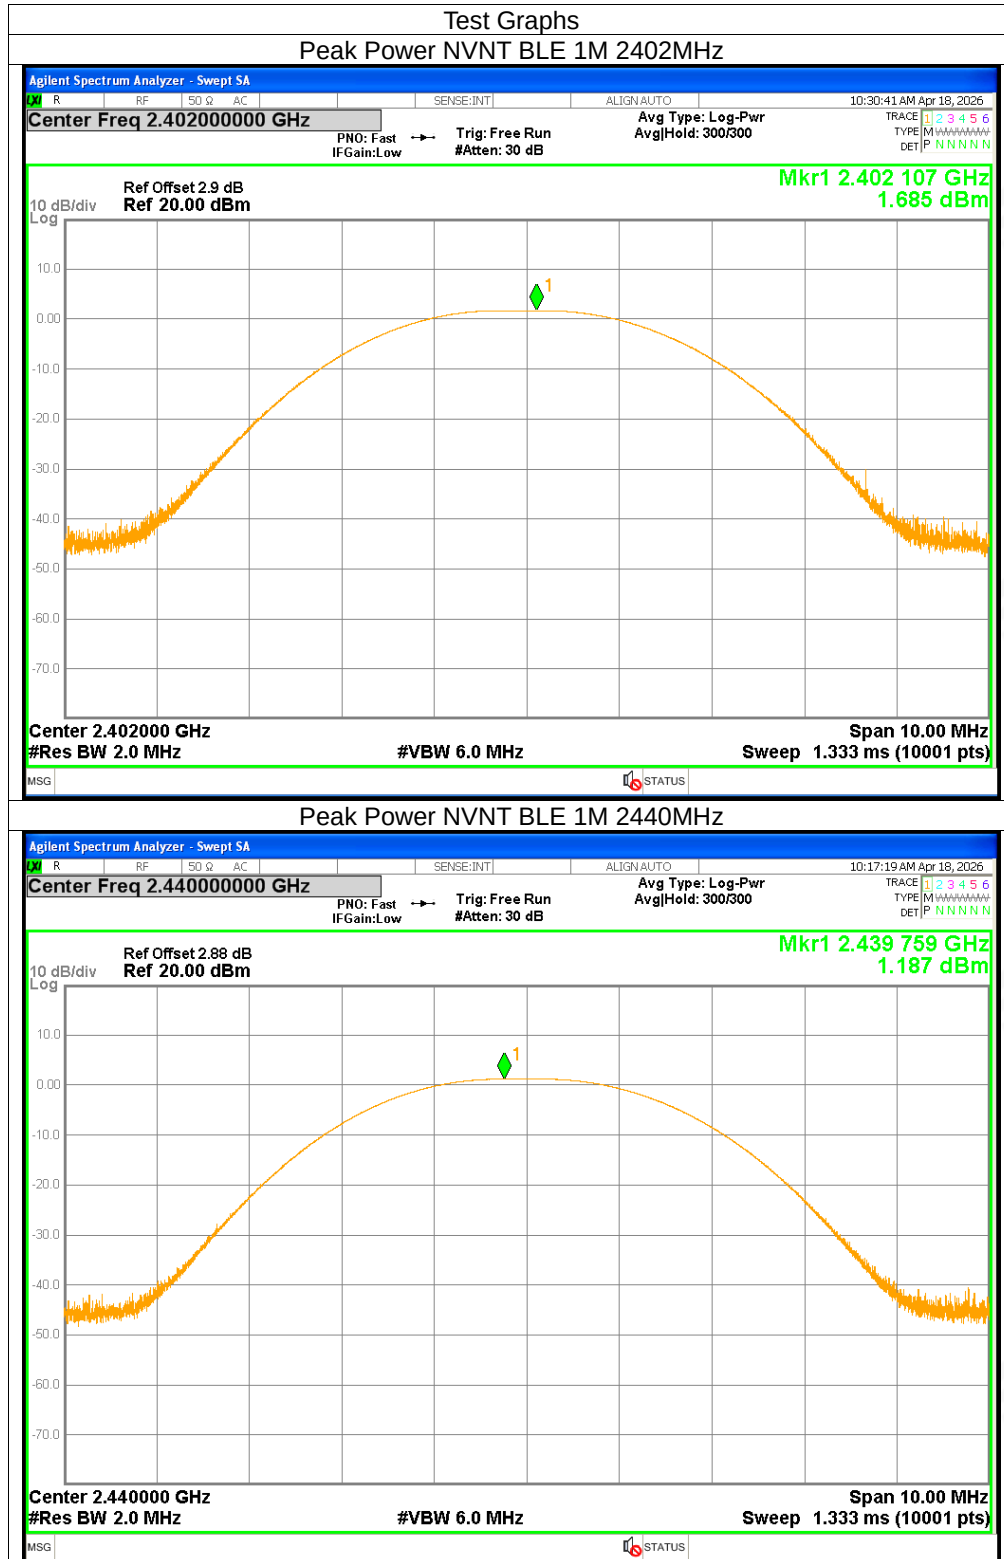

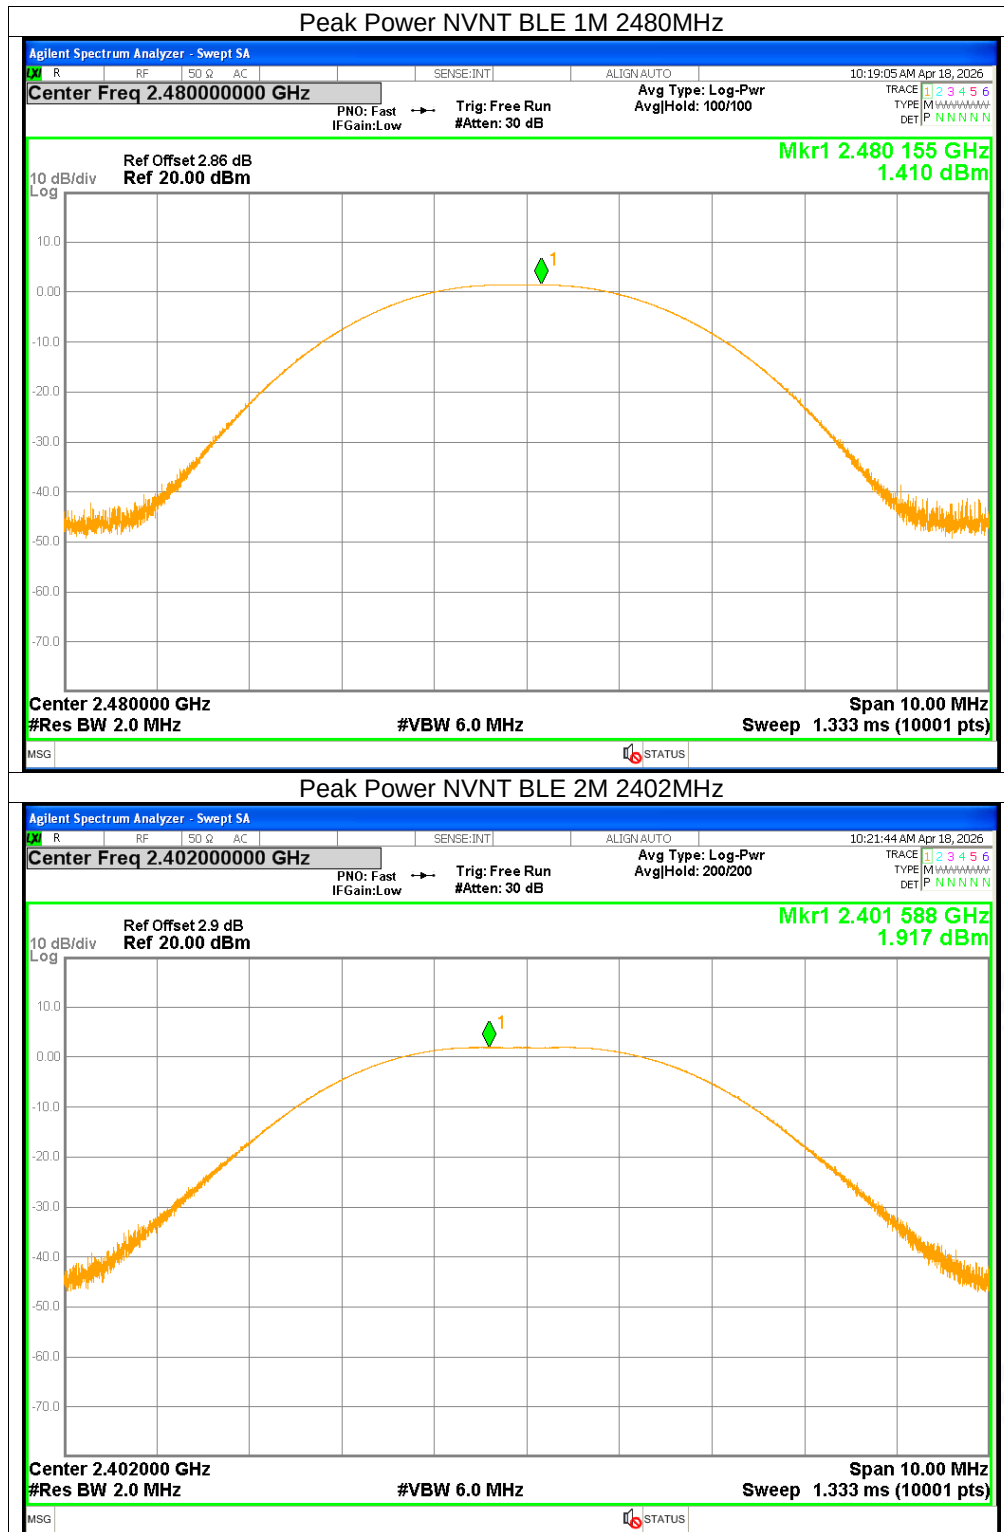

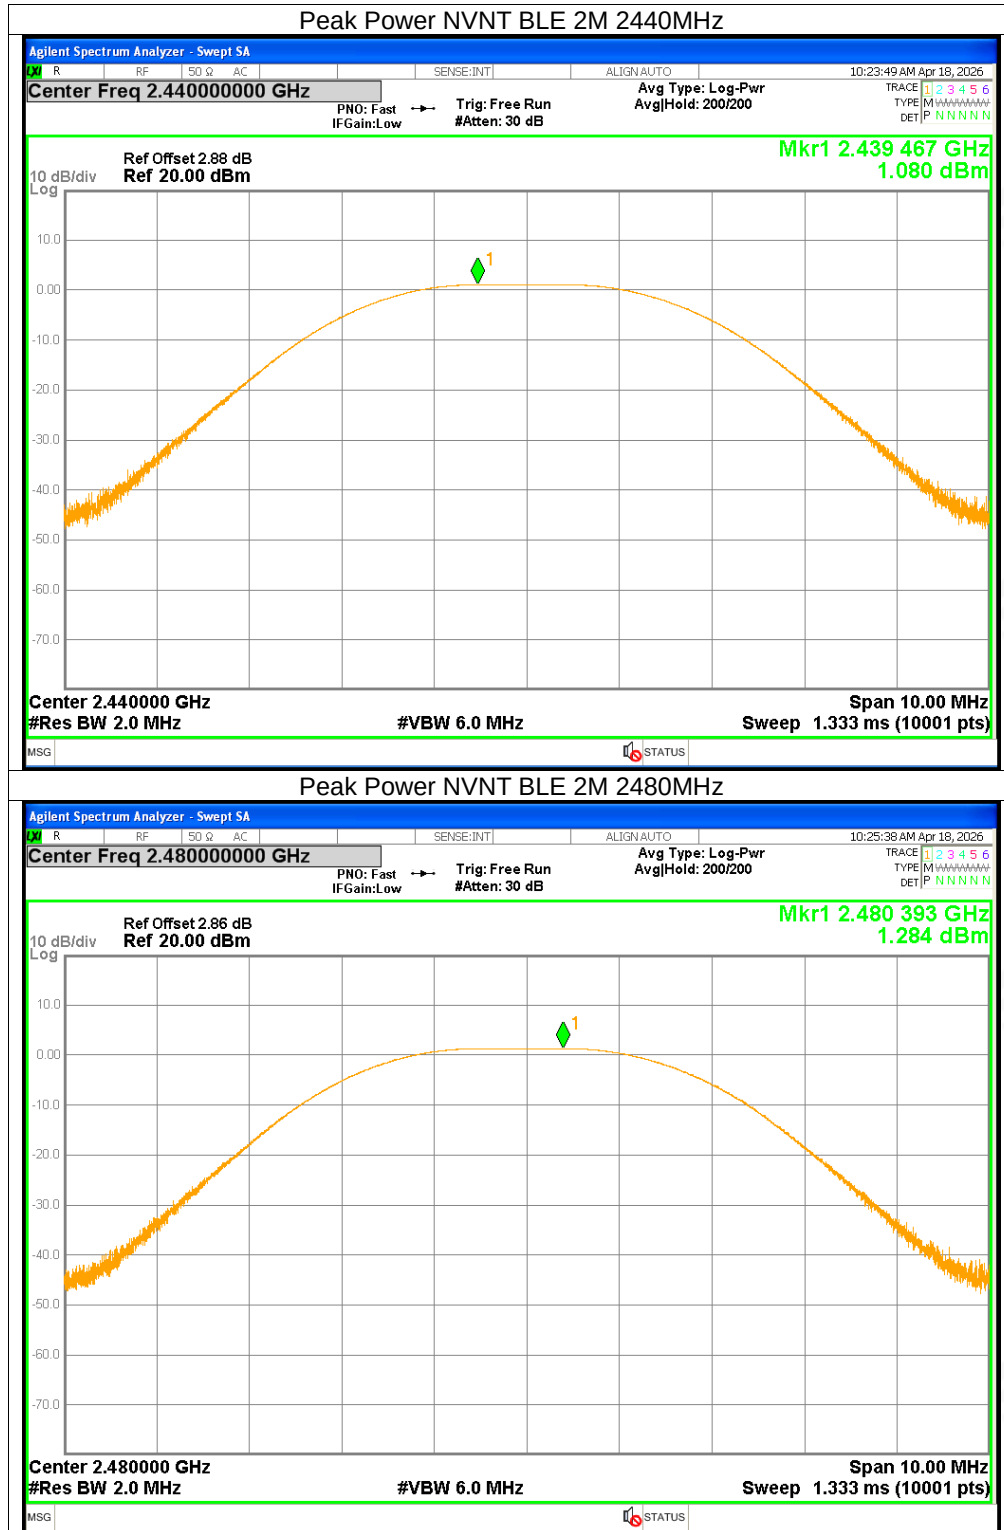



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.6591	≥ 0.5	Pass
NVNT	BLE 1M	2440	0.671	≥ 0.5	Pass
NVNT	BLE 1M	2480	0.6765	≥ 0.5	Pass
NVNT	BLE 2M	2402	1.06	≥ 0.5	Pass
NVNT	BLE 2M	2440	1.107	≥ 0.5	Pass
NVNT	BLE 2M	2480	1.107	≥ 0.5	Pass

