






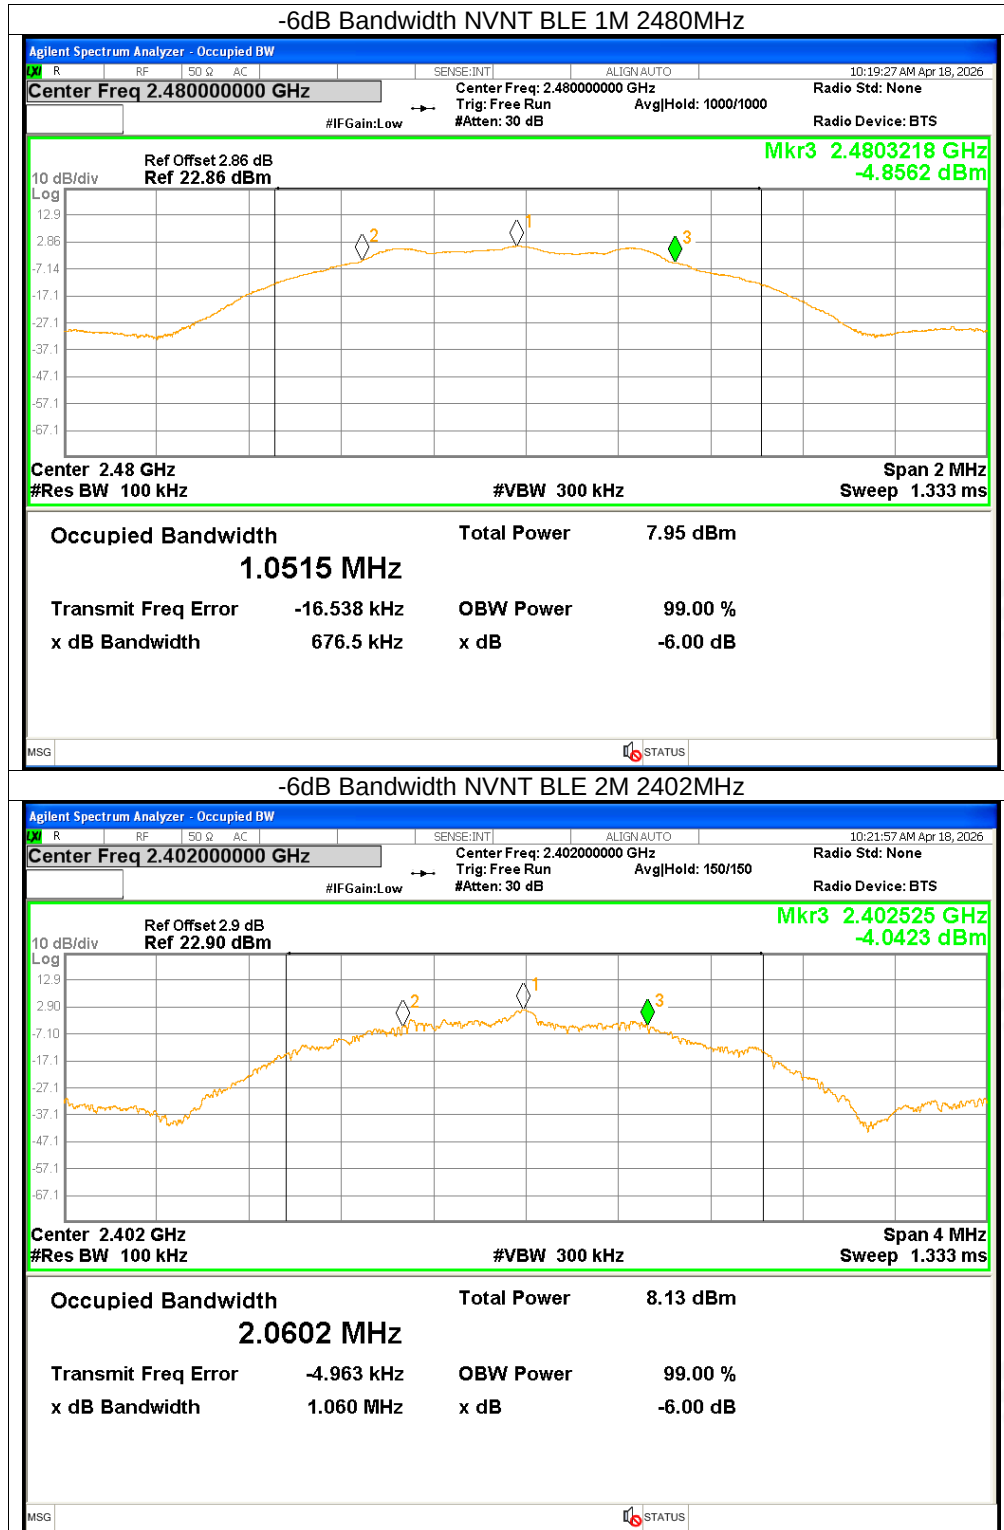


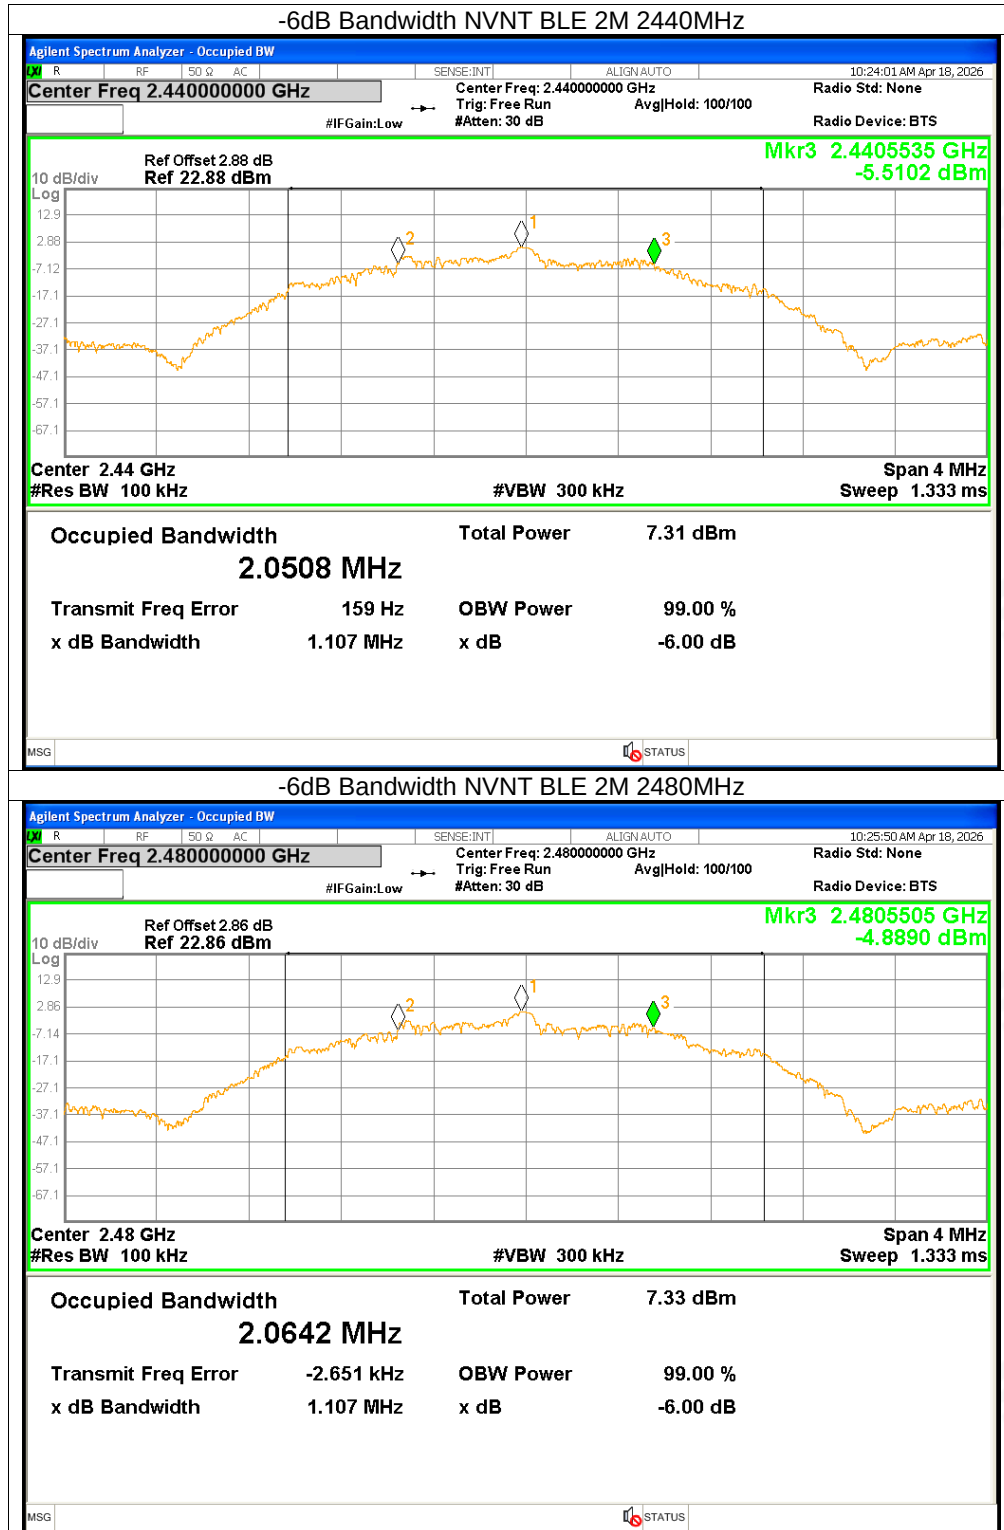


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	BLE 1M	2402	1.0444
NVNT	BLE 1M	2440	1.0417
NVNT	BLE 1M	2480	1.0441
NVNT	BLE 2M	2402	2.0412
NVNT	BLE 2M	2440	2.042
NVNT	BLE 2M	2480	2.0415

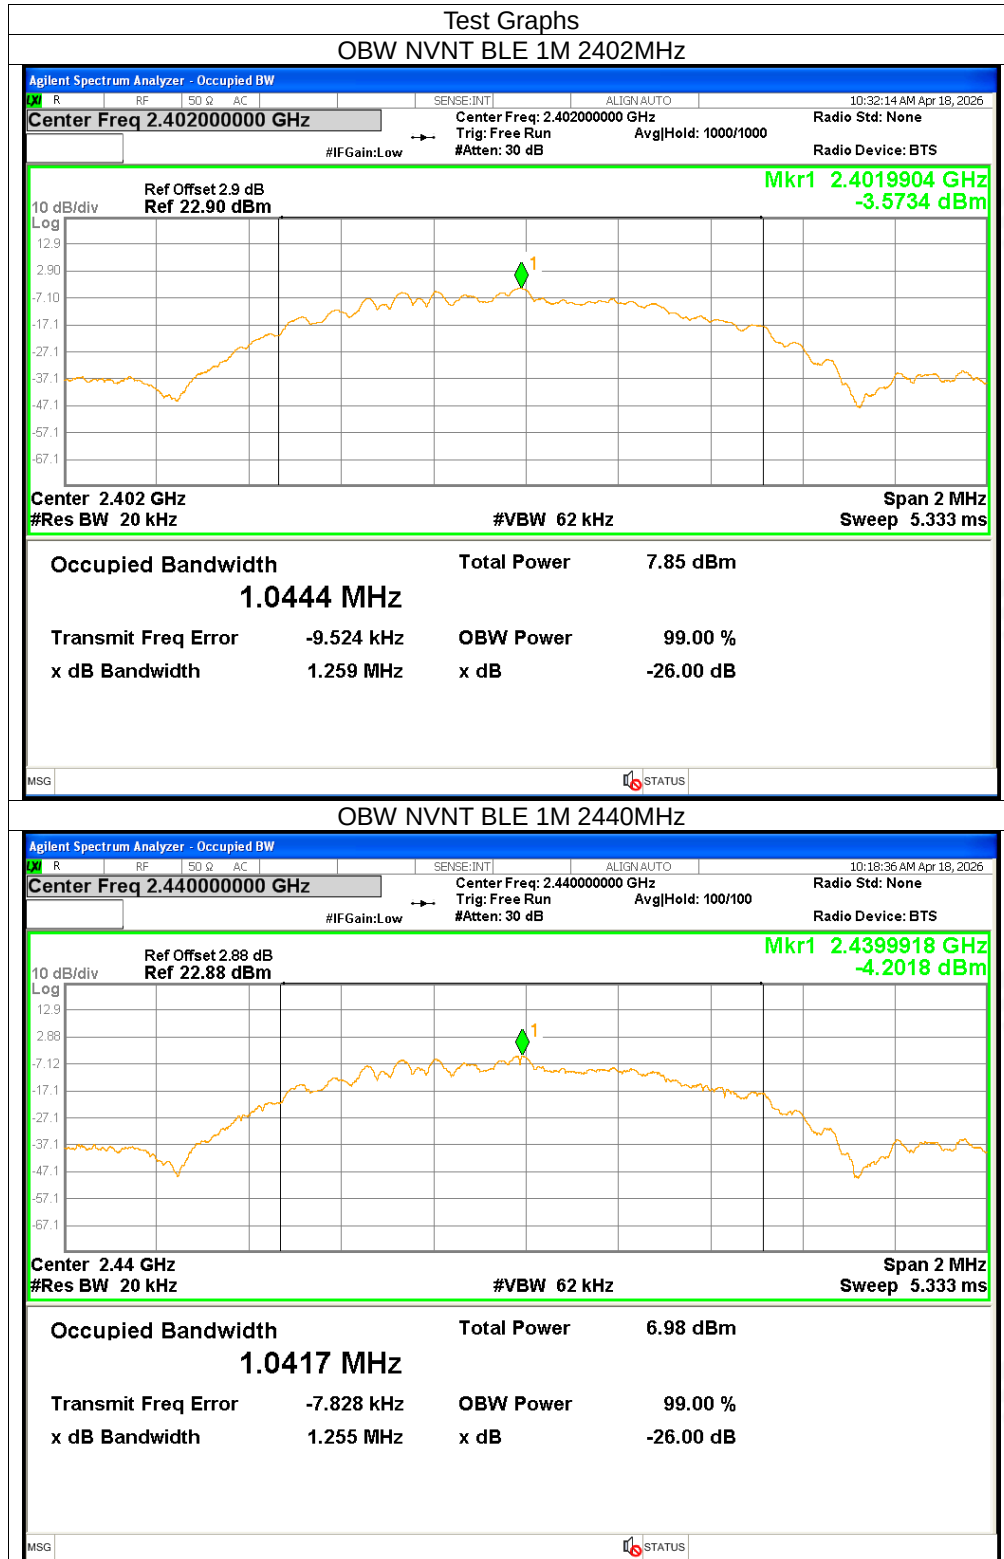

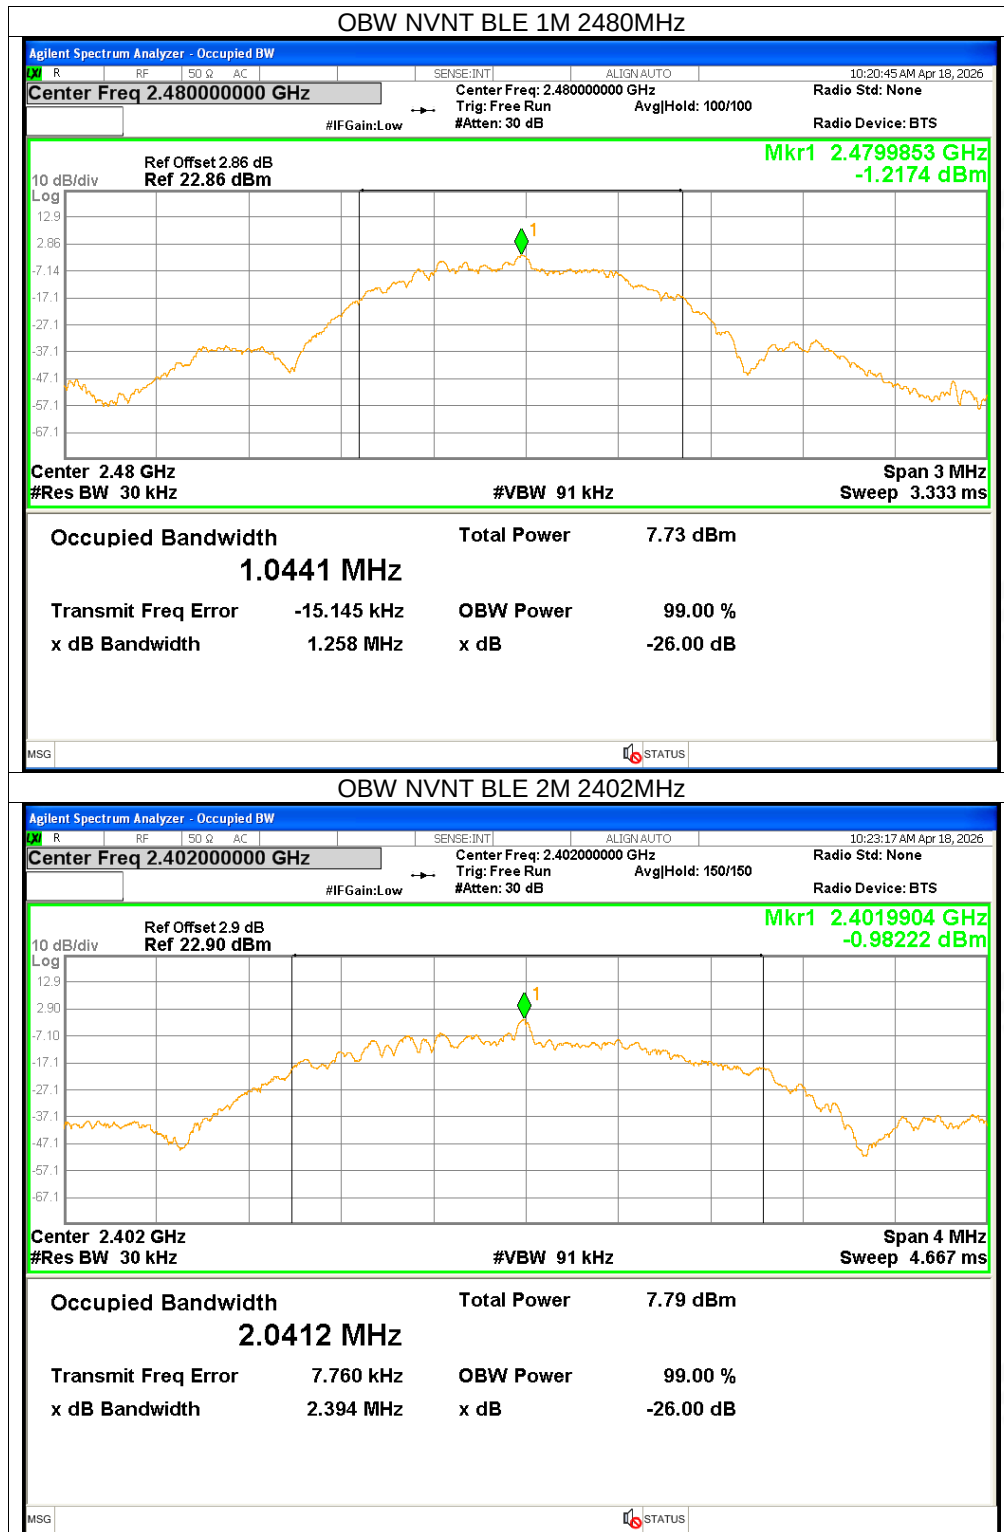


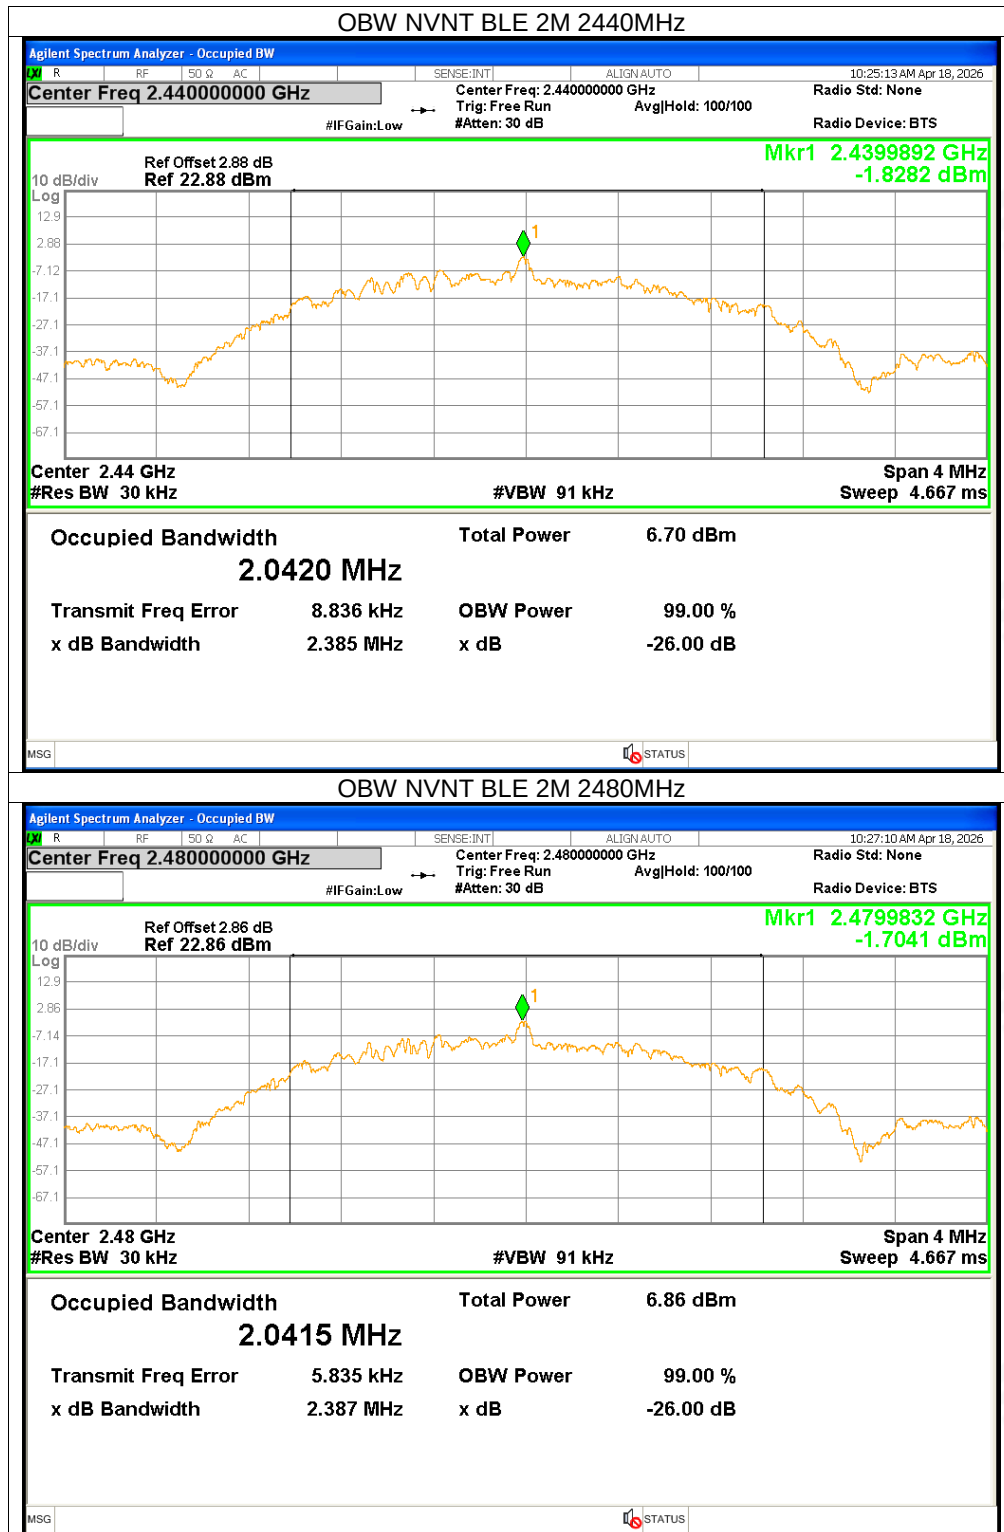





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-13.92	≤ -8	Pass
NVNT	BLE 1M	2440	-14.37	≤ -8	Pass
NVNT	BLE 1M	2480	-14.34	≤ -8	Pass
NVNT	BLE 2M	2402	-15.59	≤ -8	Pass
NVNT	BLE 2M	2440	-16.79	≤ -8	Pass
NVNT	BLE 2M	2480	-16.23	≤ -8	Pass

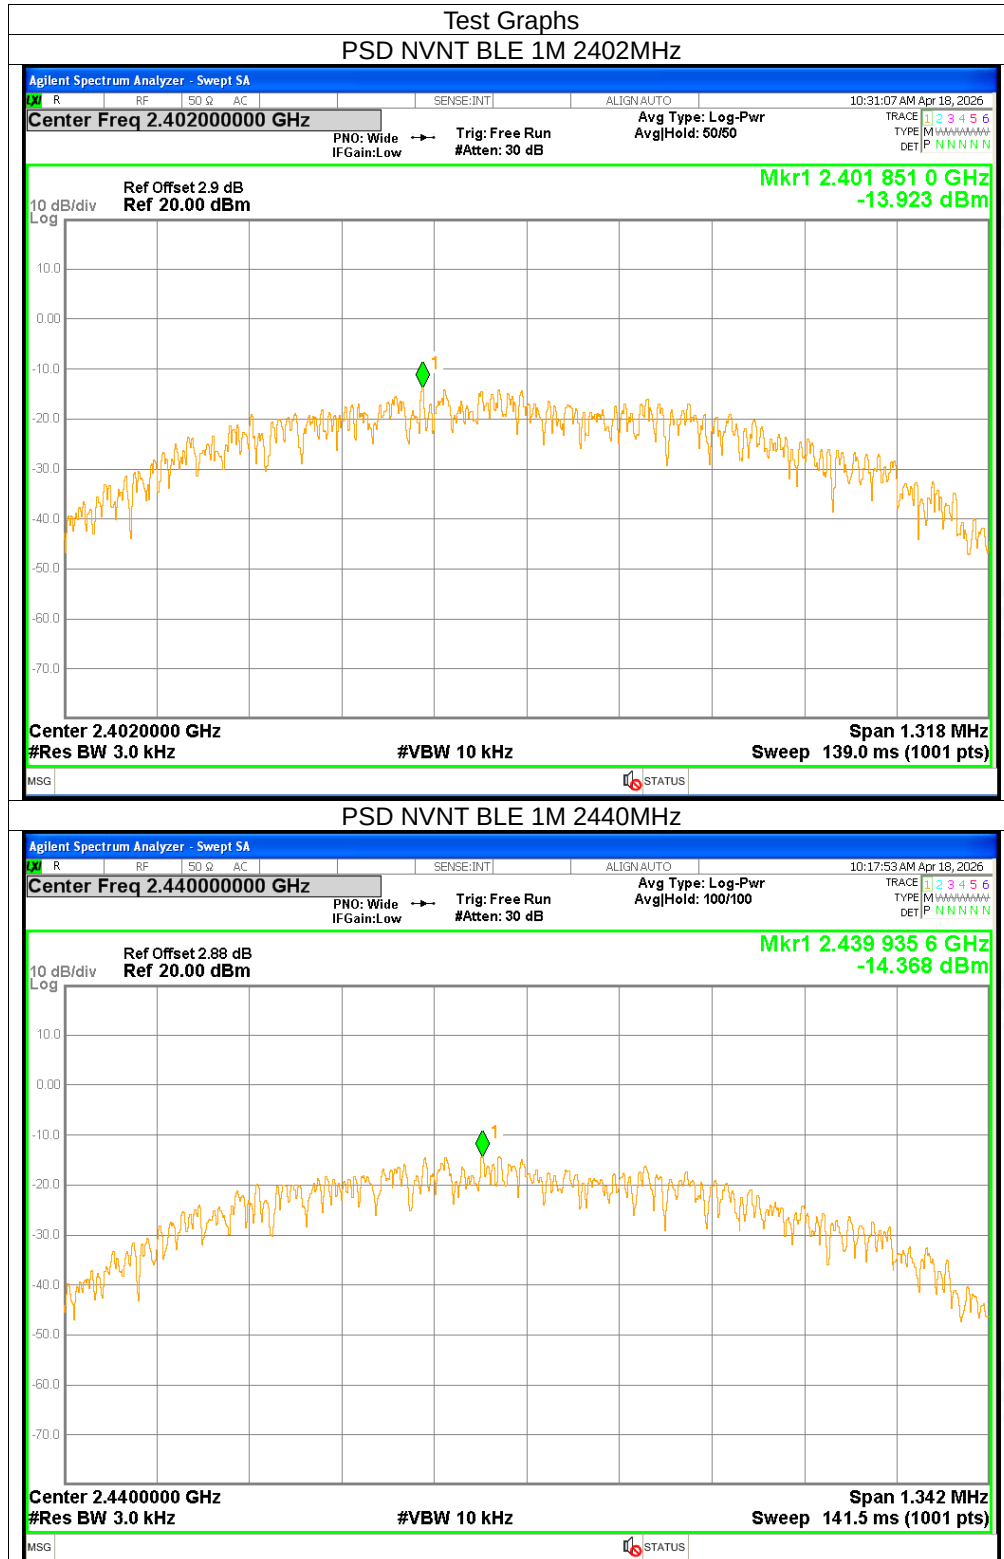

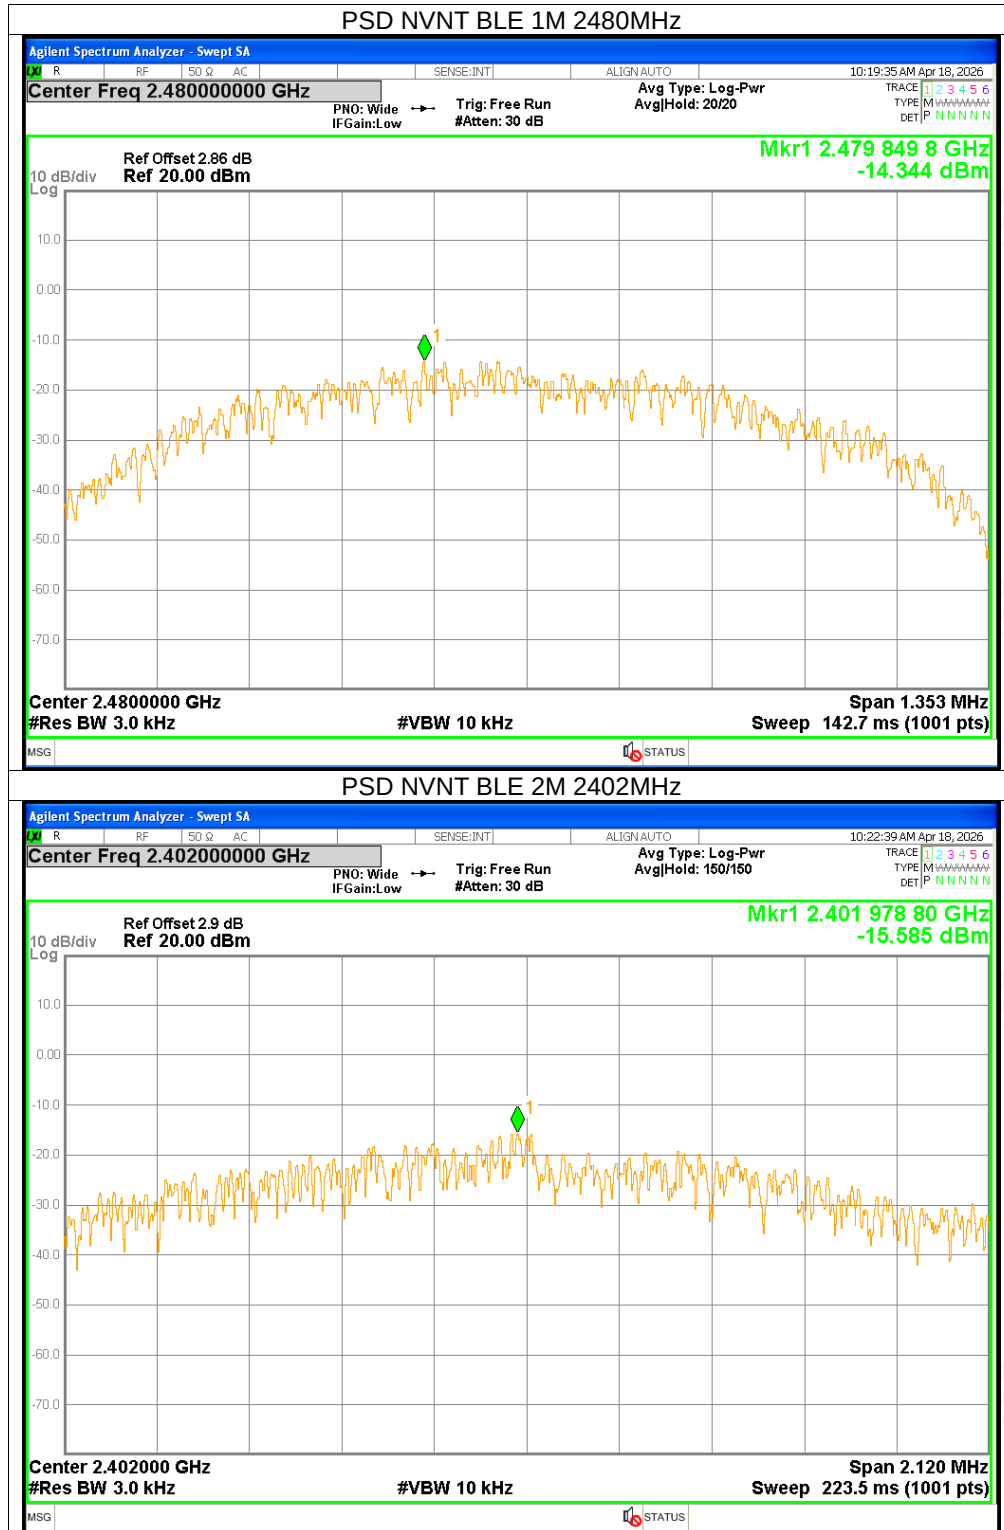


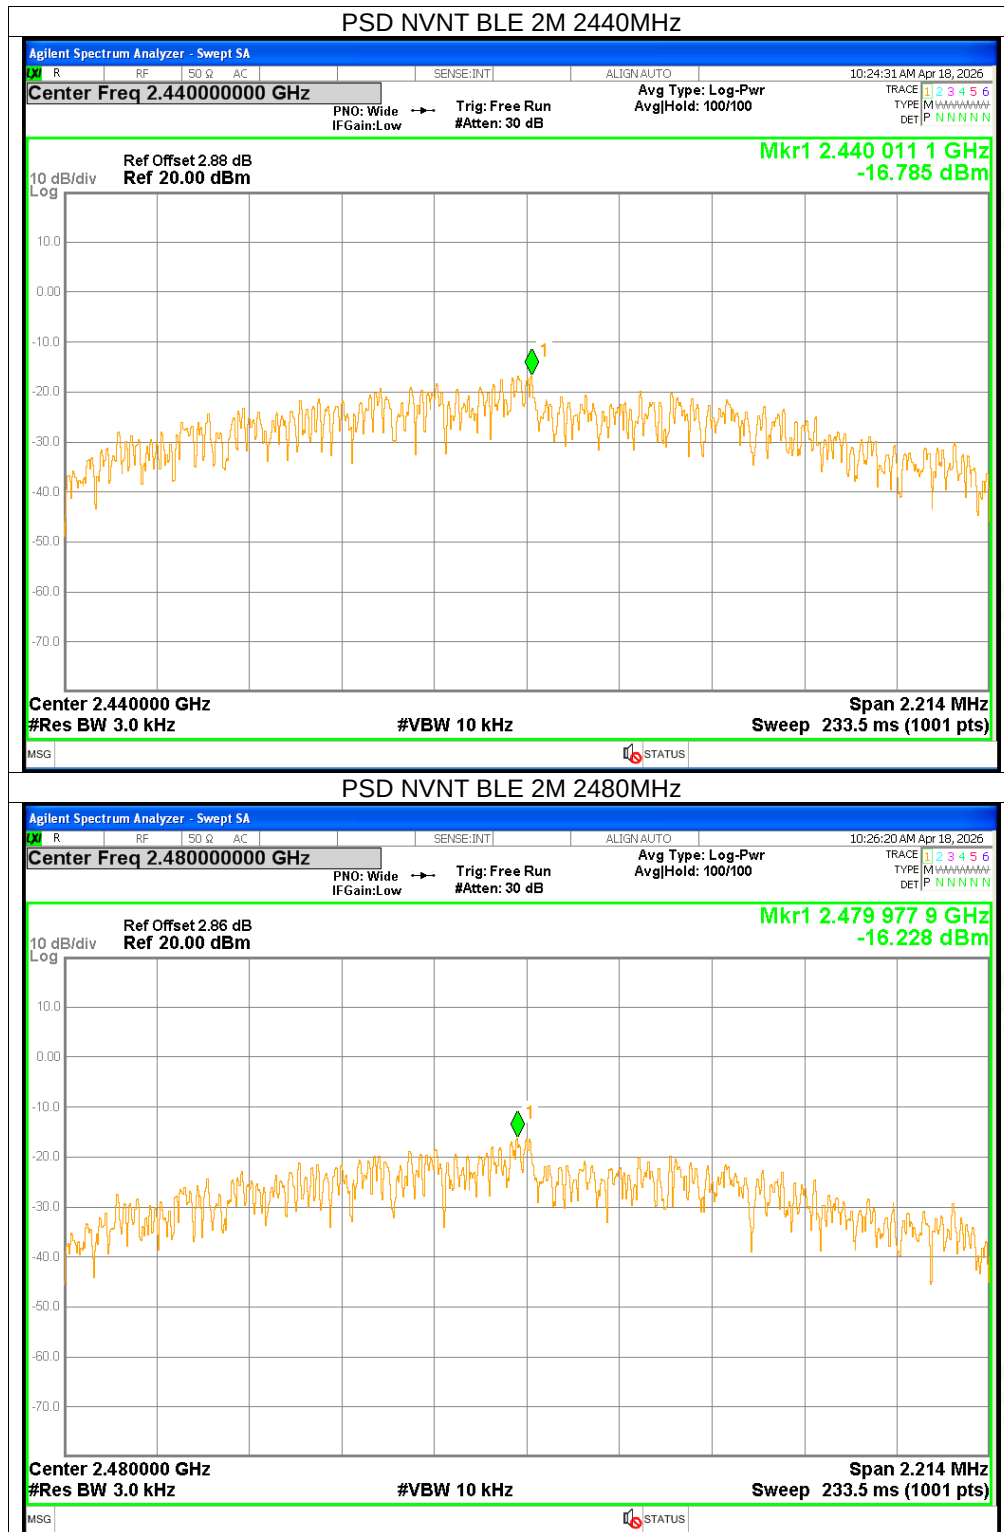






Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-44.23	≤ -20	Pass
NVNT	BLE 1M	2480	-43.24	≤ -20	Pass
NVNT	BLE 2M	2402	-31.94	≤ -20	Pass
NVNT	BLE 2M	2480	-43.37	≤ -20	Pass

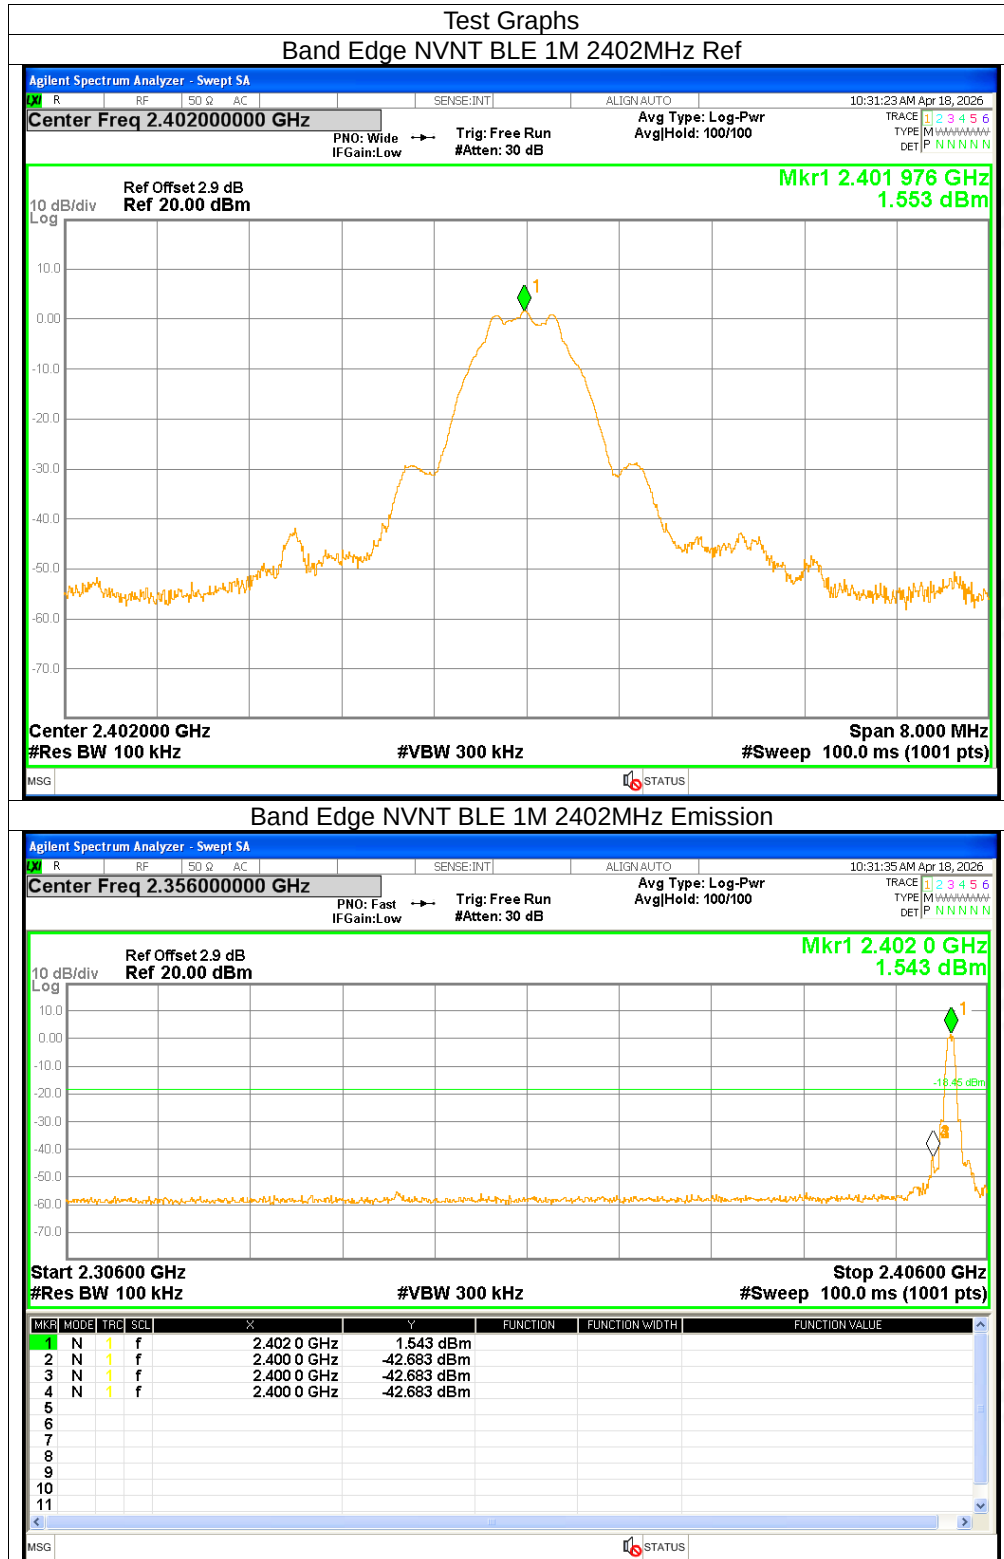

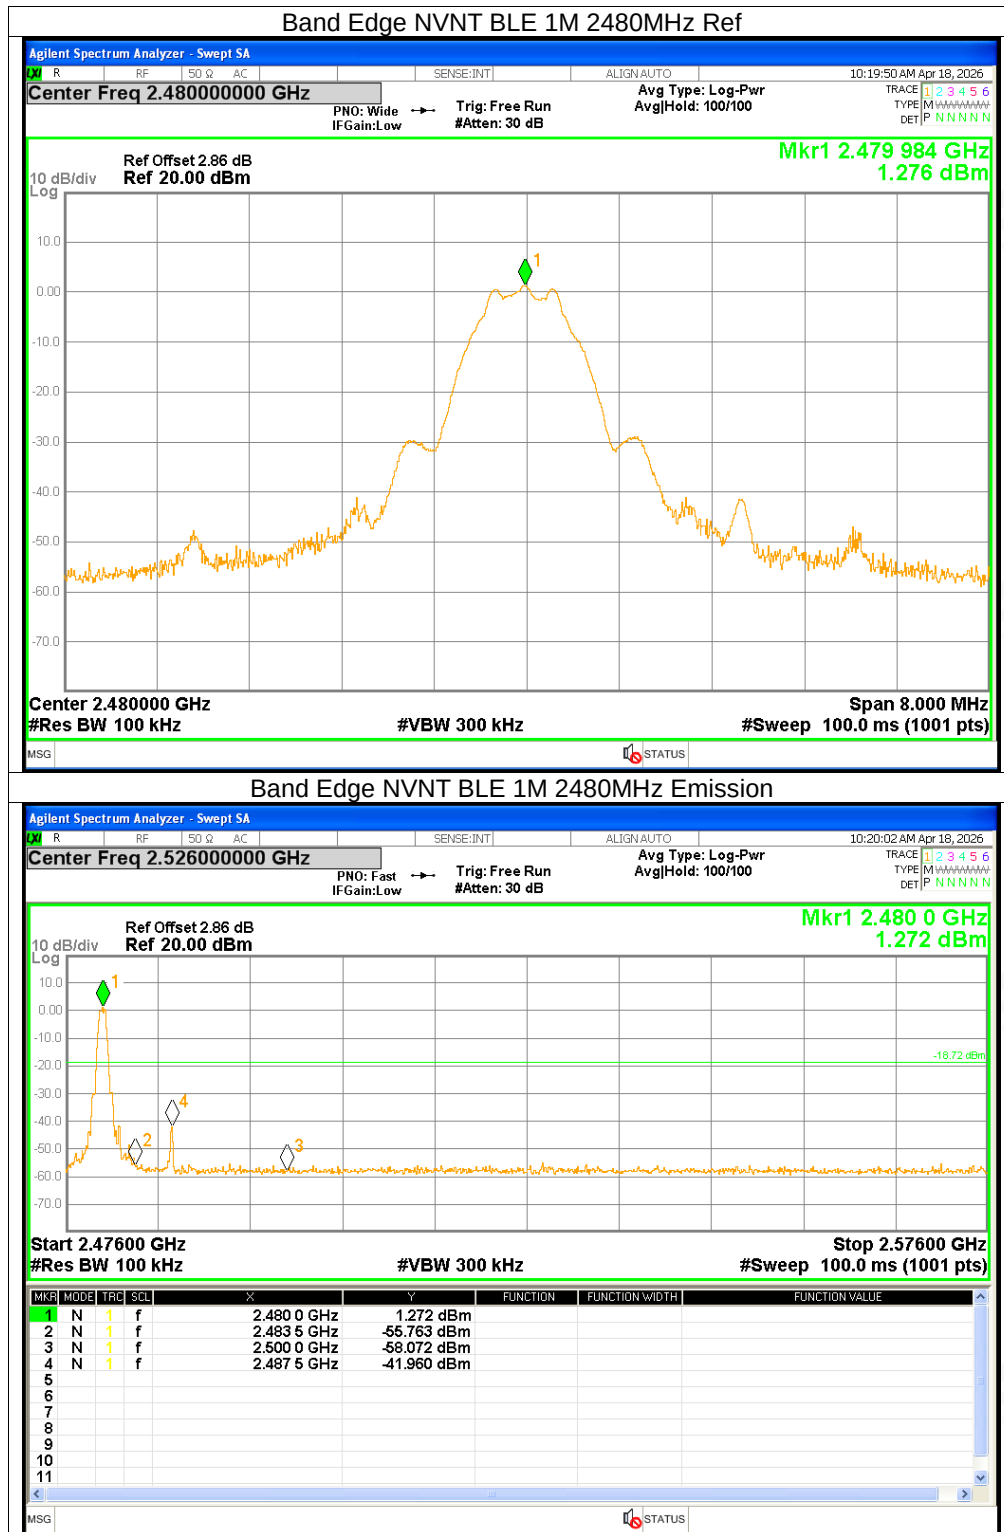

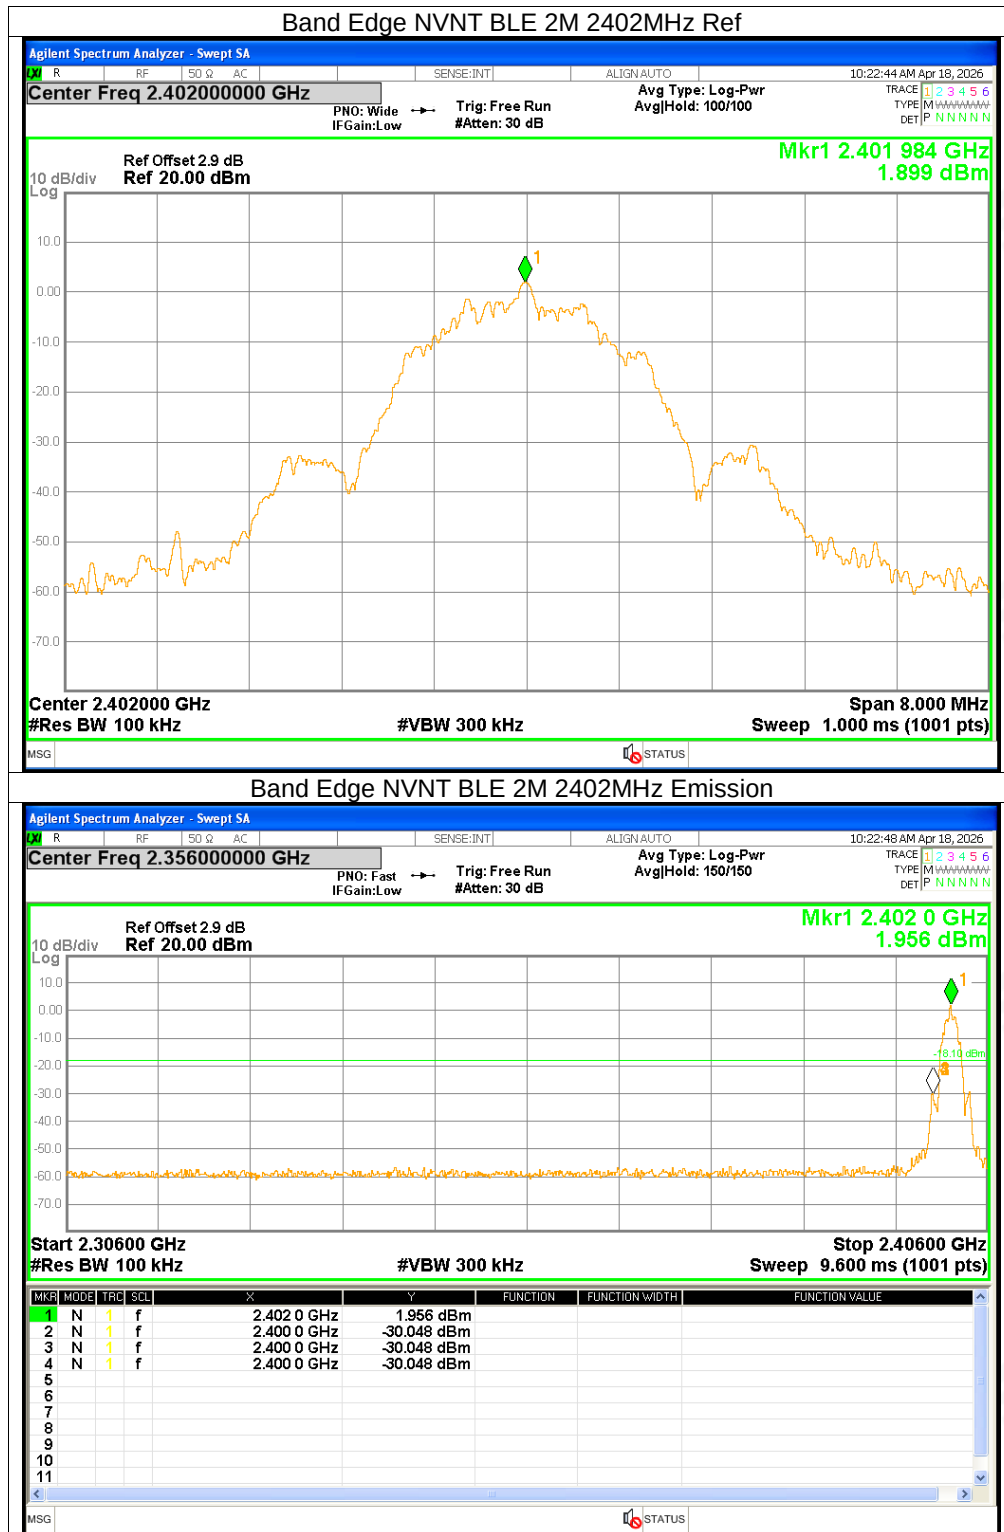


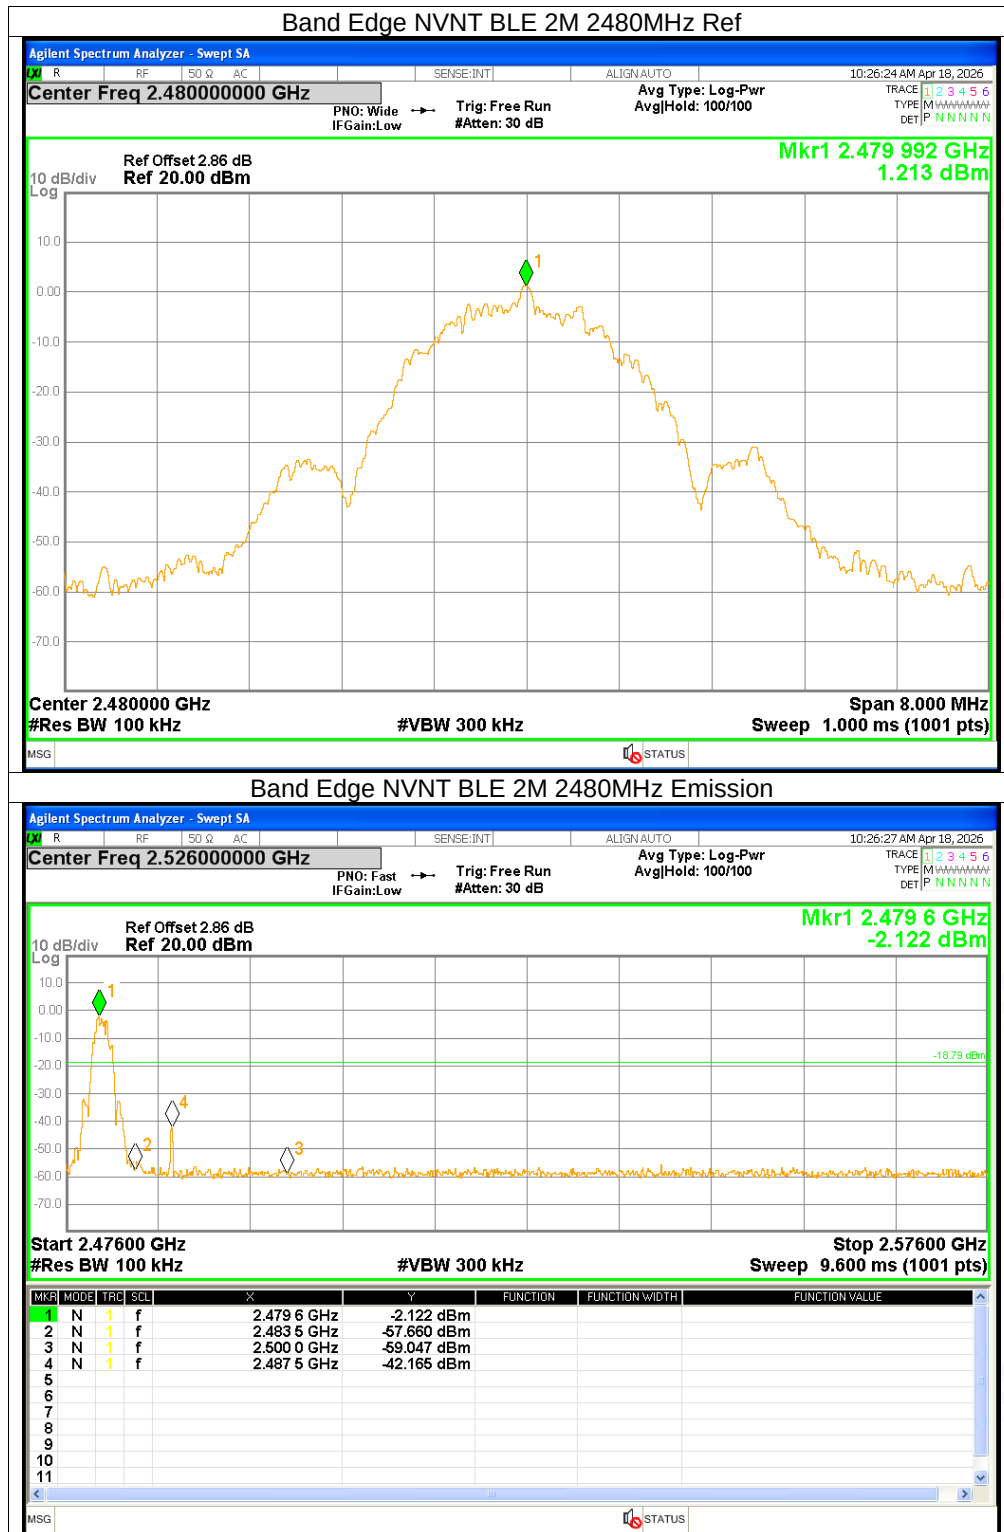






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-38.68	<=-20	Pass
NVNT	BLE 1M	2440	-43.82	<=-20	Pass
NVNT	BLE 1M	2480	-44.36	<=-20	Pass
NVNT	BLE 2M	2402	-54.51	<=-20	Pass
NVNT	BLE 2M	2440	-54.07	<=-20	Pass
NVNT	BLE 2M	2480	-54.47	<=-20	Pass

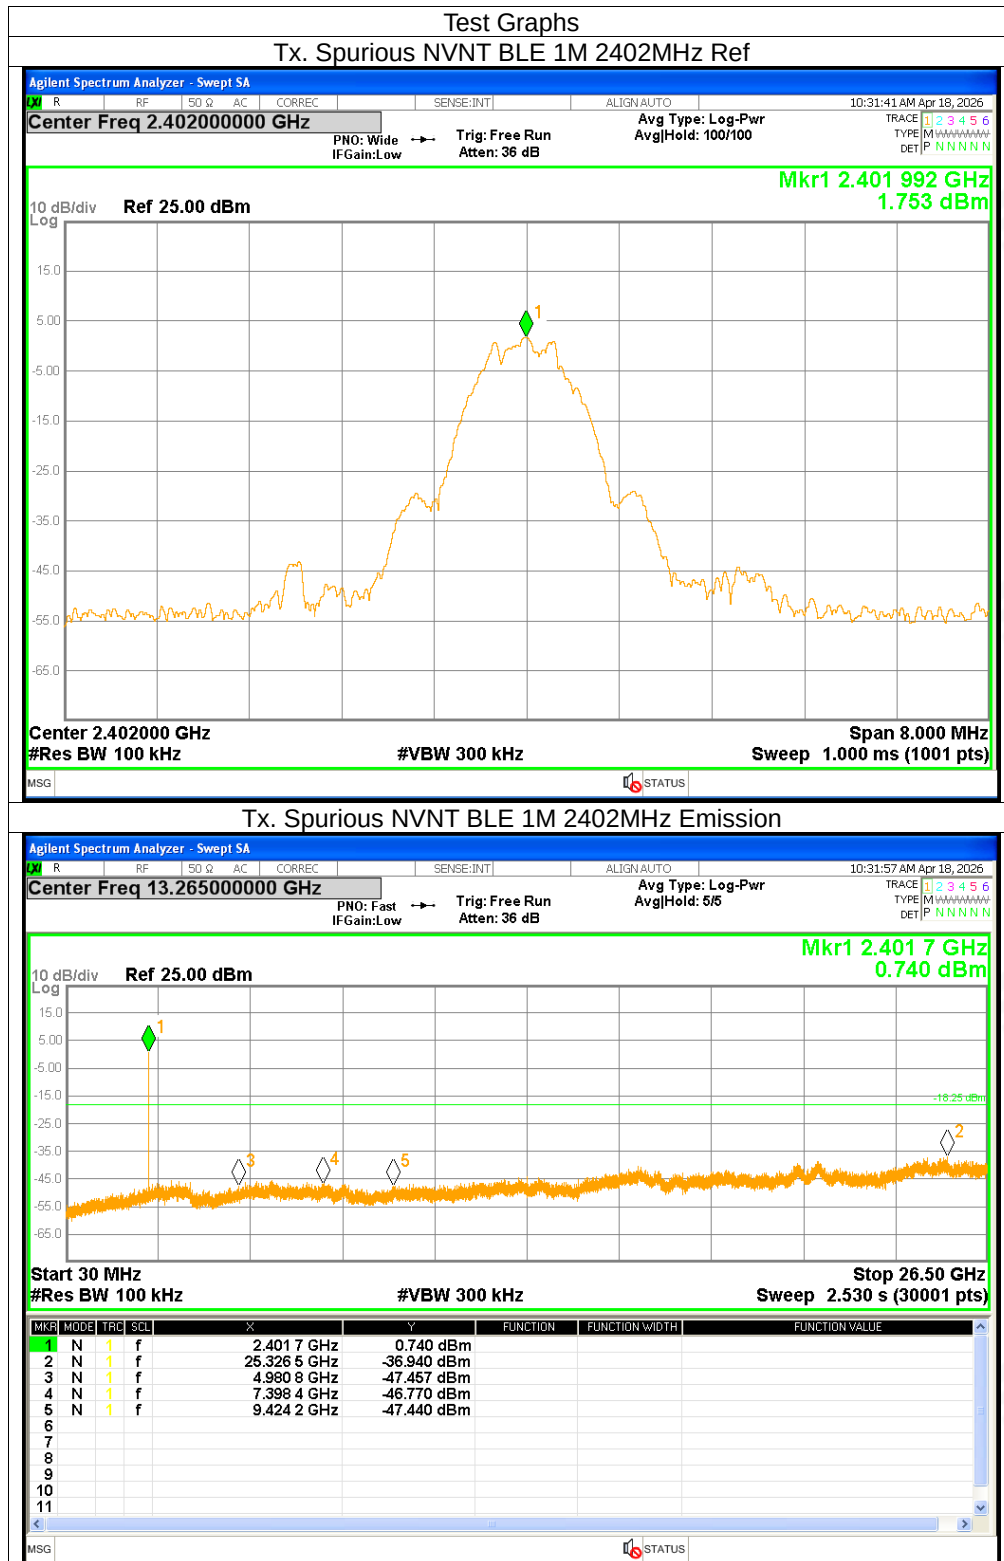


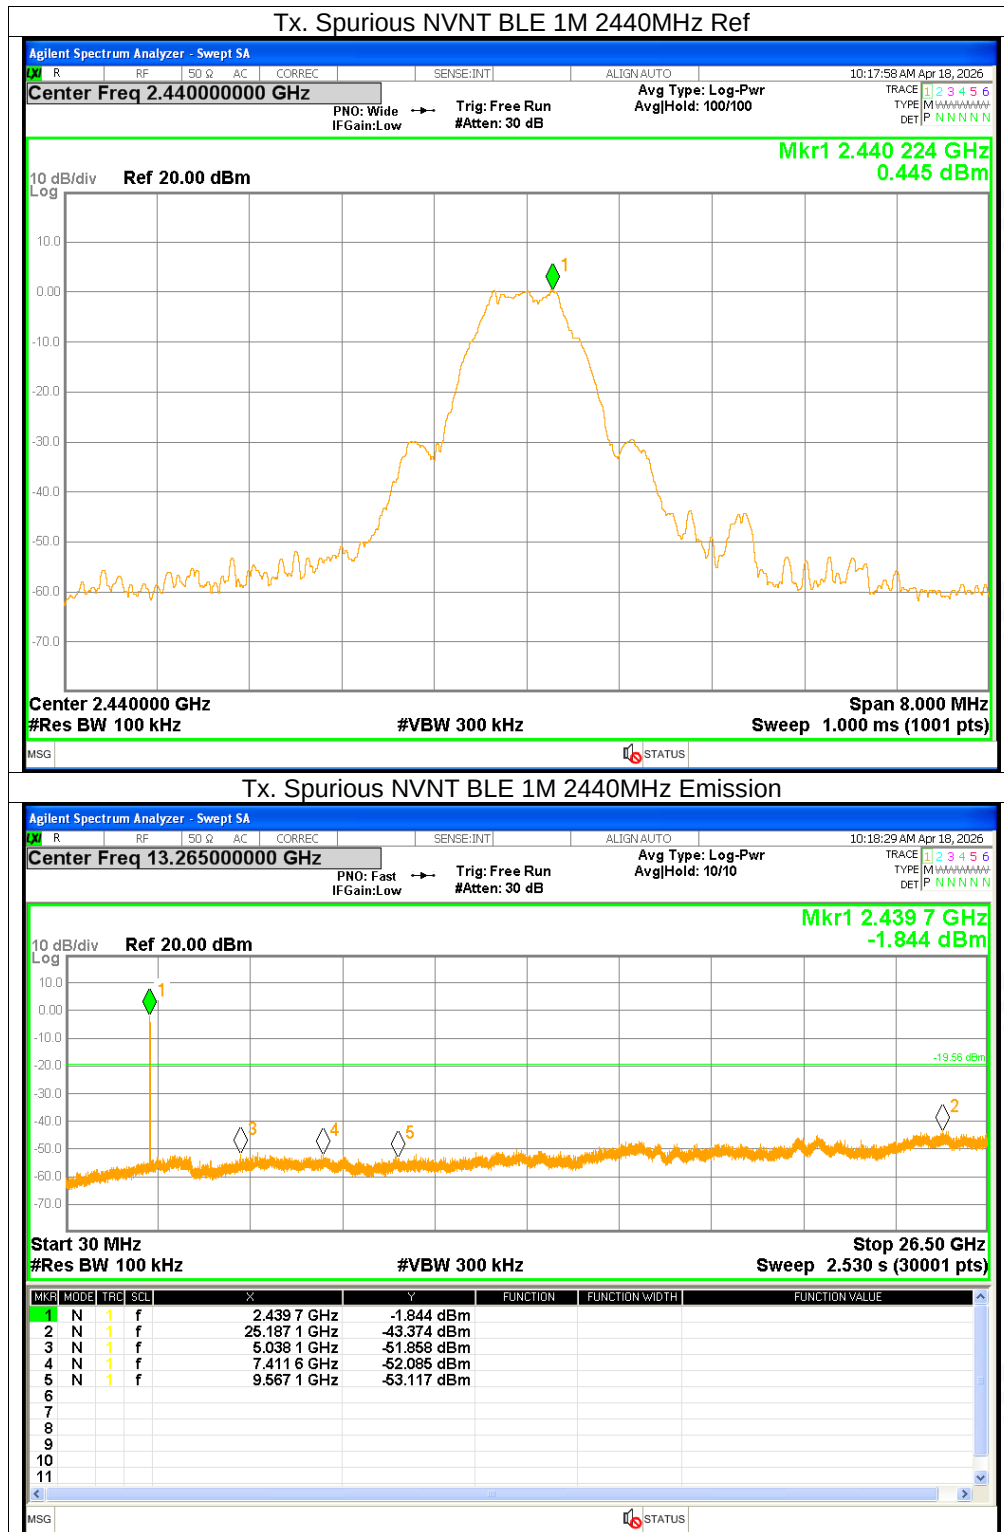

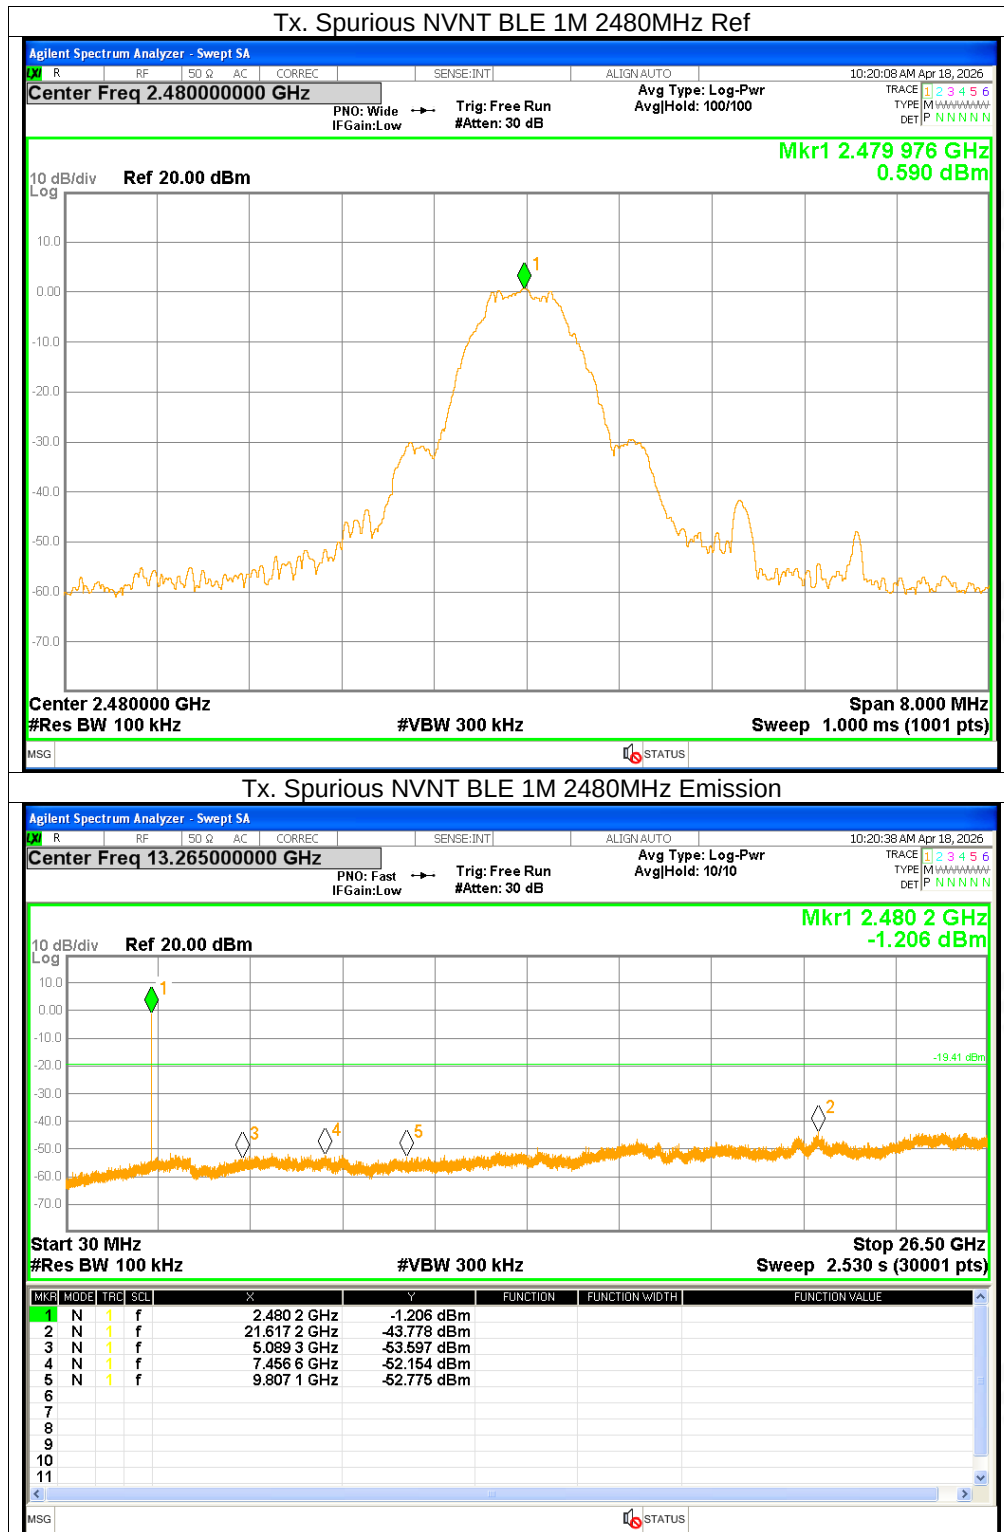

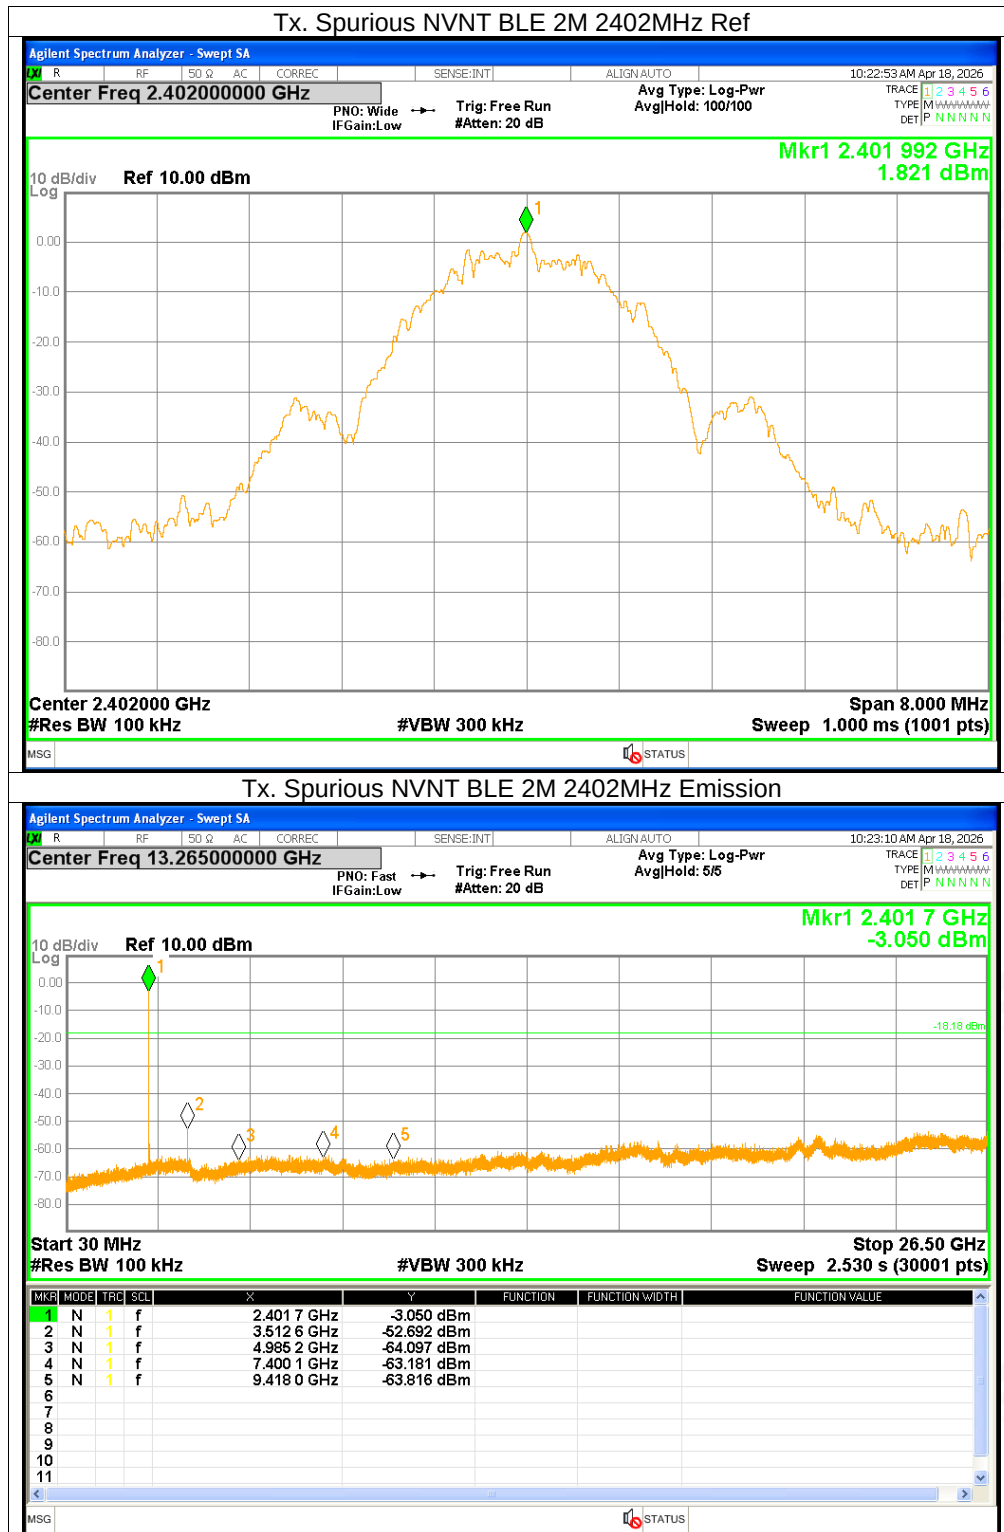

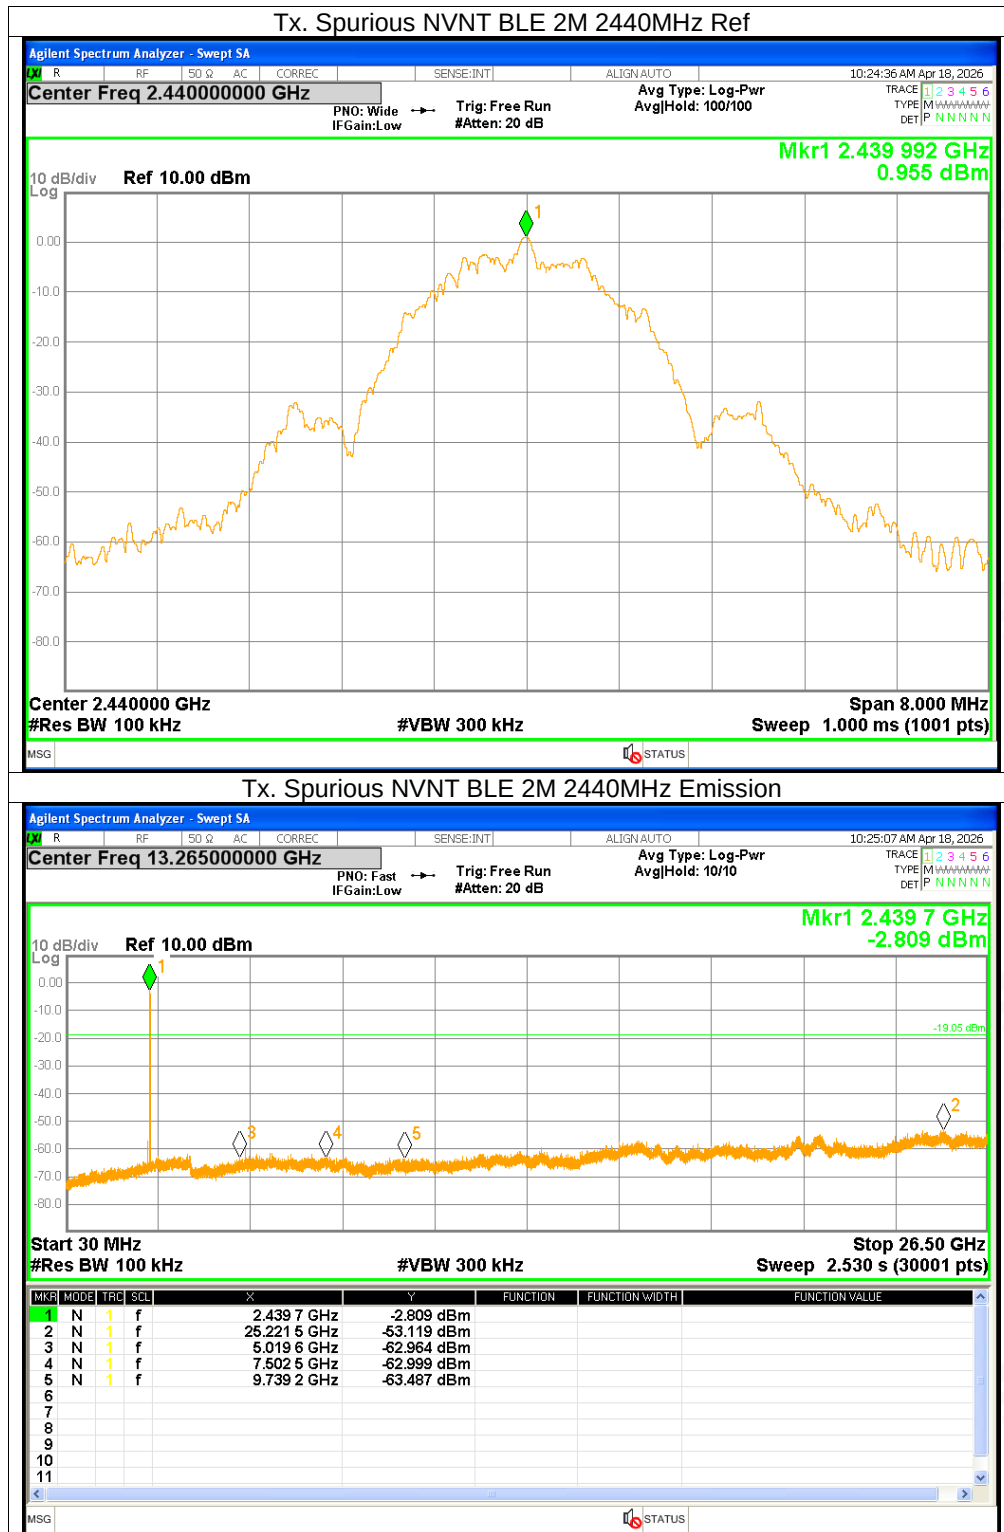

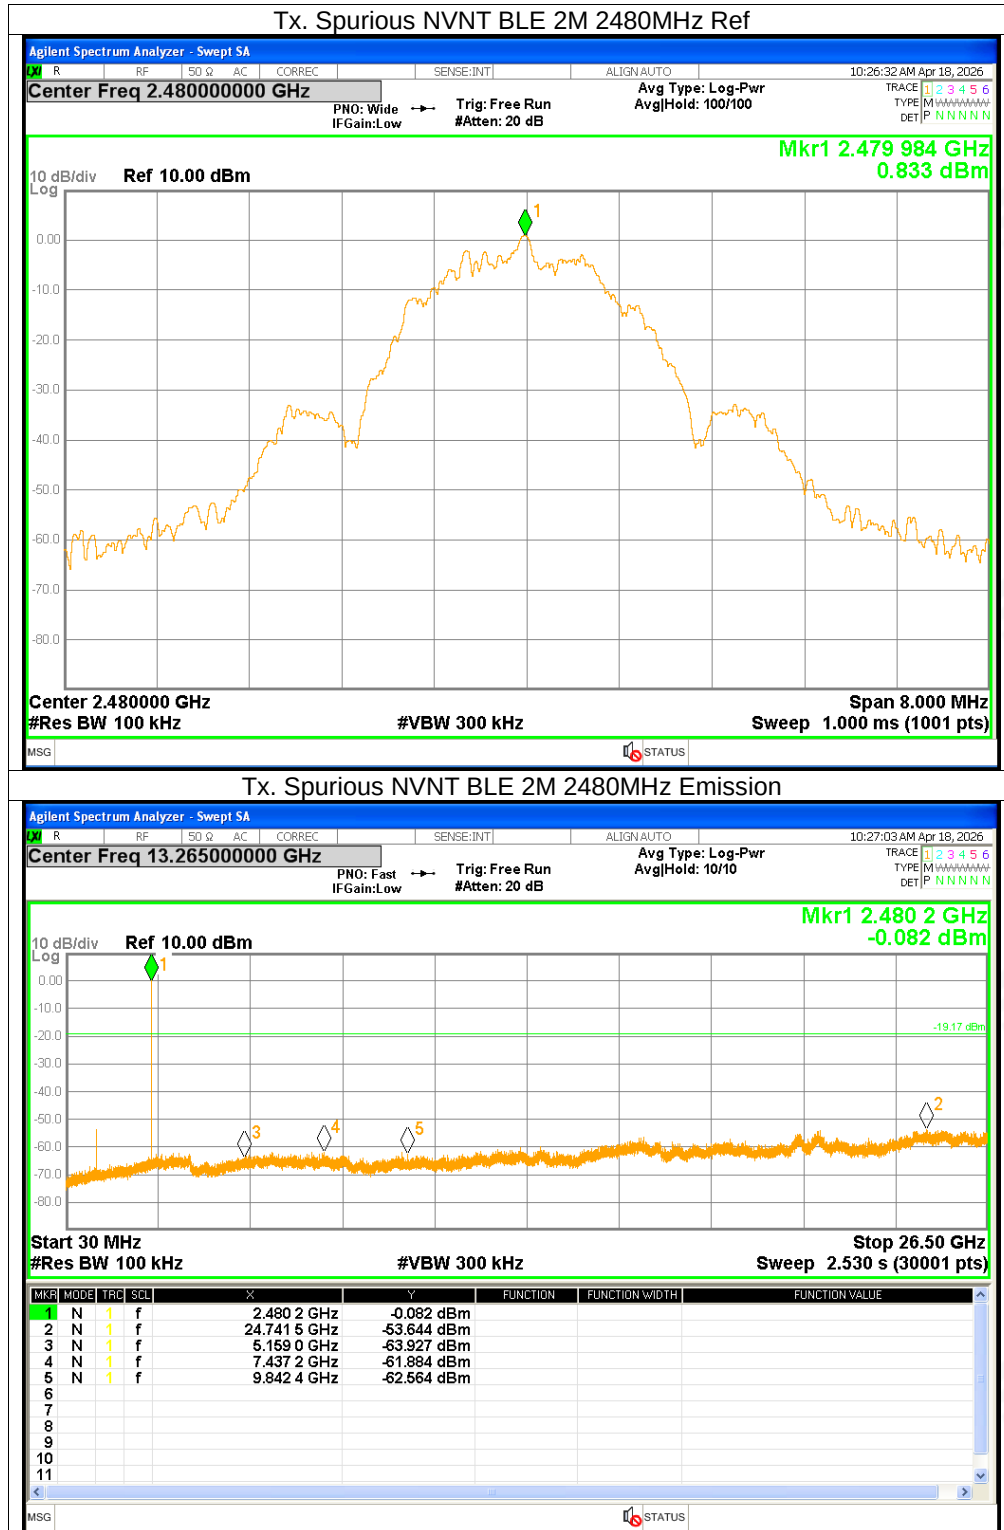



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****