

#3

Date of measurement: 30/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels/Frequency	Middle (661)/ frequency 1880.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.000
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

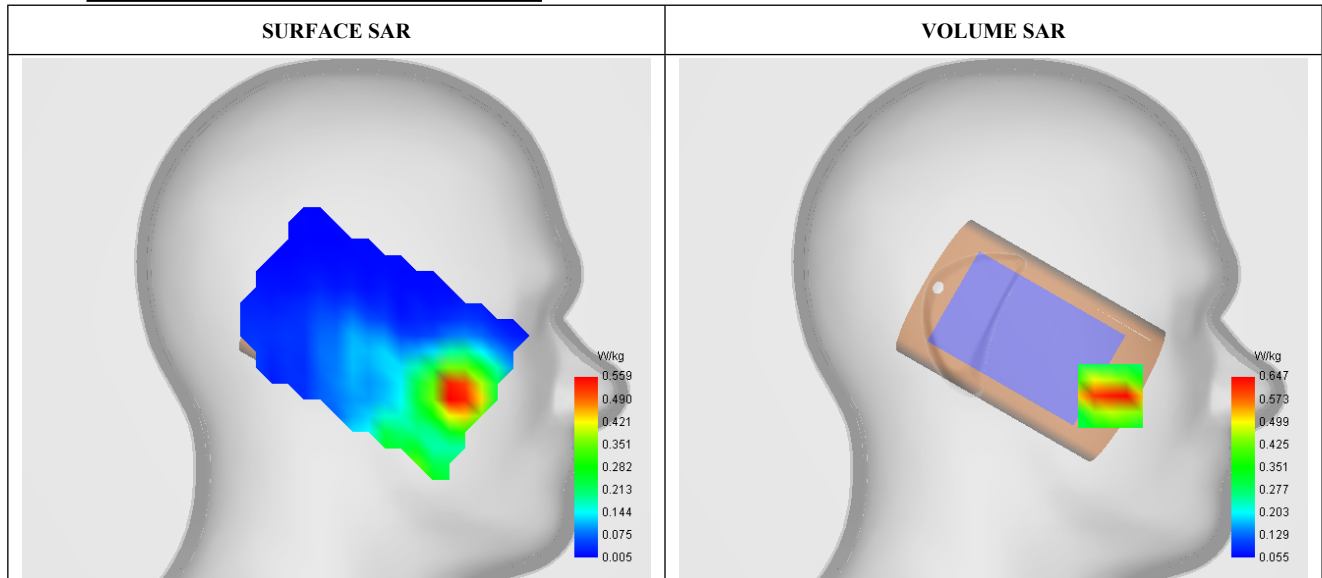


Maximum location: X=-58.00, Y=-38.00 ; SAR Peak: 0.99 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.242
SAR 1g (W/Kg)	0.642
Variation (%)	0.900
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	86.244204

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.734	0.647	0.558	0.346	0.370	0.236	0.210

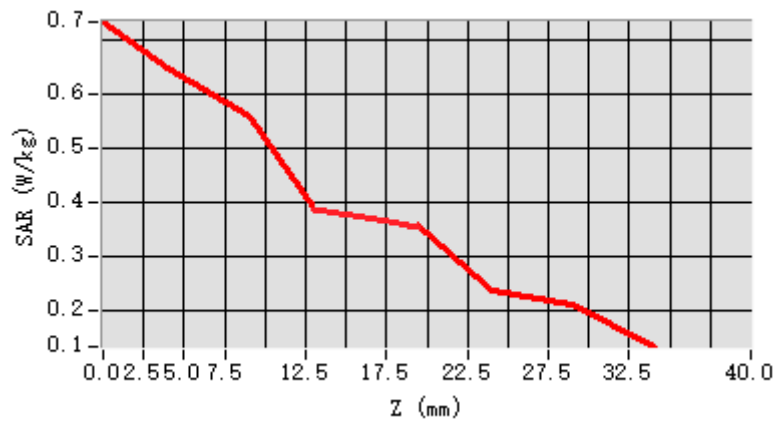

F. 3D Image

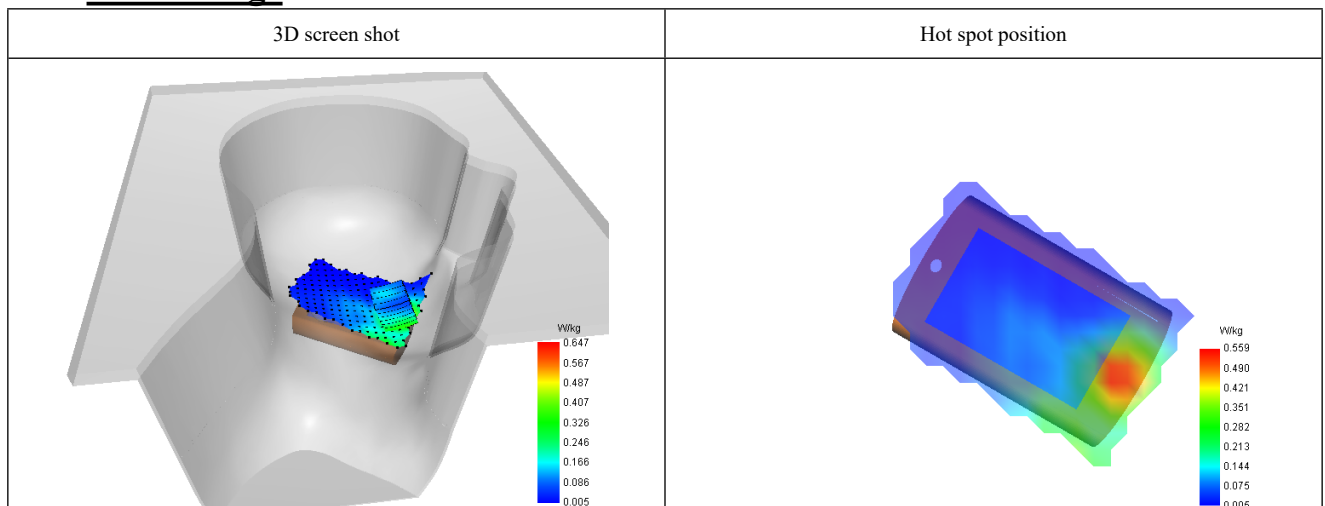

#4

Date of measurement: 30/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels/Frequency	Middle (661)/ frequency 1880.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.000
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

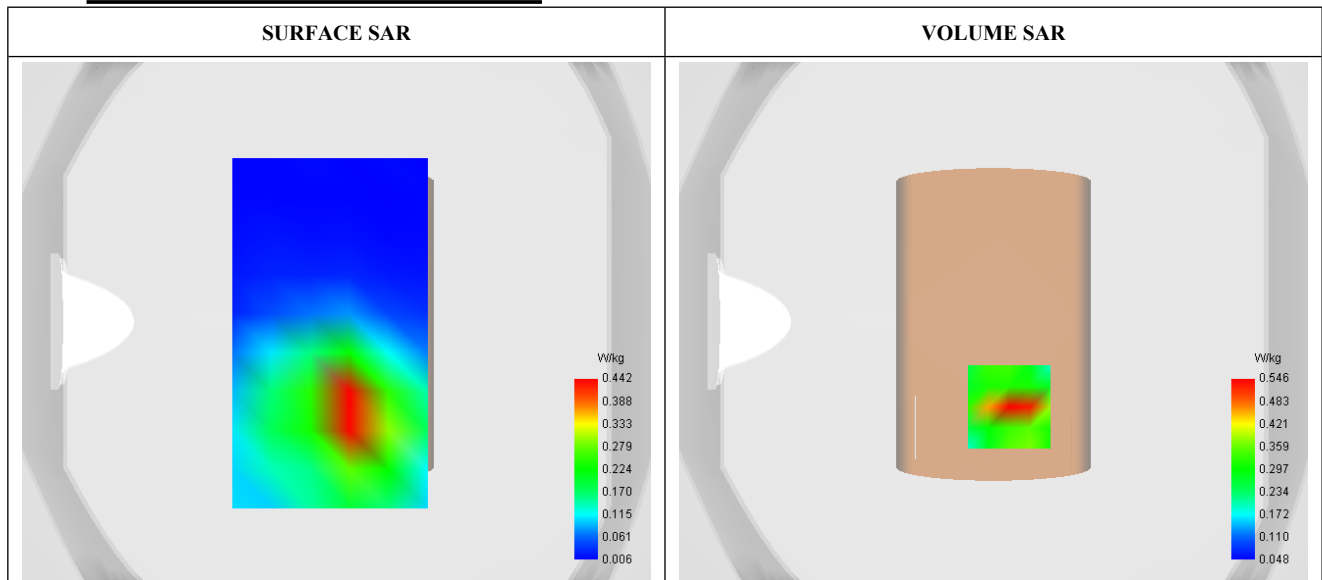


Maximum location: X=6.00, Y=-33.00 ; SAR Peak: 0.79 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.289
SAR 1g (W/Kg)	0.487
Variation (%)	-1.570
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	65.750916

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.785	0.546	0.359	0.297	0.192	0.155	0.100

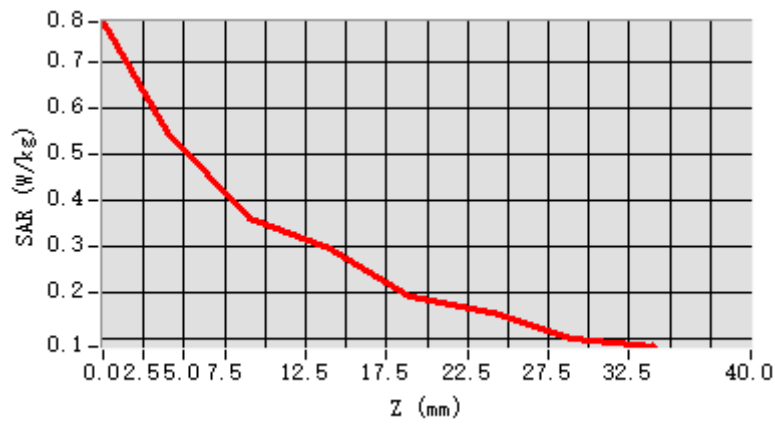

F. 3D Image

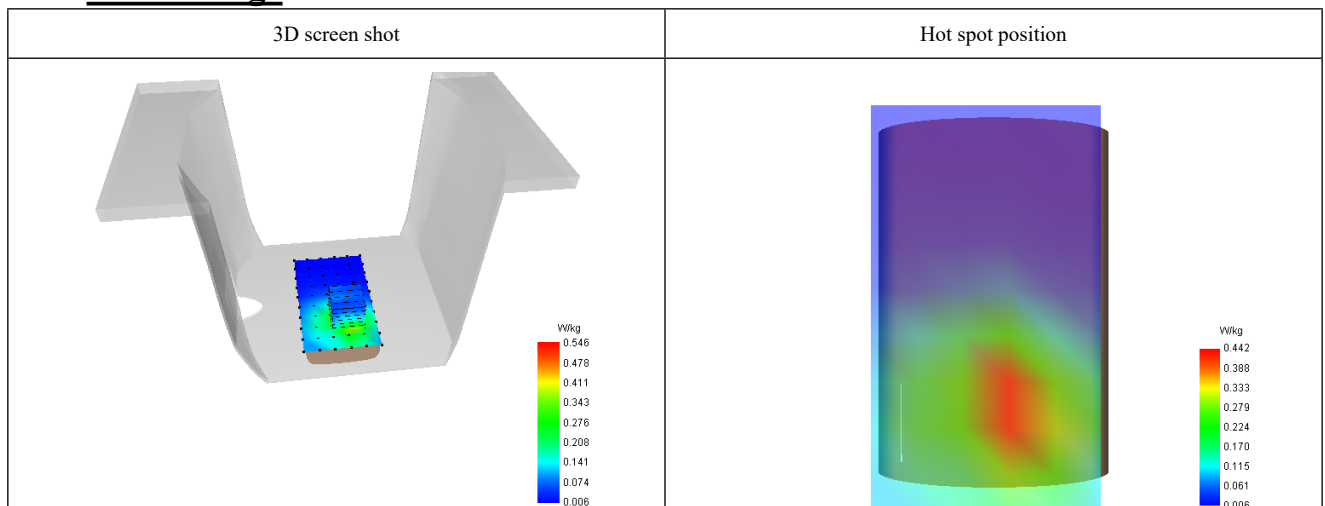

#5

Date of measurement: 30/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.000
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

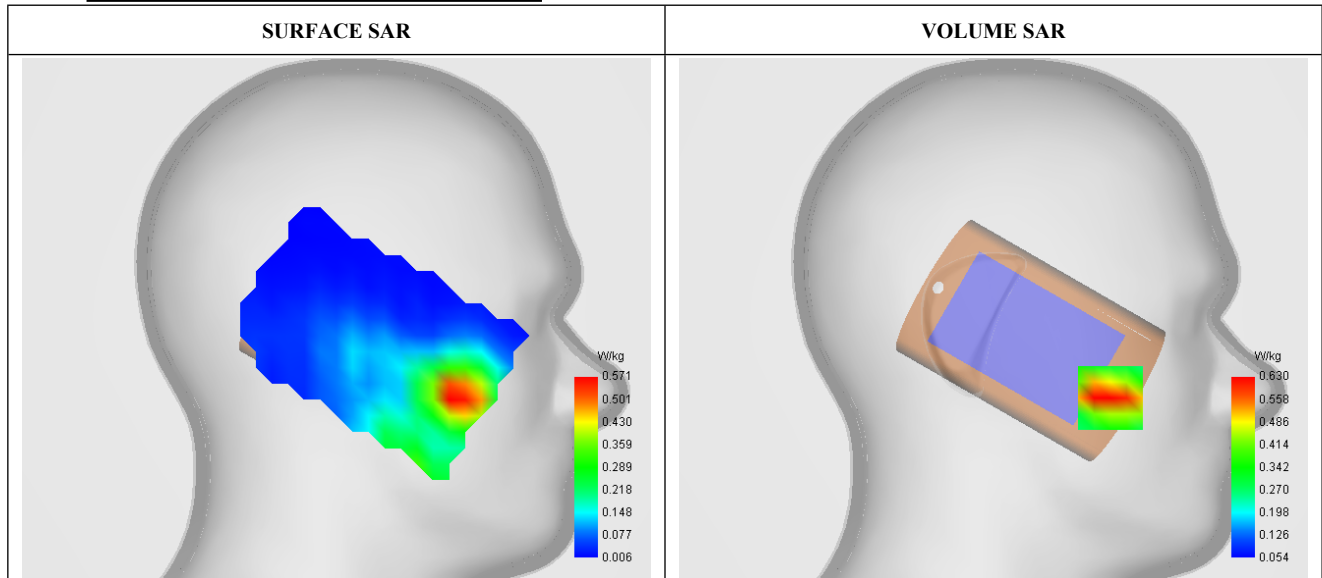


Maximum location: X=-58.00, Y=-39.00 ; SAR Peak: 0.81 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.408
SAR 1g (W/Kg)	0.607
Variation (%)	-0.420
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	87.301587

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.649	0.630	0.550	0.417	0.330	0.256	0.190

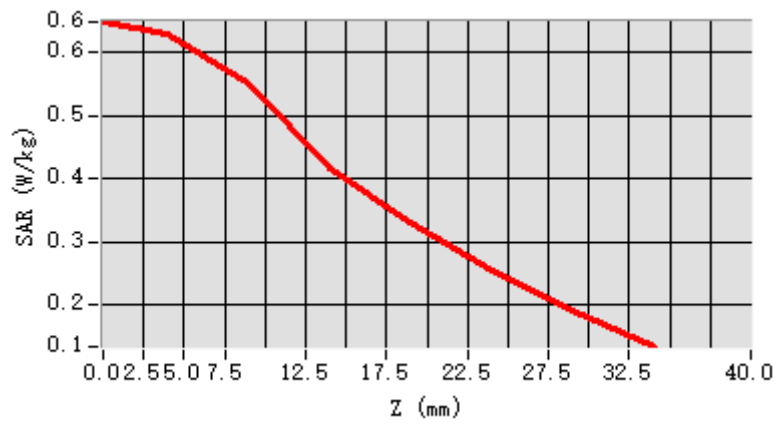

F. 3D Image

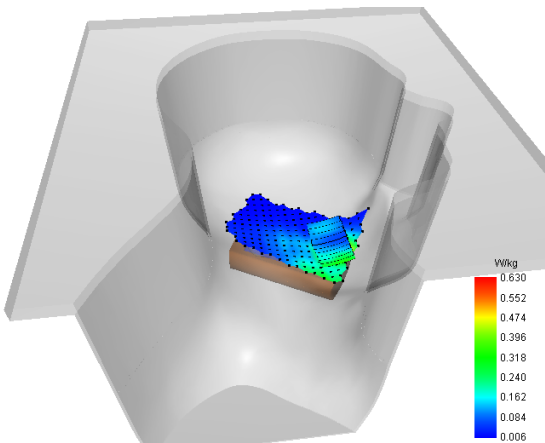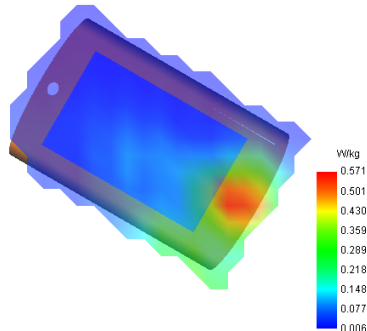3D screen shot	Hot spot position
	

#6

Date of measurement: 30/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.000
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

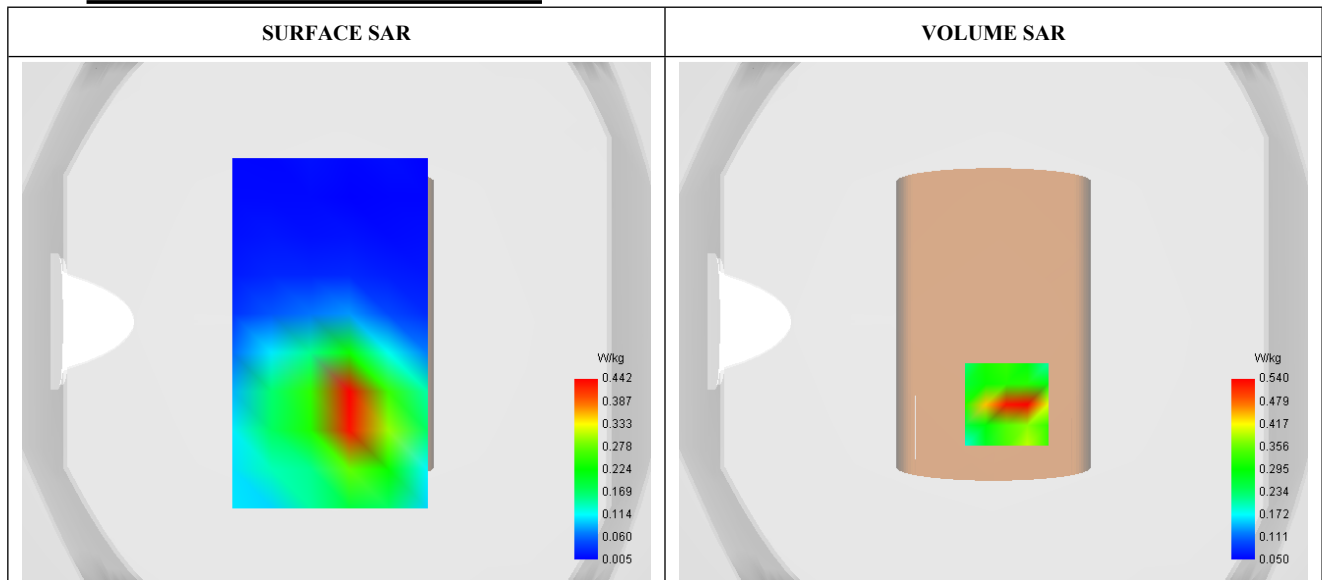


Maximum location: X=5.00, Y=-32.00 ; SAR Peak: 0.76 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.291
SAR 1g (W/Kg)	0.482
Variation (%)	1.440
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	51.296296

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.927	0.540	0.277	0.282	0.158	0.141	0.095

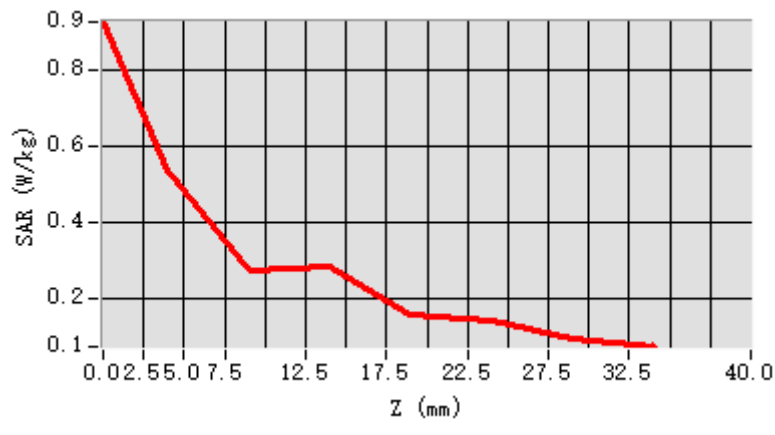

F. 3D Image

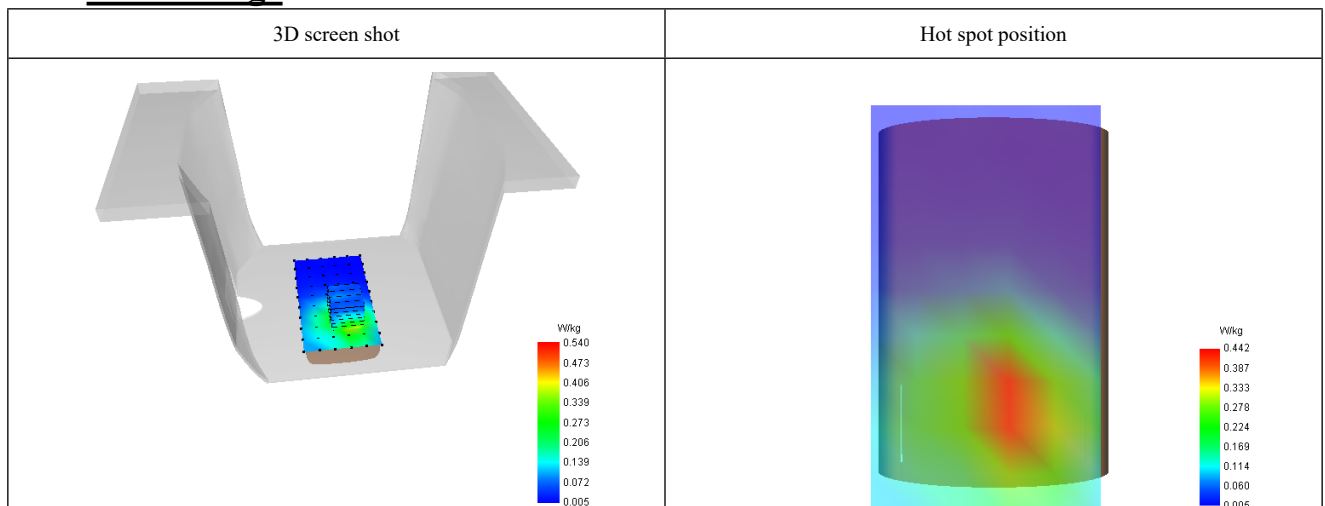

#7

Date of measurement: 29/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.600 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.600
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

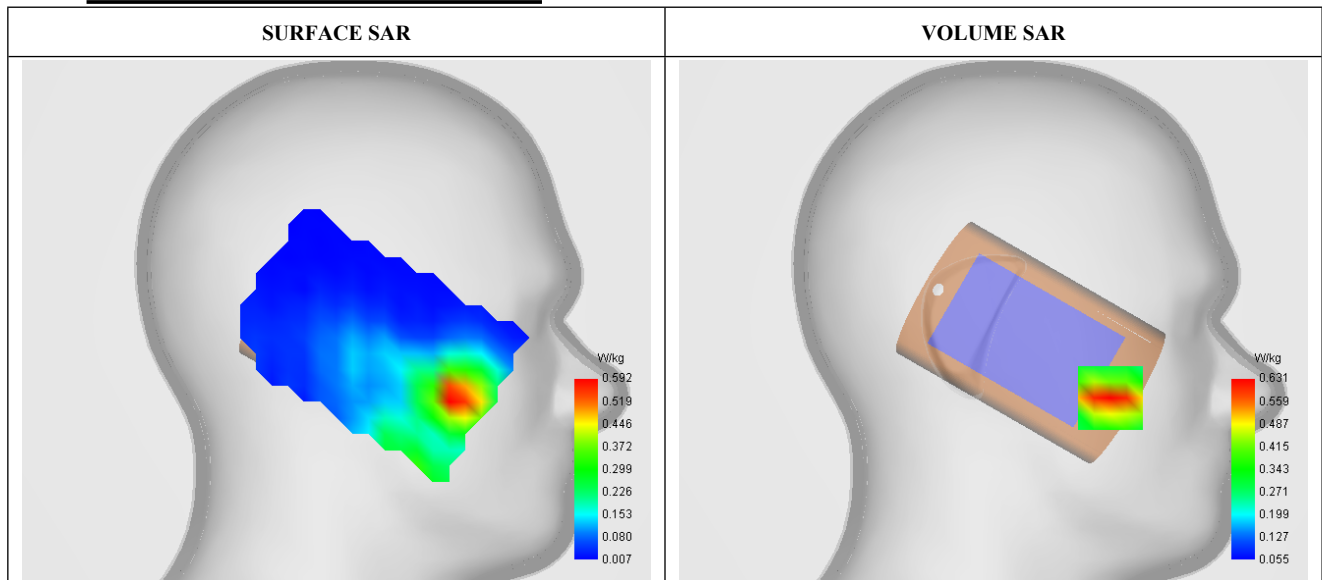


Maximum location: X=-58.00, Y=-38.00 ; SAR Peak: 0.84 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.419
SAR 1g (W/Kg)	0.609
Variation (%)	-1.380
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	87.638669

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.660	0.631	0.553	0.427	0.347	0.278	0.206

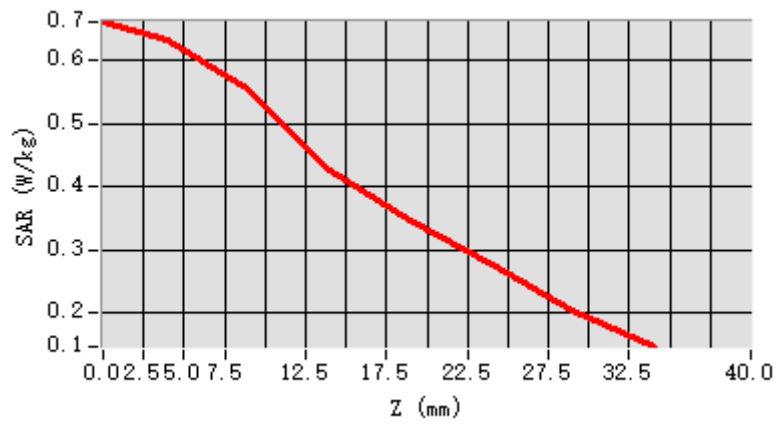

F. 3D Image

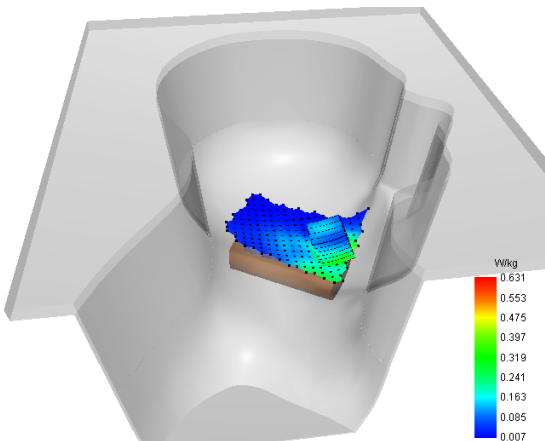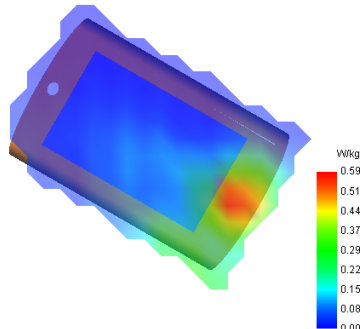3D screen shot	Hot spot position
	

#8

Date of measurement: 29/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.600 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.600
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

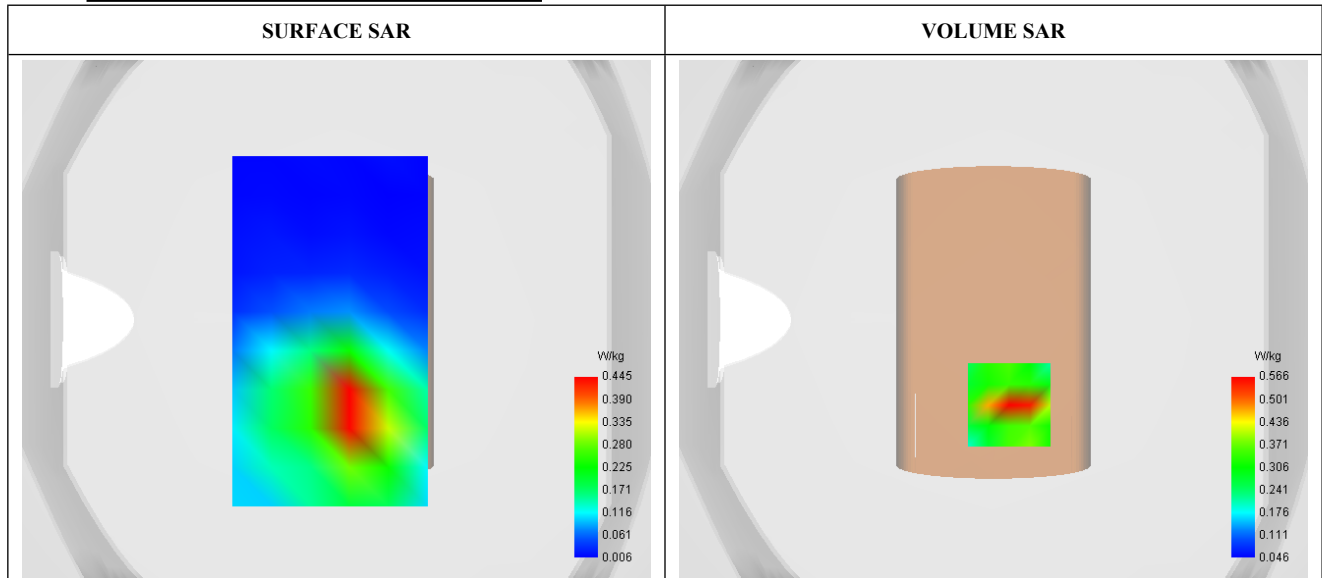


Maximum location: X=6.00, Y=-33.00 ; SAR Peak: 0.80 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.301
SAR 1g (W/Kg)	0.506
Variation (%)	-4.100
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	66.077739

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.811	0.566	0.374	0.304	0.199	0.152	0.100

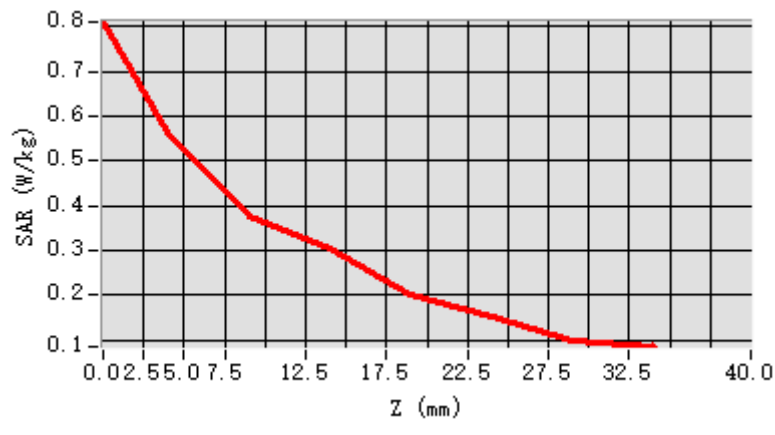

F. 3D Image

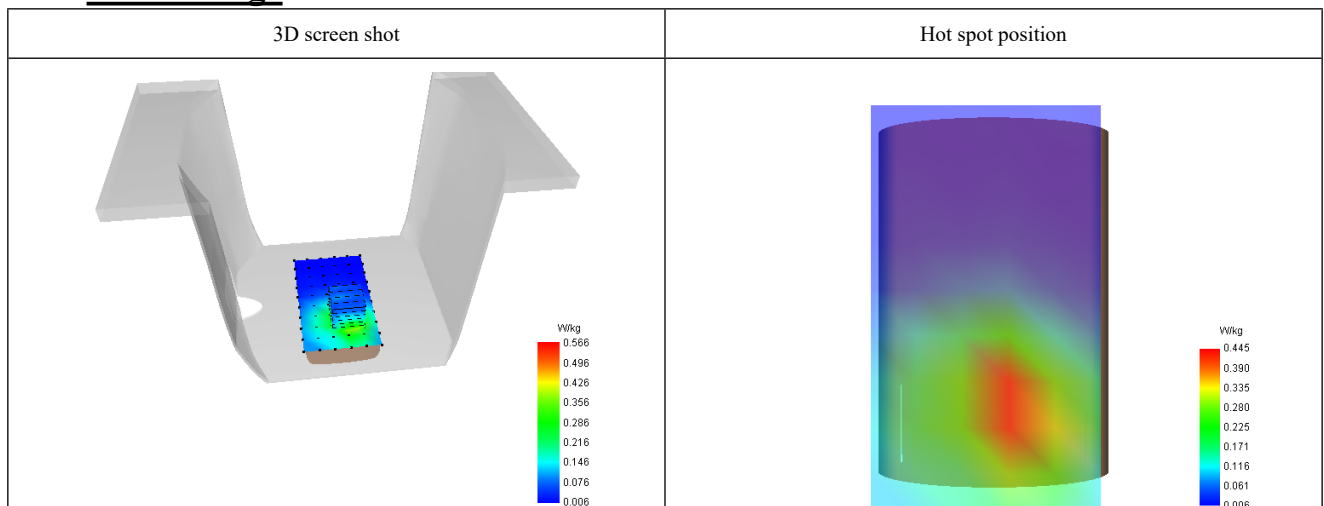

#9

Date of measurement: 28/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.66
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.400 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.400
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

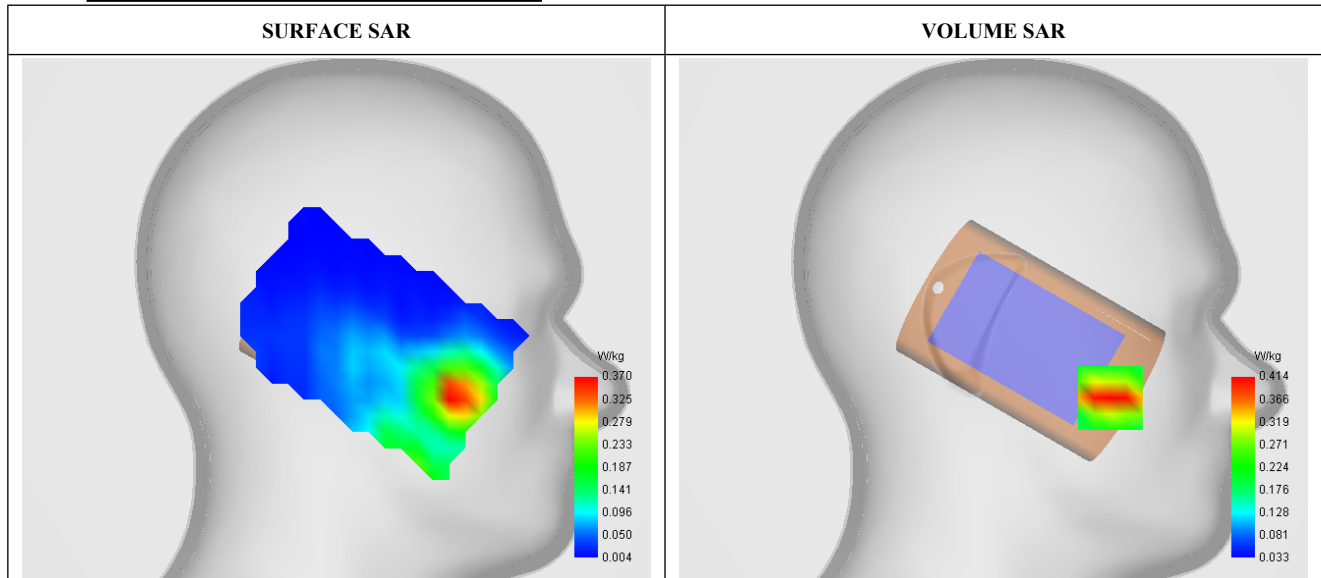


Maximum location: X=-58.00, Y=-39.00 ; SAR Peak: 0.60 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.277
SAR 1g (W/Kg)	0.411
Variation (%)	-3.380
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	85.024155

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.472	0.414	0.352	0.272	0.232	0.188	0.137

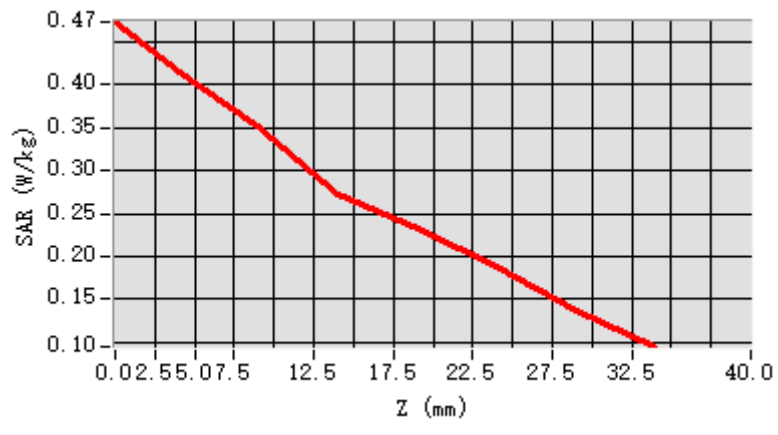

F. 3D Image

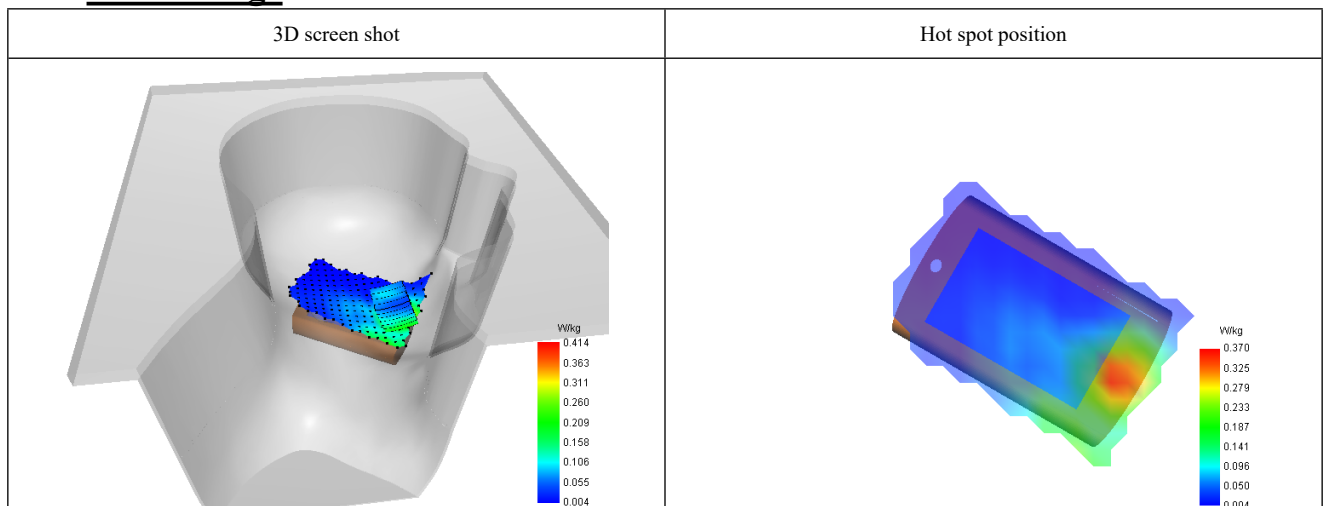

#10

Date of measurement: 28/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.66
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.400 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.400
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

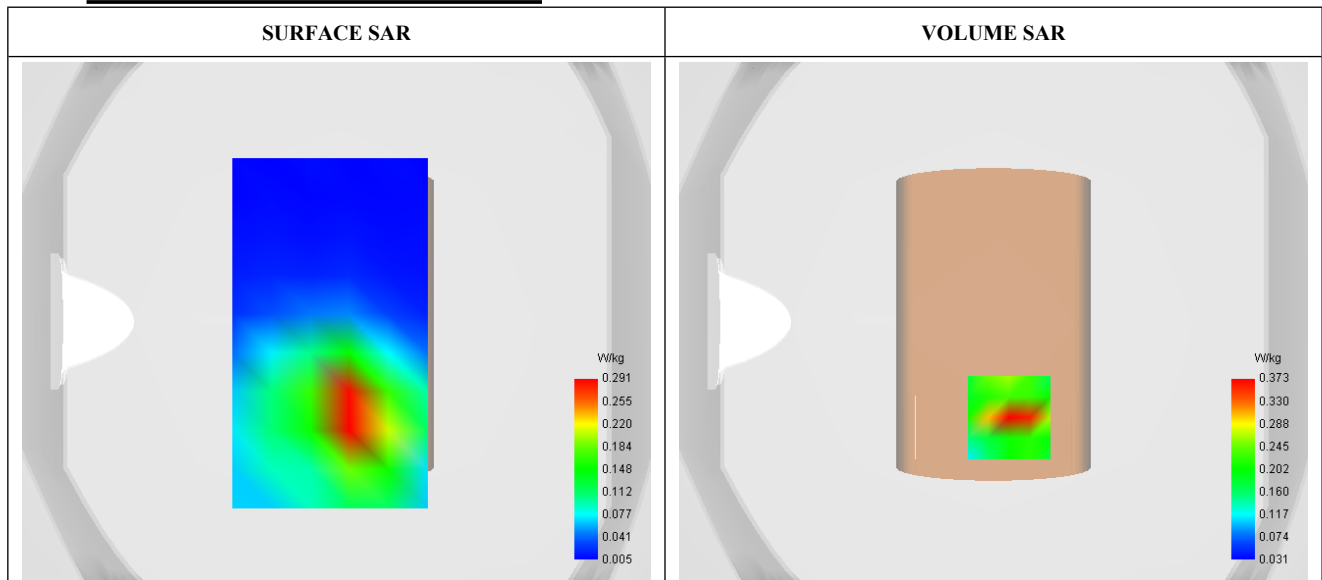


Maximum location: X=6.00, Y=-37.00 ; SAR Peak: 0.53 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.195
SAR 1g (W/Kg)	0.332
Variation (%)	-4.350
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	65.683646

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.536	0.373	0.245	0.195	0.128	0.098	0.064

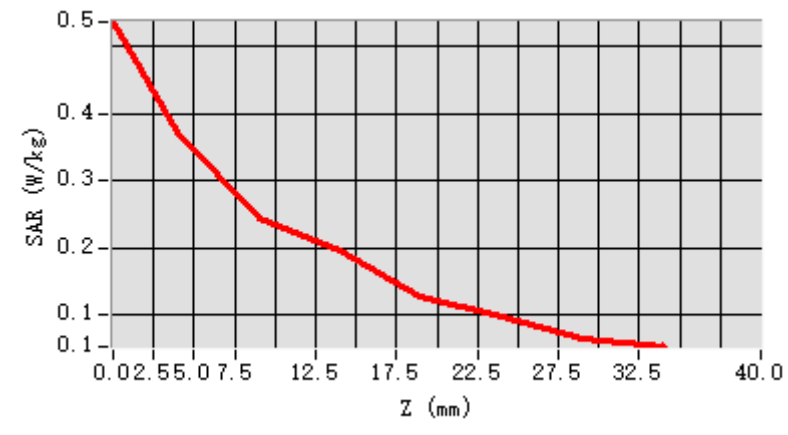

F. 3D Image

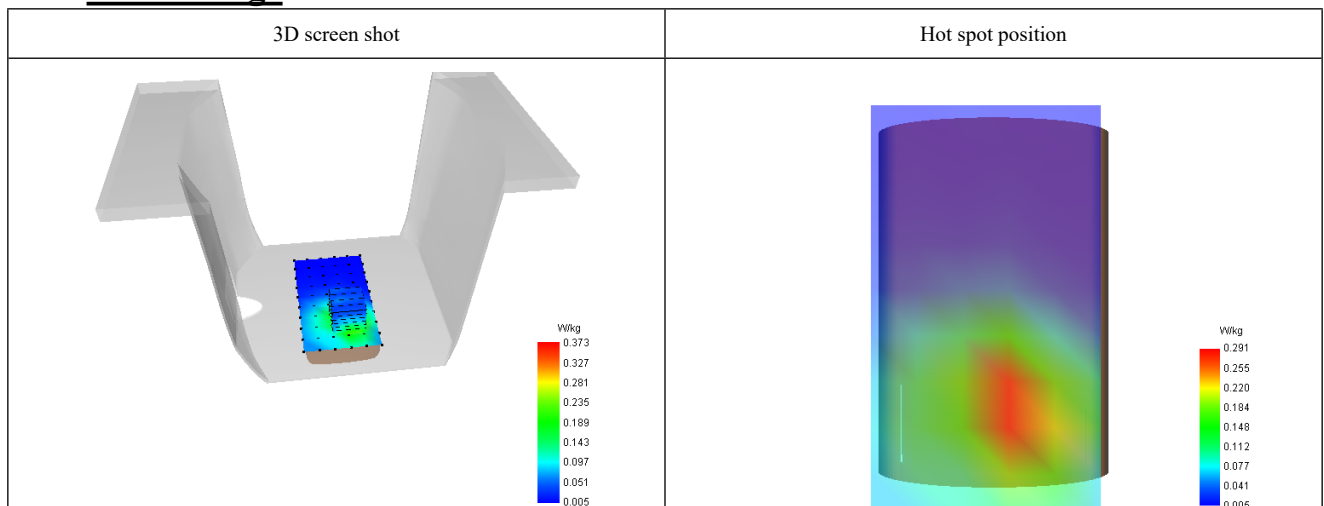

#11

Date of measurement: 5/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.30
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Channels/Frequency	Low (36)/ frequency 5180.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5180.000
Relative permittivity (real part)	36.000
Relative permittivity (imaginary part)	16.120
Conductivity (S/m)	4.639

C. SAR Surface and Volume

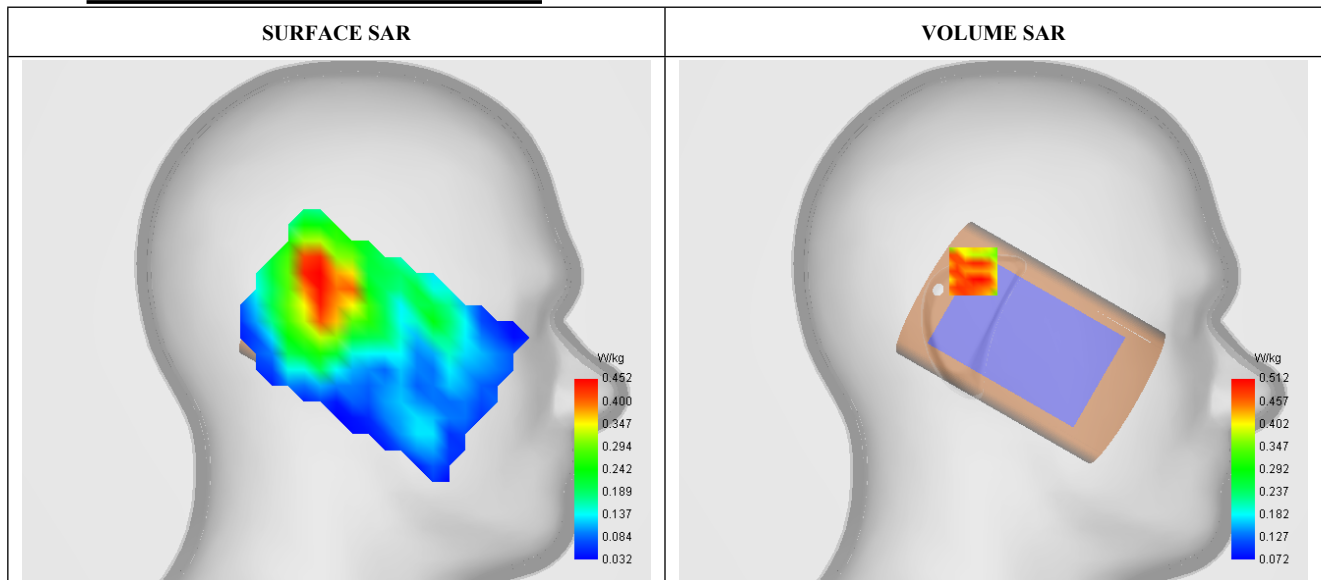


Maximum location: X=10.00, Y=25.00 ; SAR Peak: 0.98 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.249
SAR 1g (W/Kg)	0.504
Variation (%)	-4.690
Horizontal validation criteria: minimum distance (mm)	15.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	81.250000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.596	0.512	0.416	0.396	0.289	0.311	0.224	0.237	0.171	0.177	0.132	0.154

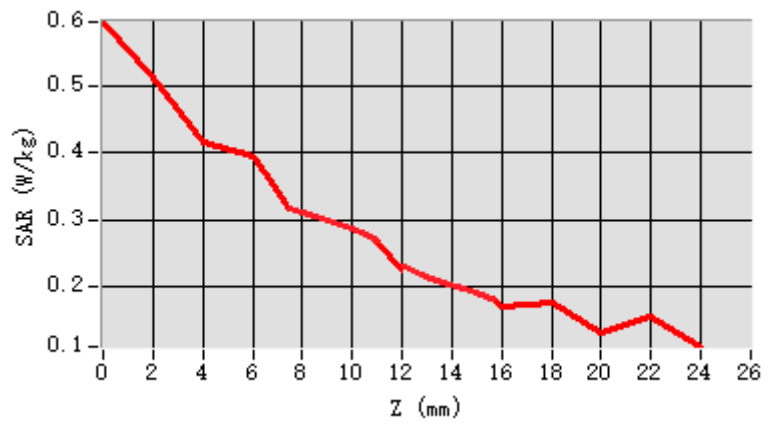

F. 3D Image

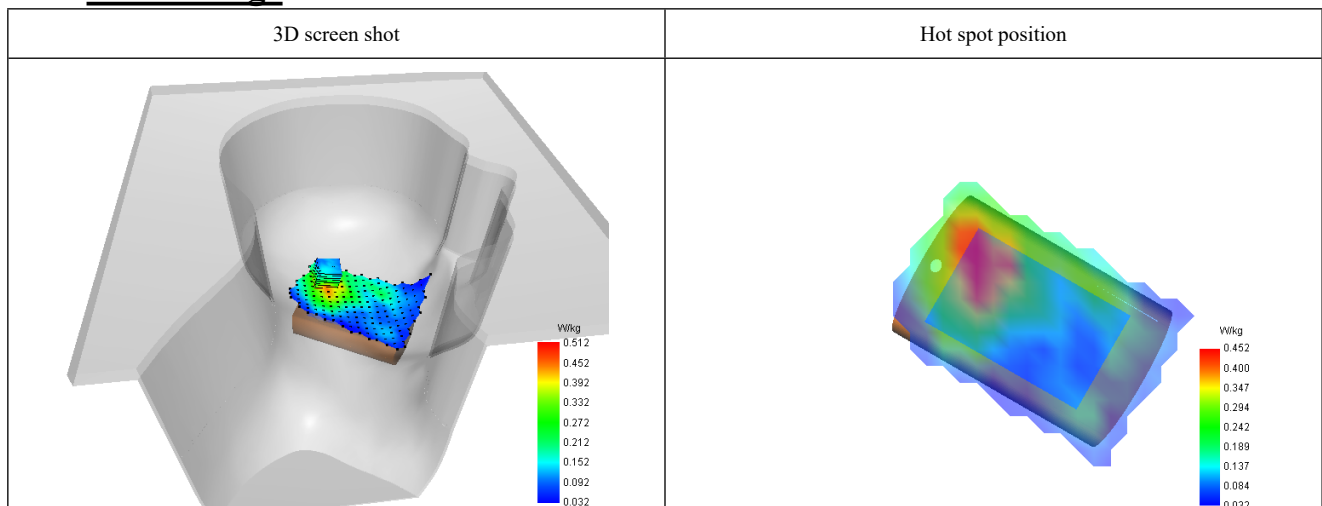

#12

Date of measurement: 5/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.30
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Channels/Frequency	Low (36)/ frequency 5180.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5180.000
Relative permittivity (real part)	36.000
Relative permittivity (imaginary part)	16.120
Conductivity (S/m)	4.639

C. SAR Surface and Volume

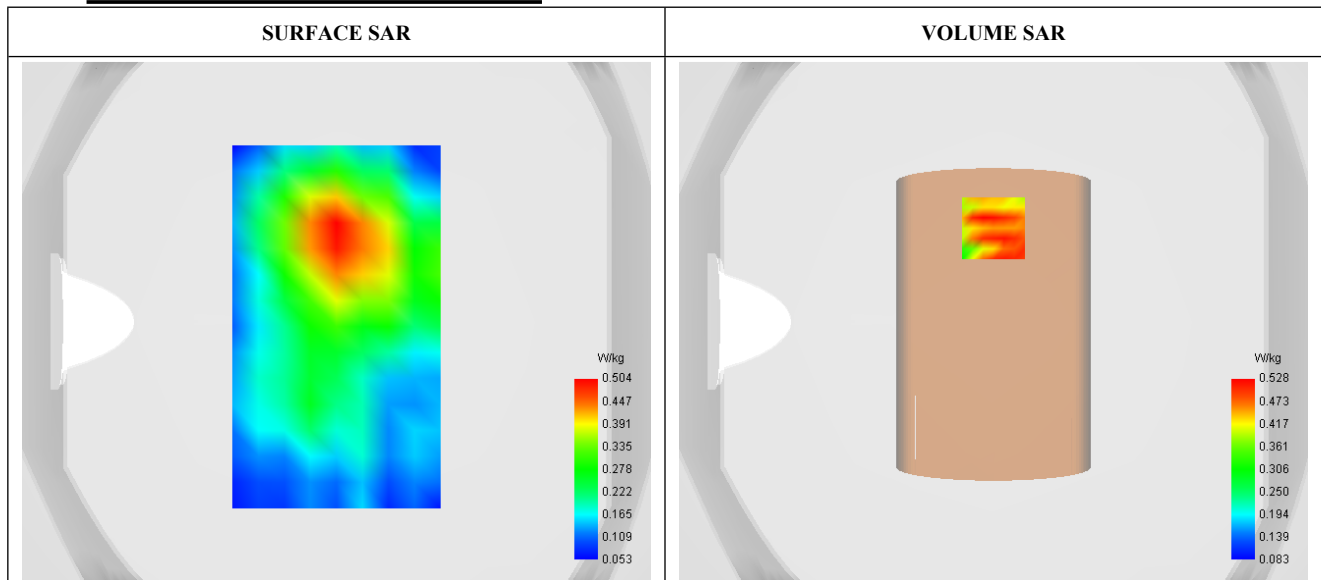


Maximum location: X=0.00, Y=36.00 ; SAR Peak: 0.75 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.240
SAR 1g (W/Kg)	0.423
Variation (%)	3.280
Horizontal validation criteria: minimum distance (mm)	14.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	87.878788

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.598	0.528	0.464	0.417	0.366	0.333	0.295	0.267	0.215	0.211	0.146	0.159

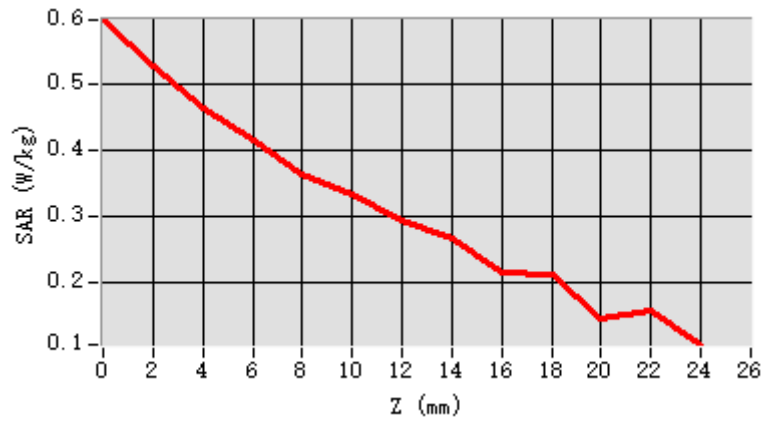

F. 3D Image

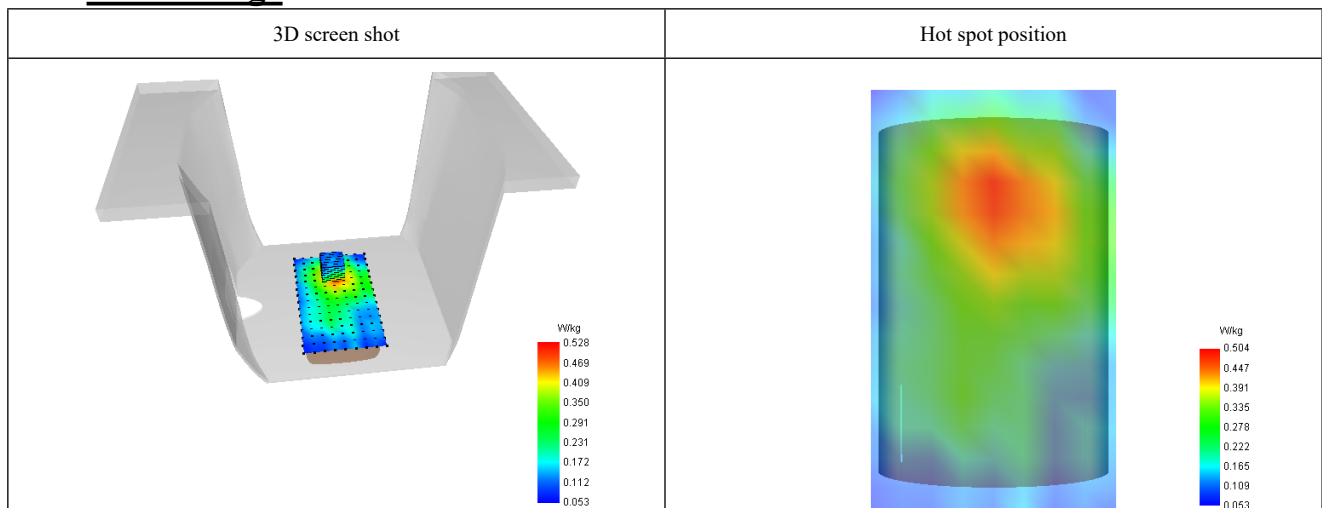

#13

Date of measurement: 6/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.27
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Channels/Frequency	Low (149)/ frequency 5745.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5745.000
Relative permittivity (real part)	35.312
Relative permittivity (imaginary part)	16.353
Conductivity (S/m)	5.219

C. SAR Surface and Volume

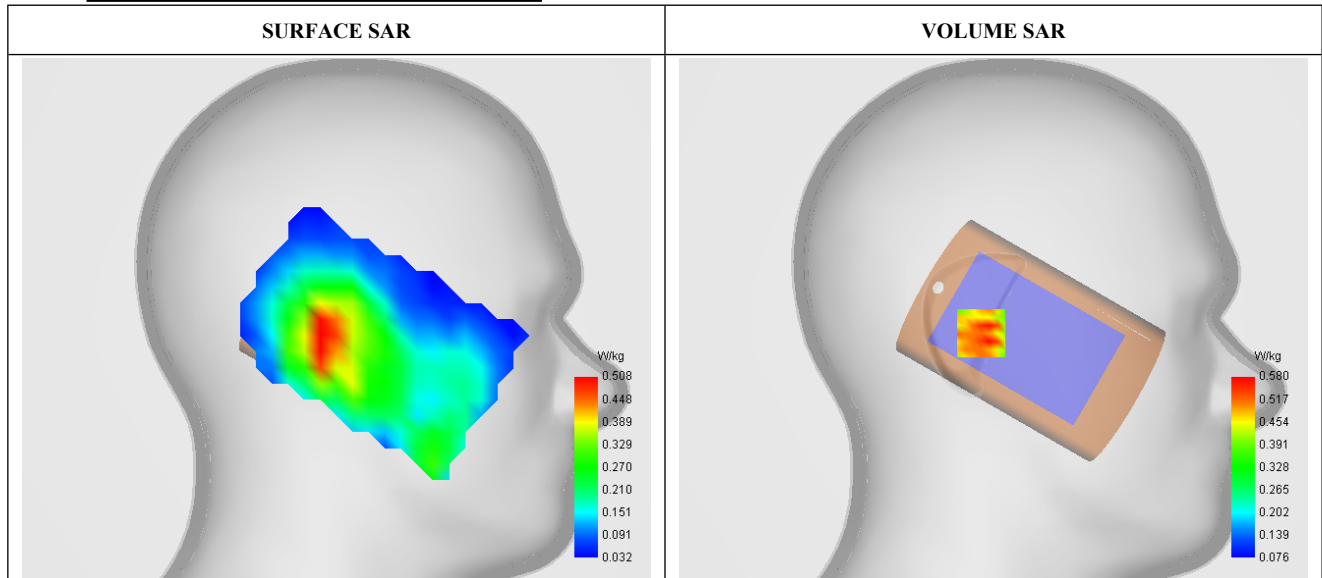


Maximum location: X=6.00, Y=-7.00 ; SAR Peak: 1.28 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.320
SAR 1g (W/Kg)	0.553
Variation (%)	-4.020
Horizontal validation criteria: minimum distance (mm)	14.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	84.827586

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.664	0.580	0.492	0.444	0.408	0.356	0.324	0.286	0.236	0.222	0.175	0.187

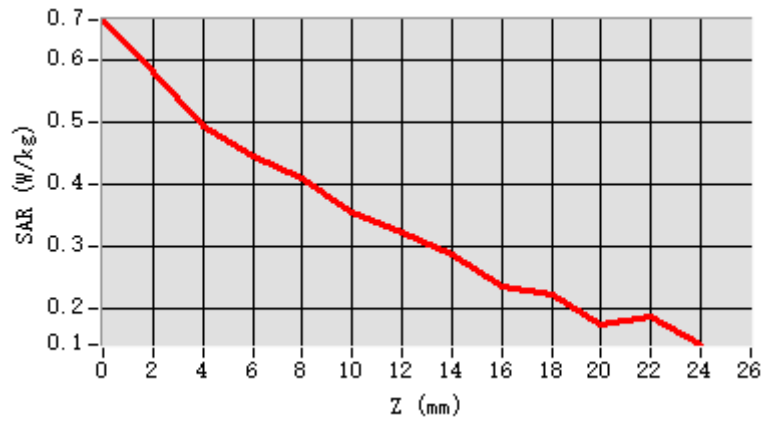

F. 3D Image

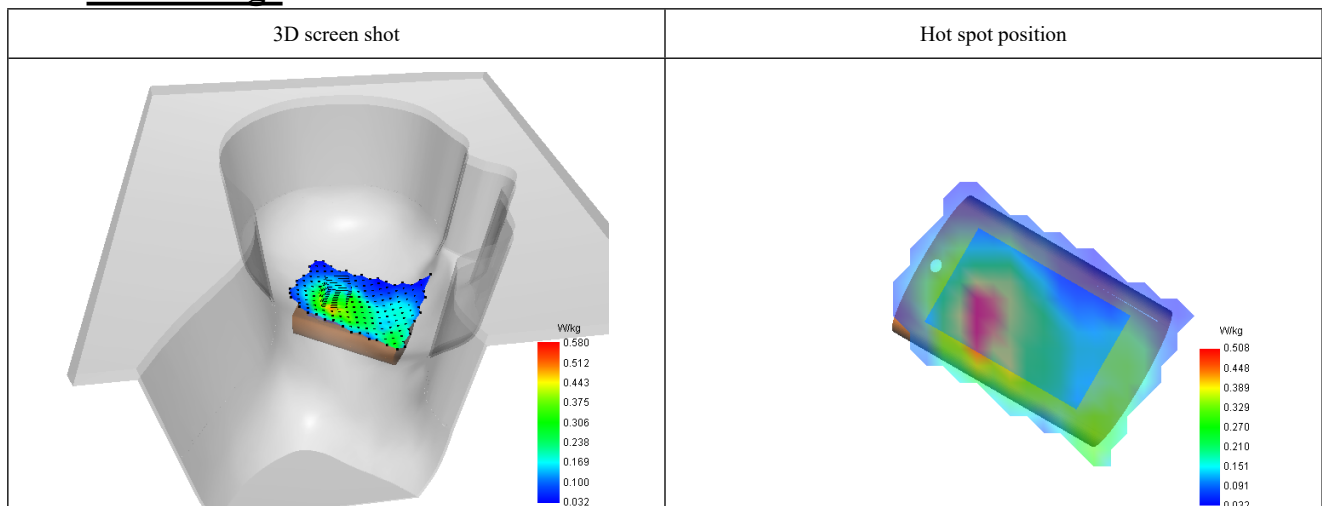

#14

Date of measurement: 6/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.27
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Channels/Frequency	Low (149)/ frequency 5745.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5745.000
Relative permittivity (real part)	35.312
Relative permittivity (imaginary part)	16.353
Conductivity (S/m)	5.219

C. SAR Surface and Volume

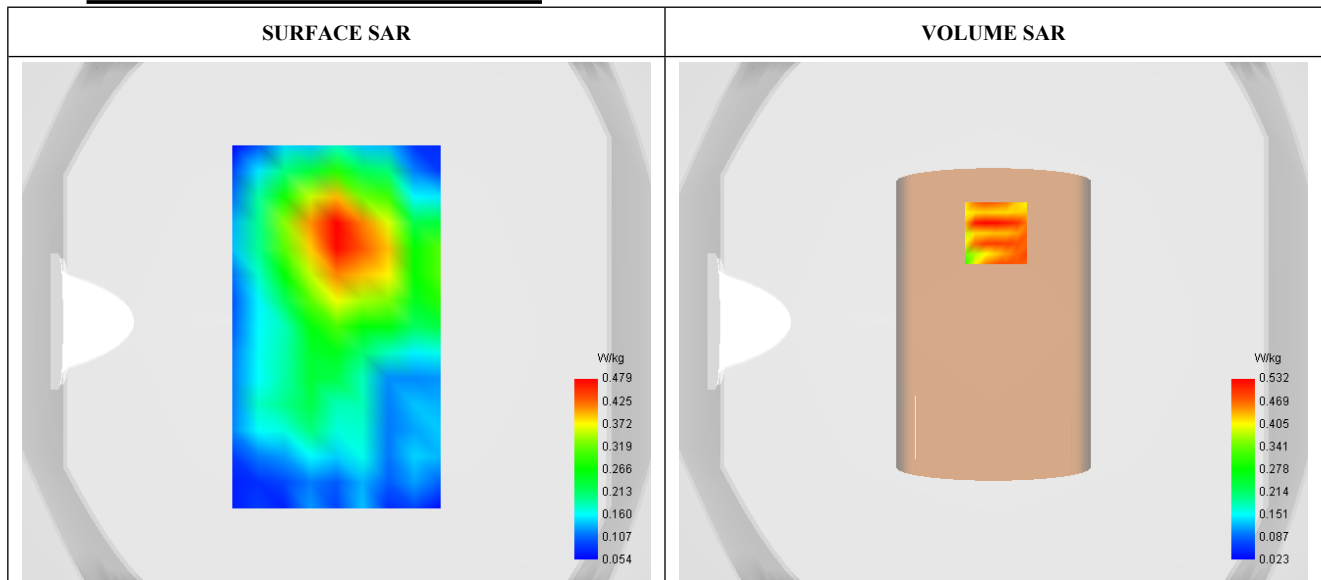


Maximum location: X=1.00, Y=34.00 ; SAR Peak: 0.72 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.238
SAR 1g (W/Kg)	0.406
Variation (%)	2.260
Horizontal validation criteria: minimum distance (mm)	14.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	86.466165

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.601	0.532	0.460	0.412	0.344	0.323	0.264	0.256	0.219	0.193	0.140	0.159

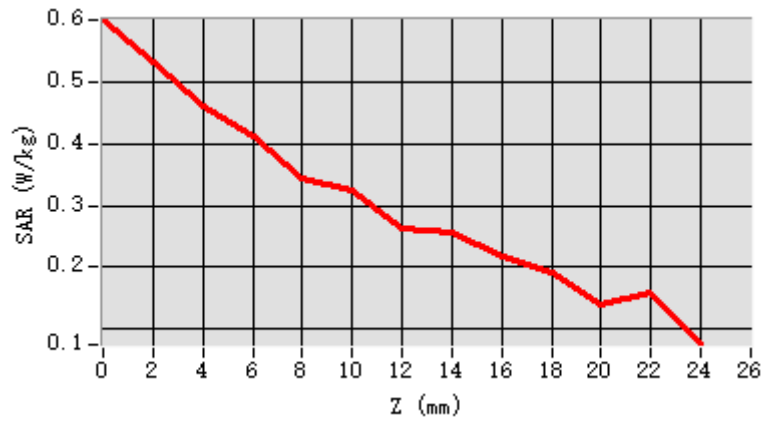

F. 3D Image

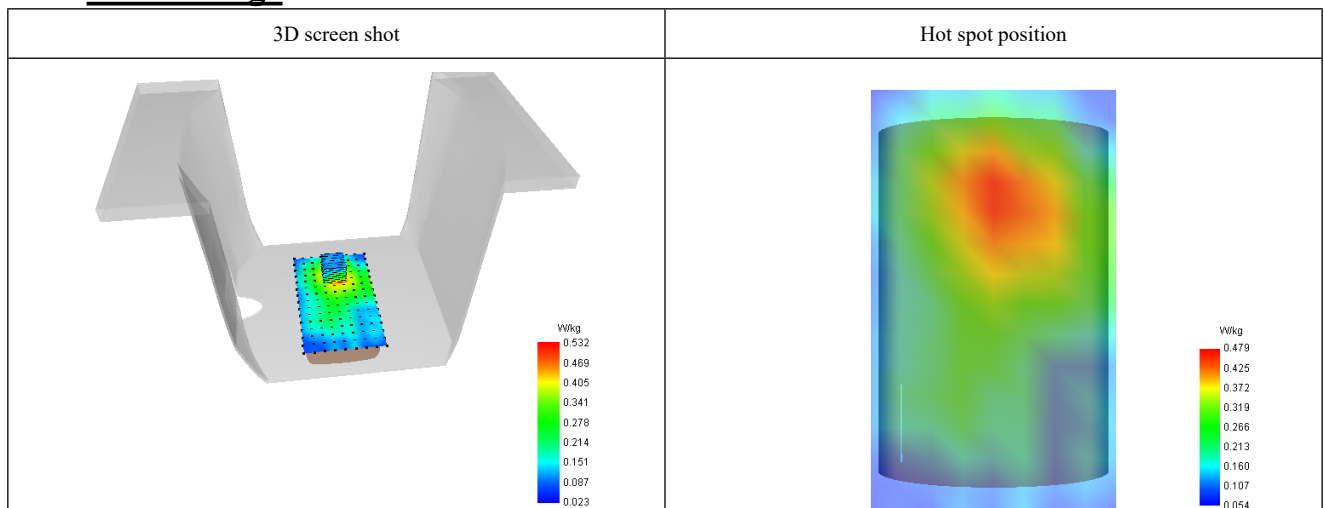

#15

Date of measurement: 2/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.38
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	ISM
Channels/Frequency	Middle (6)/ frequency 2437.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2437.000
Relative permittivity (real part)	39.226
Relative permittivity (imaginary part)	13.207
Conductivity (S/m)	1.788

C. SAR Surface and Volume

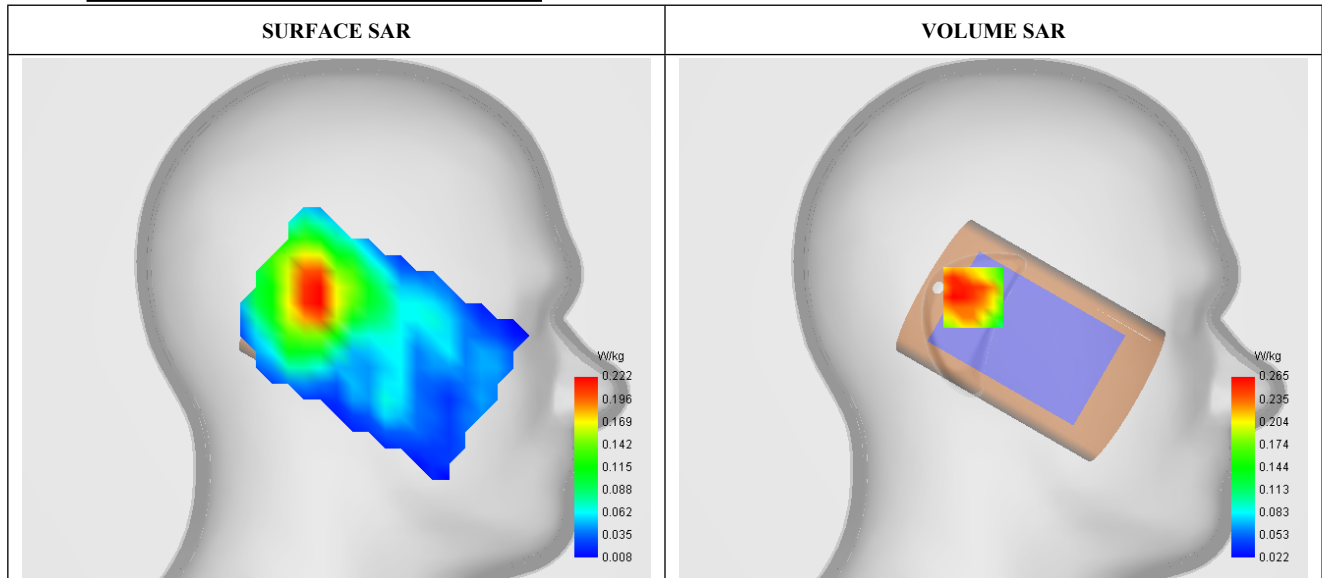


Maximum location: X=10.00, Y=11.00 ; SAR Peak: 0.41 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.260
Variation (%)	-3.270
Horizontal validation criteria: minimum distance (mm)	29.154759
Vertical validation criteria: SAR ratio M2/M1 (%)	64.905660

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.392	0.265	0.172	0.150	0.089	0.095	0.053

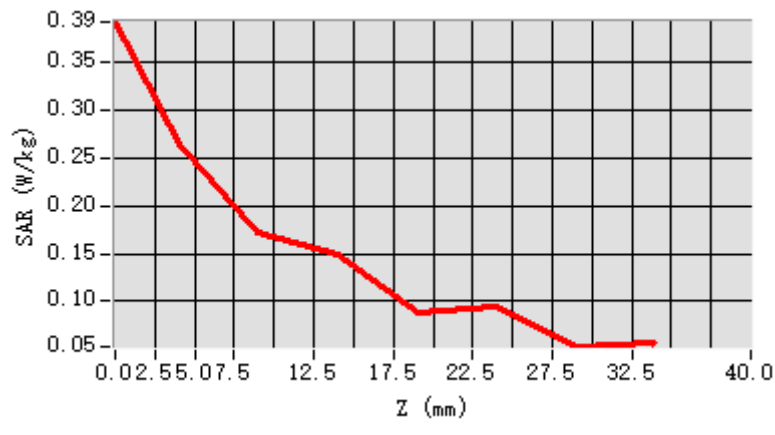

F. 3D Image

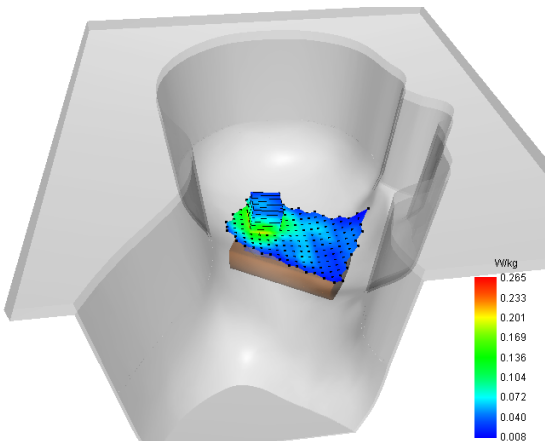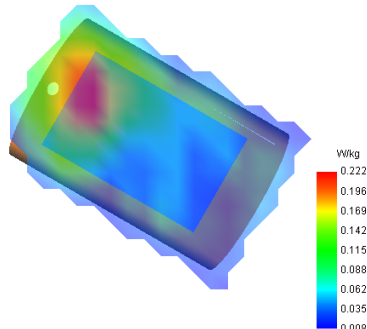3D screen shot	Hot spot position
	

#16

Date of measurement: 2/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.38
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Middle (6)/ frequency 2437.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2437.000
Relative permittivity (real part)	39.226
Relative permittivity (imaginary part)	13.207
Conductivity (S/m)	1.788

C. SAR Surface and Volume

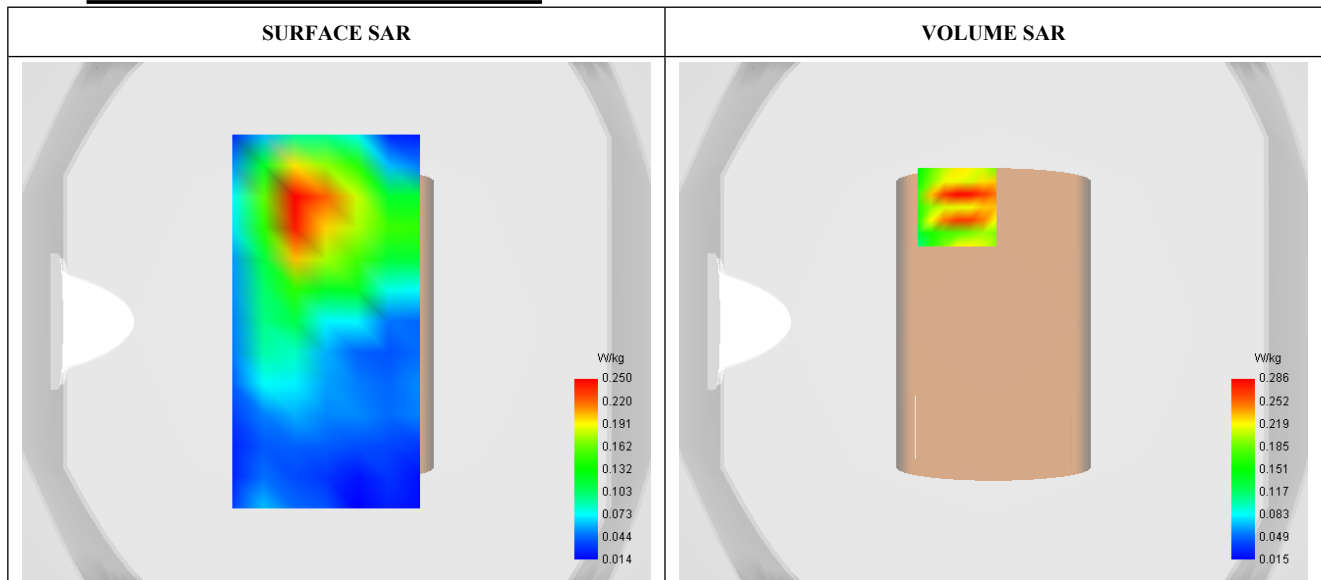


Maximum location: X=-14.00, Y=44.00 ; SAR Peak: 0.44 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.153
SAR 1g (W/Kg)	0.242
Variation (%)	3.860
Horizontal validation criteria: minimum distance (mm)	18.027756
Vertical validation criteria: SAR ratio M2/M1 (%)	59.090909

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.457	0.286	0.169	0.116	0.086	0.052	0.035

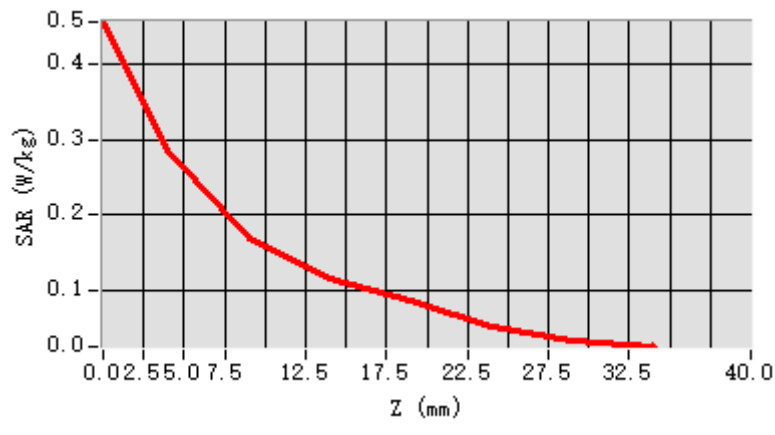

F. 3D Image

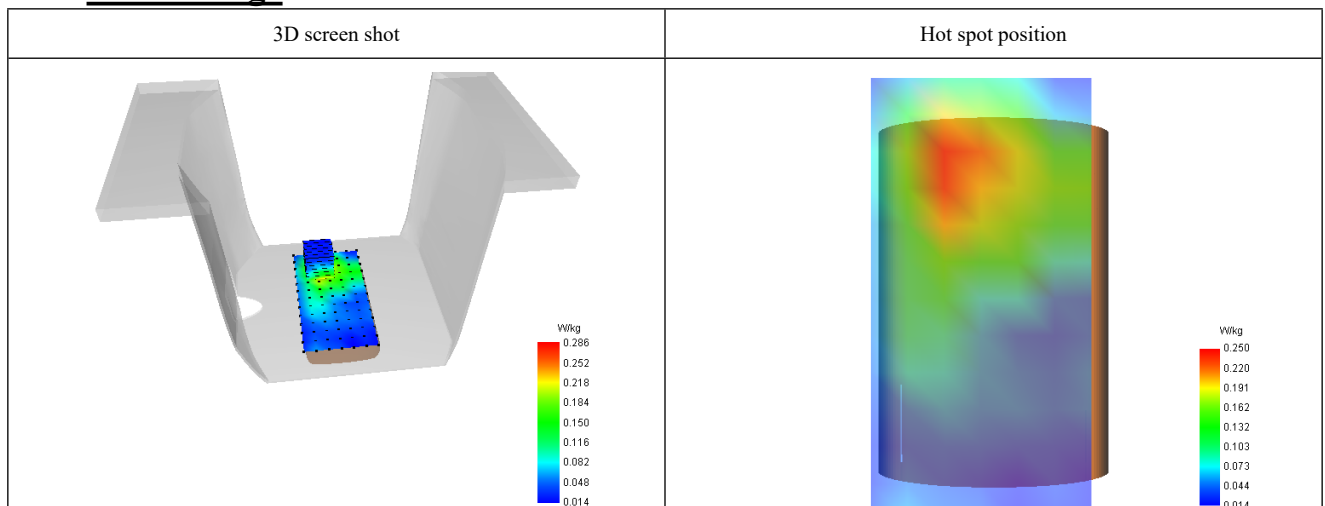

#17

Date of measurement: 30/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Channels/Frequency	Middle (18900)/ frequency 1880.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.000
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.455
Conductivity (S/m)	1.404

C. SAR Surface and Volume

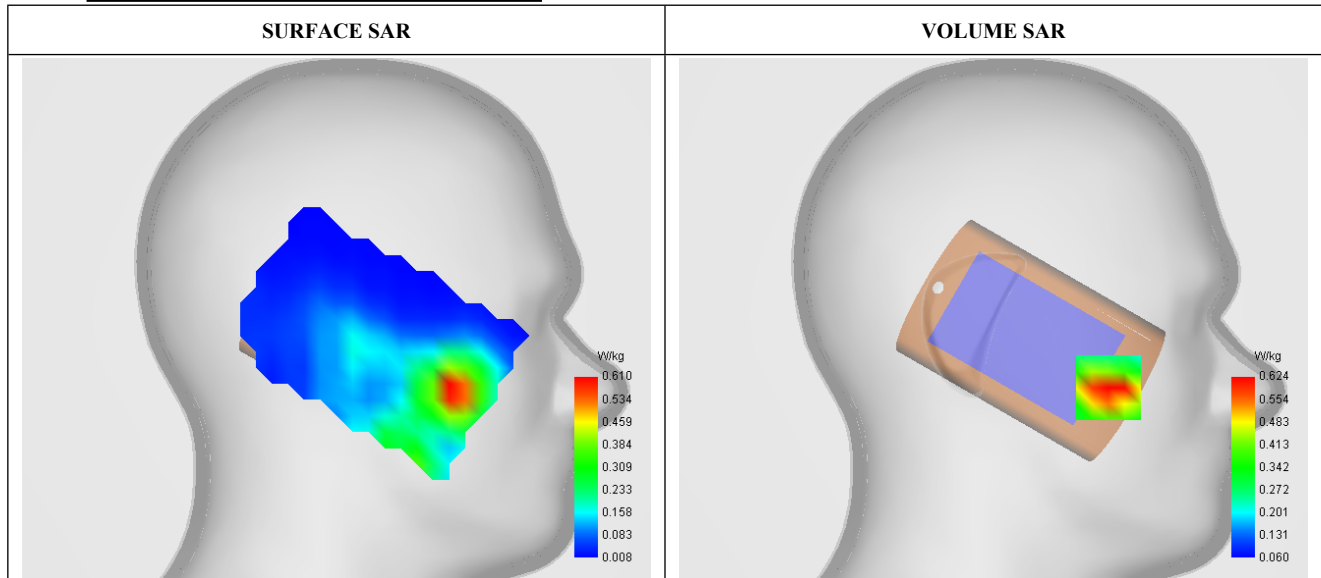


Maximum location: X=-57.00, Y=-34.00 ; SAR Peak: 0.90 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.428
SAR 1g (W/Kg)	0.621
Variation (%)	4.230
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	83.814103

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.756	0.624	0.523	0.426	0.363	0.307	0.216

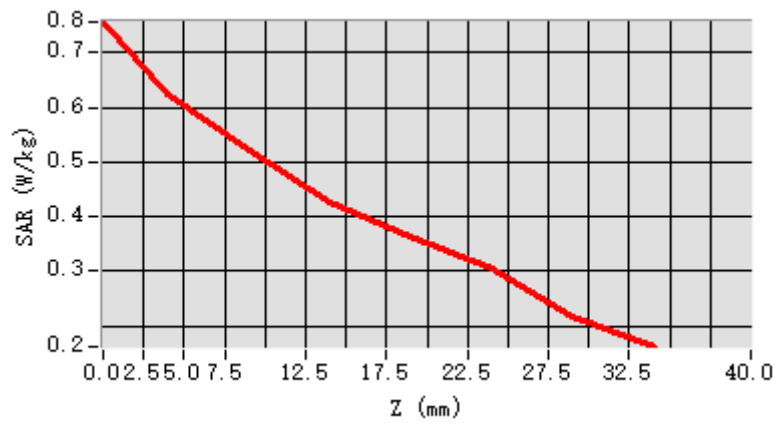

F. 3D Image

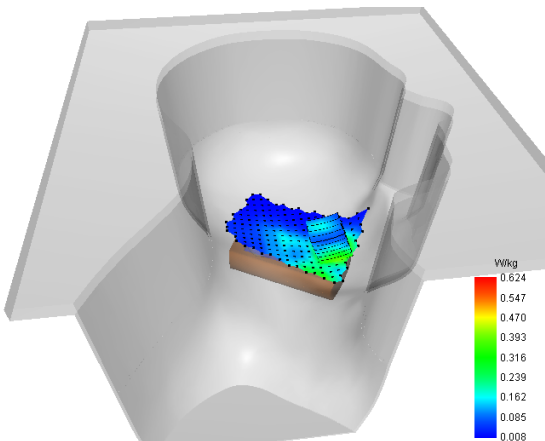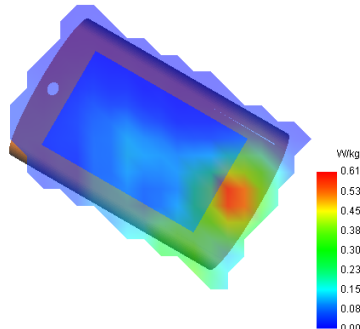3D screen shot	Hot spot position
	

#18

Date of measurement: 30/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels/Frequency	Middle (18900)/ frequency 1880.000 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.000
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.455
Conductivity (S/m)	1.404

C. SAR Surface and Volume

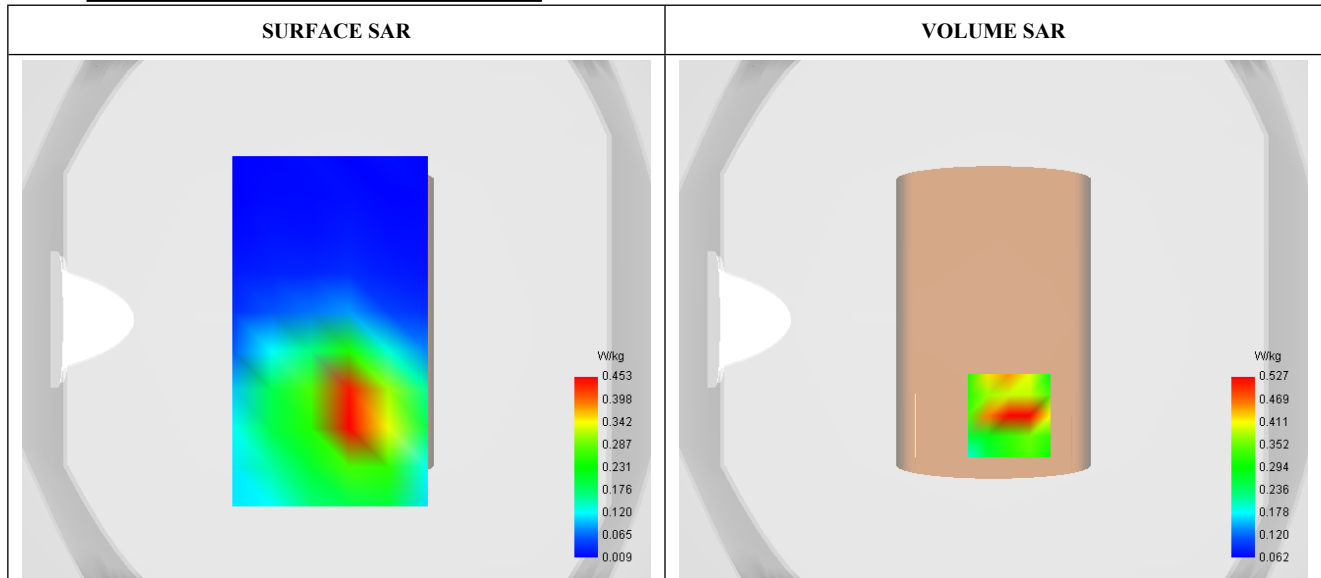


Maximum location: X=6.00, Y=-37.00 ; SAR Peak: 0.77 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.307
SAR 1g (W/Kg)	0.491
Variation (%)	-1.930
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	67.362429

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.749	0.527	0.355	0.280	0.196	0.160	0.111

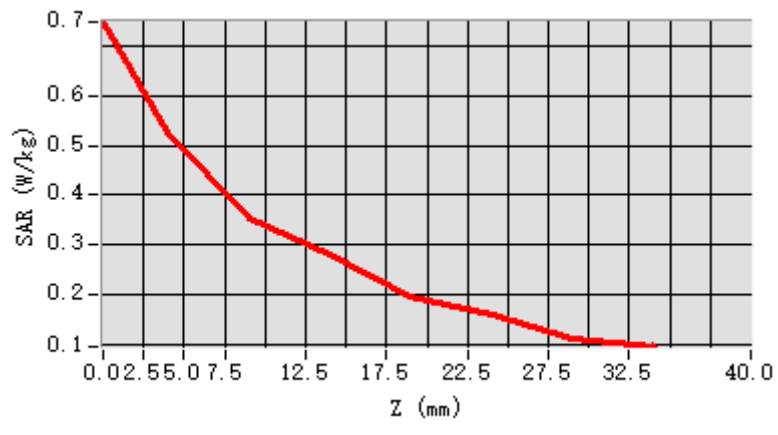

F. 3D Image

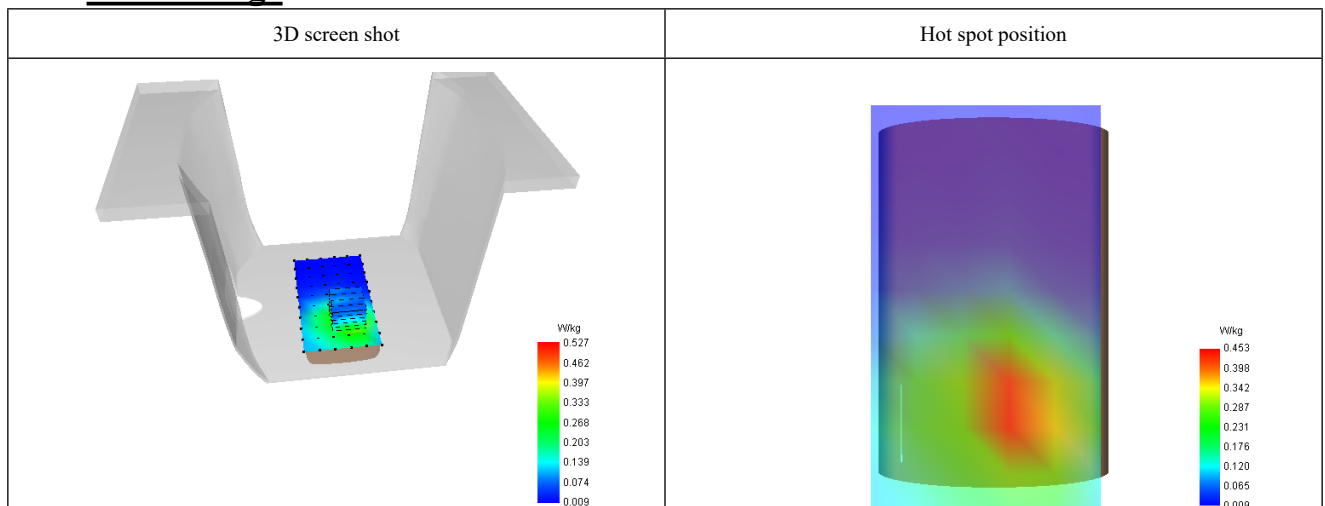

#19

Date of measurement: 29/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Channels/Frequency	Middle (20175)/ frequency 1732.500 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.500
Relative permittivity (real part)	40.122
Relative permittivity (imaginary part)	14.153
Conductivity (S/m)	1.362

C. SAR Surface and Volume

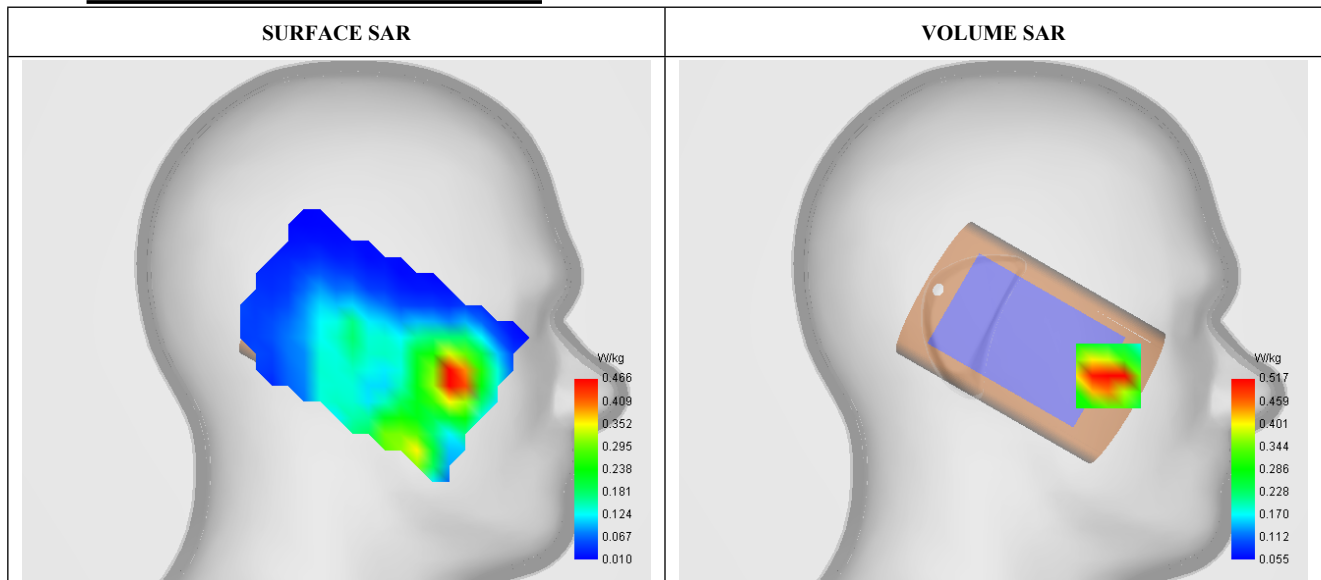


Maximum location: X=-57.00, Y=-27.00 ; SAR Peak: 0.79 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.350
SAR 1g (W/Kg)	0.516
Variation (%)	4.680
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	82.785300

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.601	0.517	0.428	0.338	0.286	0.253	0.199

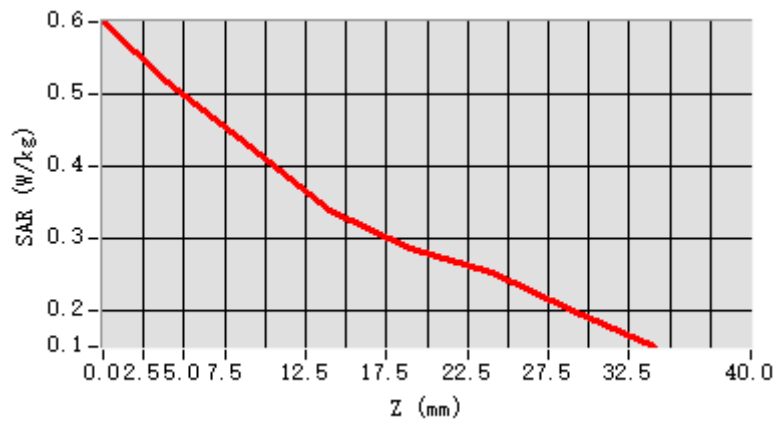

F. 3D Image

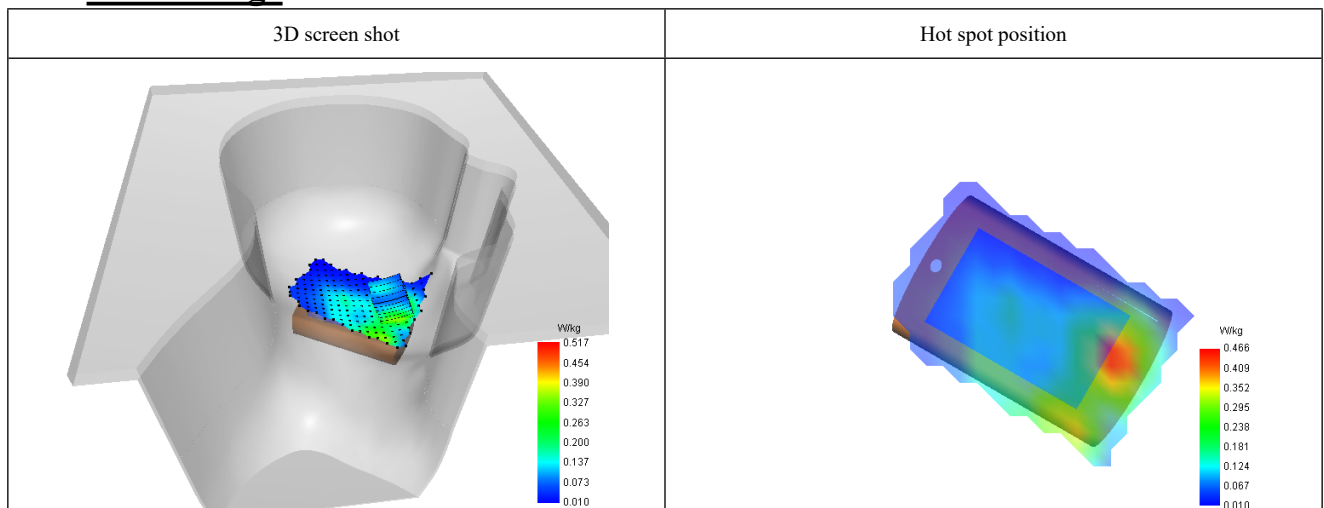

#20

Date of measurement: 29/1/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels/Frequency	Middle (20175)/ frequency 1732.500 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.500
Relative permittivity (real part)	40.122
Relative permittivity (imaginary part)	14.153
Conductivity (S/m)	1.362

C. SAR Surface and Volume

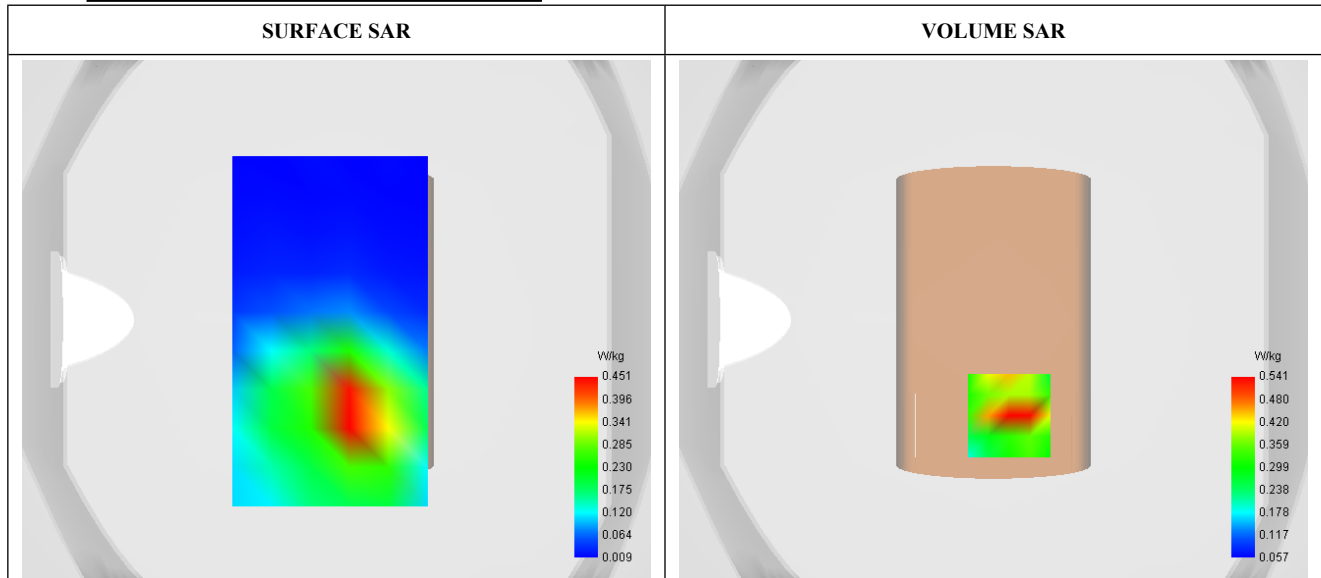

Maximum location: X=6.00, Y=-37.00 ; SAR Peak: 0.75 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.308
SAR 1g (W/Kg)	0.494
Variation (%)	-4.800
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	67.467652