

Ti-CC26060416-ATD

Meas.1 Body Plane with Back Side 0mm on 0 Channel in Bluetooth mode with ANT0

Date: 2026.07.01

Communication System Band: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.309

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.706$ S/m; $\epsilon_r = 40.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71, 7.71, 7.71); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch0/Area Scan (81x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.102 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.311 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 41.5%

Maximum value of SAR (measured) = 0.081 W/kg

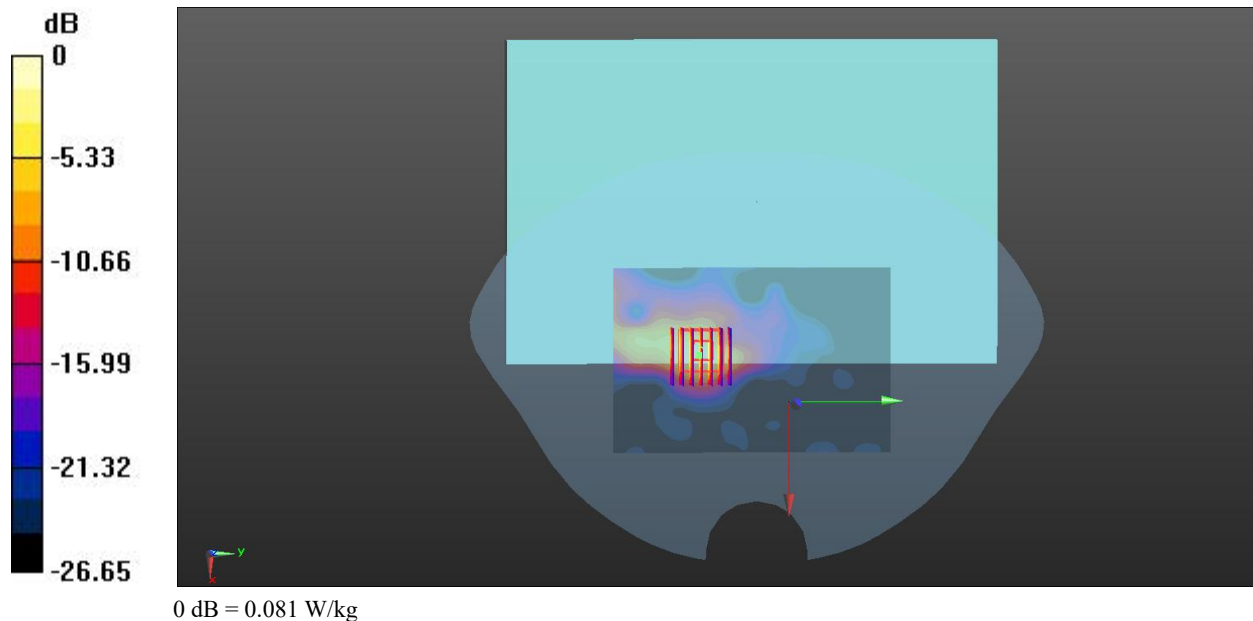

Ti-CC26060416-ATD

Meas.2 Body Plane with Back Side 0mm on 11 Channel in IEEE802.11b mode with ANT0

Date: 2026.07.01

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.009

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 37.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71, 7.71, 7.71); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.686 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5860 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 0.672 W/kg

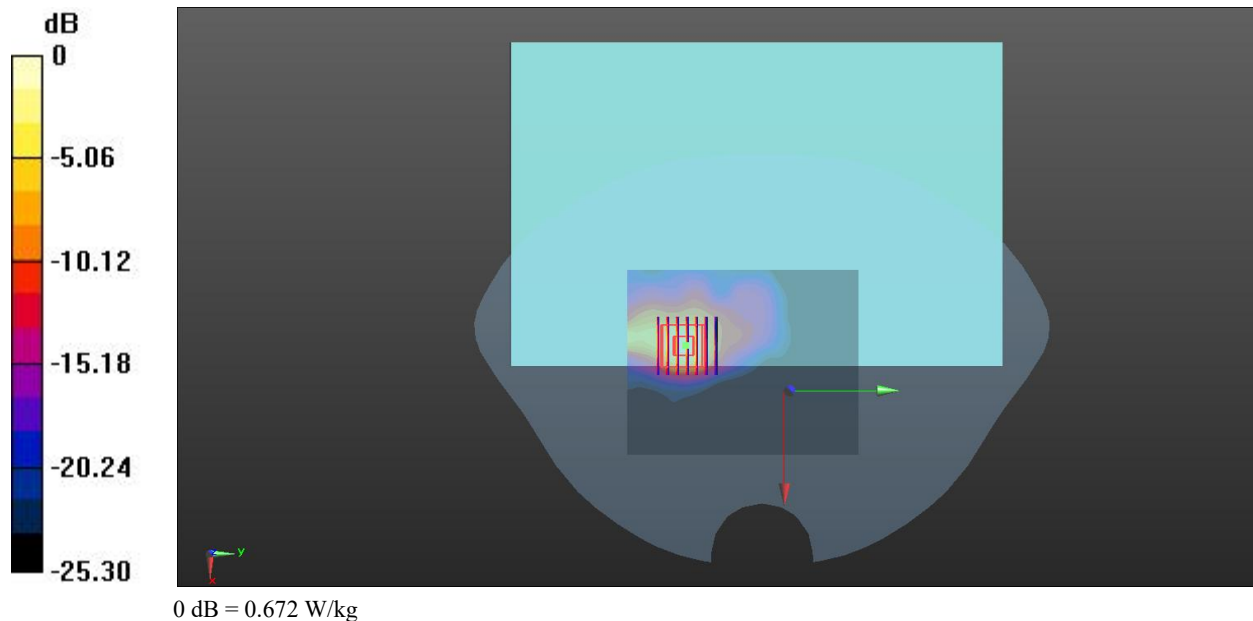

Ti-CC26060416-ATD

Meas.3 Body Plane with Back Side 0mm on 38 Channel in IEEE802.11n40 mode with ANT0

Date: 2026.07.02

Communication System Band: 5.2G; Frequency: 5190 MHz; Duty Cycle: 1:1.046

Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 36.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5, 5.5, 5.5); Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch38/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.07 W/kg

Ch38/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.764 V/m; Power Drift = 3.27 dB


Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 1.74 W/kg

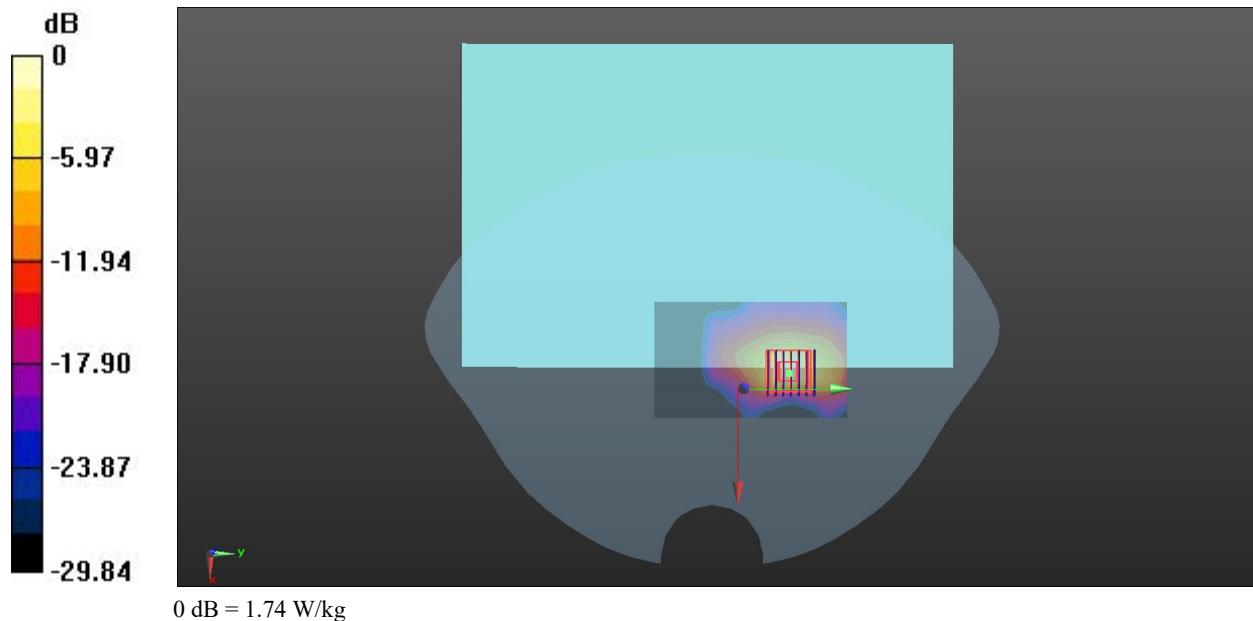

Ti-CC26060416-ATD

Meas.4 Body Plane with Back Side 0mm on 159 Channel in IEEE802.11n40 mode with ANT0

Date: 2026.07.02

Communication System Band: 5.8G; Frequency: 5795 MHz; Duty Cycle: 1:1.046

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 35.55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.99, 4.99, 4.99); Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch159/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.54 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.721 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.06 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 2.07 W/kg

