

Ti-CC26070315-ATD

Meas.1 Body Plane with Back Side 0mm on 0 Channel in Bluetooth mode with ANT0

Date: 2026.08.04

Communication System Band: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.309

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.732$ S/m; $\epsilon_r = 38.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch0/Area Scan (81x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.086 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.605 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.089 W/kg

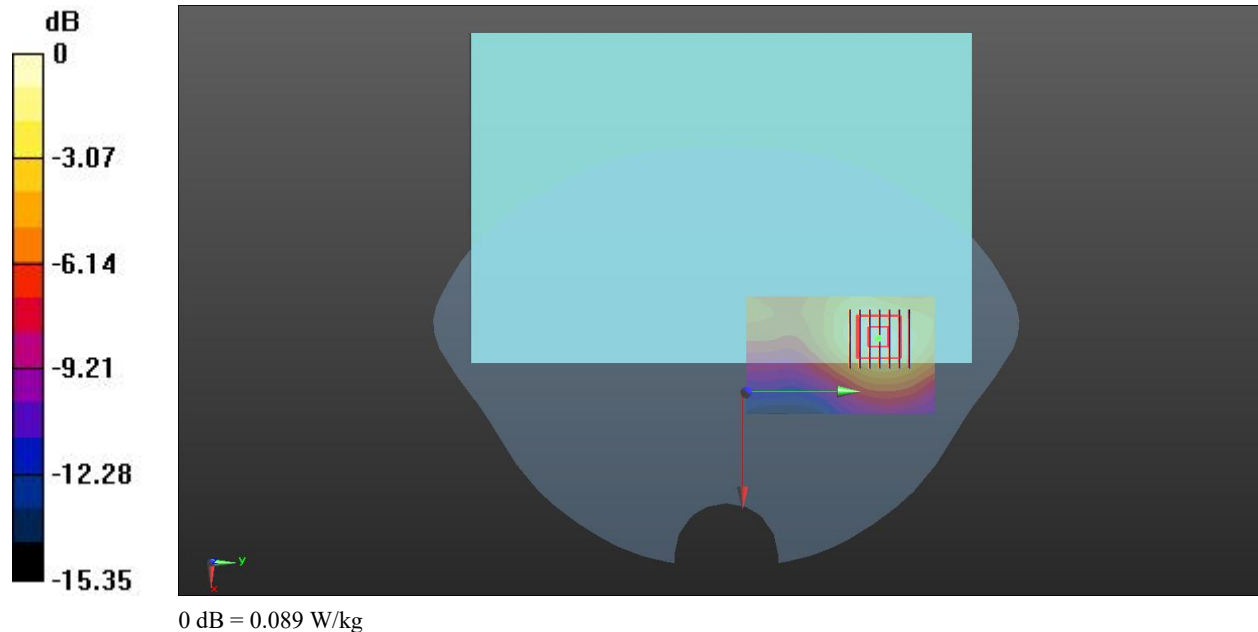

Ti-CC26070315-ATD

Meas.2 Body Plane with Back Side 0mm on 11 Channel in IEEE802.11b mode with ANT0

Date: 2026.08.04

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.009

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.086$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.600 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.365 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.585 W/kg

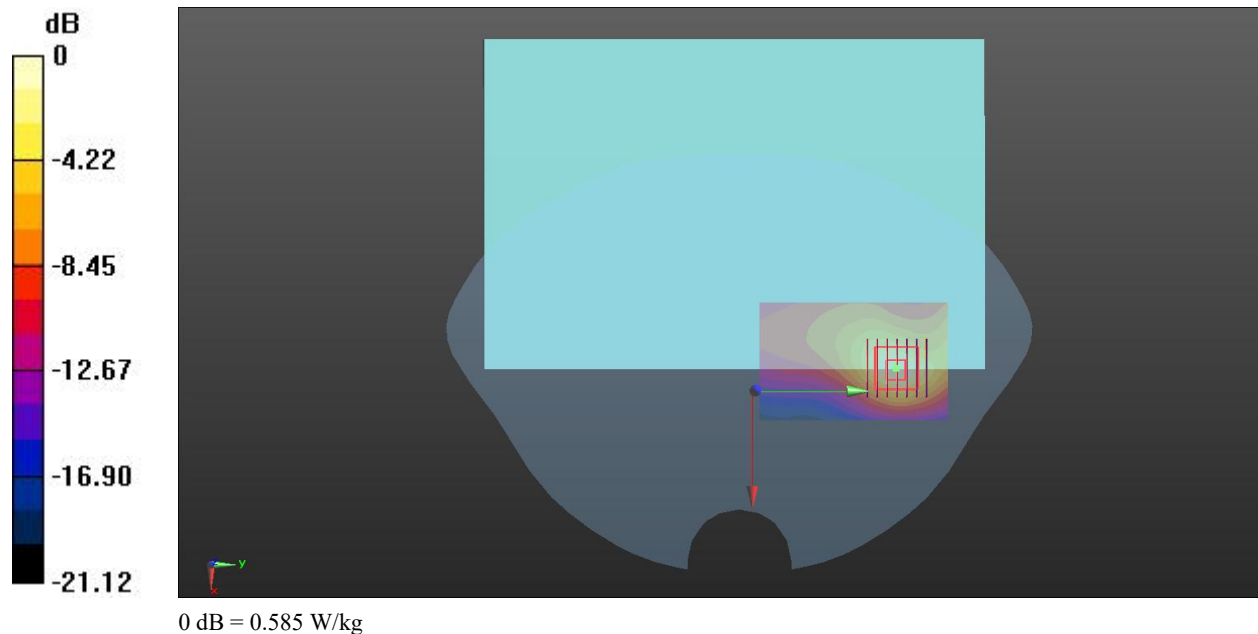

Ti-CC26070315-ATD

Meas.3 Body Plane with Back Side 0mm on 38 Channel in IEEE802.11n40 mode with ANT0

Date: 2026.08.04

Communication System Band: 5.2G; Frequency: 5190 MHz; Duty Cycle: 1:1.046

Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 4.761$ S/m; $\epsilon_r = 36.914$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.63, 5.94, 5.72); Calibrated: 2025.08.06
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch38/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.932 W/kg

Ch38/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.349 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.796 W/kg

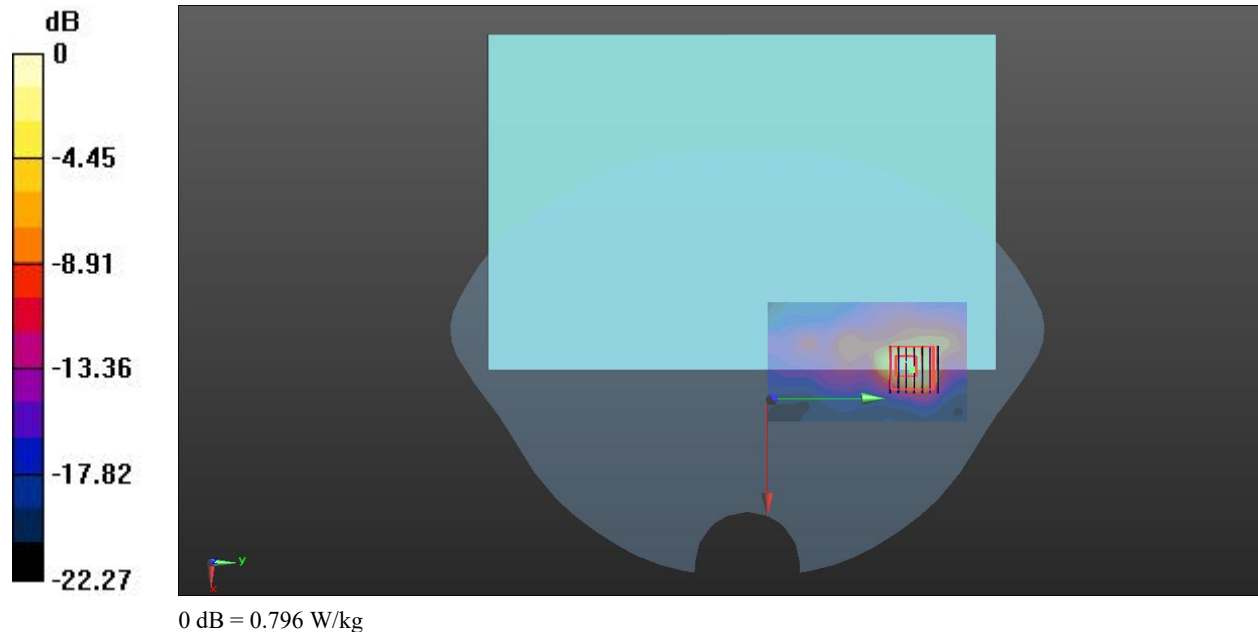

Ti-CC26070315-ATD

Meas.4 Body Plane with Back Side 0mm on 151 Channel in IEEE802.11n40 mode with ANT0

Date: 2026.08.04

Communication System Band: 5.8G; Frequency: 5755 MHz; Duty Cycle: 1:1.046

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 34.762$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(5.1, 5.39, 5.18); Calibrated: 2025.08.06
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7474)

Ch151/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Ch151/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.106 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 1.10 W/kg

