






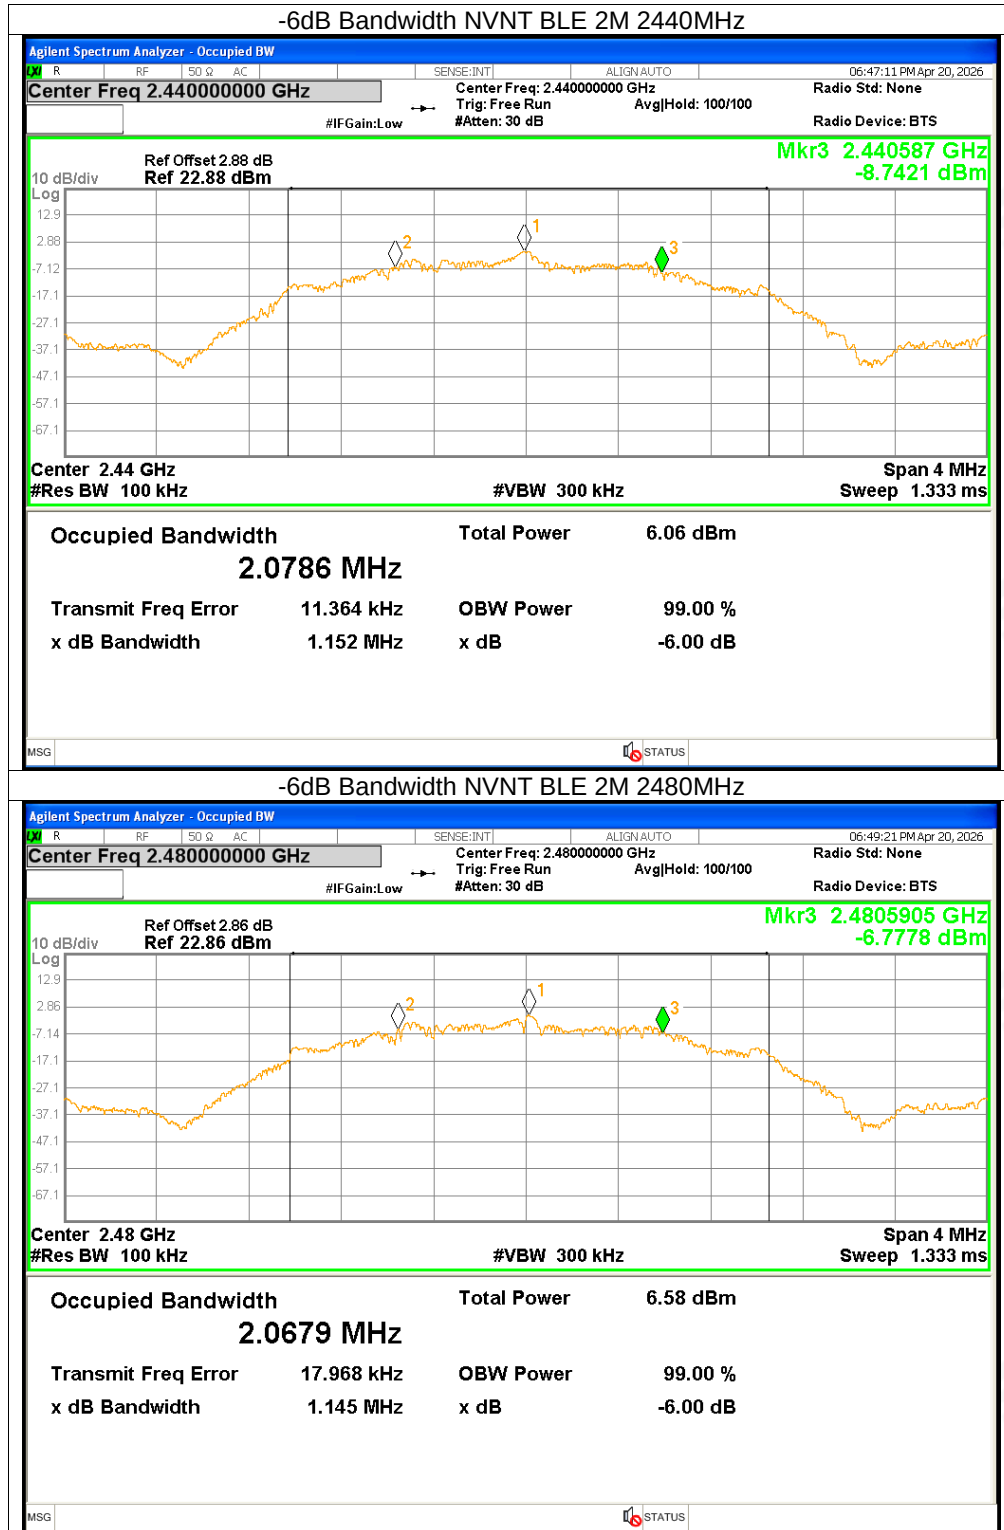


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-14.91	≤ -8	Pass
NVNT	BLE 1M	2440	-14.8	≤ -8	Pass
NVNT	BLE 1M	2480	-14.11	≤ -8	Pass
NVNT	BLE 2M	2402	-17.49	≤ -8	Pass
NVNT	BLE 2M	2440	-17.39	≤ -8	Pass
NVNT	BLE 2M	2480	-16.68	≤ -8	Pass

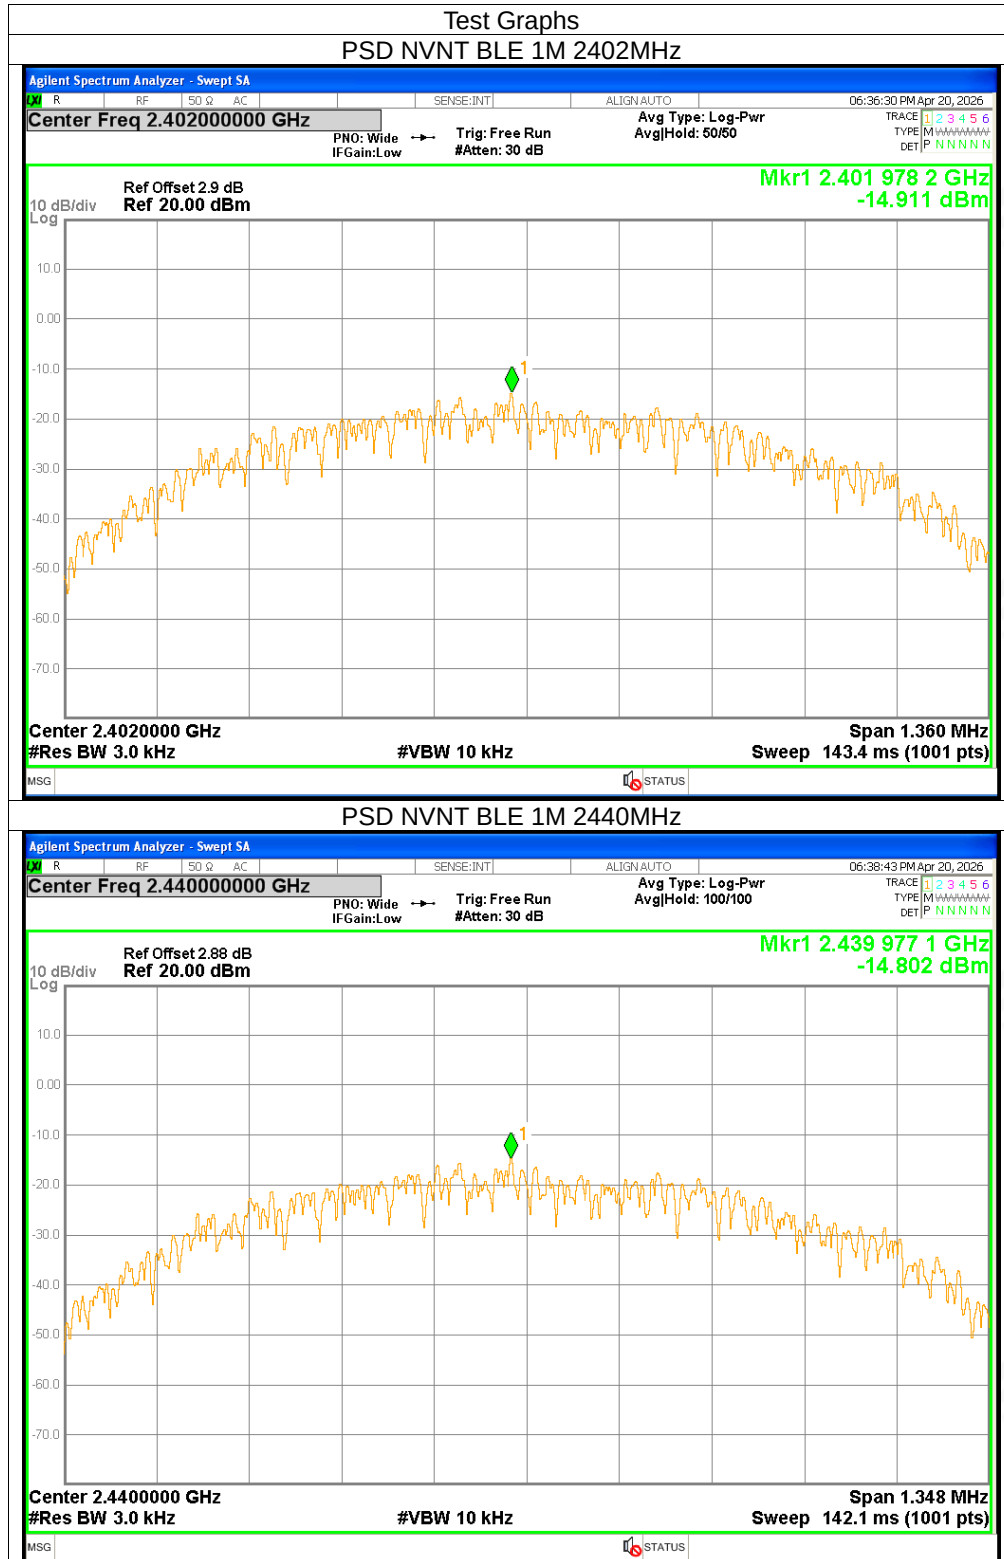

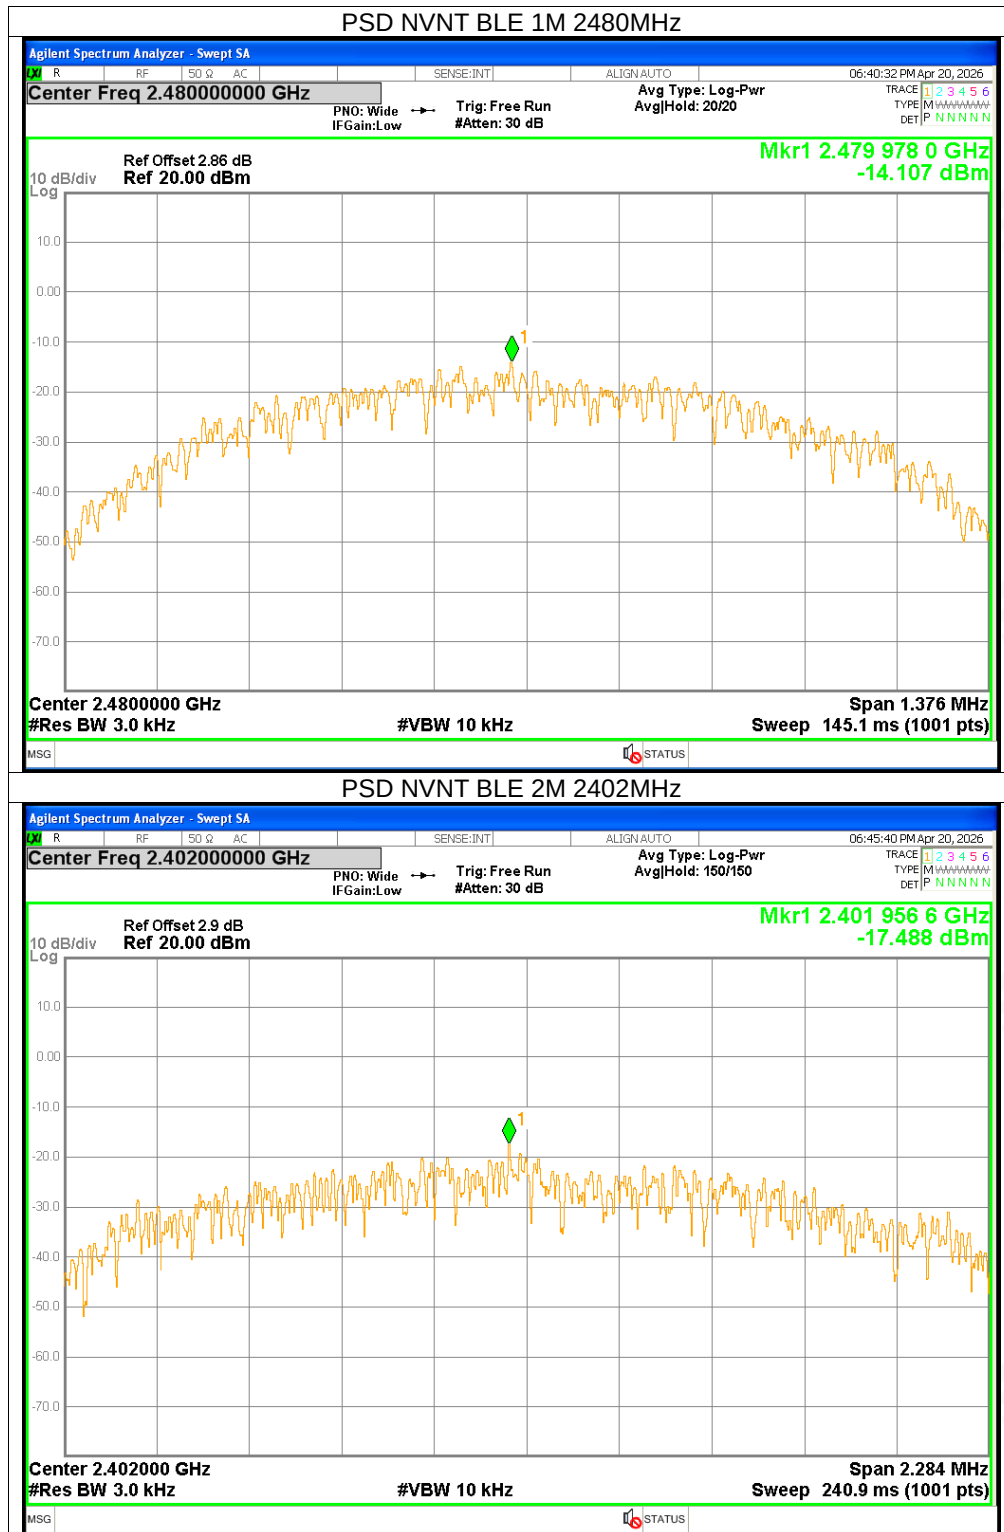


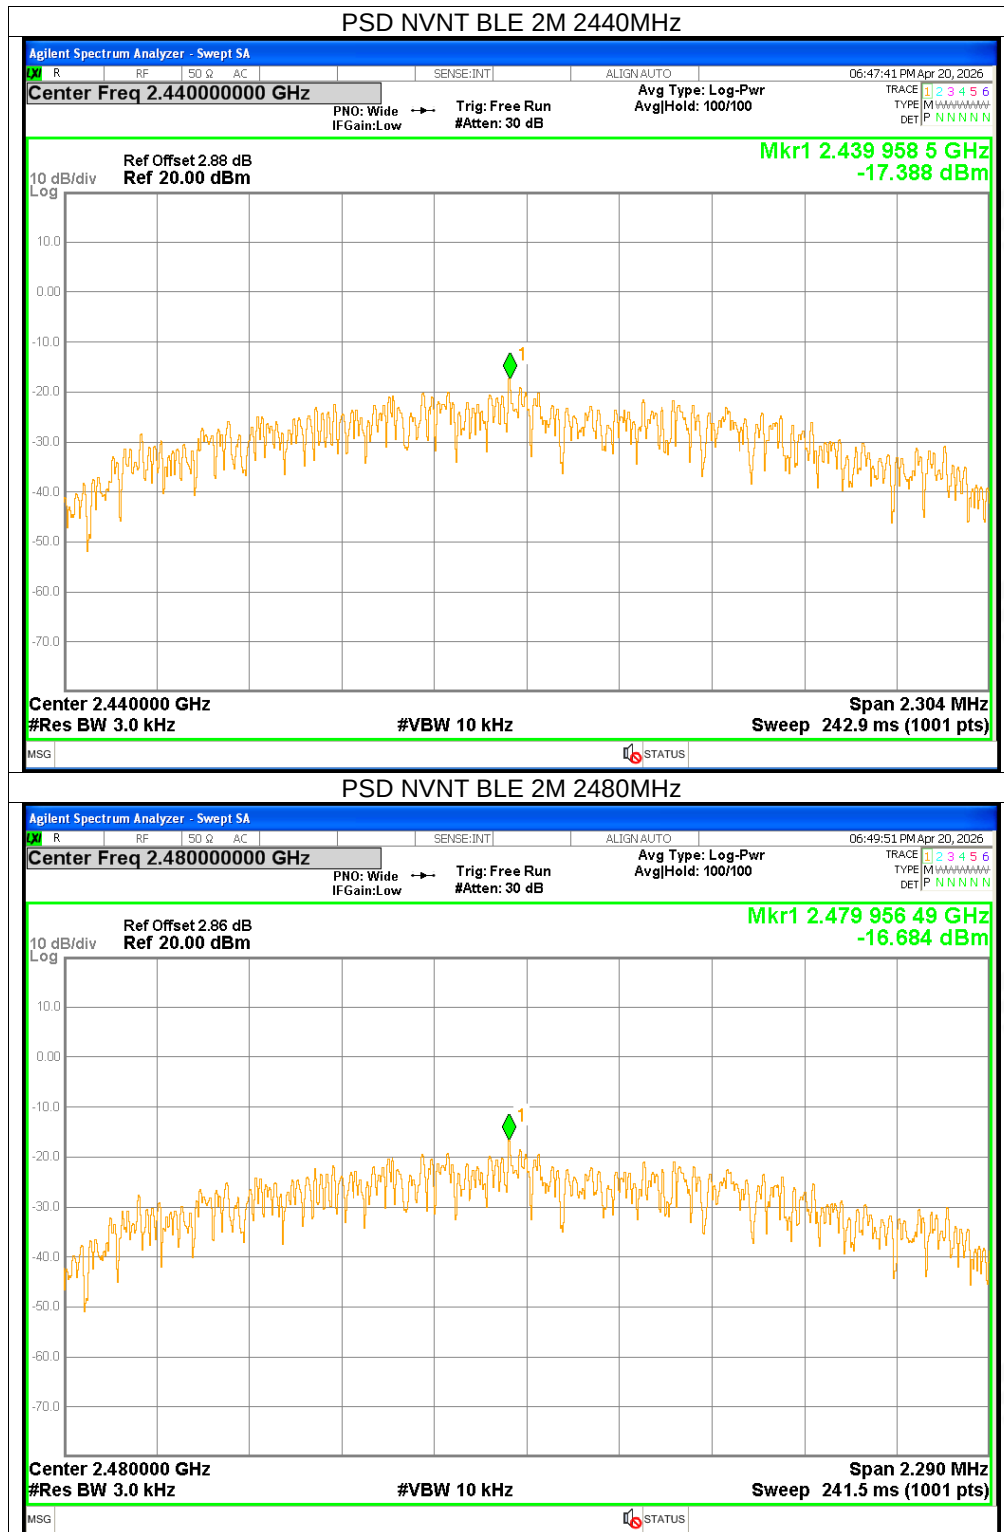






Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-55.53	≤ -20	Pass
NVNT	BLE 1M	2480	-56.28	≤ -20	Pass
NVNT	BLE 2M	2402	-30.85	≤ -20	Pass
NVNT	BLE 2M	2480	-56.96	≤ -20	Pass

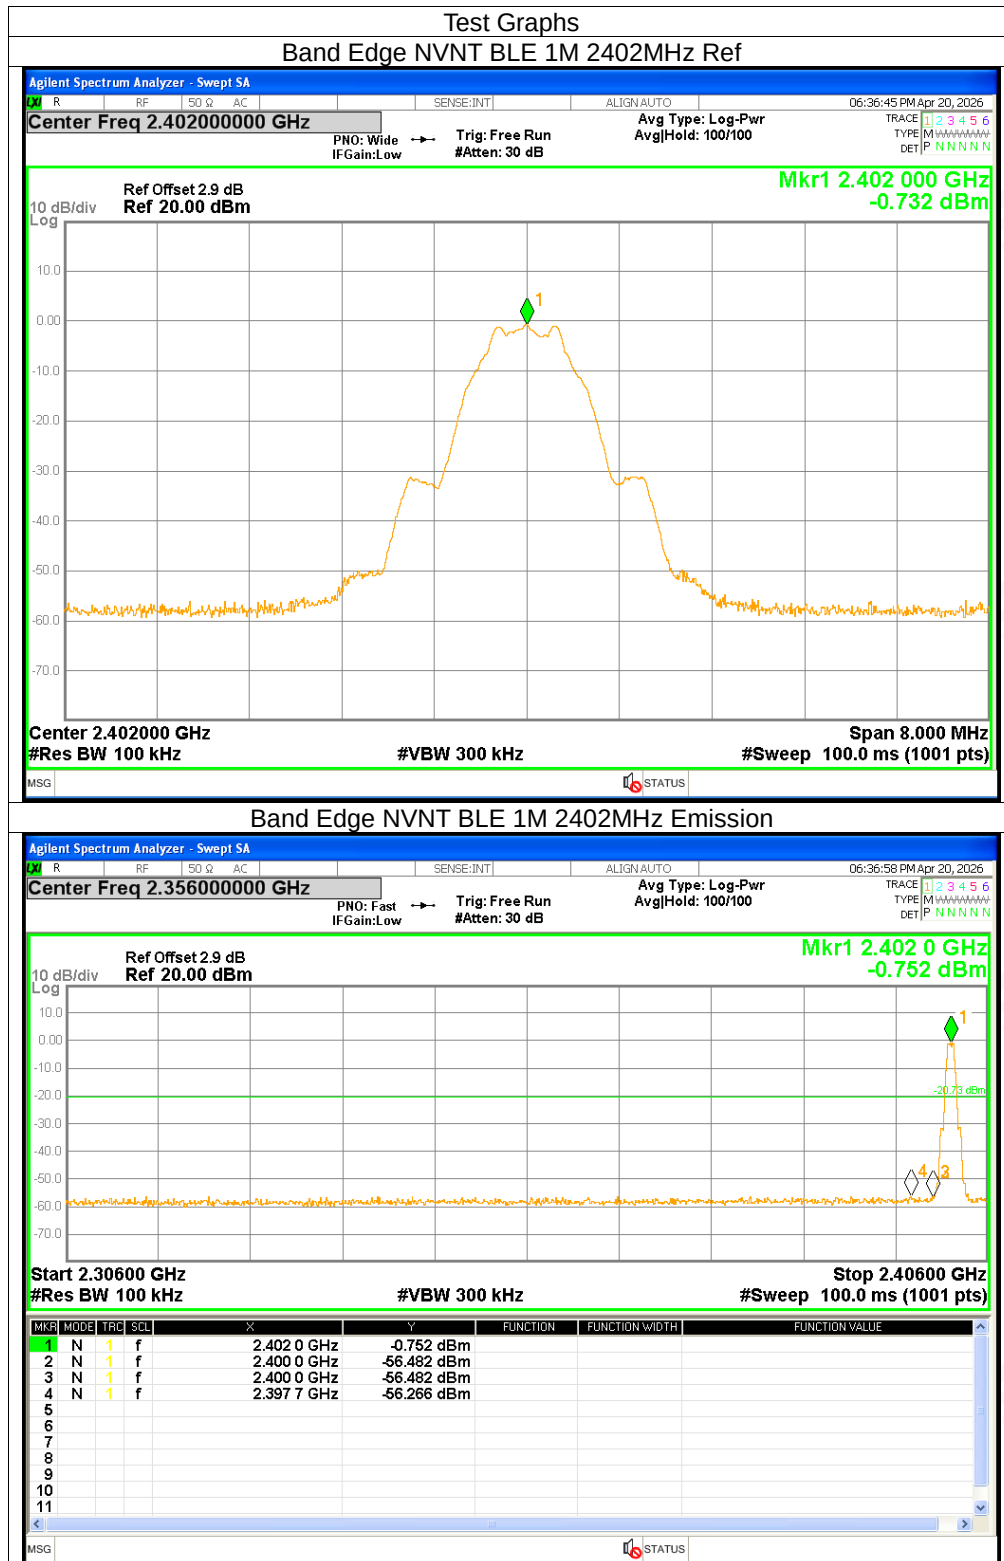

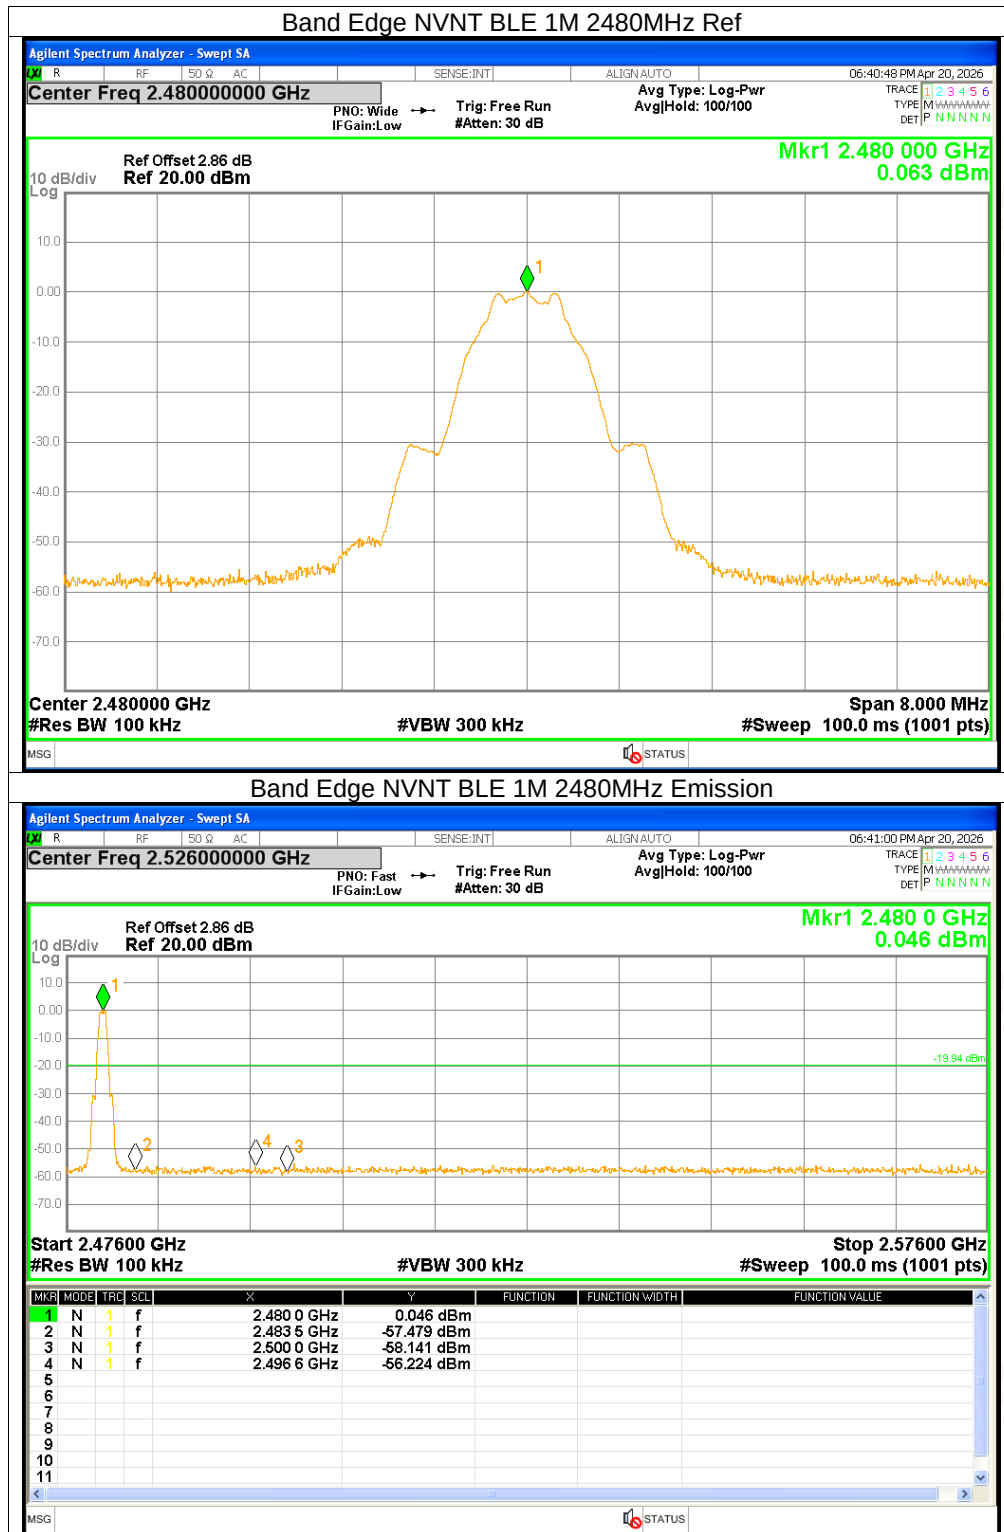

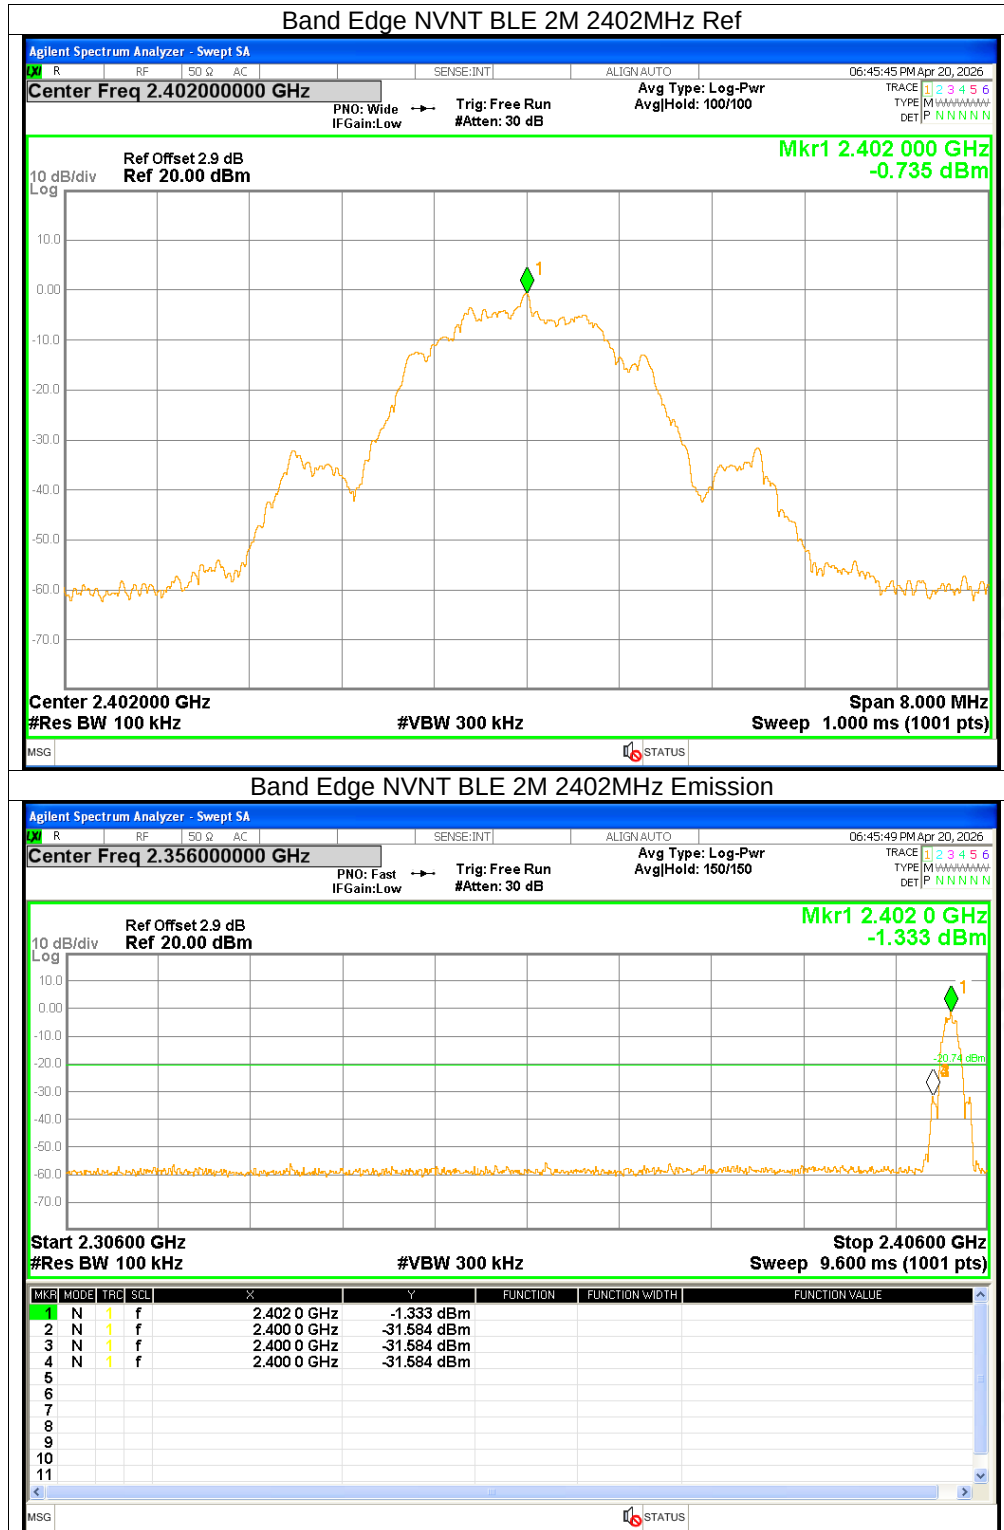


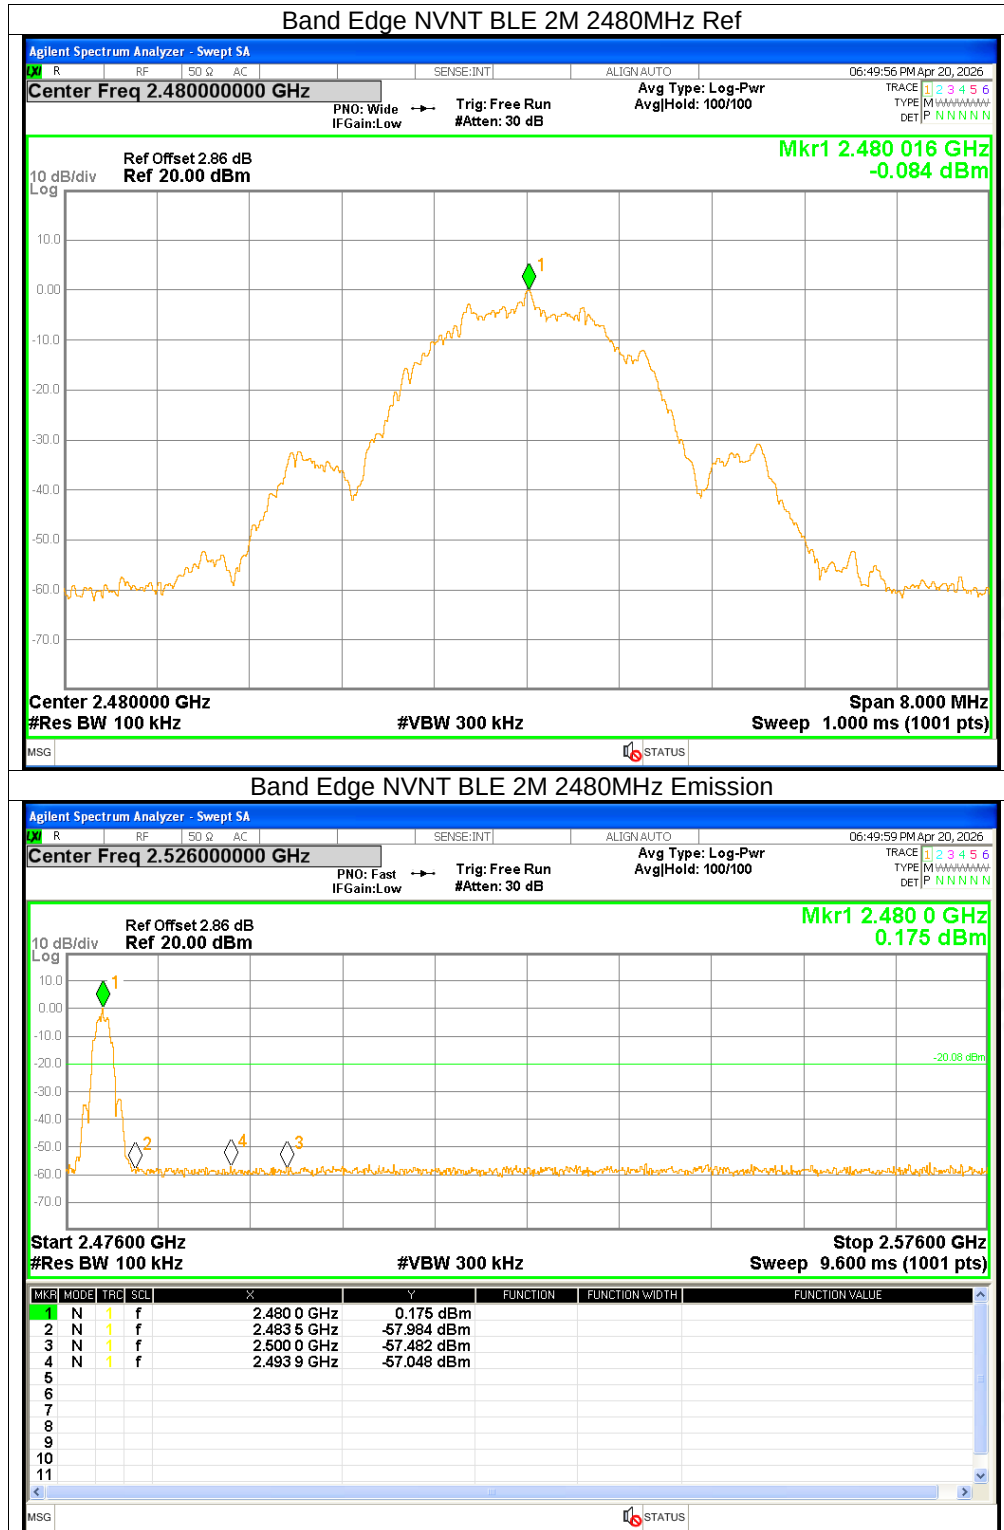






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-35.91	<=-20	Pass
NVNT	BLE 1M	2440	-42.1	<=-20	Pass
NVNT	BLE 1M	2480	-43.62	<=-20	Pass
NVNT	BLE 2M	2402	-52.34	<=-20	Pass
NVNT	BLE 2M	2440	-49.95	<=-20	Pass
NVNT	BLE 2M	2480	-53.02	<=-20	Pass

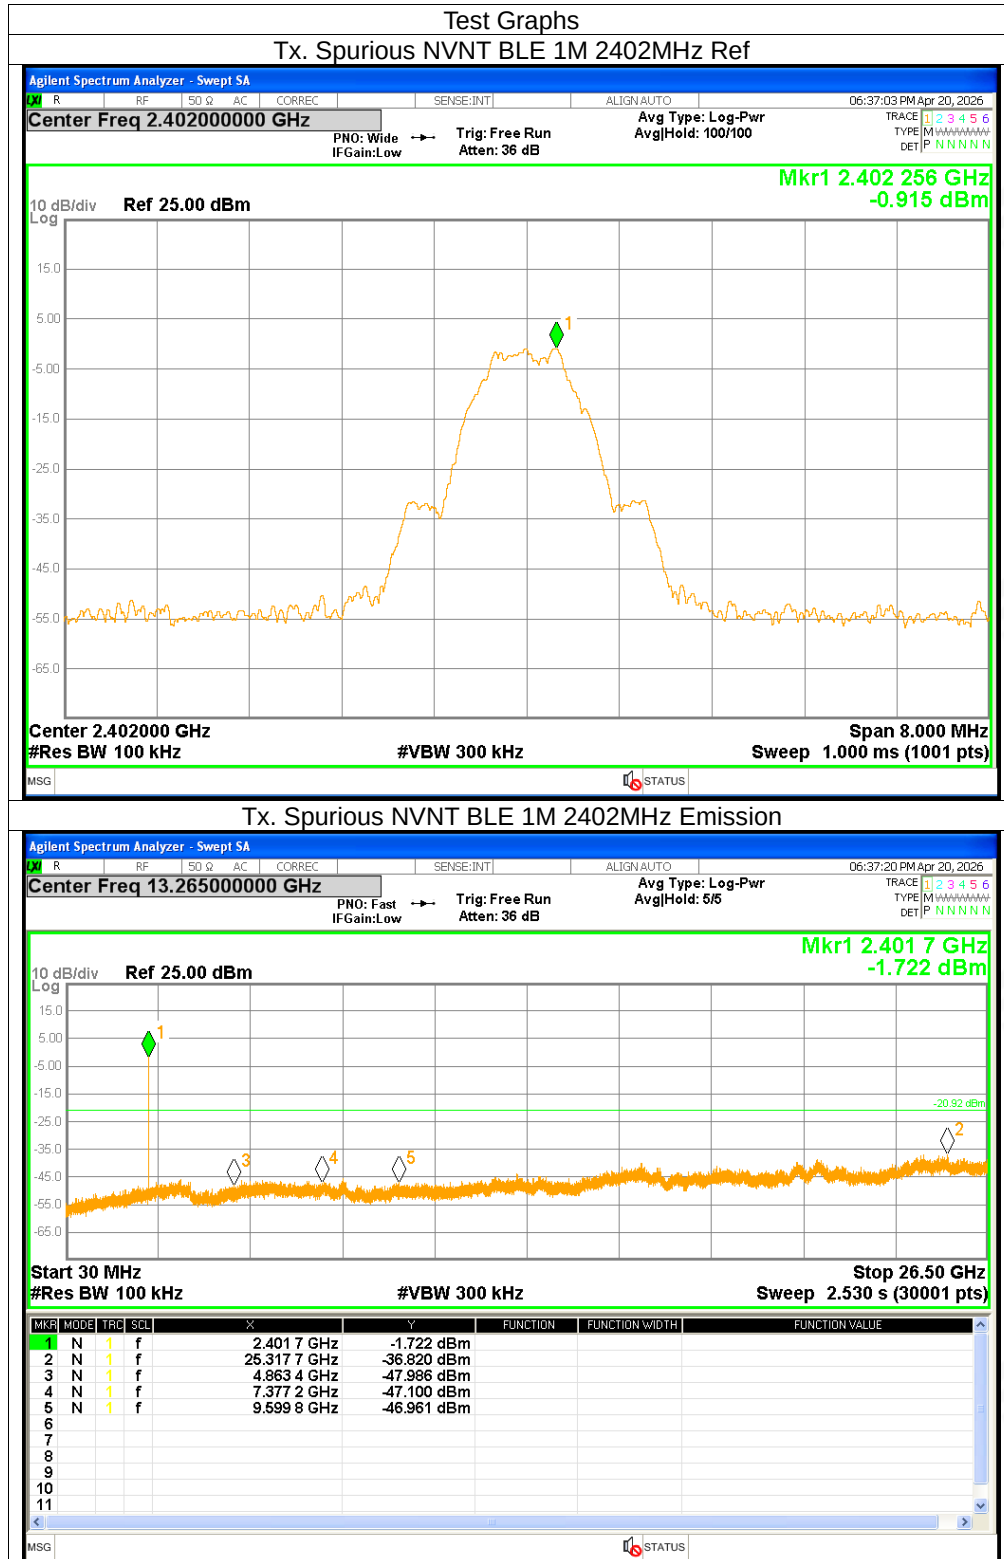


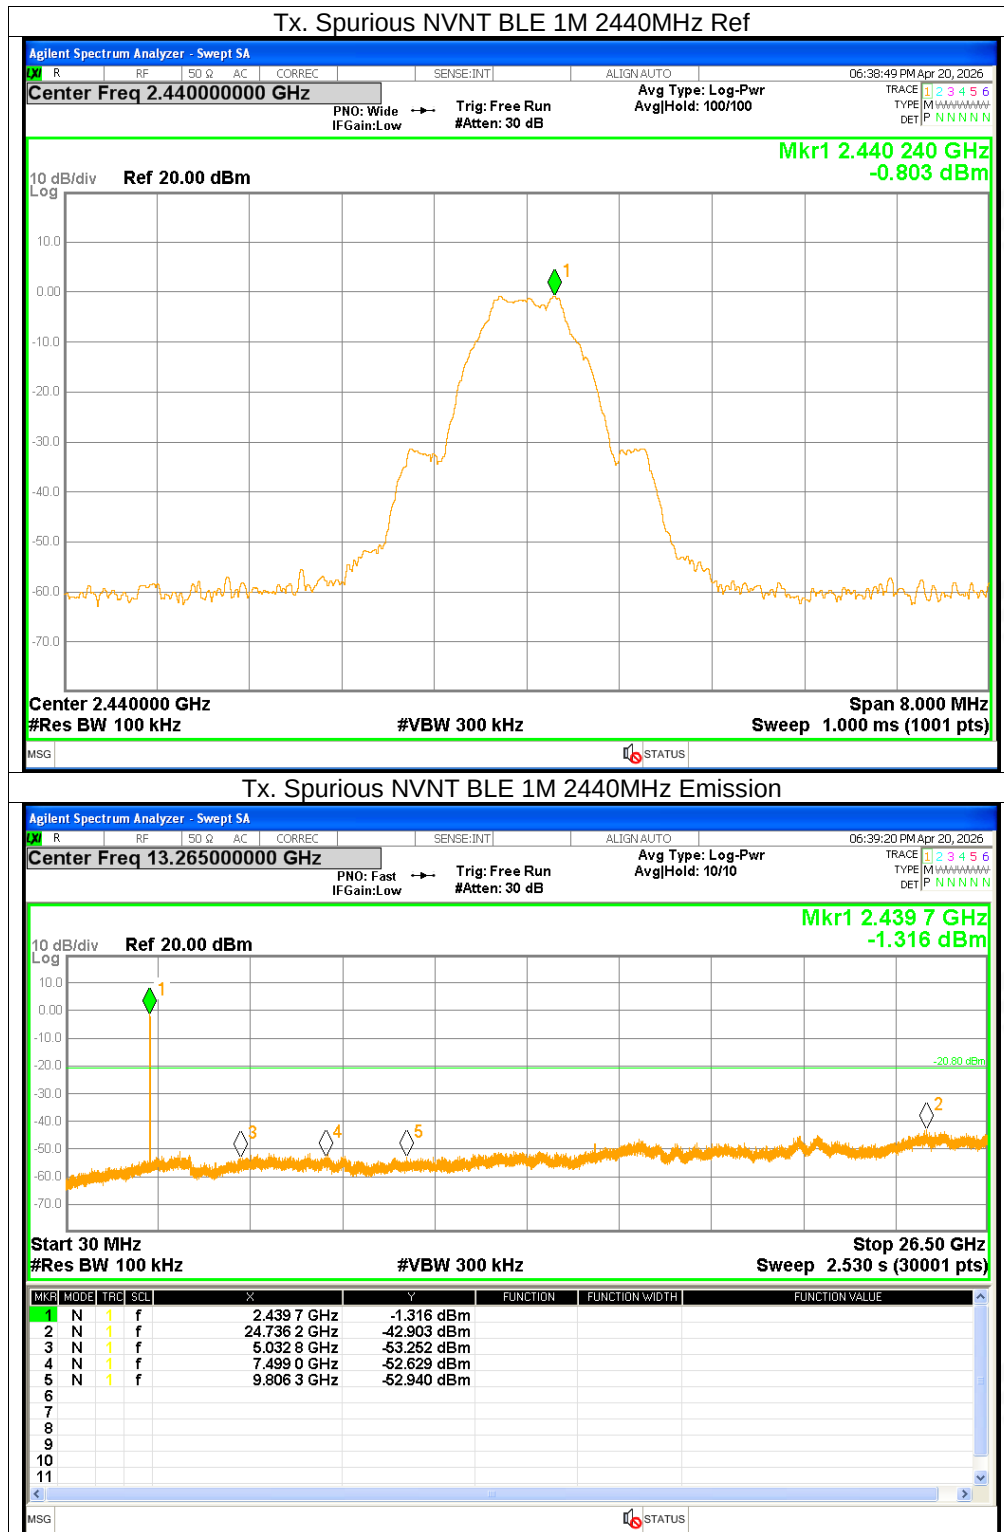

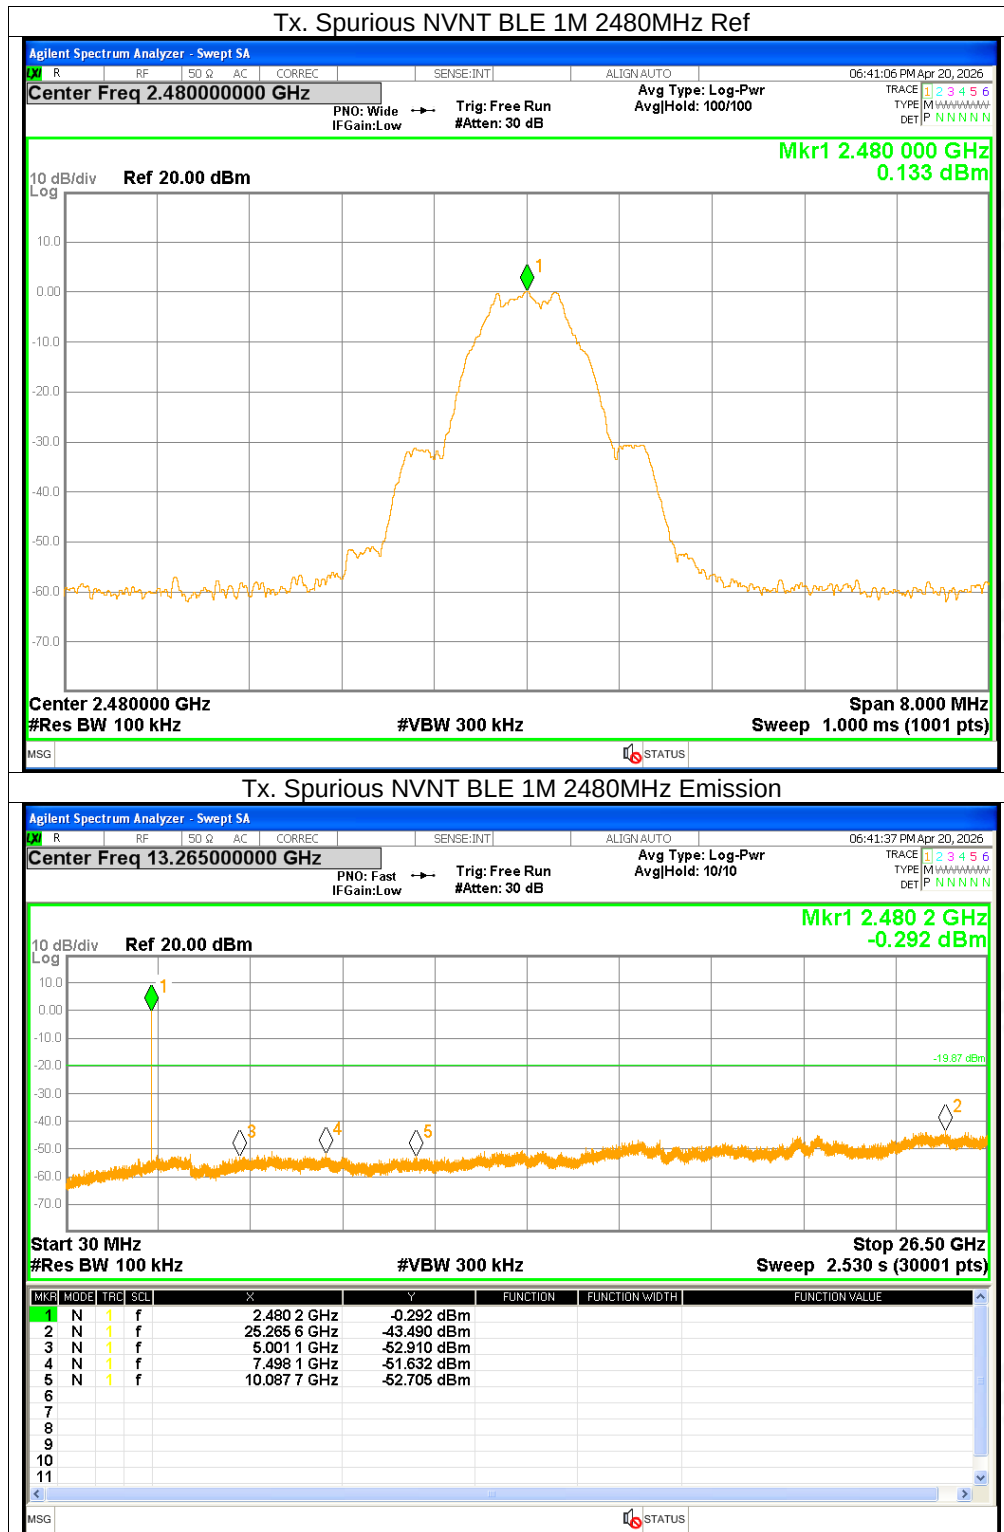

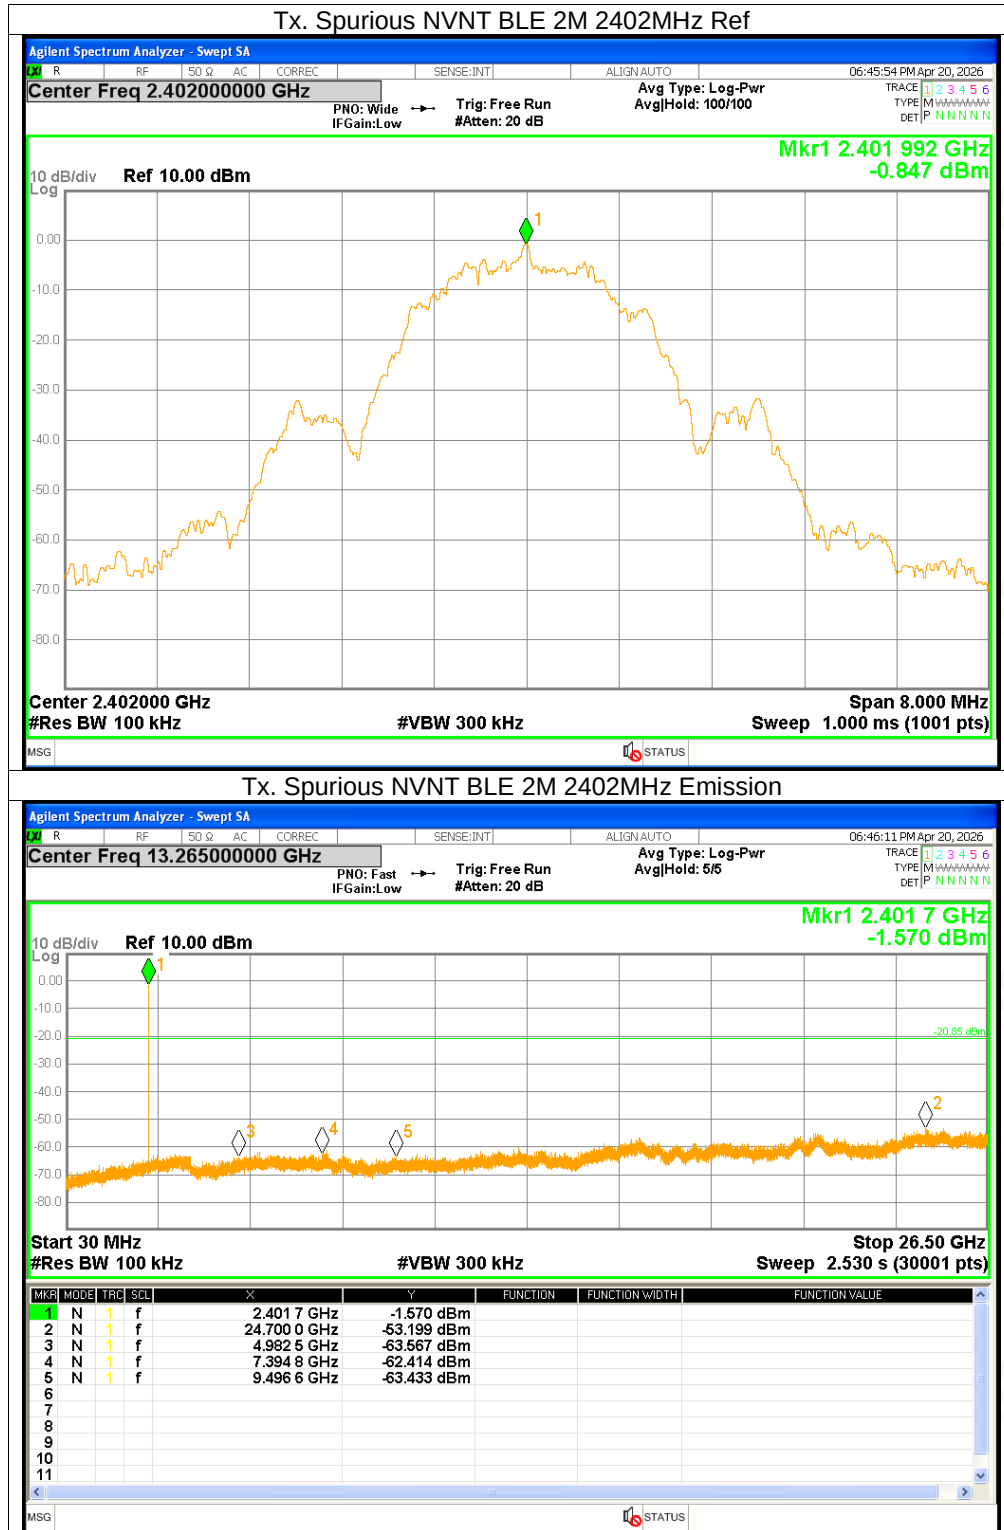

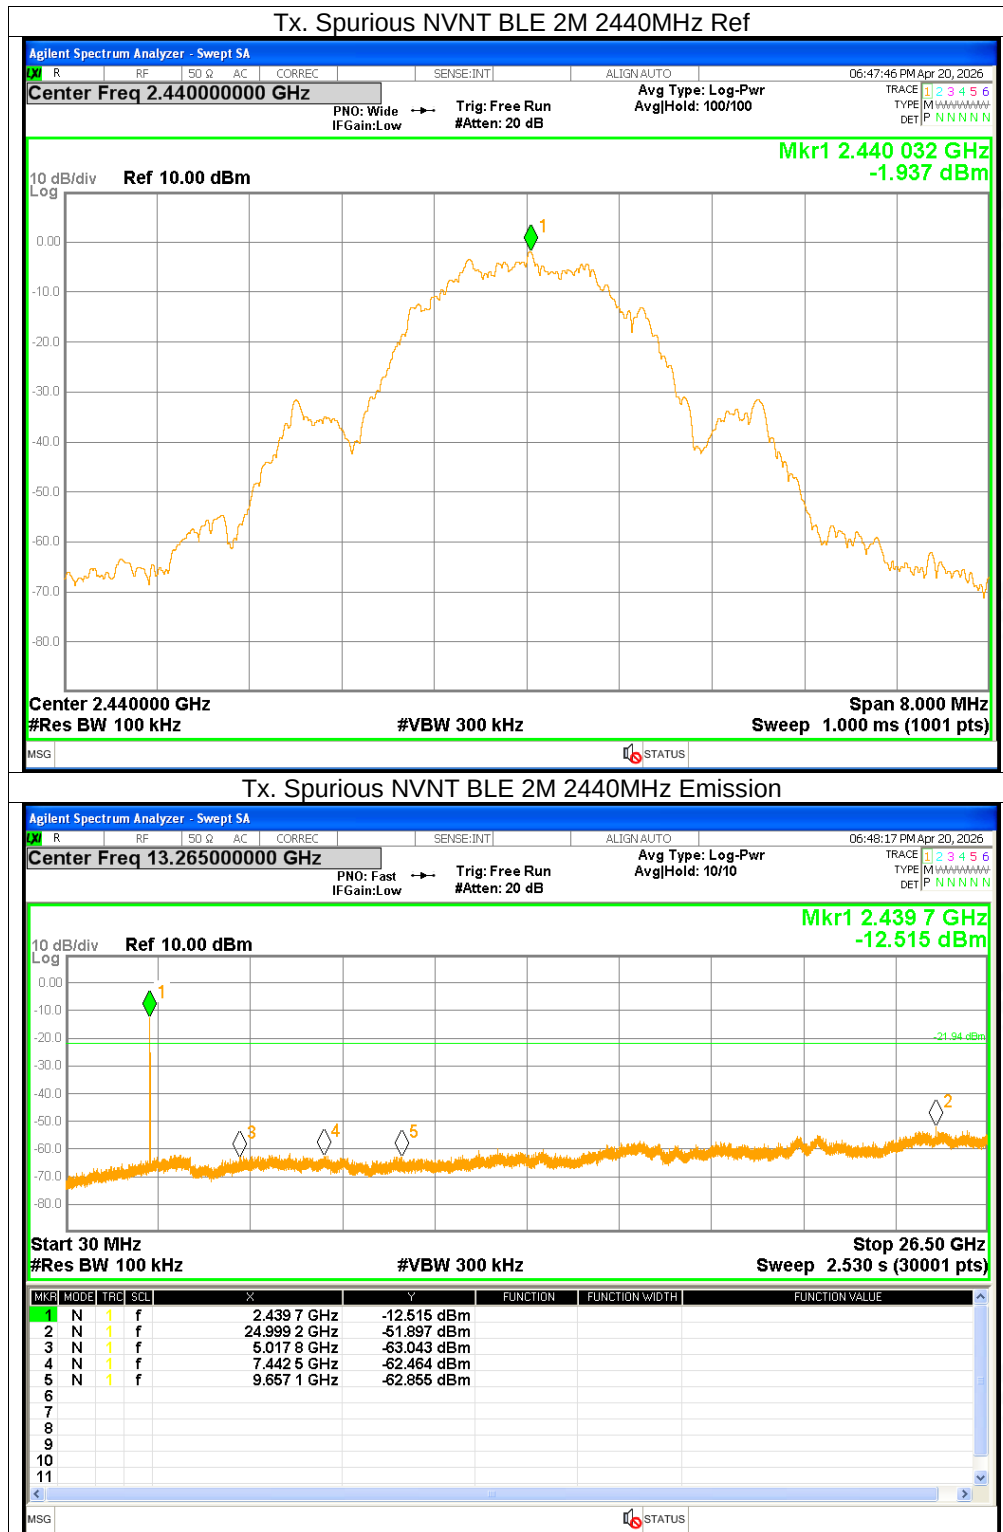

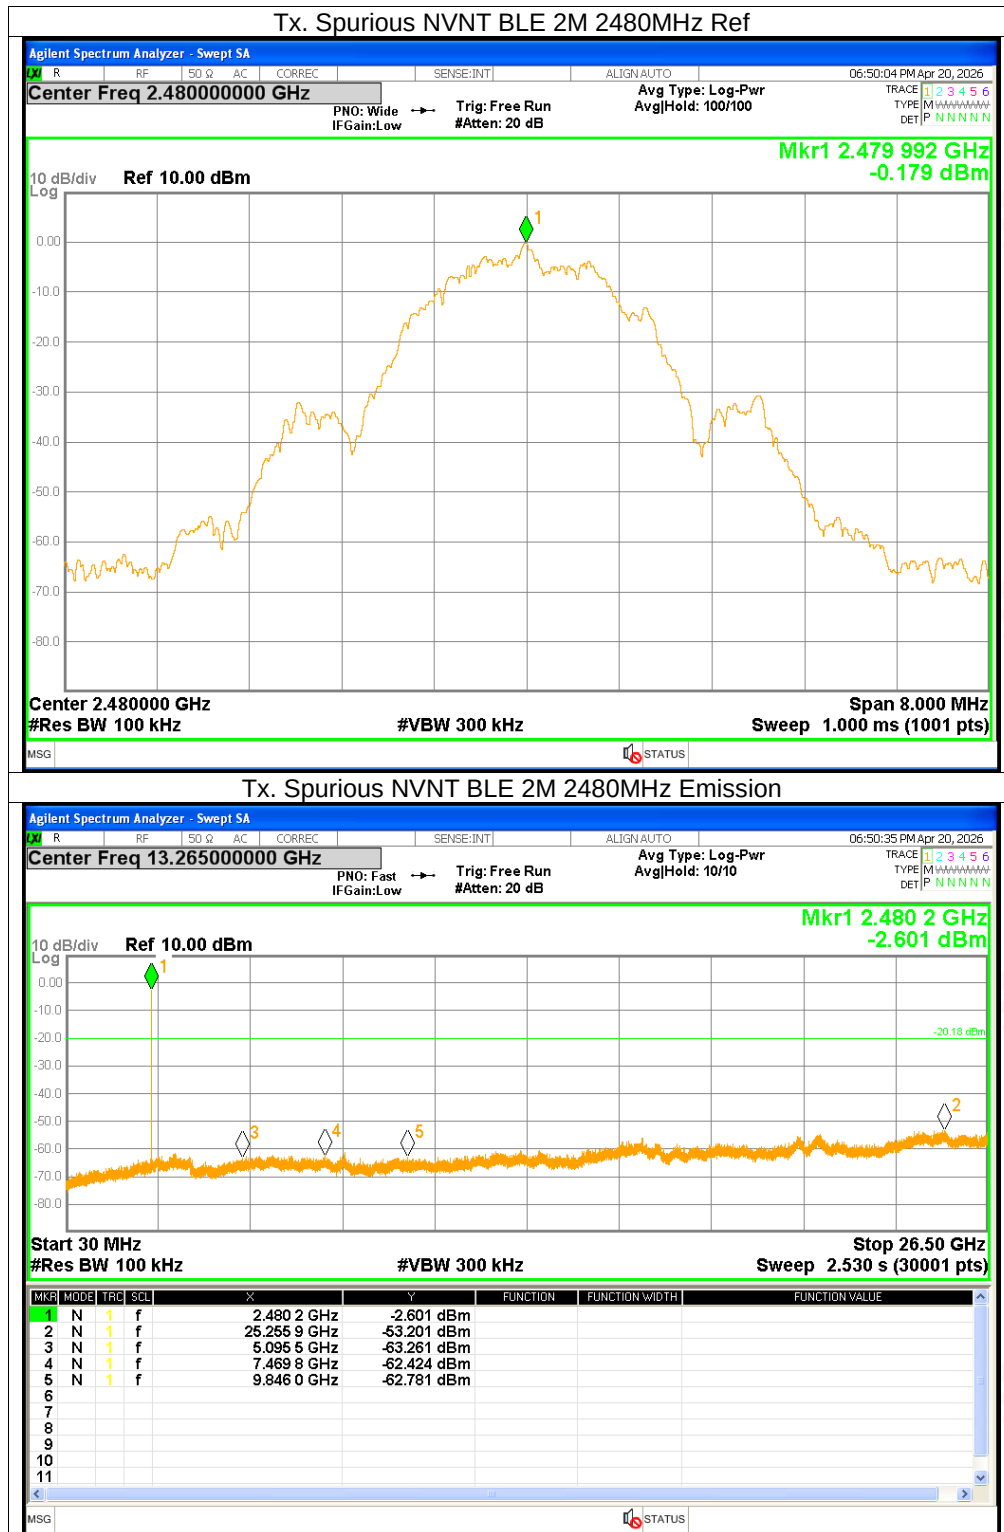



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****