






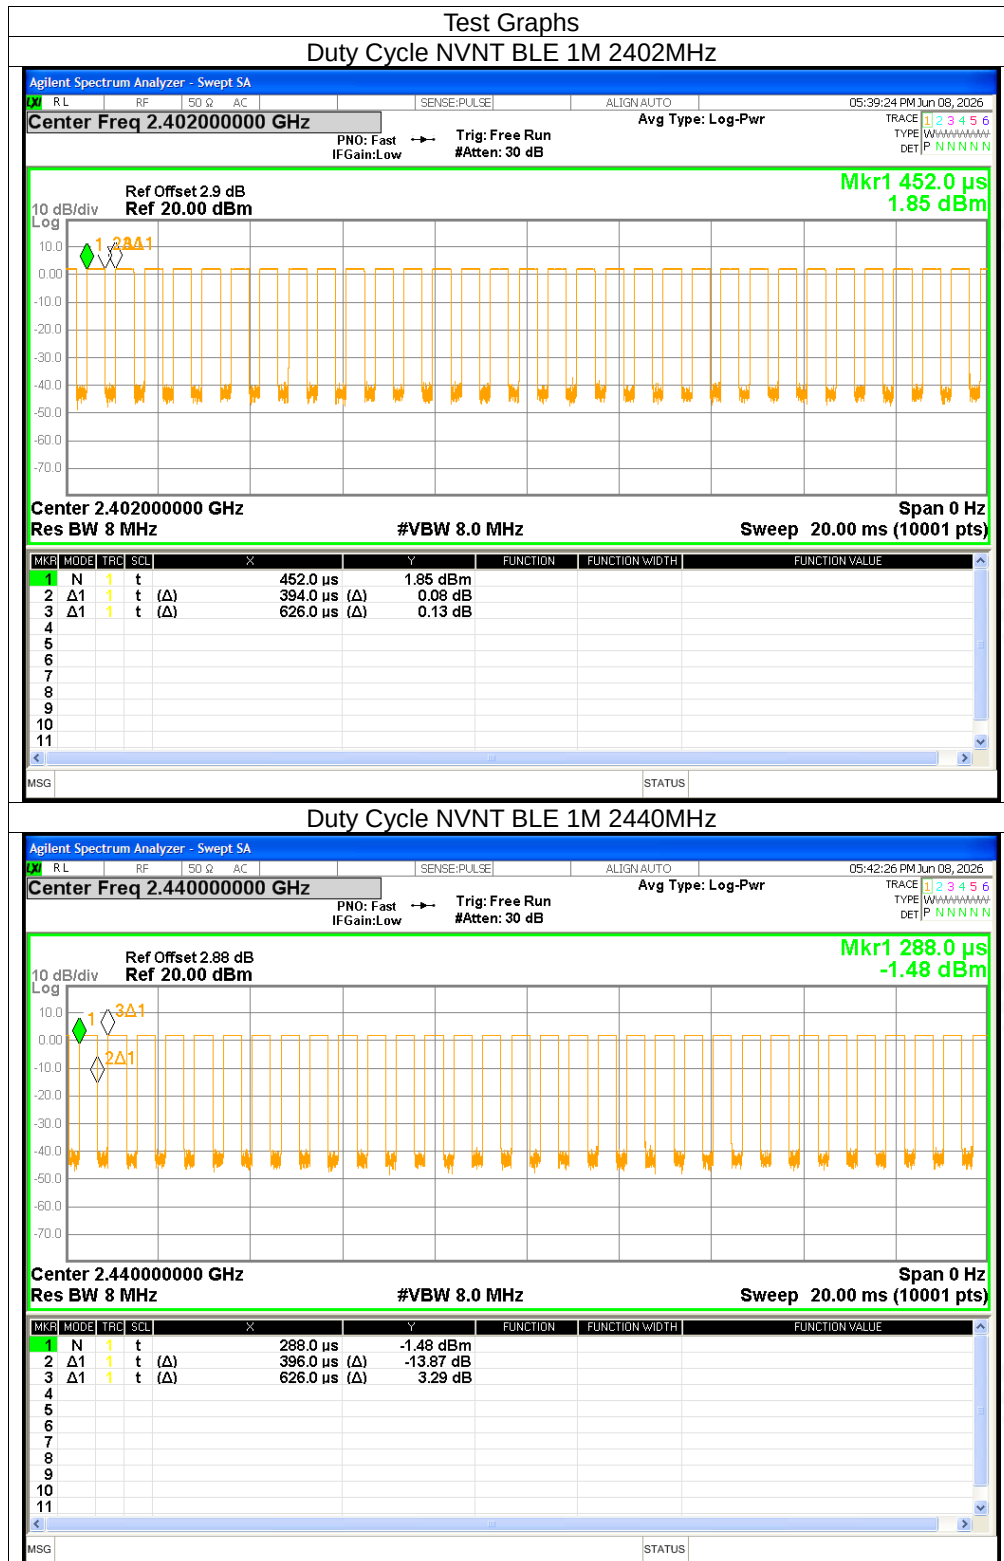


Duty Cycle NVNT BLE 1M 2480MHz

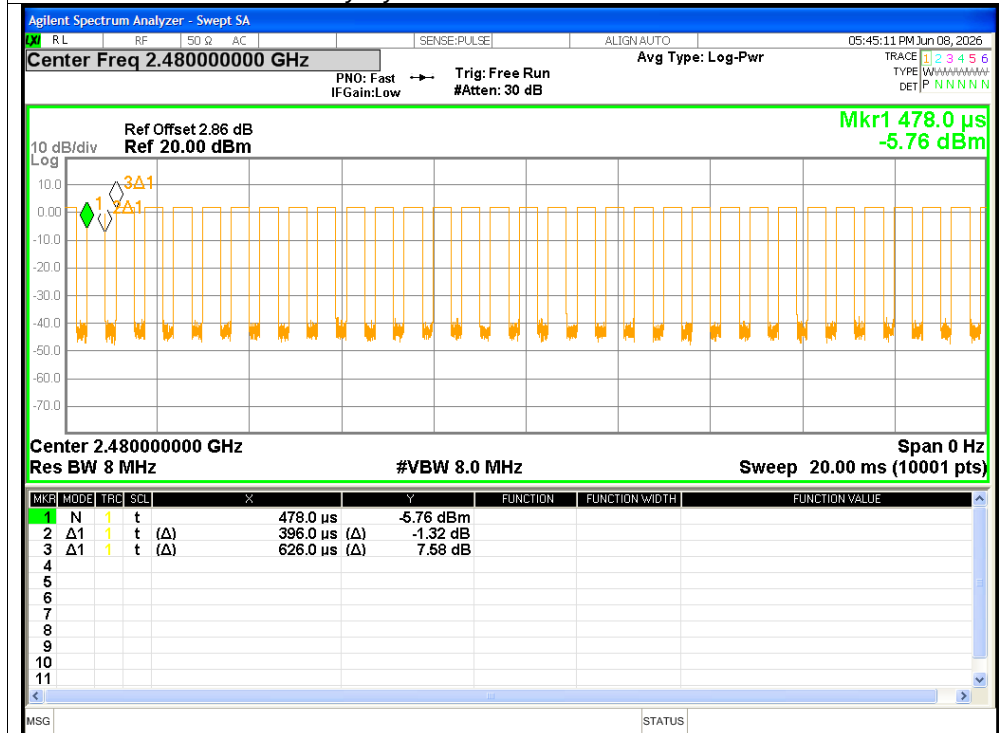

Duty Cycle NVNT BLE 2M 2404MHz

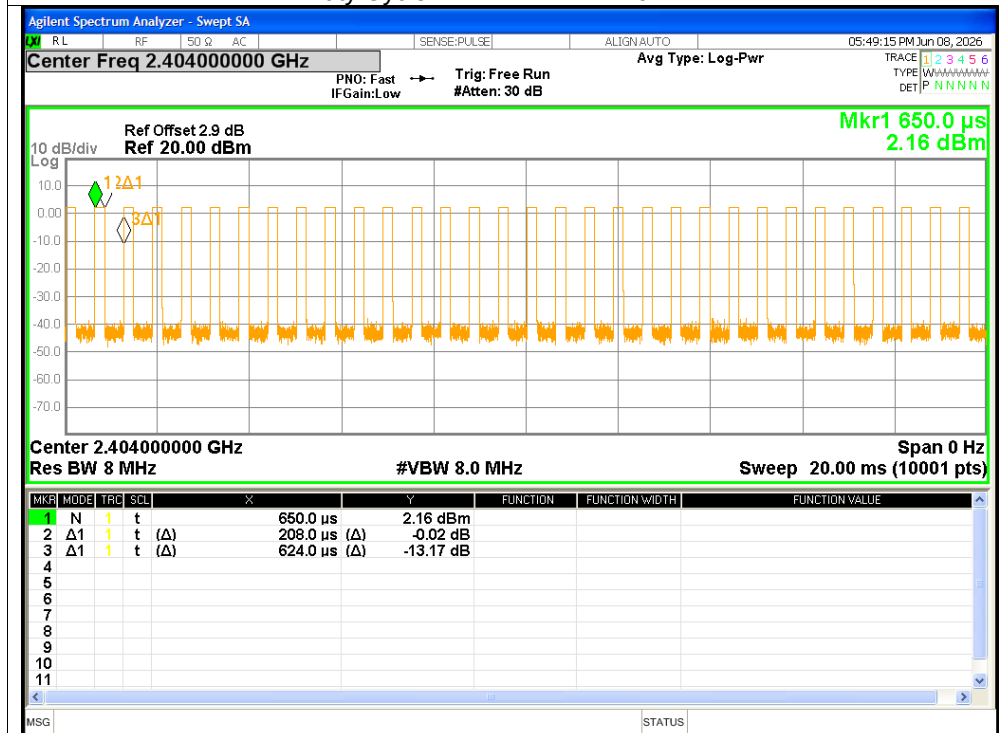


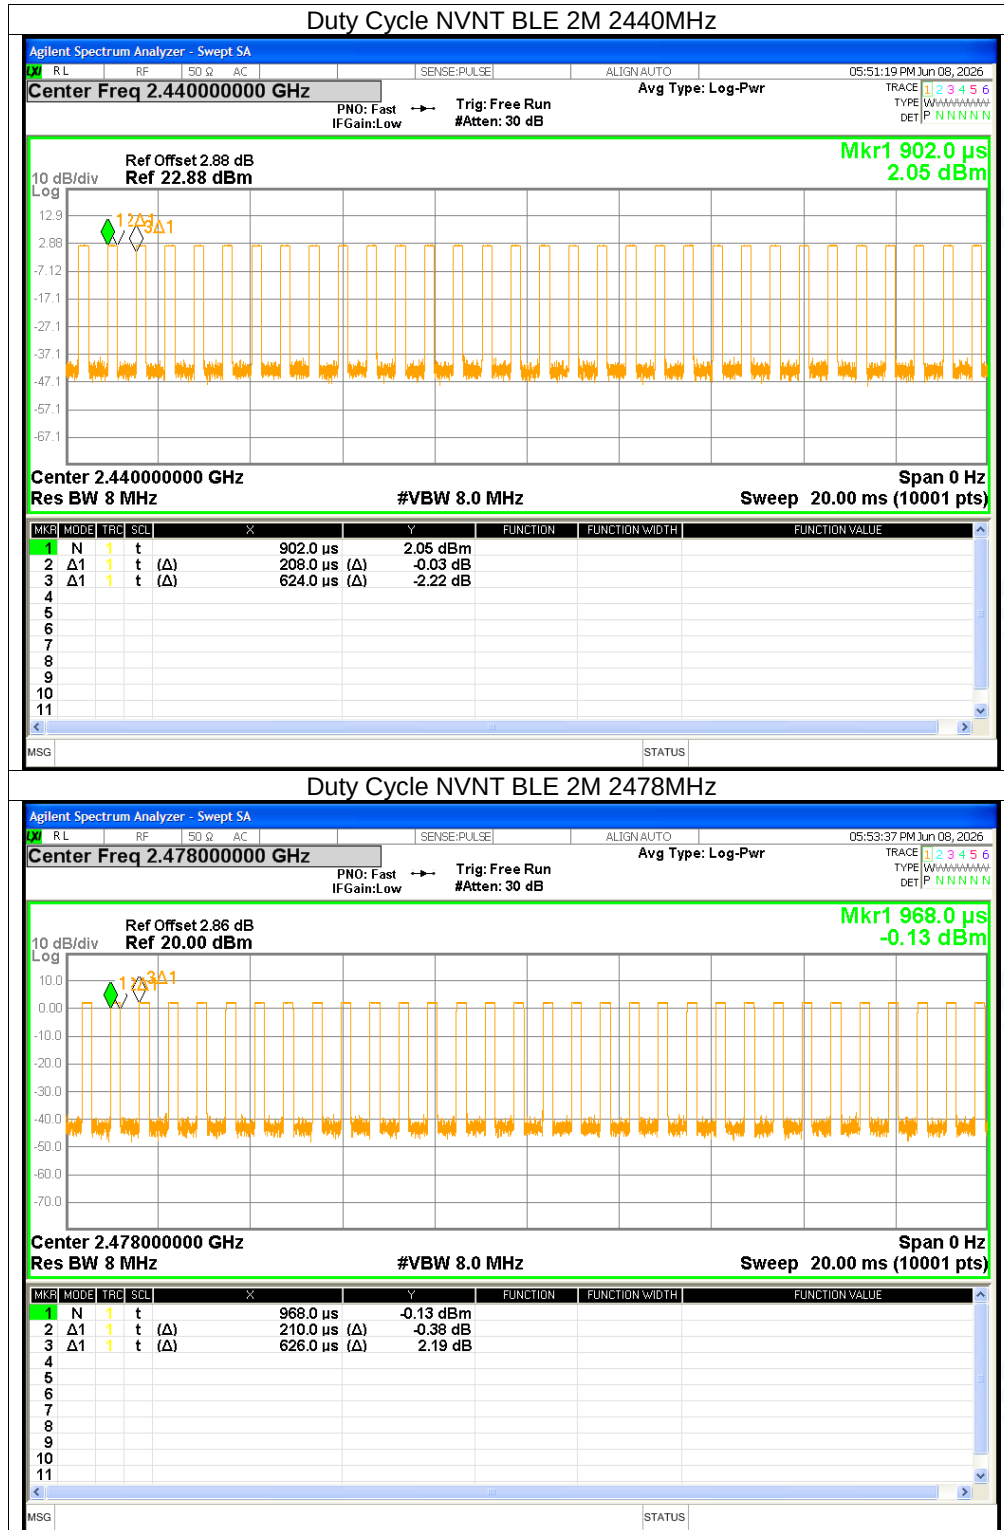





Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	2.07	≤ 30	Pass
NVNT	BLE 1M	2440	1.91	≤ 30	Pass
NVNT	BLE 1M	2480	1.93	≤ 30	Pass
NVNT	BLE 2M	2404	2.23	≤ 30	Pass
NVNT	BLE 2M	2440	2.08	≤ 30	Pass
NVNT	BLE 2M	2478	2.1	≤ 30	Pass

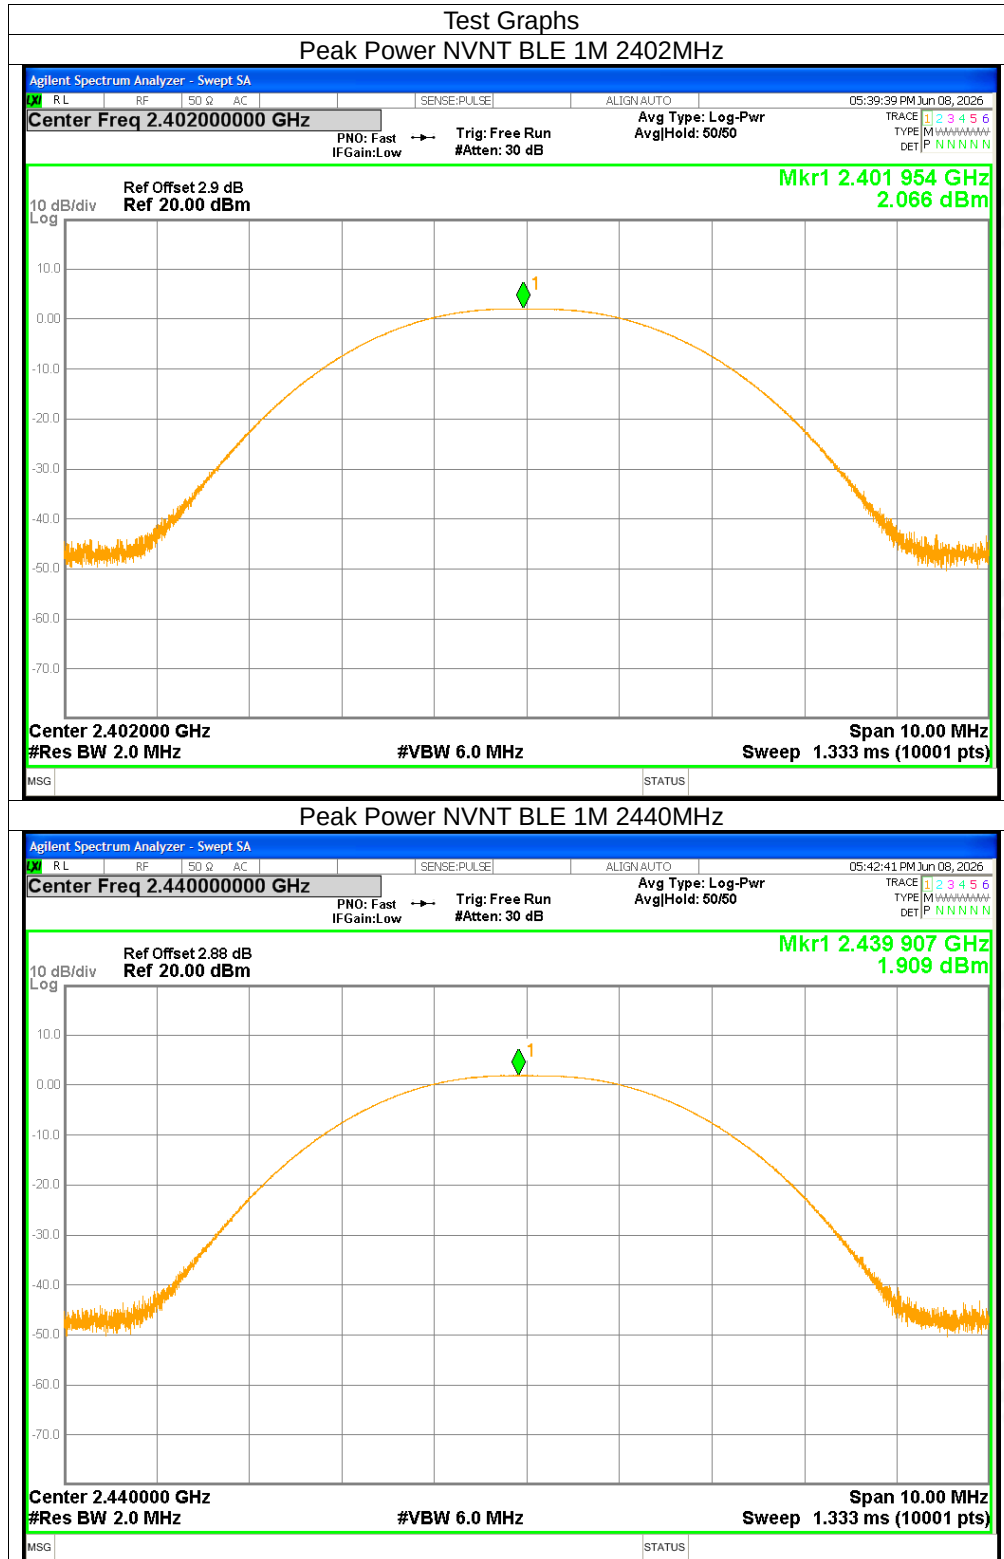

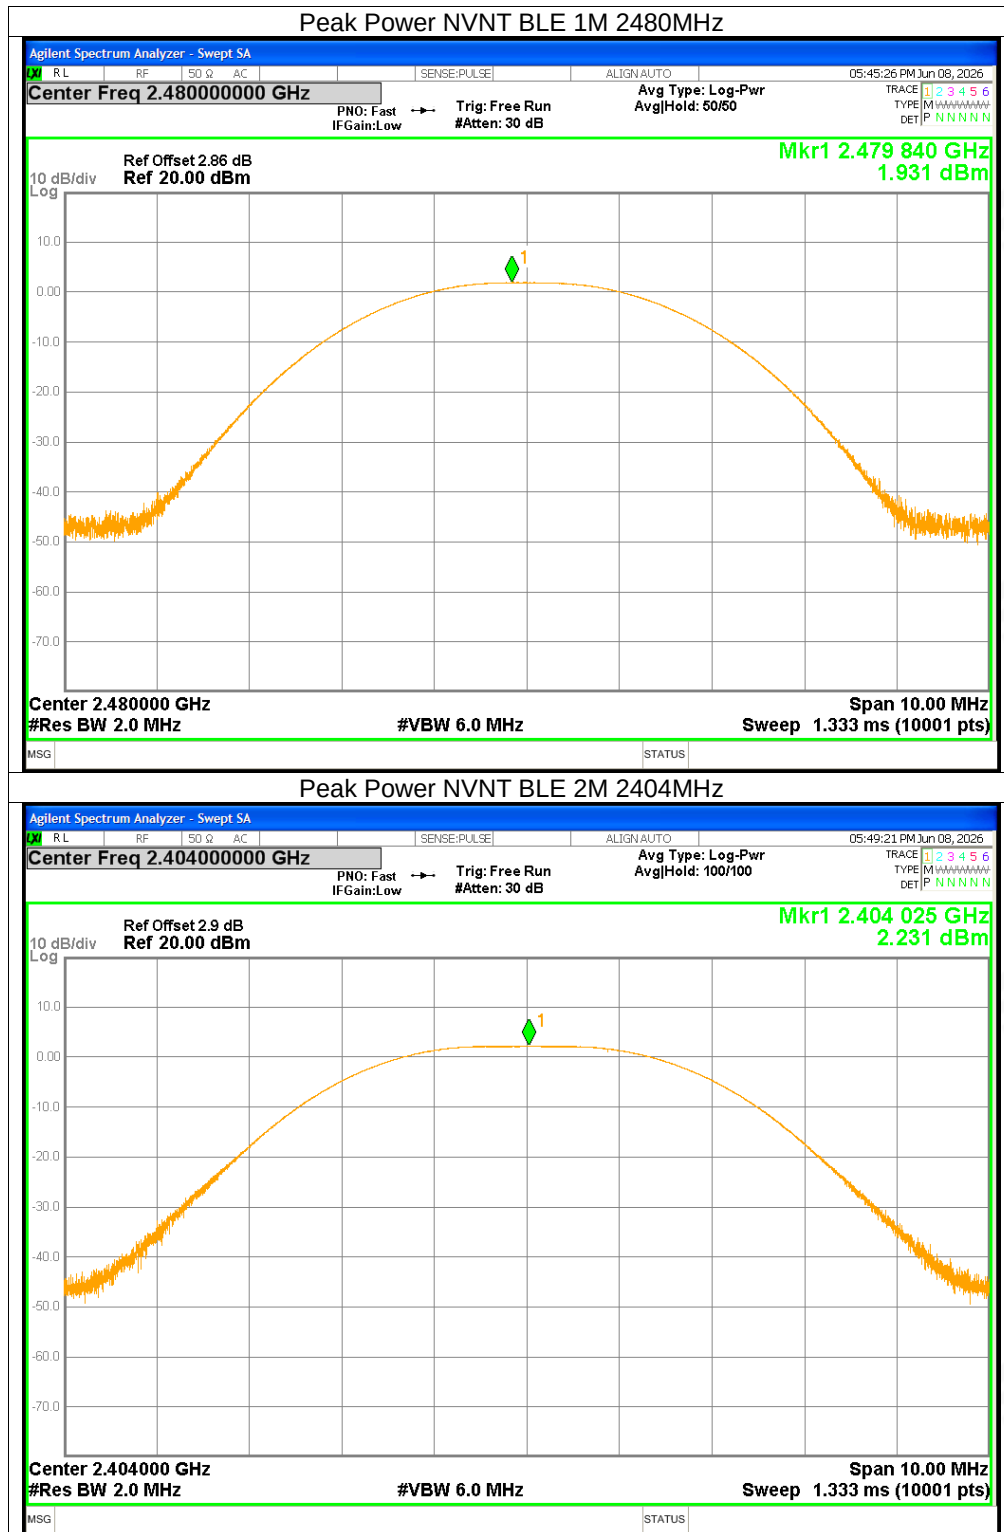


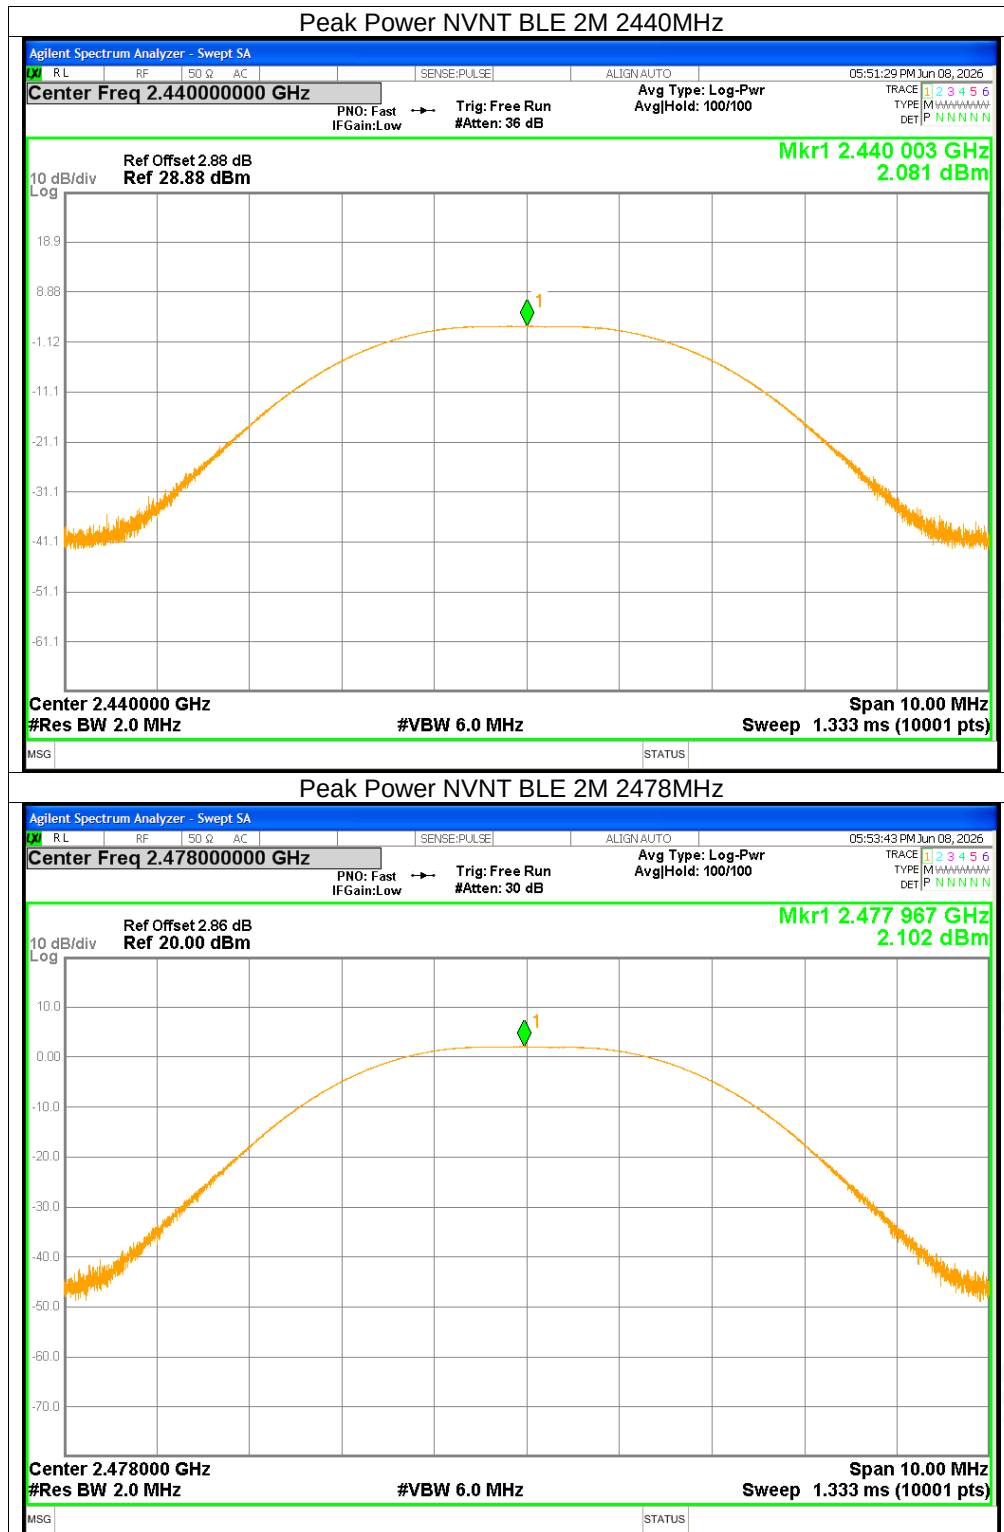





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.6526	≥ 0.5	Pass
NVNT	BLE 1M	2440	0.6564	≥ 0.5	Pass
NVNT	BLE 1M	2480	0.6587	≥ 0.5	Pass
NVNT	BLE 2M	2404	0.9307	≥ 0.5	Pass
NVNT	BLE 2M	2440	1.093	≥ 0.5	Pass
NVNT	BLE 2M	2478	1.1	≥ 0.5	Pass

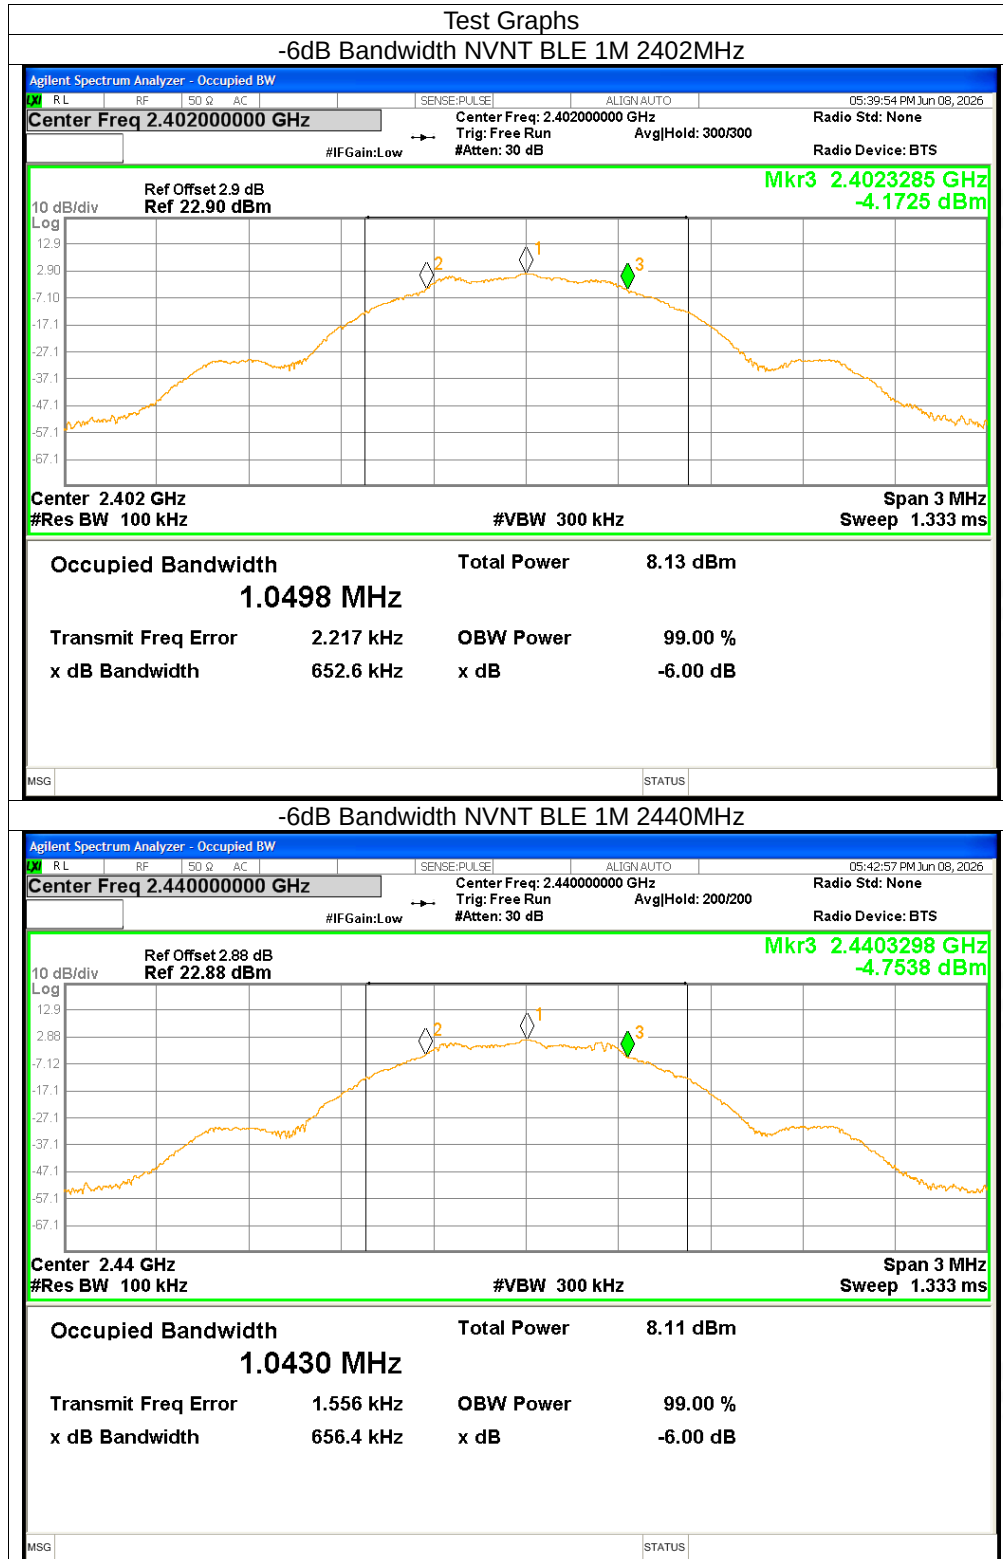

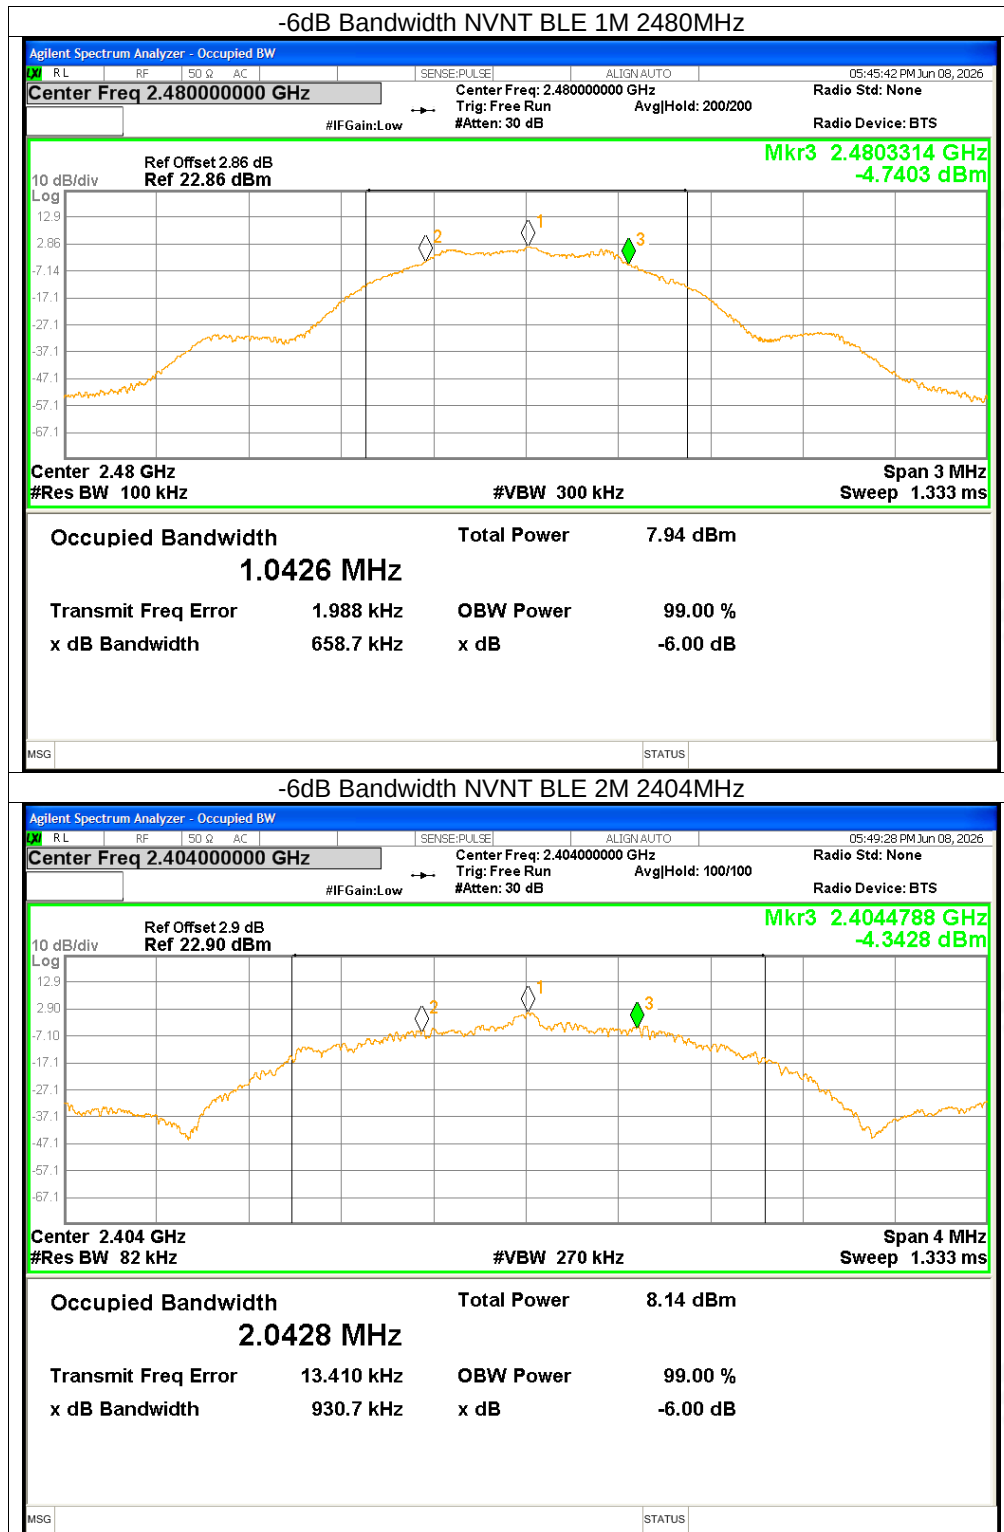


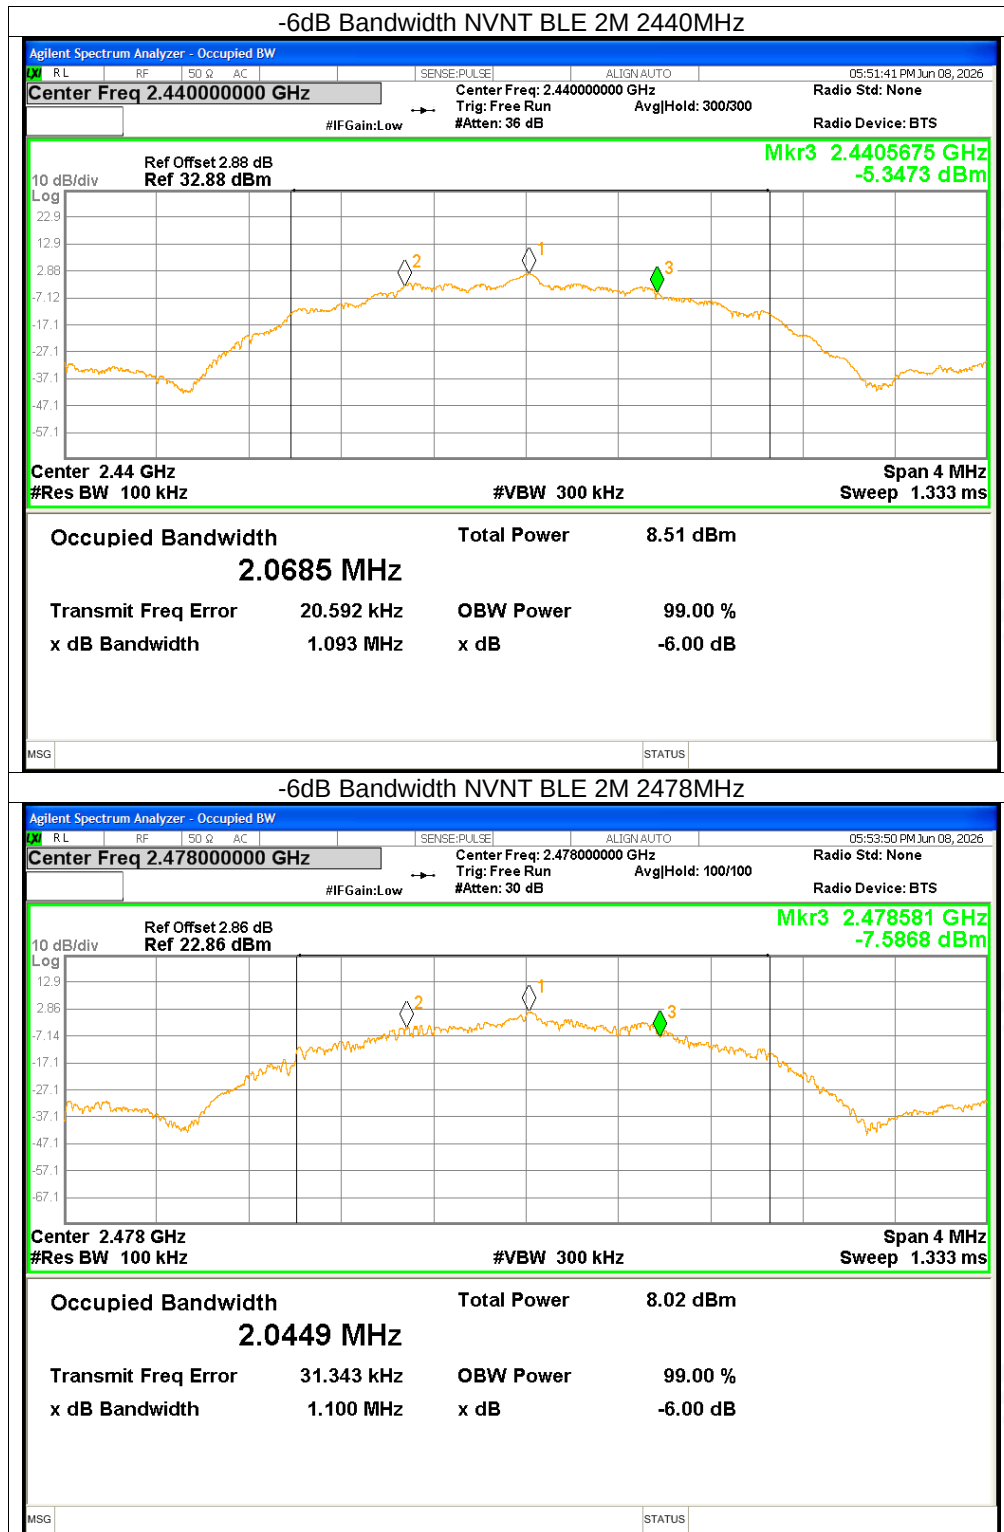





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-12.79	≤ -8	Pass
NVNT	BLE 1M	2440	-14.79	≤ -8	Pass
NVNT	BLE 1M	2480	-13.35	≤ -8	Pass
NVNT	BLE 2M	2404	-15.16	≤ -8	Pass
NVNT	BLE 2M	2440	-14.54	≤ -8	Pass
NVNT	BLE 2M	2478	-15.78	≤ -8	Pass

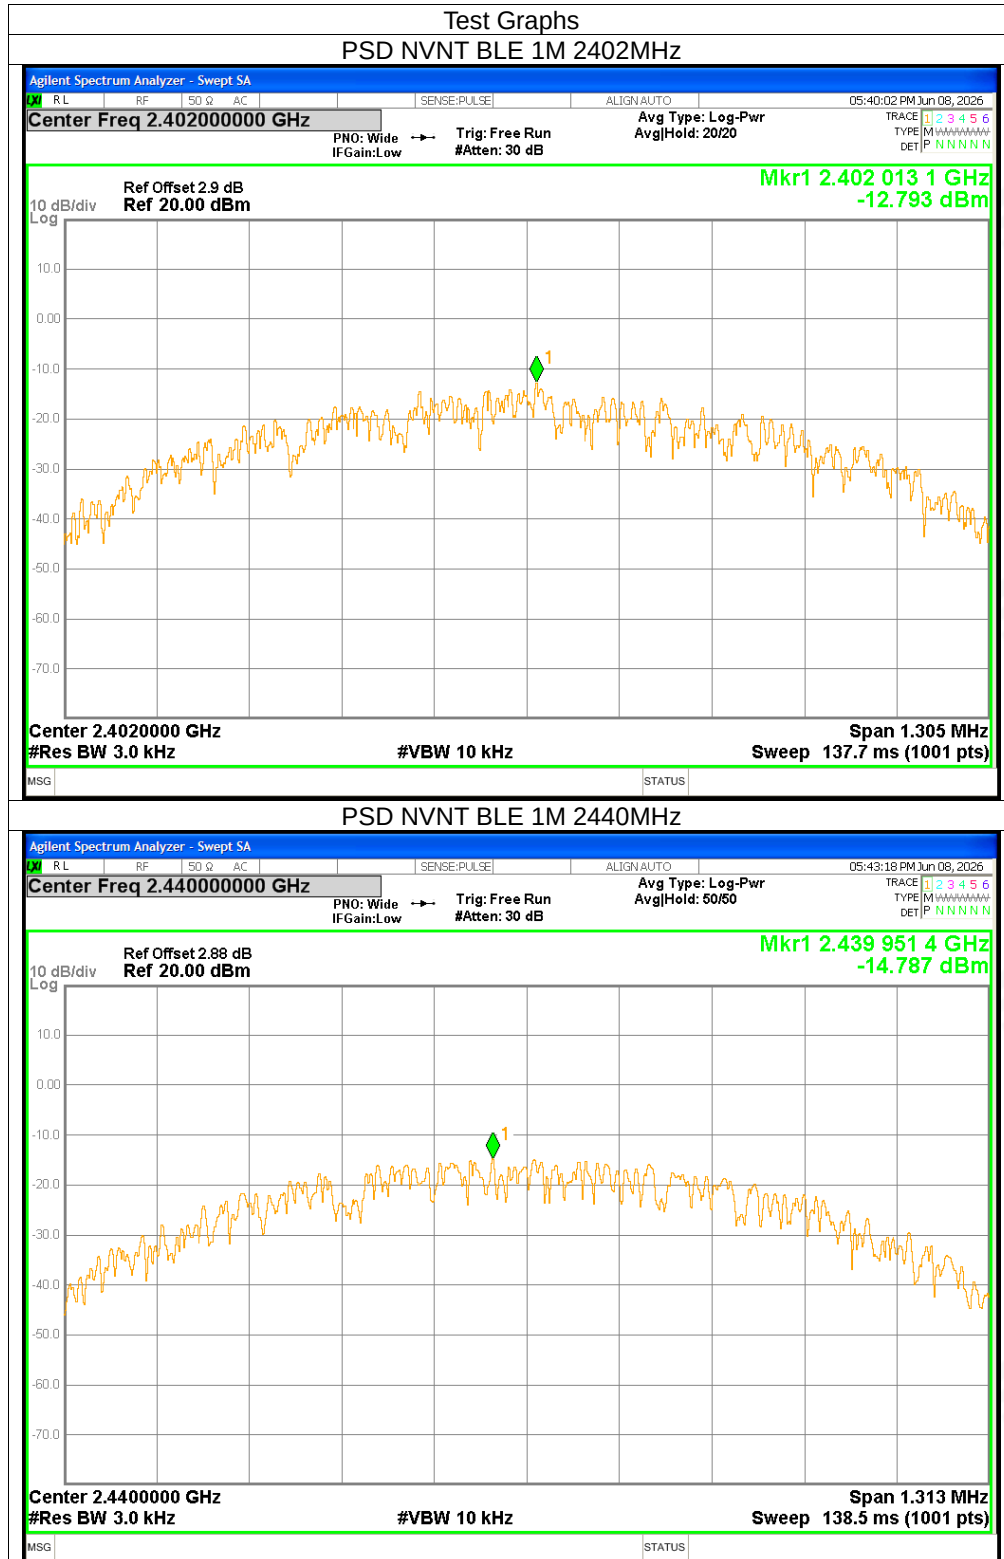

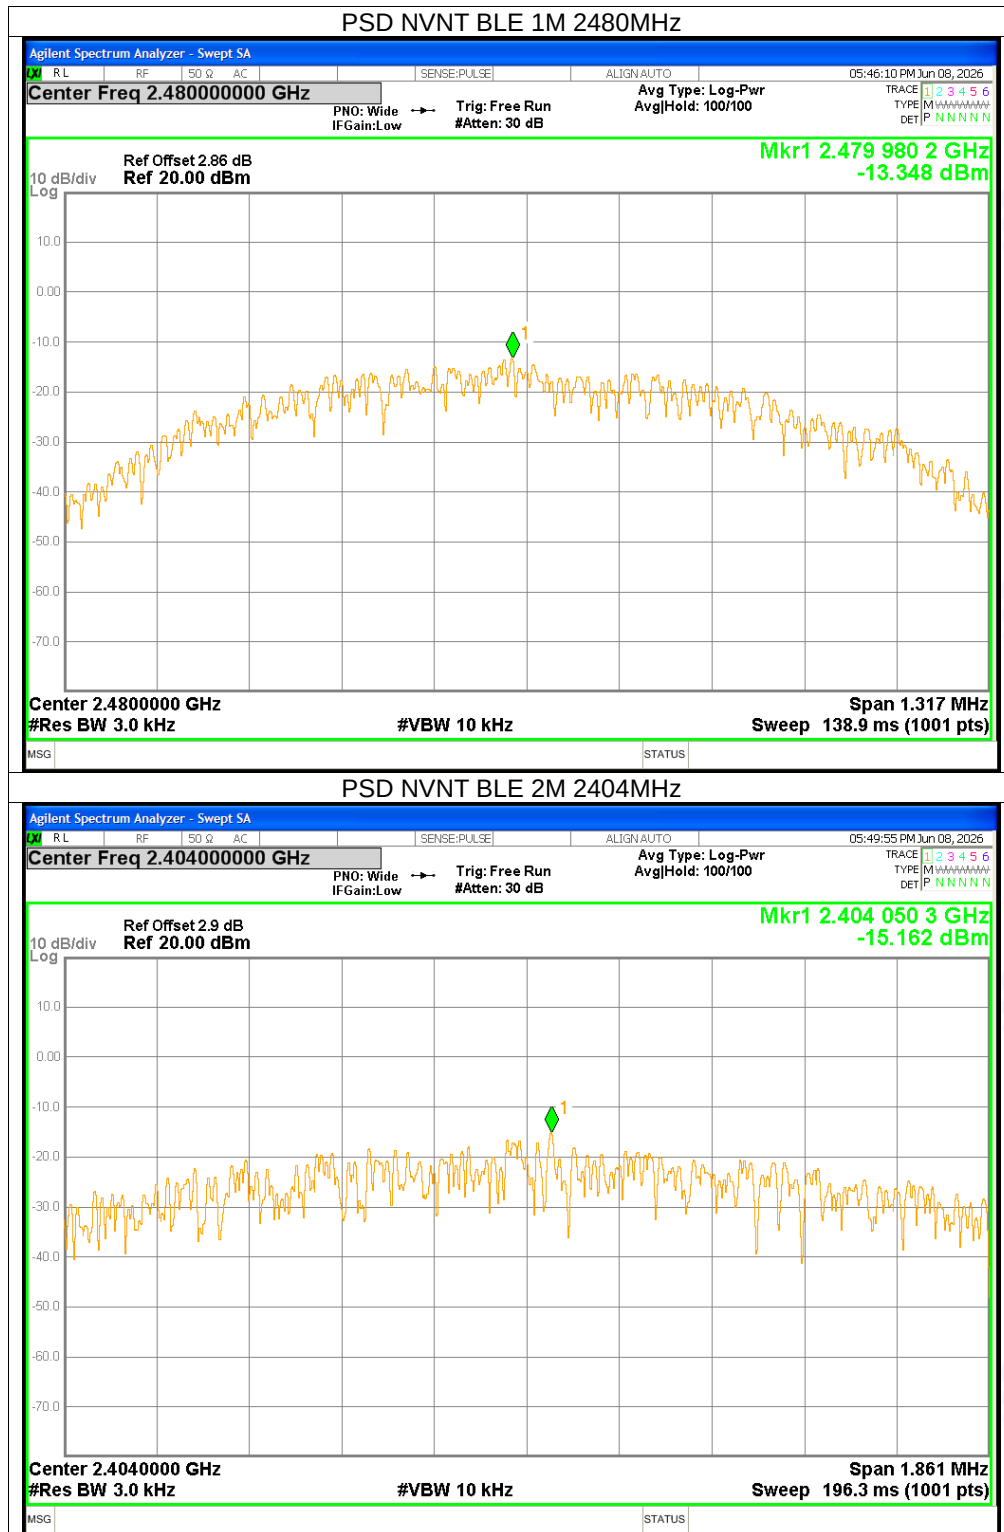

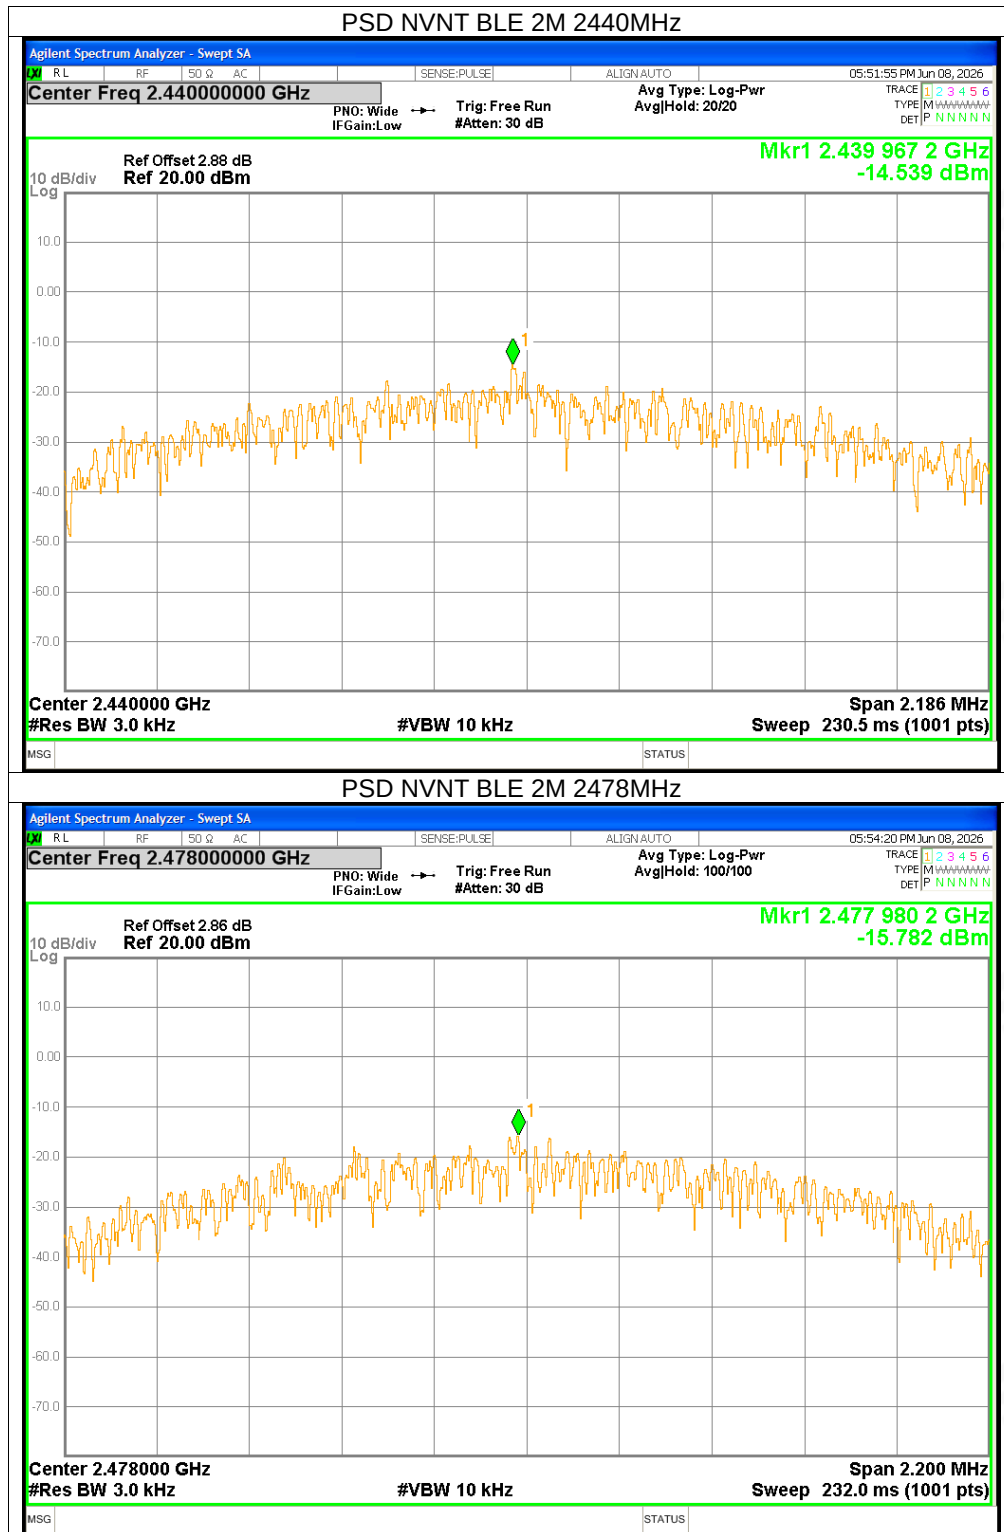



Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-57.58	≤ -20	Pass
NVNT	BLE 1M	2480	-58.08	≤ -20	Pass
NVNT	BLE 2M	2404	-57.68	≤ -20	Pass
NVNT	BLE 2M	2478	-56.99	≤ -20	Pass

