



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.160	0.835	0.562	0.387	0.273	0.189	0.131

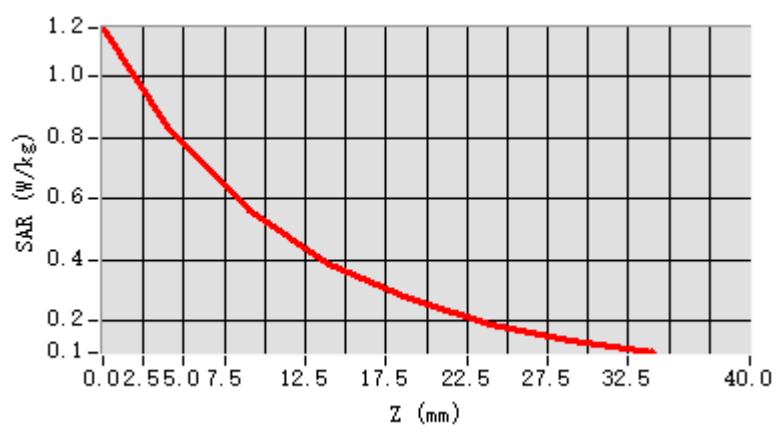

F. 3D Image

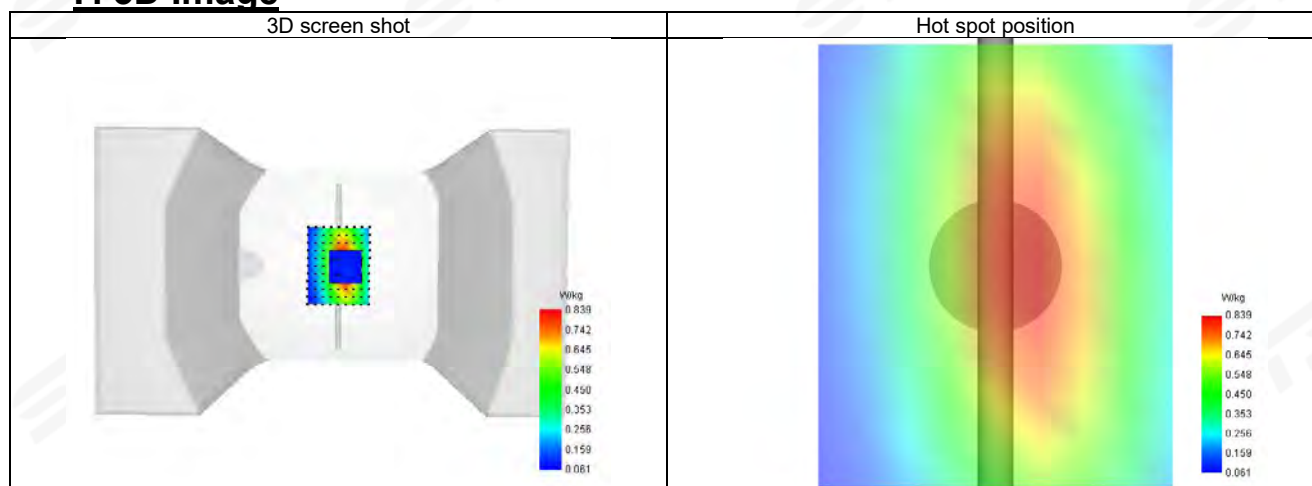

**System Performance Check Data (835MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-11-17

Experimental conditions

Phantom	Validation plane
Device Position	Dipole
Band	835MHz
Channels	Middle
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	41.72
Conductivity (S/m)	0.92
Probe	SN 08/21 EPGO352
ConvF	1.49
Crest factor:	1:1

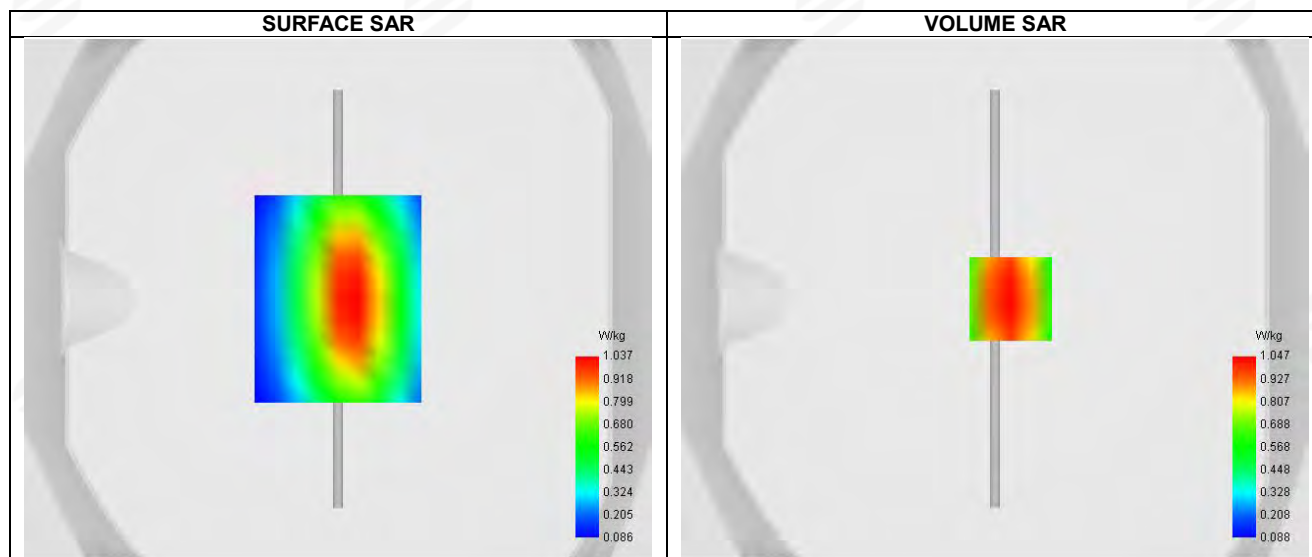


Maximum location: X=6.00, Y=0.00 ; SAR Peak: 1.45 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.632
SAR 1g (W/Kg)	0.933
Horizontal validation criteria: minimum distance (mm)	11.918230
Vertical validation criteria: SAR ratio M2/M1 (%)	67.144221

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.453	1.047	0.703	0.477	0.335	0.230	0.158

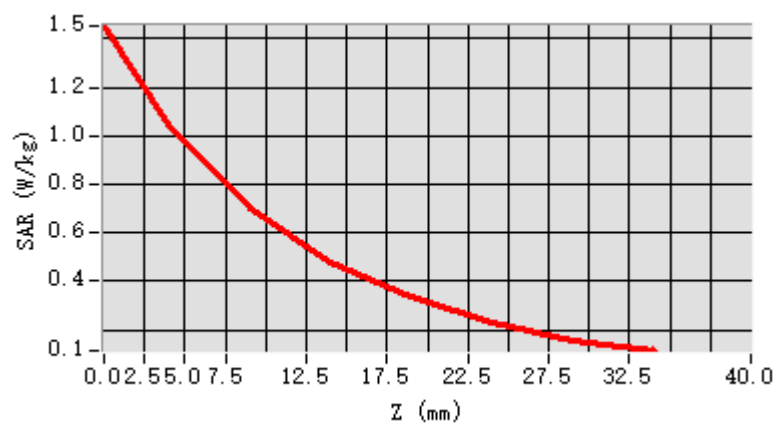

F. 3D Image

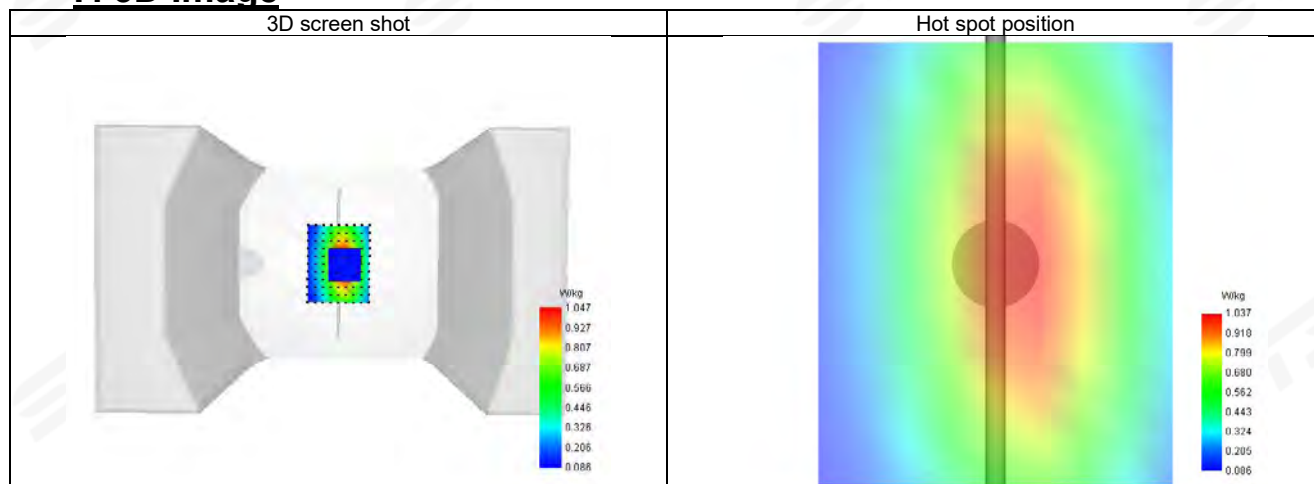

**System Performance Check Data(1800MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-11-22

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	1800MHz
Channels	Middle
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	40.11
Conductivity (S/m)	1.40
Probe	SN 08/21 EPGO352
ConvF	1.54
Crest factor:	1:1

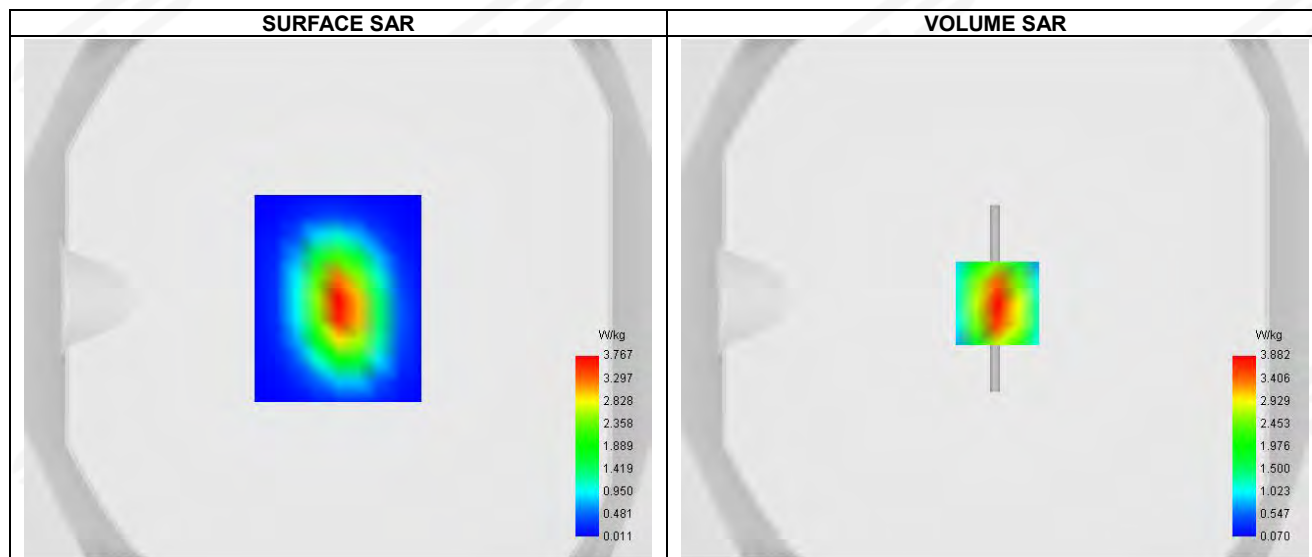


Maximum location: X=1.00, Y=-2.00 ; SAR Peak: 6.09 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.016
SAR 1g (W/Kg)	3.775
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.495475

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.140	3.882	2.155	1.239	0.731	0.421	0.243

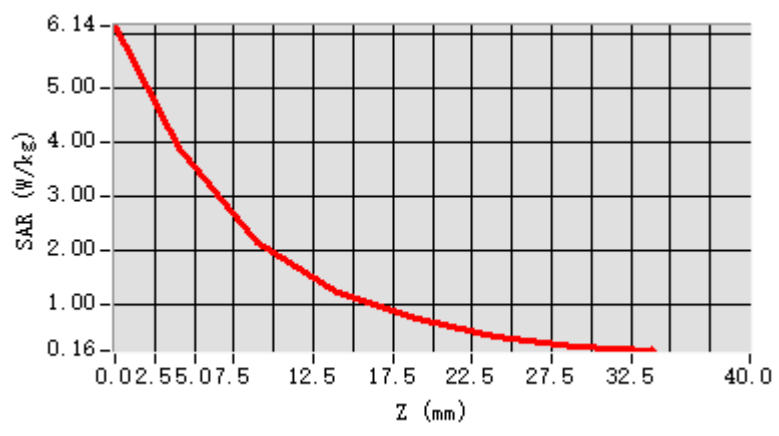

F. 3D Image

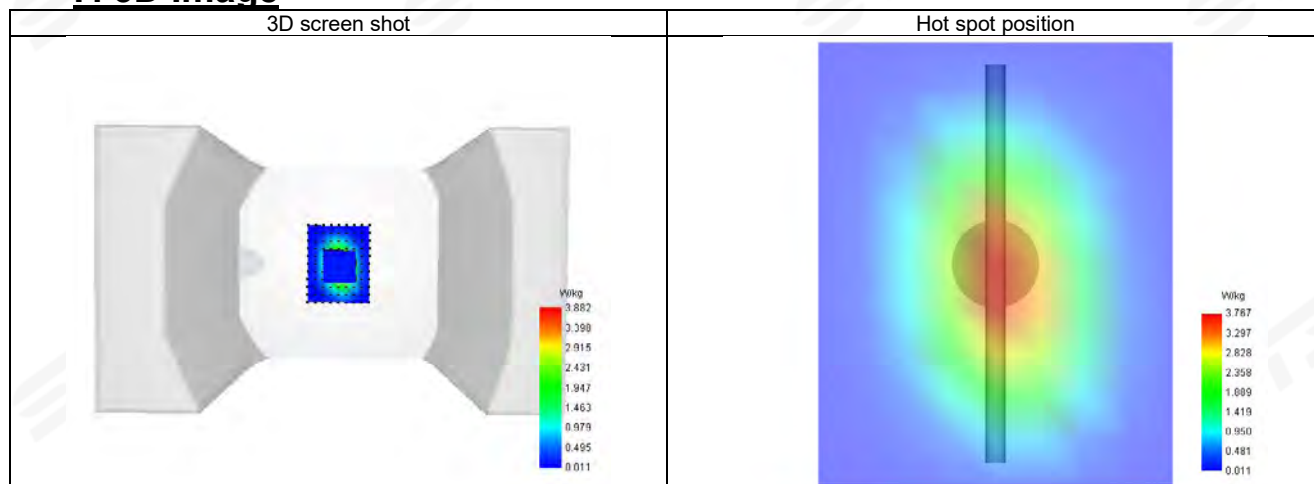

**System Performance Check Data (1900MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-11-20

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	1900MHz
Channels	Middle
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	39.57
Conductivity (S/m)	1.39
Probe	SN 08/21 EPGO352
ConvF	1.73
Crest factor:	1:1

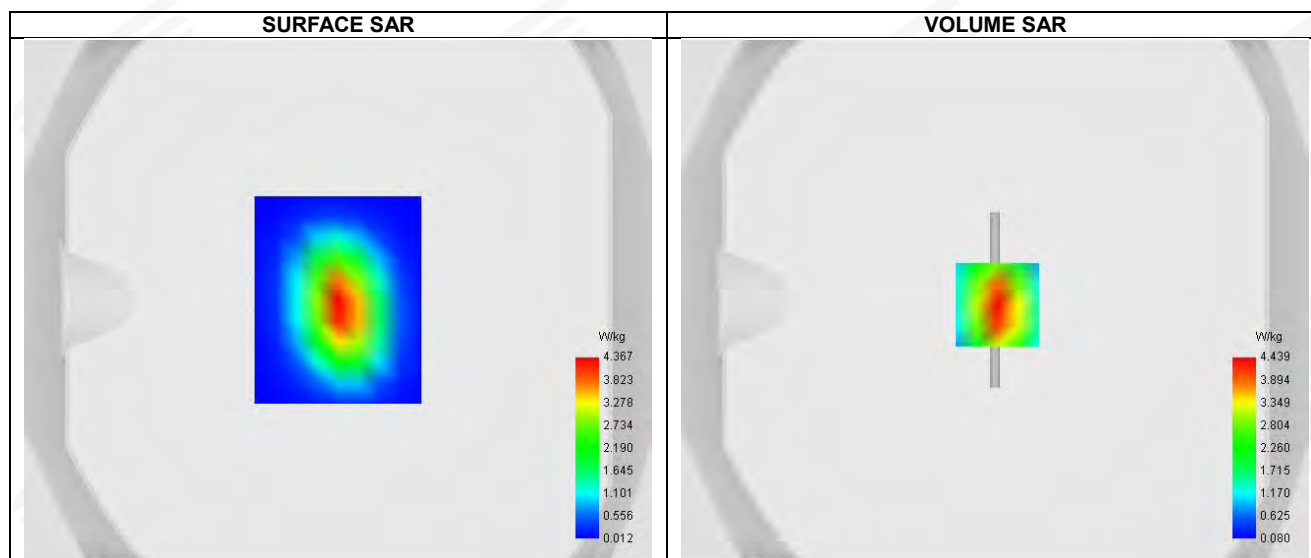


Maximum location: X=1.00, Y=-2.00 ; SAR Peak: 6.96 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.012
SAR 1g (W/Kg)	4.031
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.447932

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	7.013	4.439	2.461	1.470	0.852	0.493	0.286

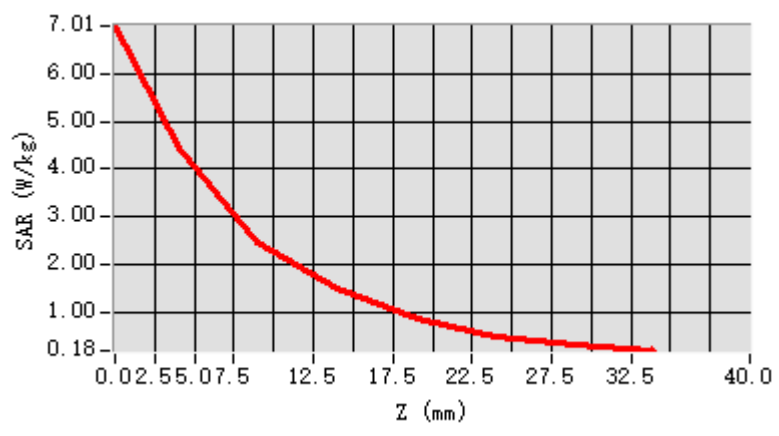

F. 3D Image

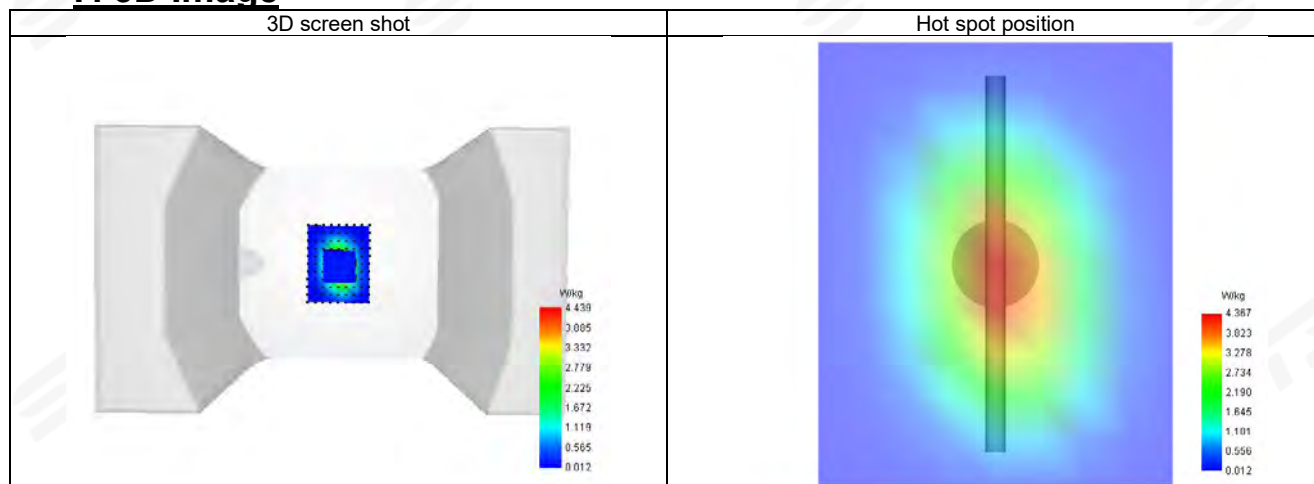




System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)
Area scan resolution: dx=8mm, dy=8mm
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
Date of measurement: 2025-11-18

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	Middle
Signal	CW
Frequency (MHz)	2450
Relative permittivity	39.98
Conductivity (S/m)	1.78
Probe	SN 08/21 EPGO352
ConvF	1.82
Crest factor:	1:1

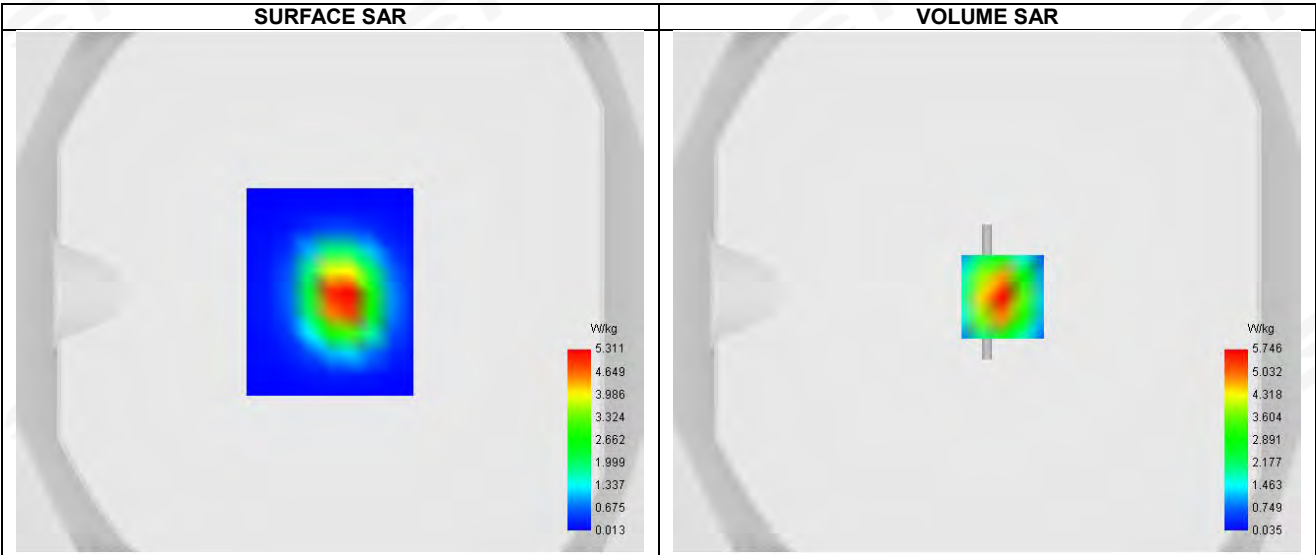


Maximum location: X=6.00, Y=-2.00 ; SAR Peak: 9.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.446
SAR 1g (W/Kg)	5.396
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	51.091045

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.475	5.746	2.936	1.535	0.795	0.412	0.213

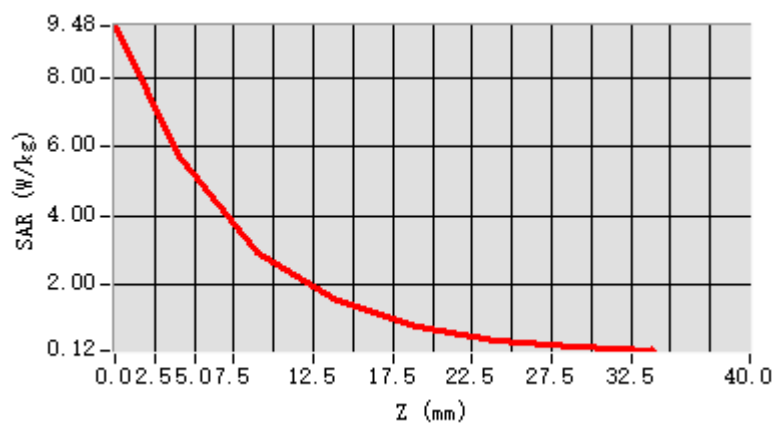

F. 3D Image

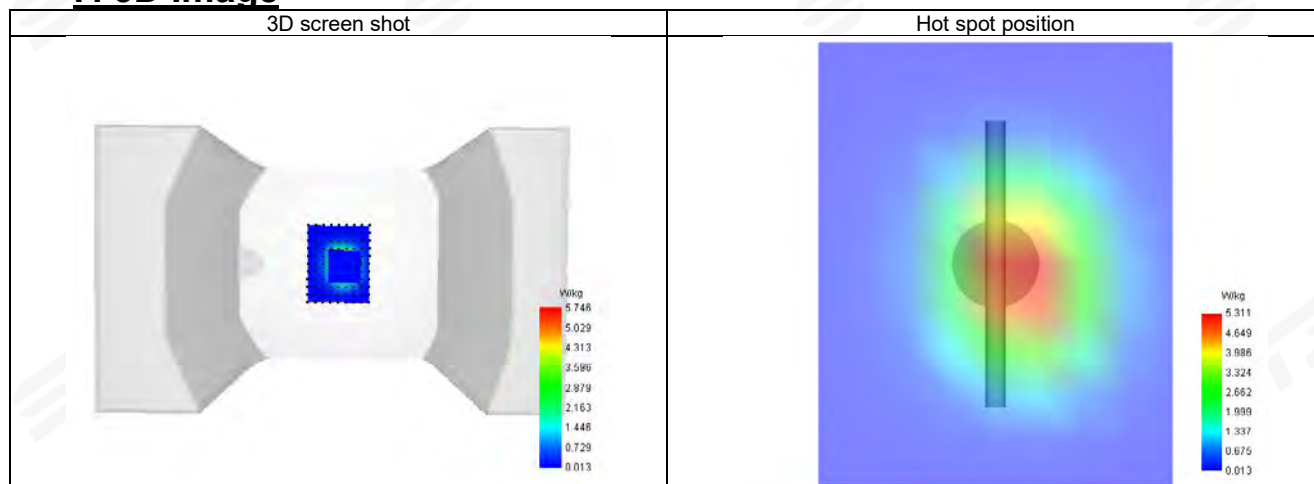

**System Performance Check Data(2600MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-11-18

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	2600MHz
Channels	Middle
Signal	CW
Frequency (MHz)	2600
Relative permittivity	40.09
Conductivity (S/m)	1.96
Probe	SN 08/21 EPGO352
ConvF	1.70
Crest factor:	1:1

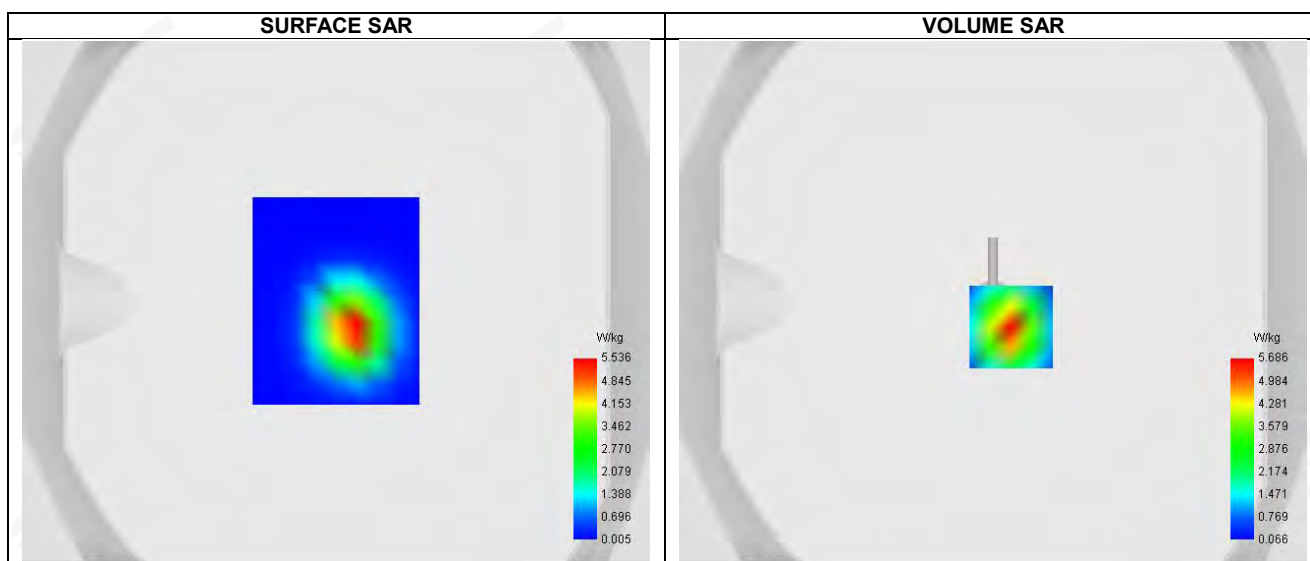


Maximum location: X=7.00, Y=-10.00 ; SAR Peak: 9.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.377
SAR 1g (W/Kg)	5.672
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	52.938820

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.258	5.686	3.010	1.744	0.974	0.544	0.304

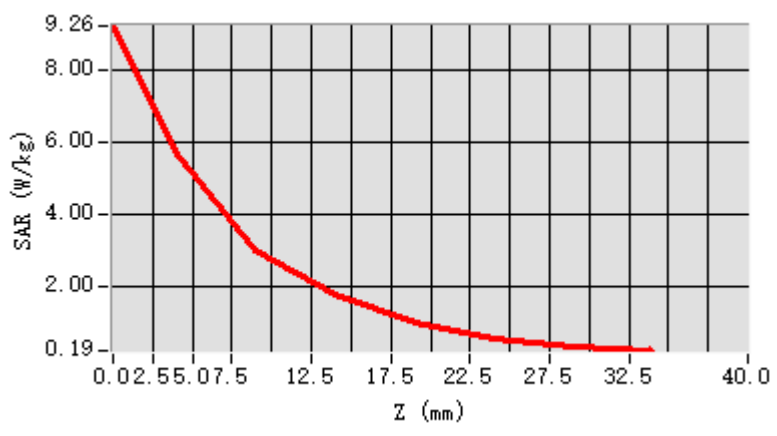

F. 3D Image

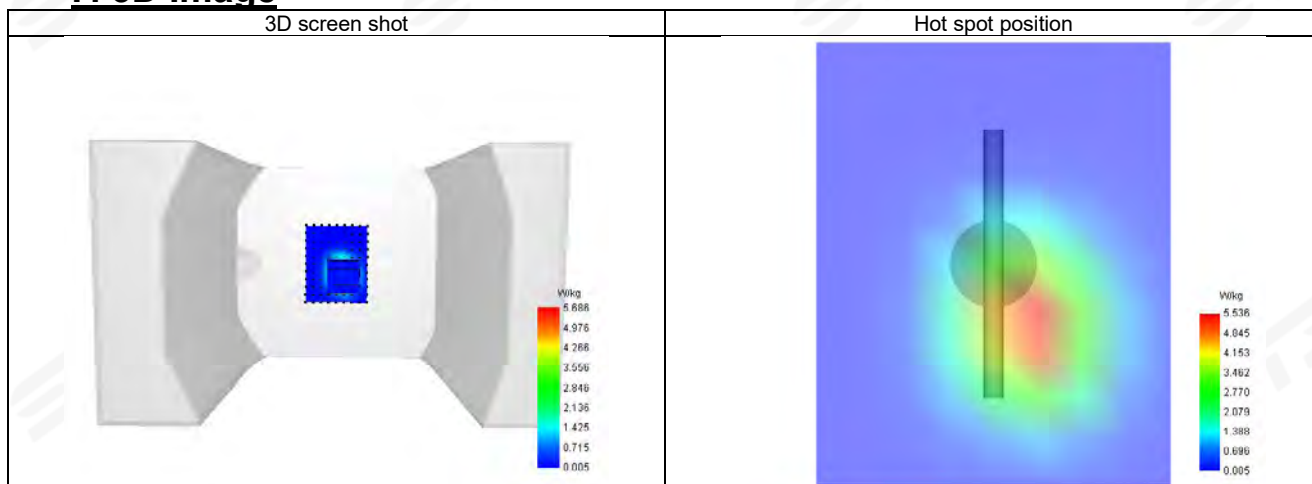

**System Performance Check Data (3700MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-11-18

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	3700MHz
Channels	Middle
Signal	CW
Frequency (MHz)	3700
Relative permittivity	37.75
Conductivity (S/m)	3.11
Probe	SN 08/21 EPGO352
ConvF	1.33
Crest factor:	1:1

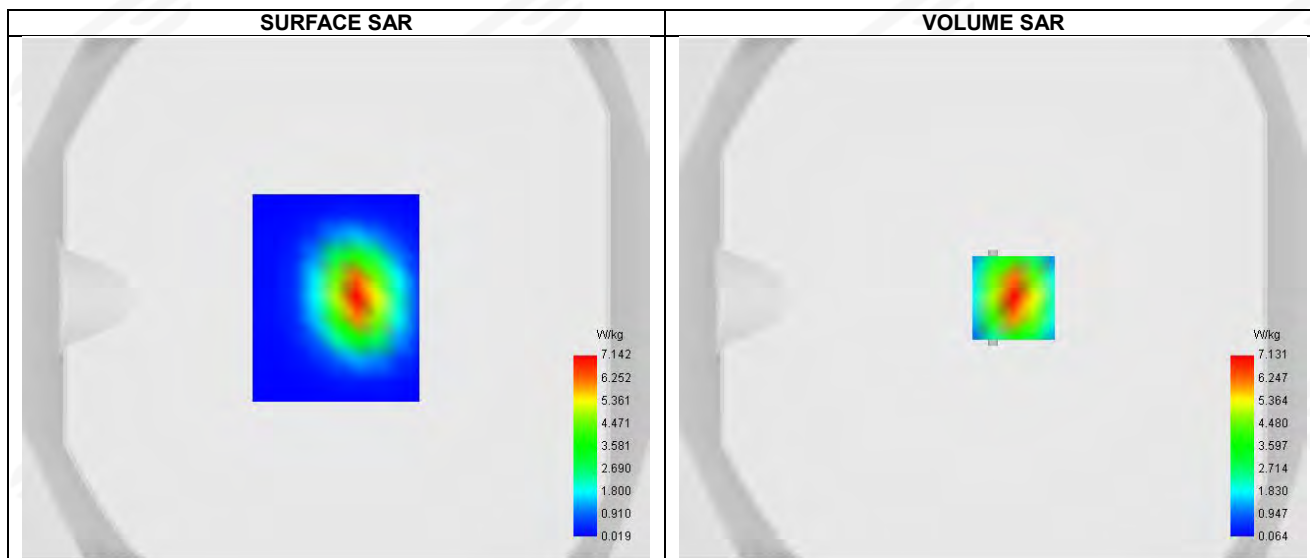


Maximum location: X=8.00, Y=0.00 ; SAR Peak: 11.45 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.525
SAR 1g (W/Kg)	6.986
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.659673

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	11.567	7.131	3.755	2.056	1.108	0.597	0.322

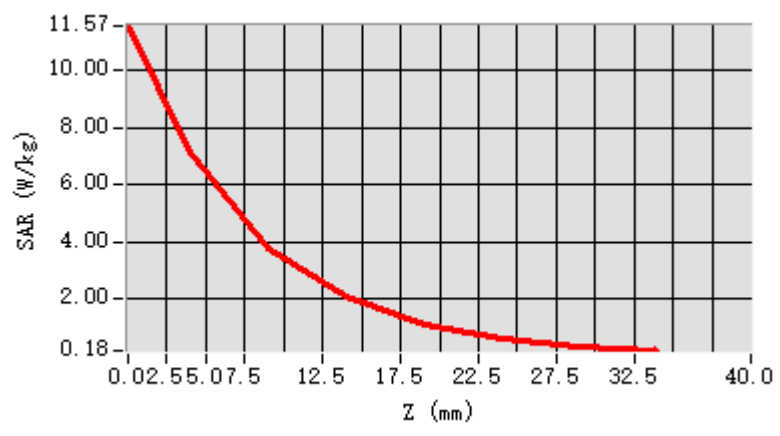

F. 3D Image

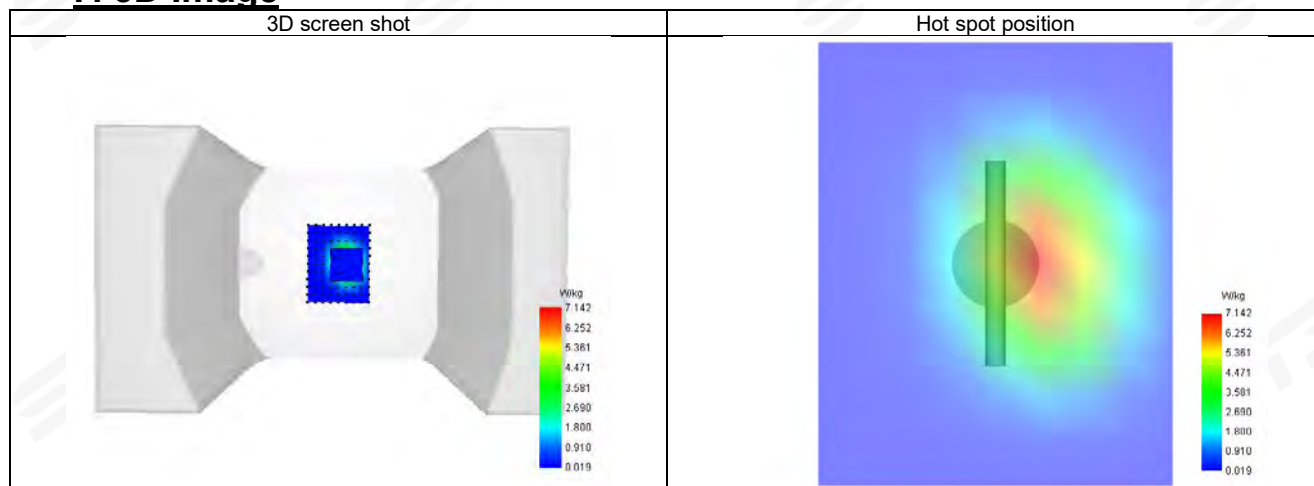

**System Performance Check Data (5200MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-11-23

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	5200MHz
Channels	Middle
Signal	CW
Frequency (MHz)	5200
Relative permittivity	37.08
Conductivity (S/m)	4.66
Probe	SN 08/21 EPGO352
ConvF	1.37
Crest factor:	1:1

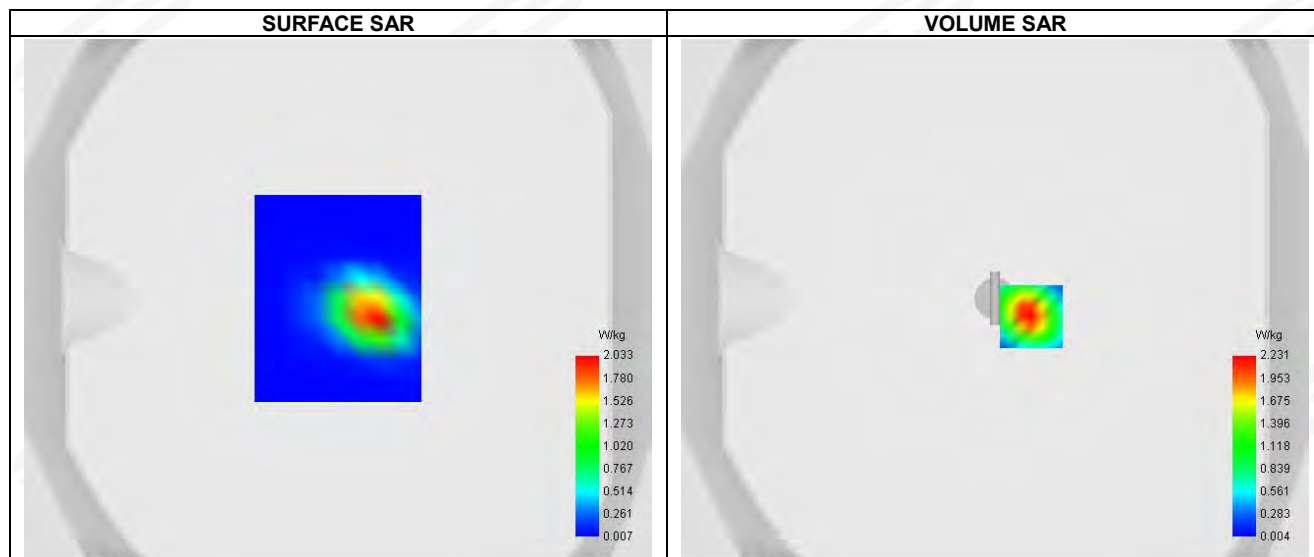**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.561
SAR 1g (W/Kg)	1.627
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	58.511765

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	3.525	2.231	1.306	0.753	0.453	0.267	0.157	0.093	0.055	0.032	0.019	0.011	0.011

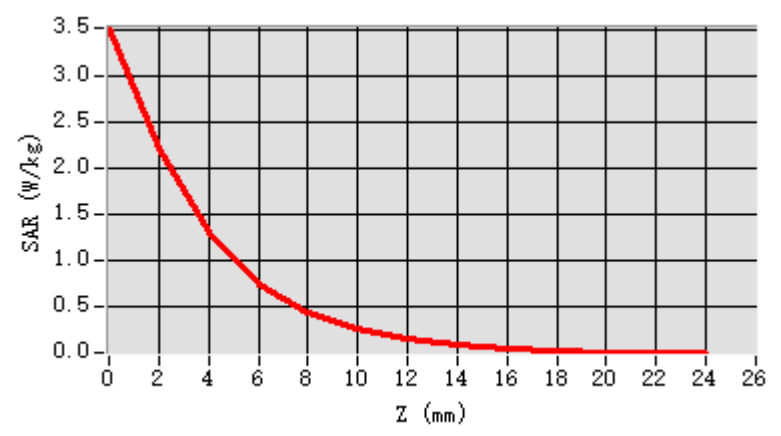

F. 3D Image

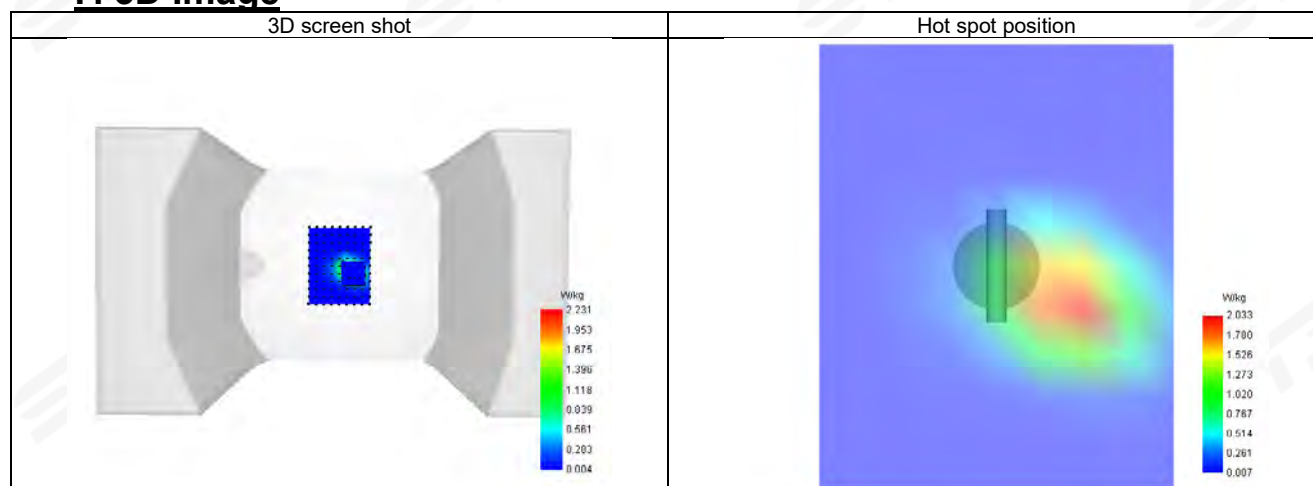

**System Performance Check Data (5800MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-11-23

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	5800MHz
Channels	Middle
Signal	CW
Frequency (MHz)	5800
Relative permittivity	34.93
Conductivity (S/m)	5.28
Probe	SN 08/21 EPGO352
ConvF	1.32
Crest factor:	1:1

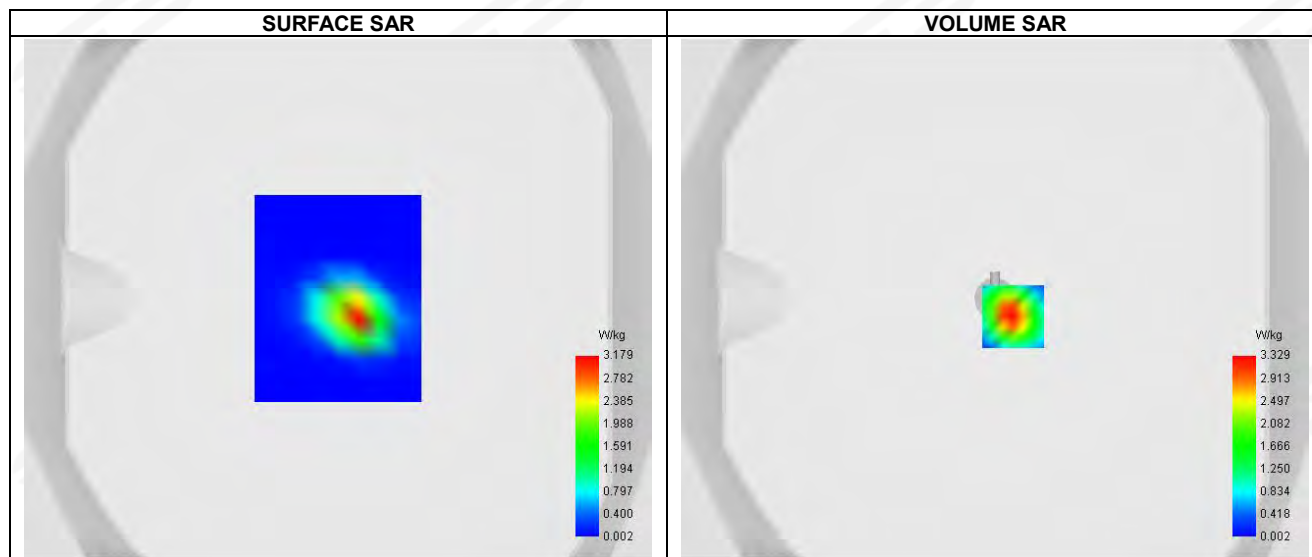

Maximum location: X=7.00, Y=-7.00 ; SAR Peak: 5.76 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.621
SAR 1g (W/Kg)	1.917
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	53.338988




E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	5.513	3.329	1.776	0.939	0.498	0.264	0.140	0.074	0.040	0.021	0.011	0.006	0.006

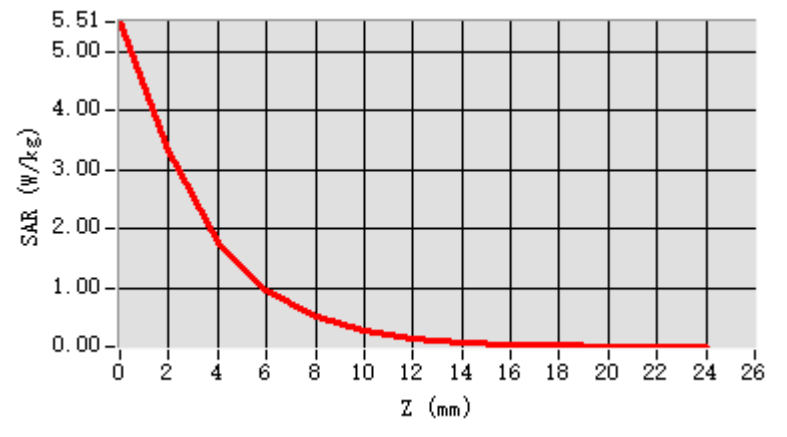


F. 3D Image

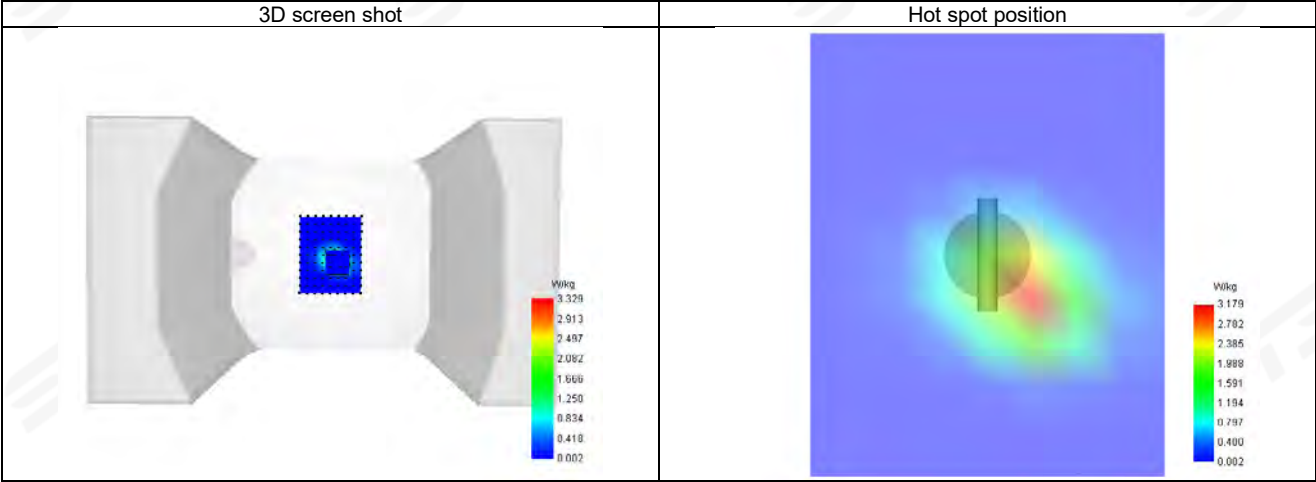

Appendix B. SAR Test Plots

Plot 1: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	GPRS 850
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	41.85
Conductivity (S/m)	0.90

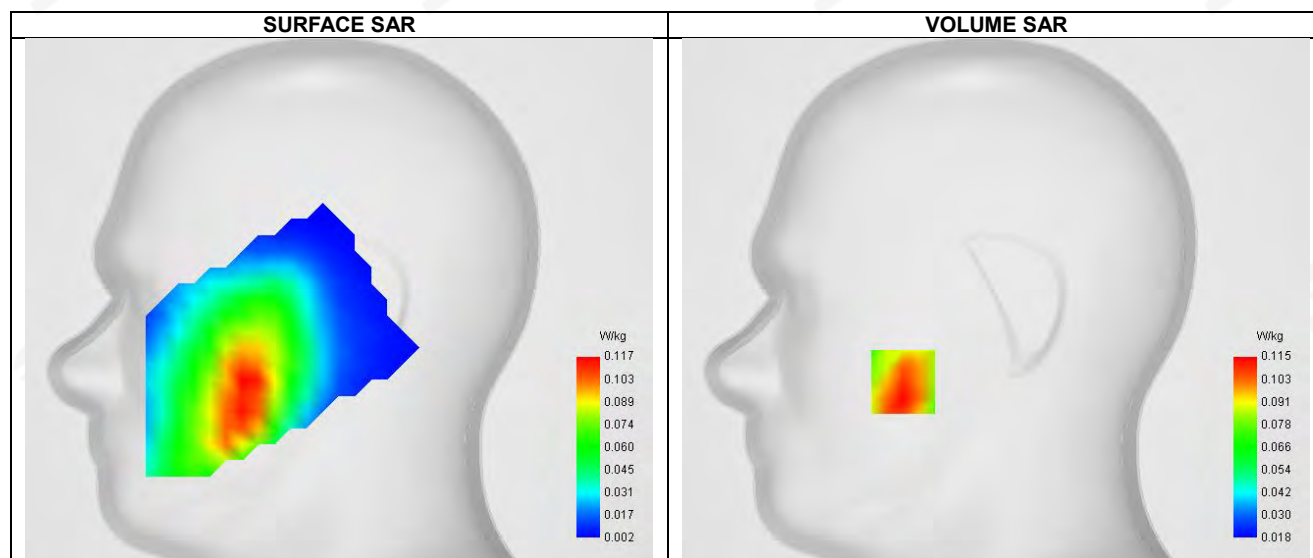


Maximum location: X=-46.00, Y=-41.00 ; SAR Peak: 0.15 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.080
SAR 1g (W/Kg)	0.112
Horizontal validation criteria: minimum distance (mm)	15.021678
Vertical validation criteria: SAR ratio M2/M1 (%)	68.695652

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.176	0.115	0.079	0.072	0.059	0.050	0.037

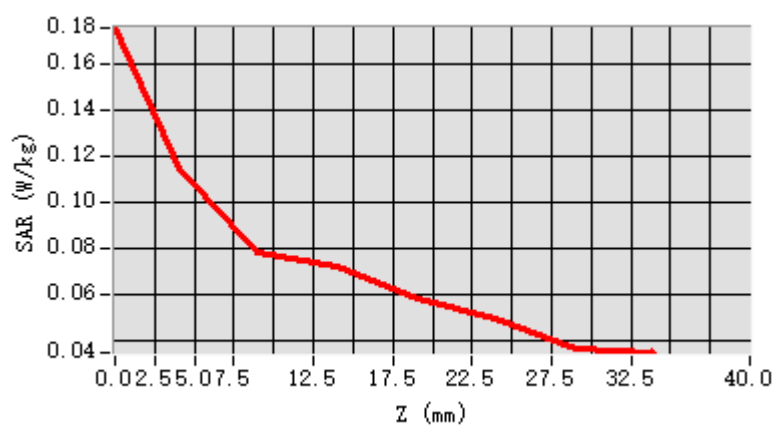


F. 3D Image

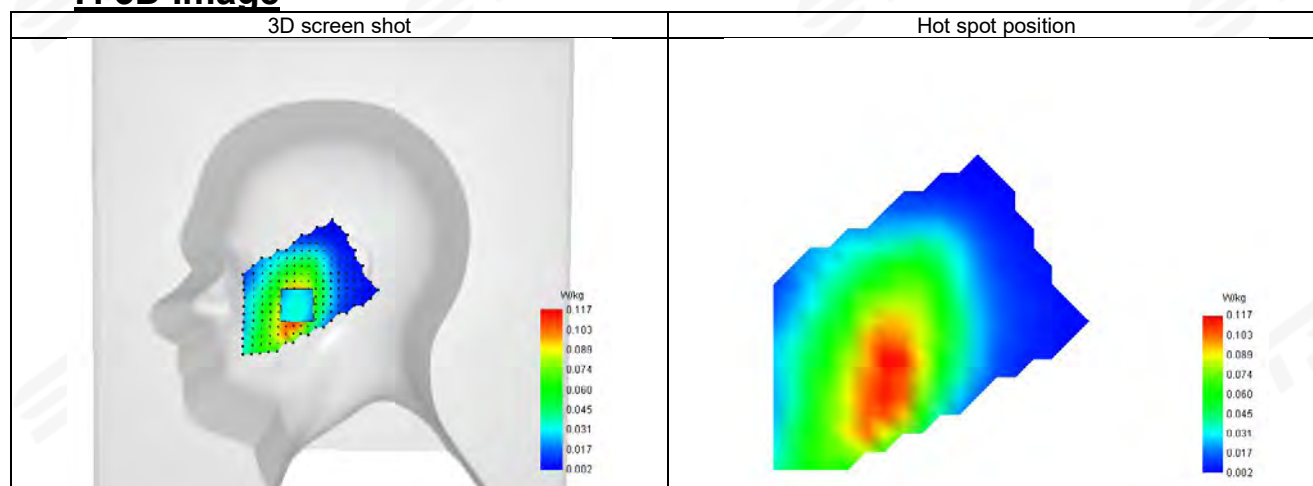

**Plot 2: DUT: Smart Phone; EUT Model: ROCK 2 Pro**


Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 850
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	41.85
Conductivity (S/m)	0.90

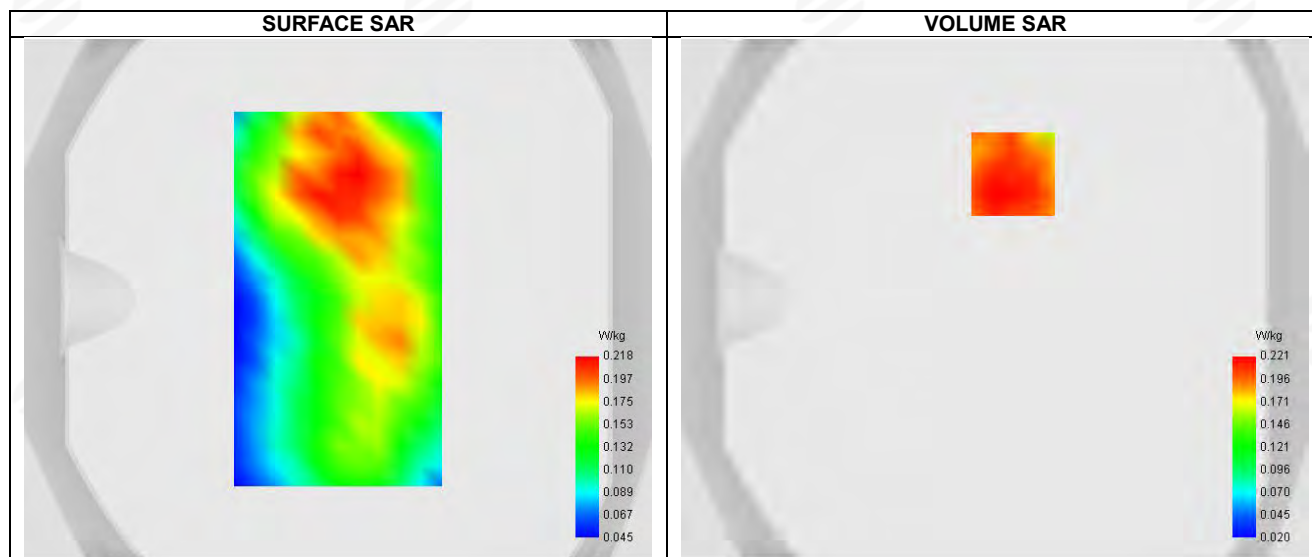**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.212
Horizontal validation criteria: minimum distance (mm)	12.651405
Vertical validation criteria: SAR ratio M2/M1 (%)	60.204151

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.337	0.221	0.133	0.115	0.070	0.055	0.036

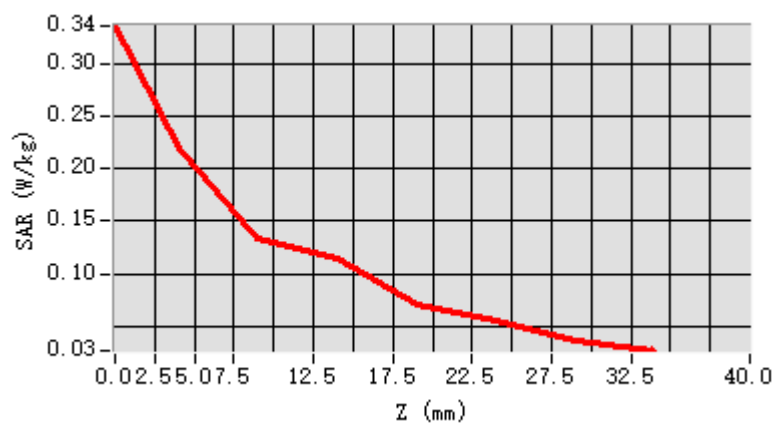


F. 3D Image

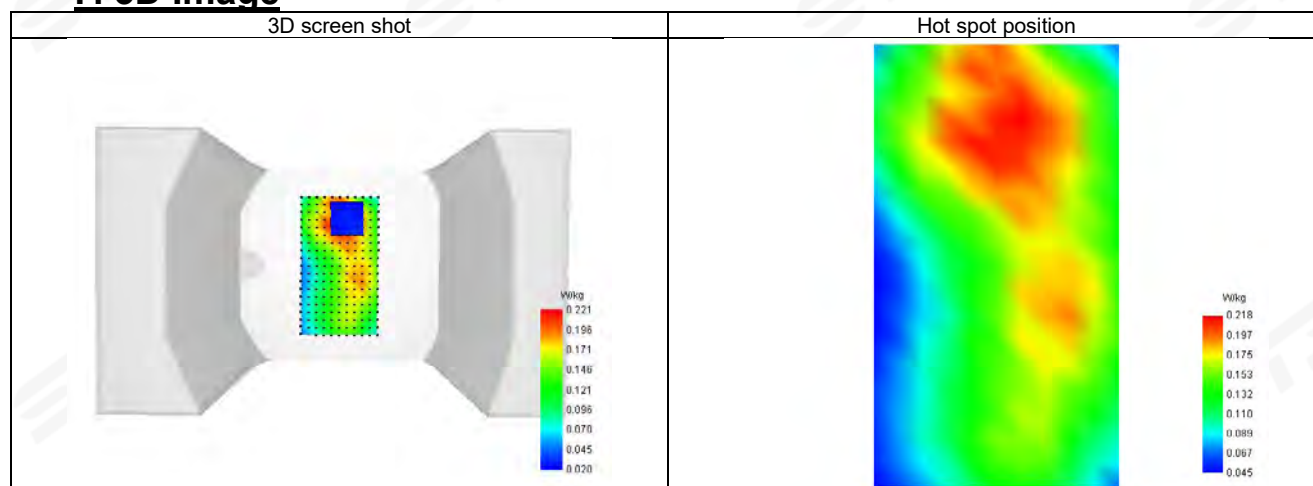

Plot 3: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GPRS 1900
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1850.2
Relative permittivity (real part)	40.68
Conductivity (S/m)	1.42

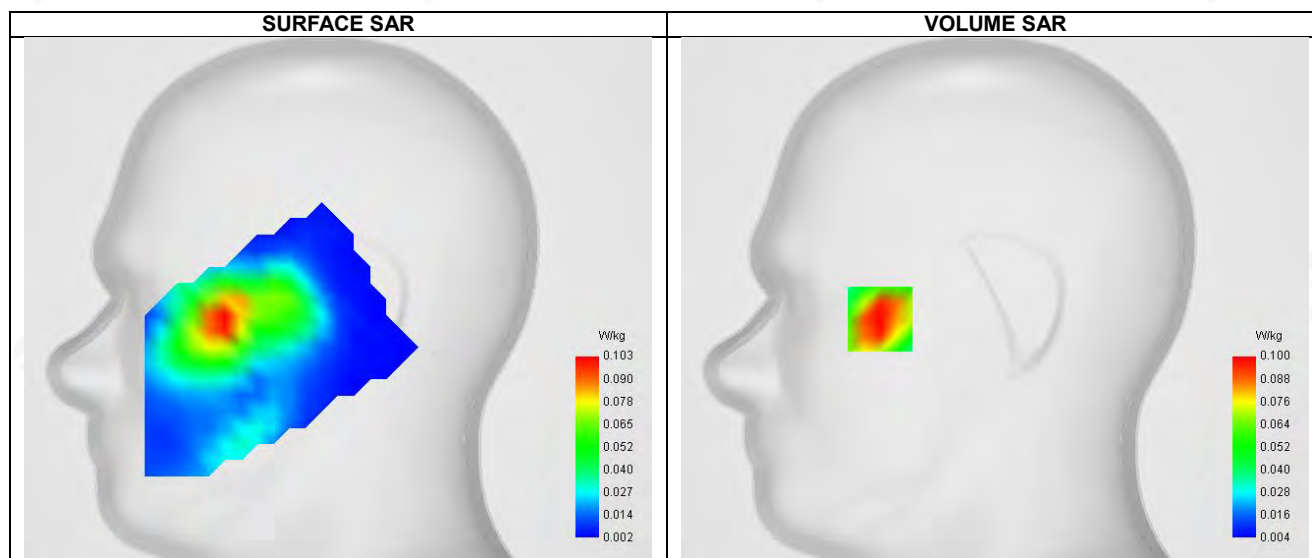


Maximum location: X=-57.00, Y=-10.00 ; SAR Peak: 0.15 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.098
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	63.526493

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.145	0.100	0.063	0.042	0.029	0.019	0.013

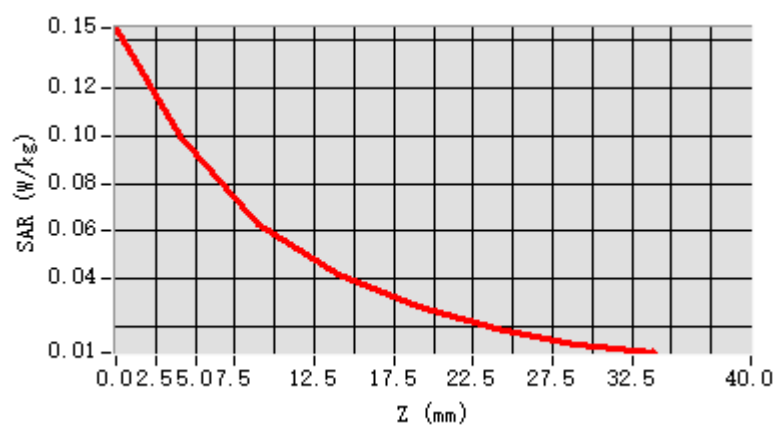


F. 3D Image

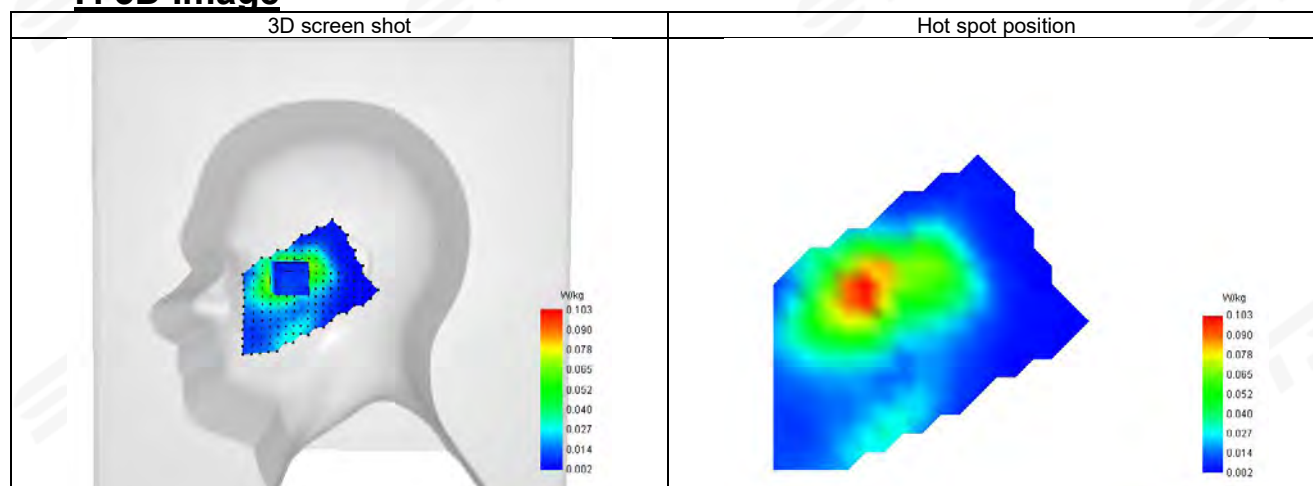

Plot 4: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 1900
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1850.2
Relative permittivity (real part)	40.68
Conductivity (S/m)	1.42

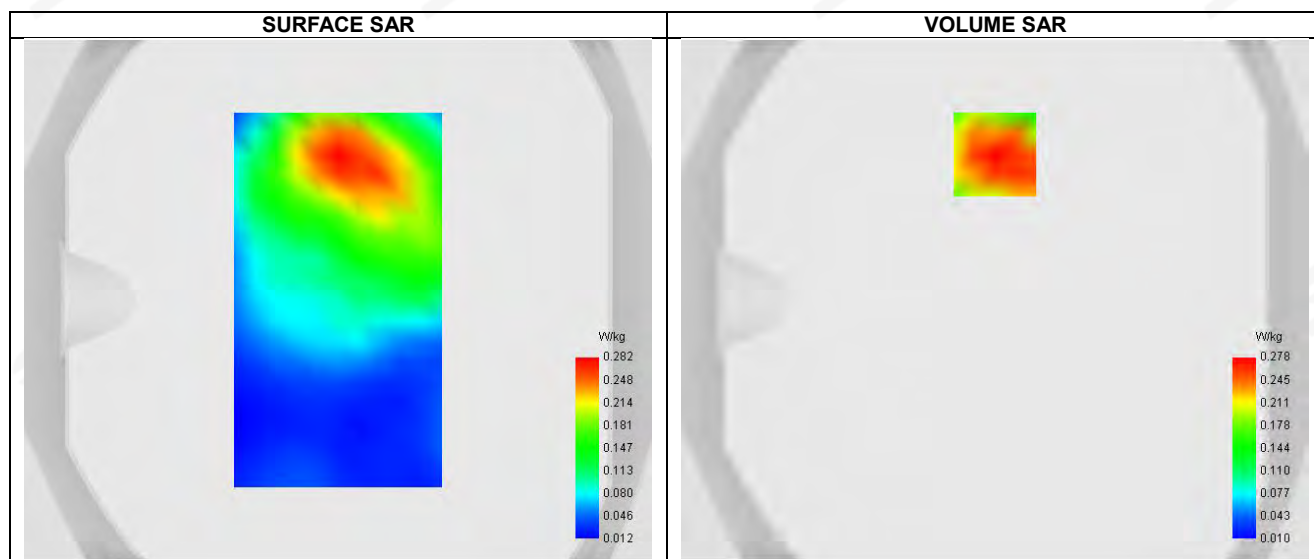


Maximum location: X=0.00, Y=56.00 ; SAR Peak: 0.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.153
SAR 1g (W/Kg)	0.267
Horizontal validation criteria: minimum distance (mm)	11.325144
Vertical validation criteria: SAR ratio M2/M1 (%)	59.775148

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.412	0.278	0.169	0.111	0.068	0.043	0.027

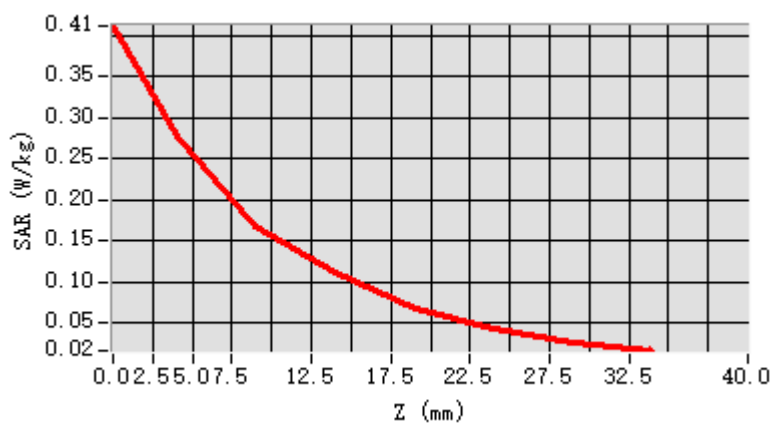


F. 3D Image

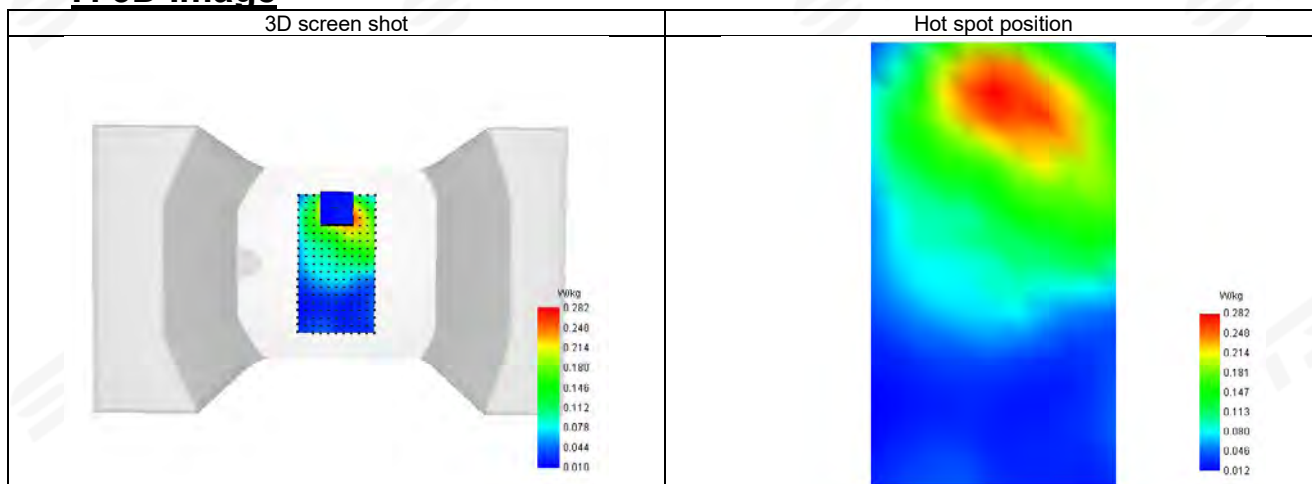

Plot 5: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	40.09
Conductivity (S/m)	1.45

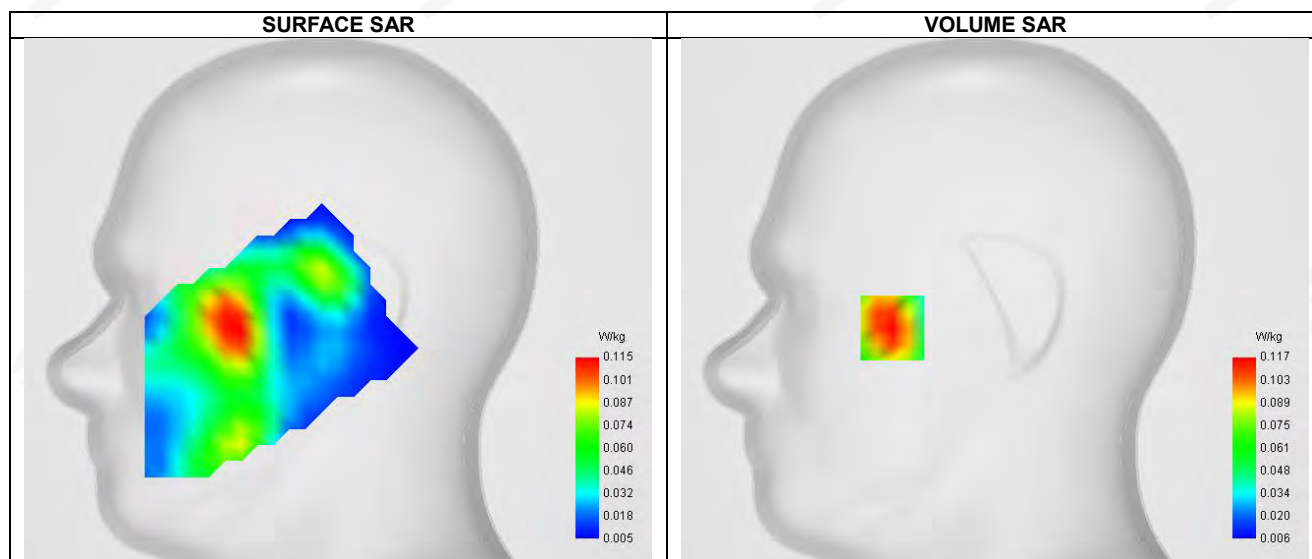


Maximum location: X=-51.00, Y=-14.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.072
SAR 1g (W/Kg)	0.114
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	66.285352

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.170	0.117	0.078	0.054	0.041	0.029	0.021

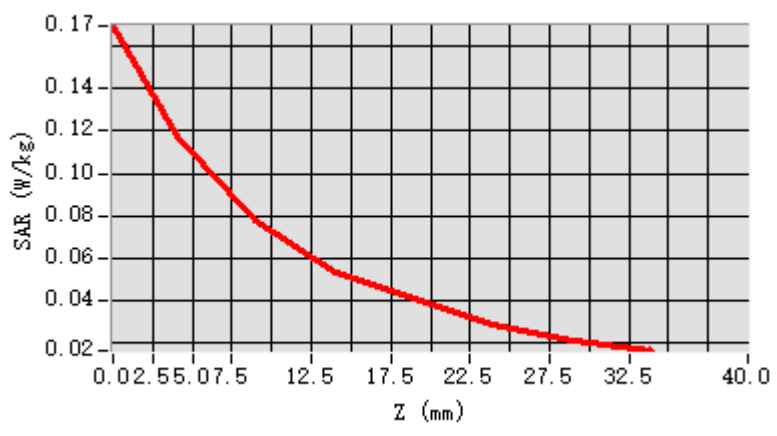


F. 3D Image

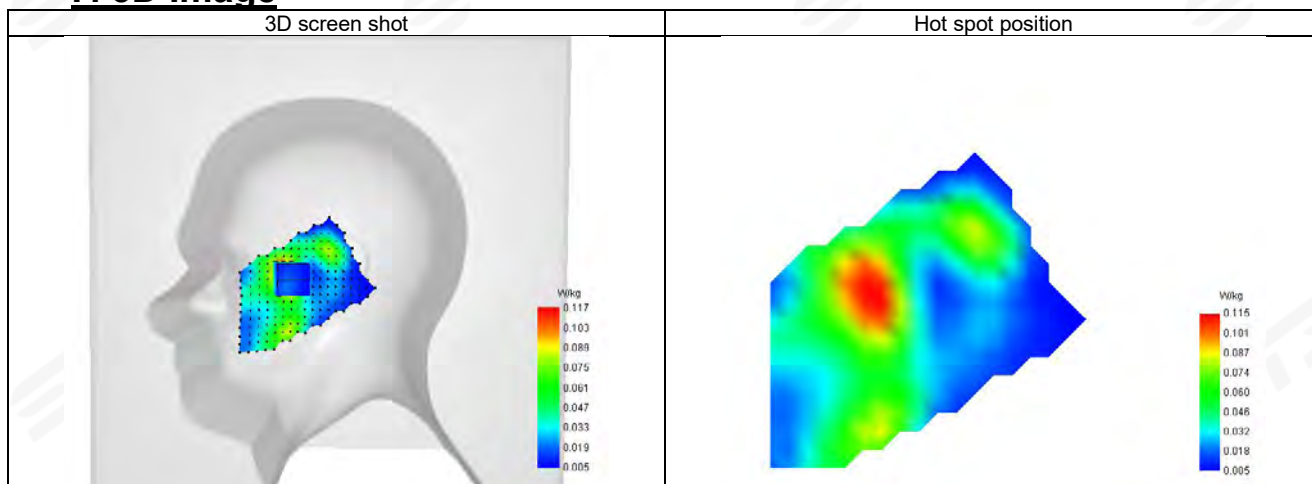

Plot 6: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	40.09
Conductivity (S/m)	1.45

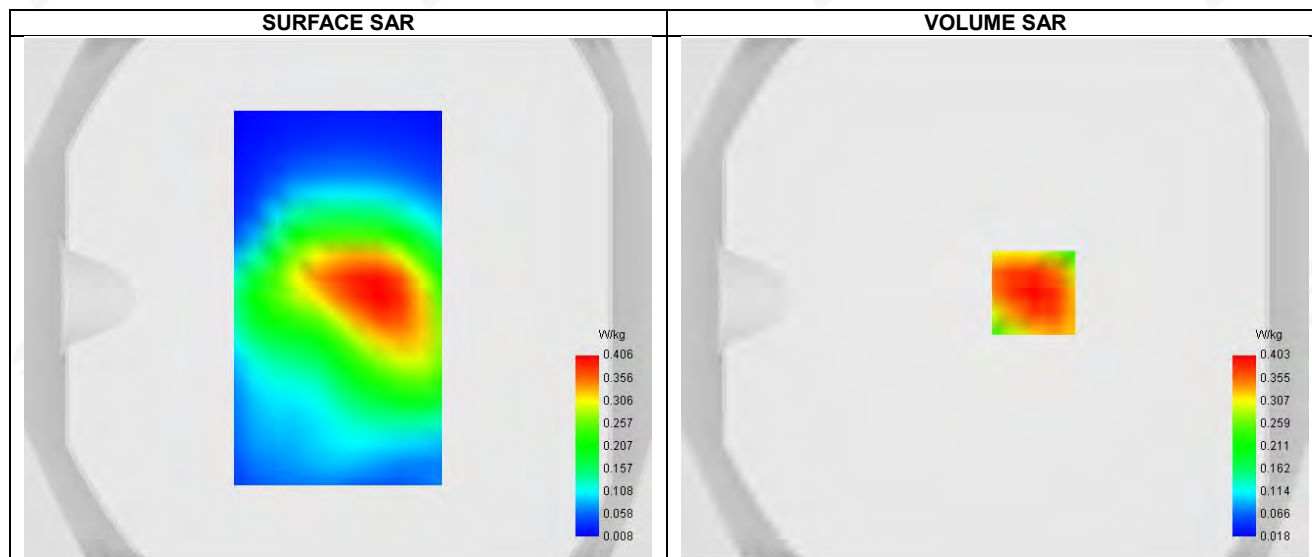


Maximum location: X=15.00, Y=2.00 ; SAR Peak: 0.57 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.387
Horizontal validation criteria: minimum distance (mm)	10.326912
Vertical validation criteria: SAR ratio M2/M1 (%)	64.764267

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.567	0.403	0.261	0.171	0.111	0.072	0.047

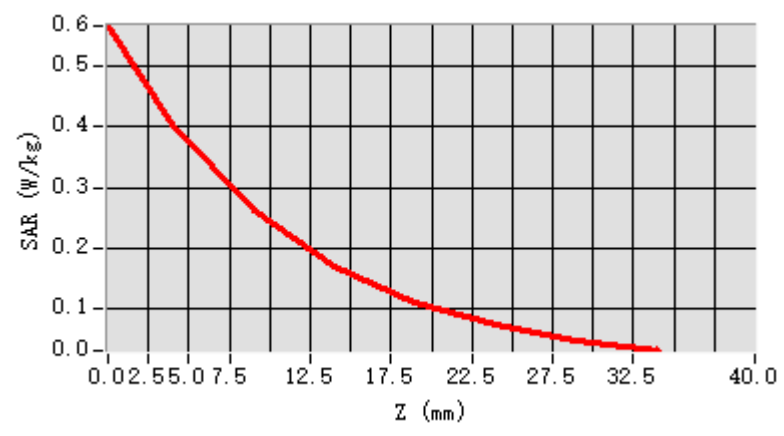


F. 3D Image

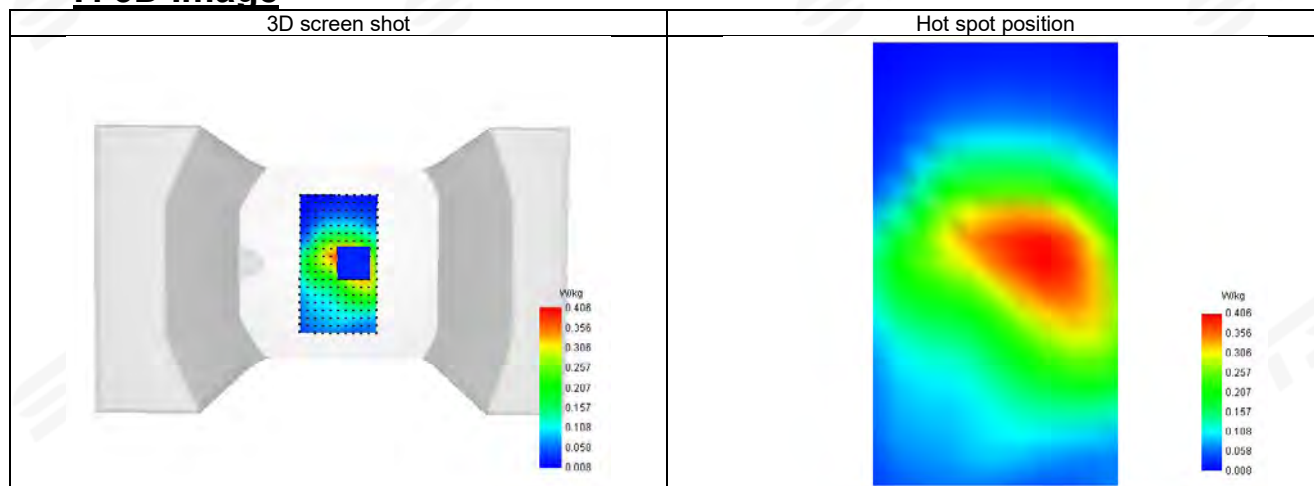

Plot 7: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA V
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.21
Conductivity (S/m)	0.89

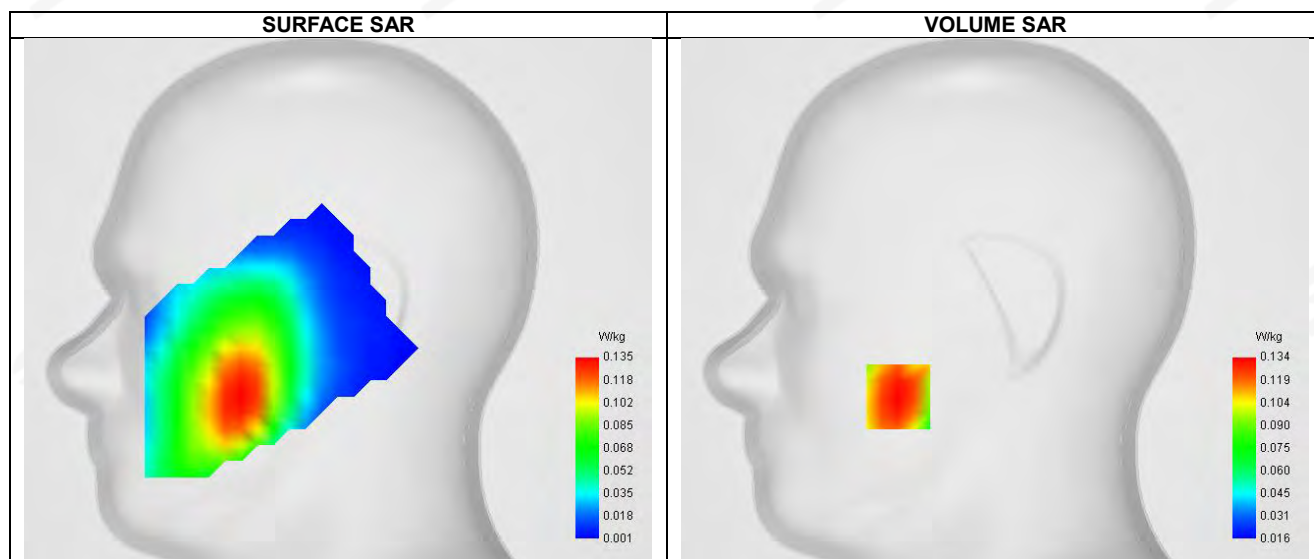


Maximum location: X=-48.00, Y=-48.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.131
Horizontal validation criteria: minimum distance (mm)	11.129502
Vertical validation criteria: SAR ratio M2/M1 (%)	79.104477

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.167	0.134	0.106	0.088	0.072	0.056	0.044

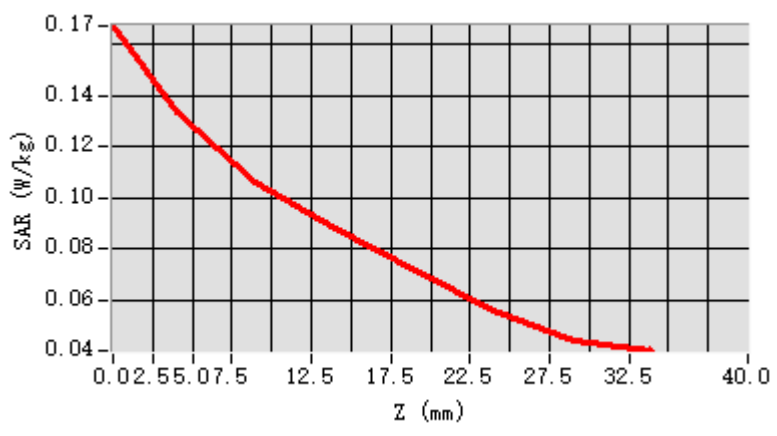


F. 3D Image

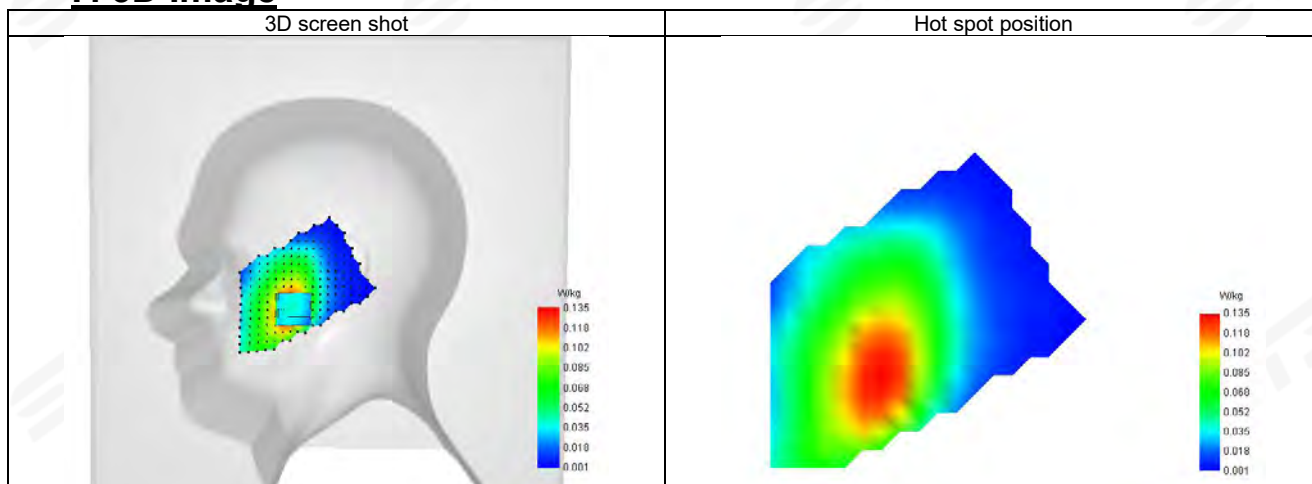

Plot 8: DUT: Smart Phone; EUT Model: ROCK 2 Pro


Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA V
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.21
Conductivity (S/m)	0.89

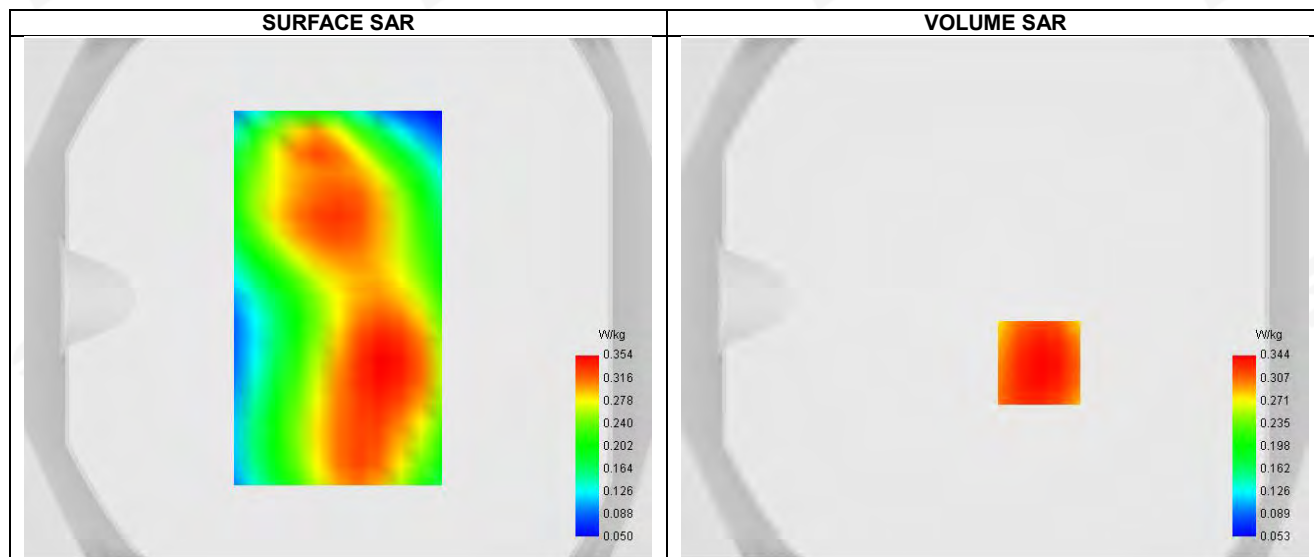
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.334
Horizontal validation criteria: minimum distance (mm)	11.302189
Vertical validation criteria: SAR ratio M2/M1 (%)	74.709302

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.433	0.344	0.257	0.197	0.148	0.112	0.084

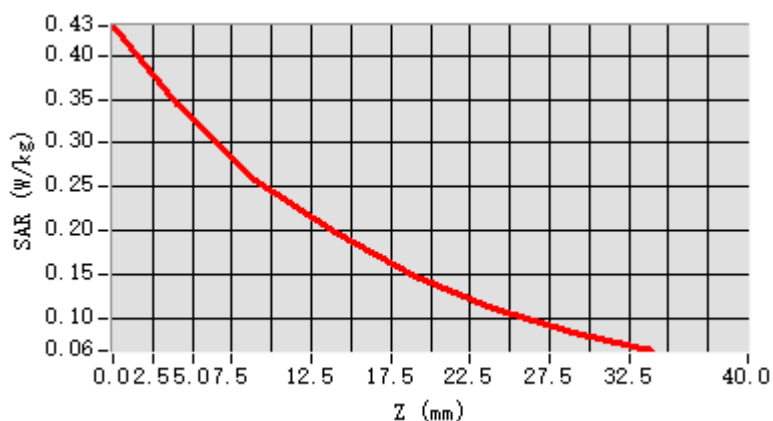


F. 3D Image

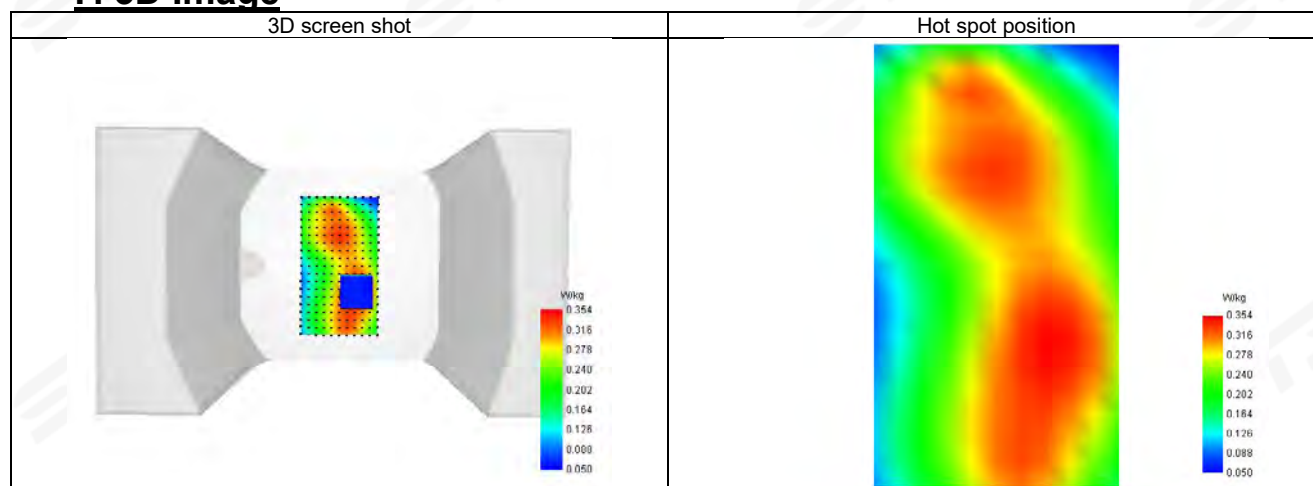

Plot 9: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-20
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1860
Relative permittivity (real part)	39.87
Conductivity (S/m)	1.38

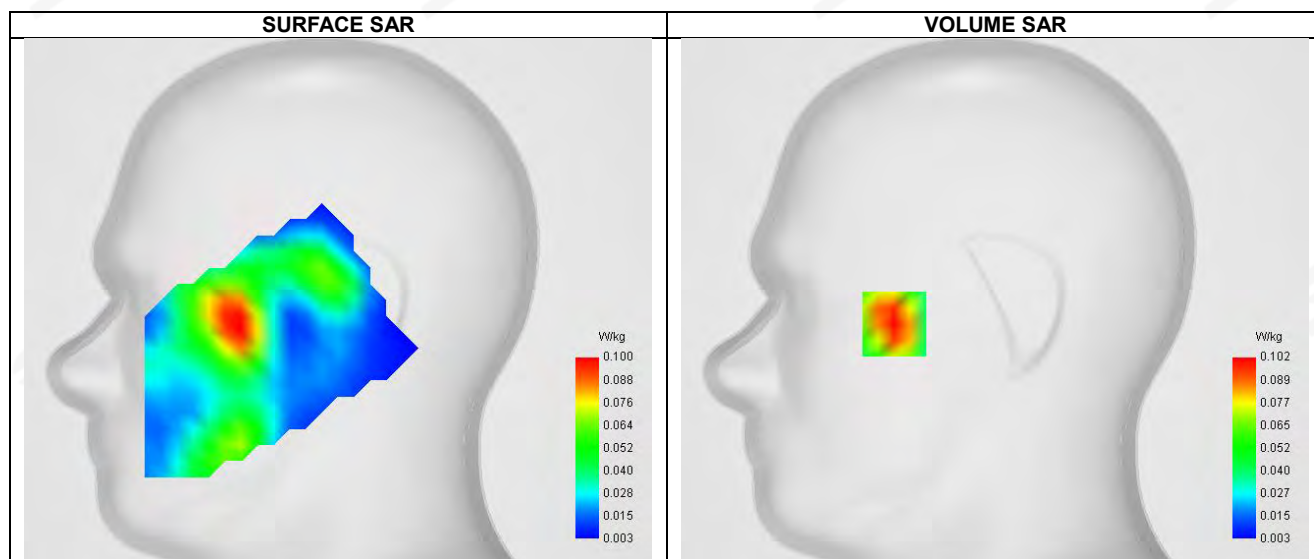


Maximum location: X=-50.00, Y=-12.00 ; SAR Peak: 0.14 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.061
SAR 1g (W/Kg)	0.097
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	69.463960

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.140	0.102	0.071	0.049	0.037	0.027	0.019

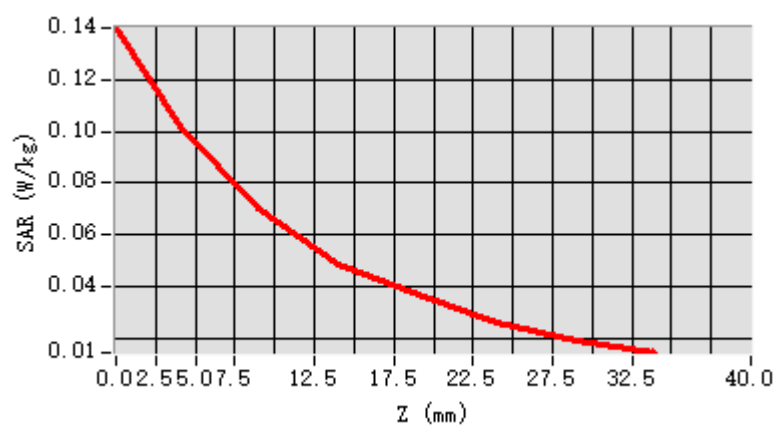


F. 3D Image

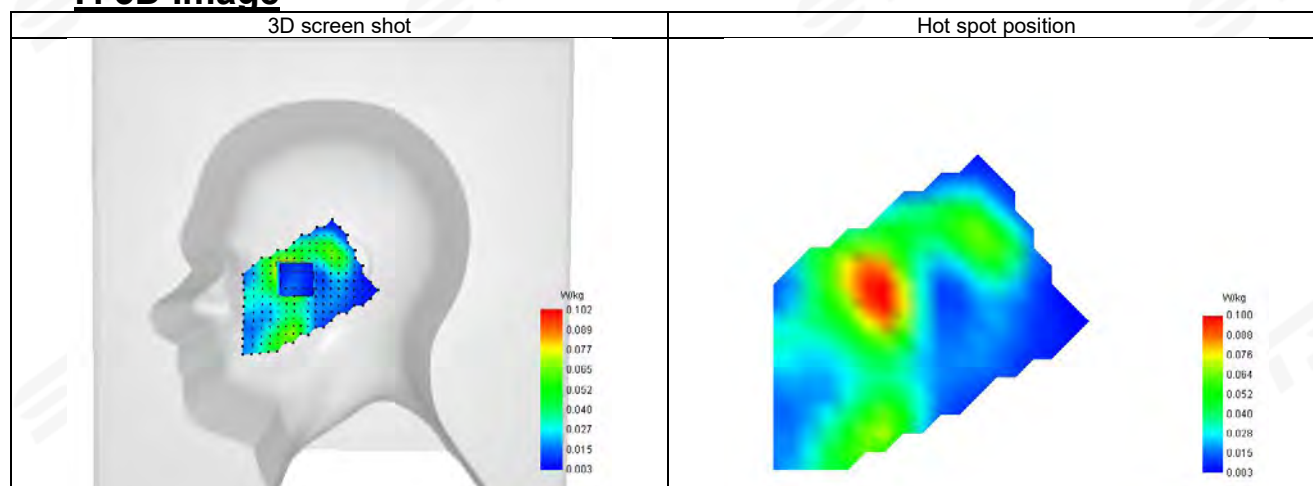

**Plot 10: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-20
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 2(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1860
Relative permittivity (real part)	39.87
Conductivity (S/m)	1.38

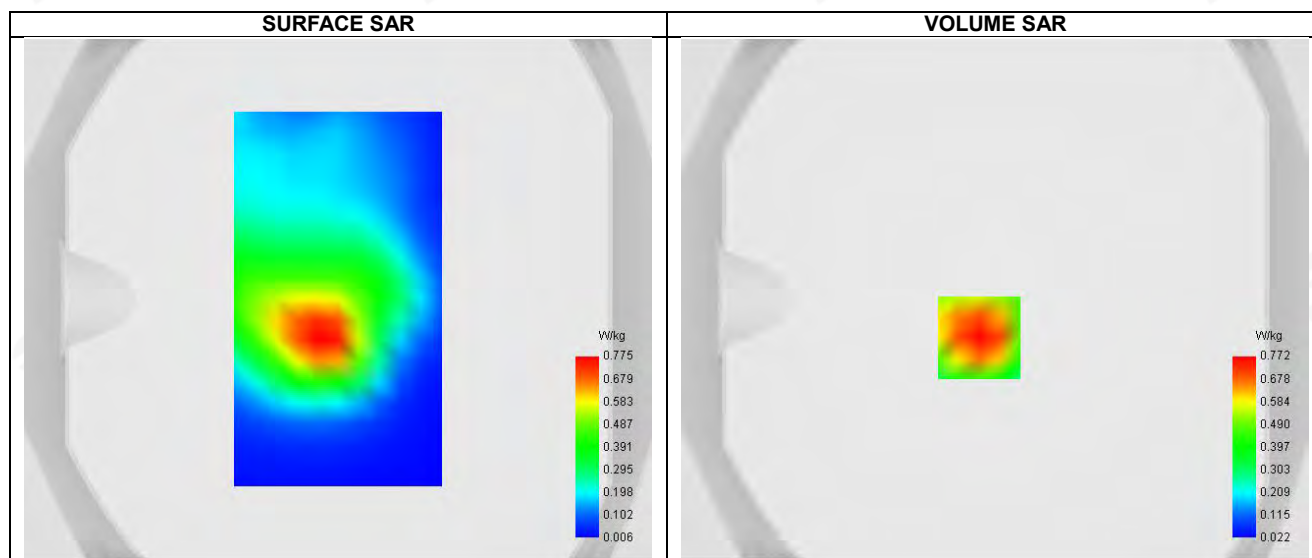


Maximum location: X=-6.00, Y=-15.00 ; SAR Peak: 1.12 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.435
SAR 1g (W/Kg)	0.733
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	63.226506

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.097	0.772	0.488	0.309	0.192	0.120	0.076

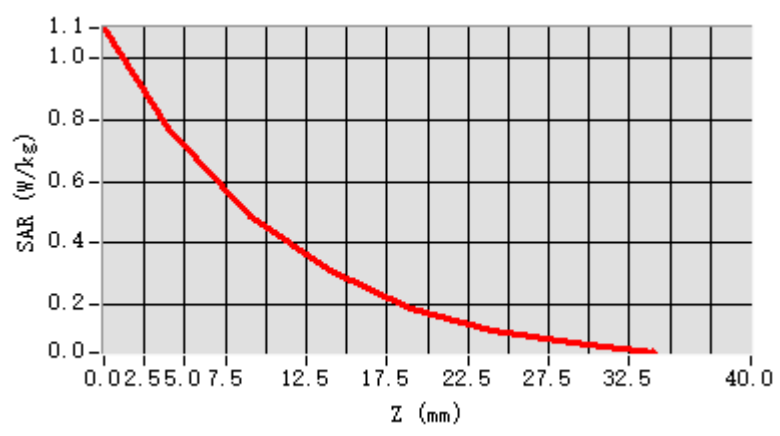


F. 3D Image

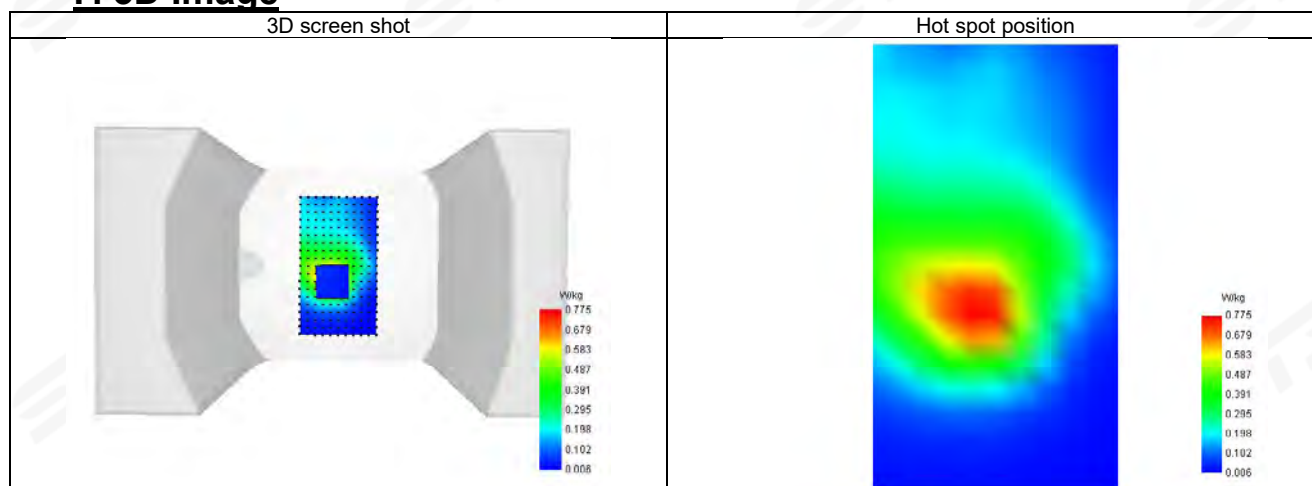

Plot 11: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720
Relative permittivity (real part)	39.66
Conductivity (S/m)	1.35

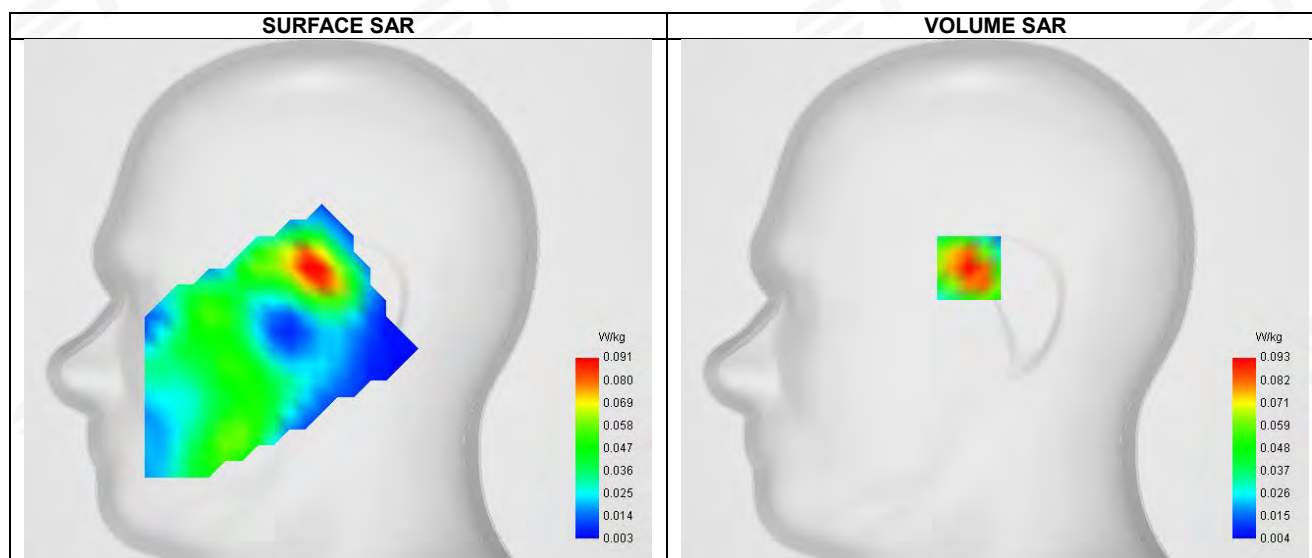


Maximum location: X=-13.00, Y=16.00 ; SAR Peak: 0.13 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.052
SAR 1g (W/Kg)	0.087
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	68.668512

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.126	0.093	0.064	0.042	0.030	0.020	0.014

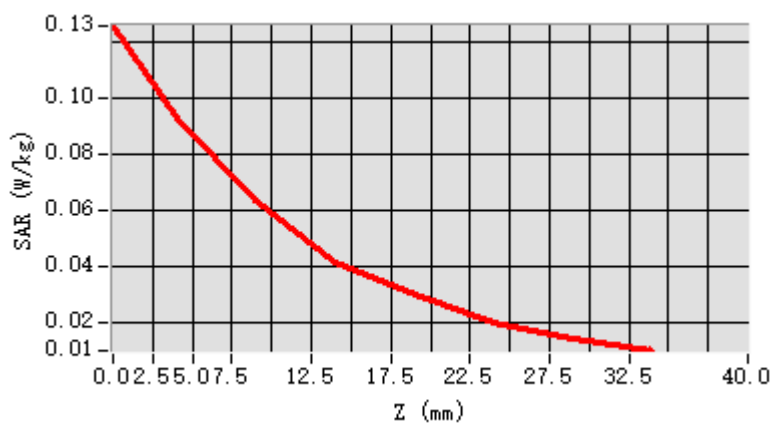


F. 3D Image

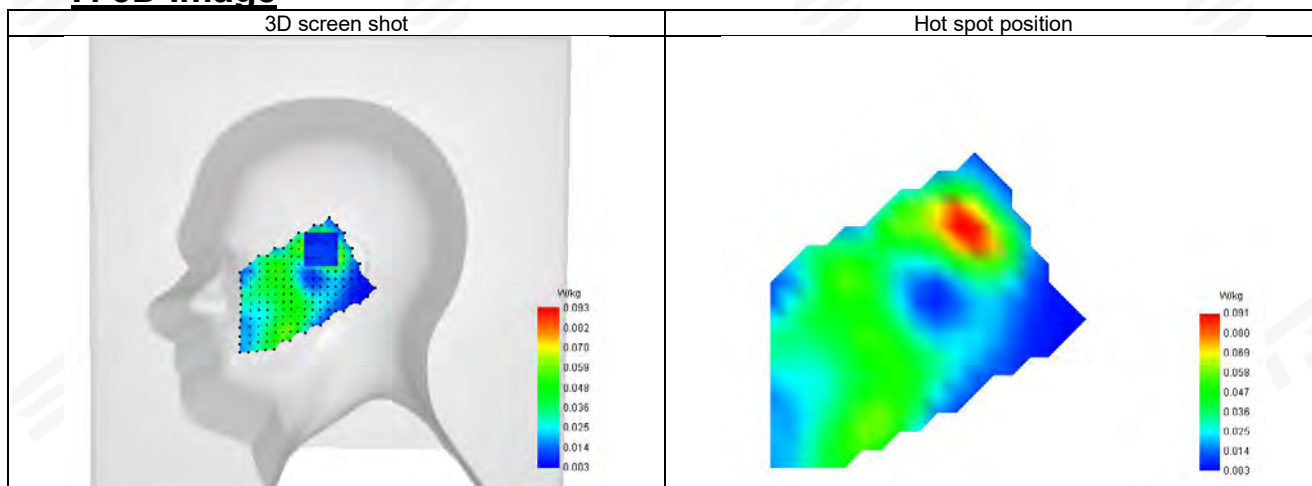

Plot 12: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720
Relative permittivity (real part)	39.66
Conductivity (S/m)	1.35

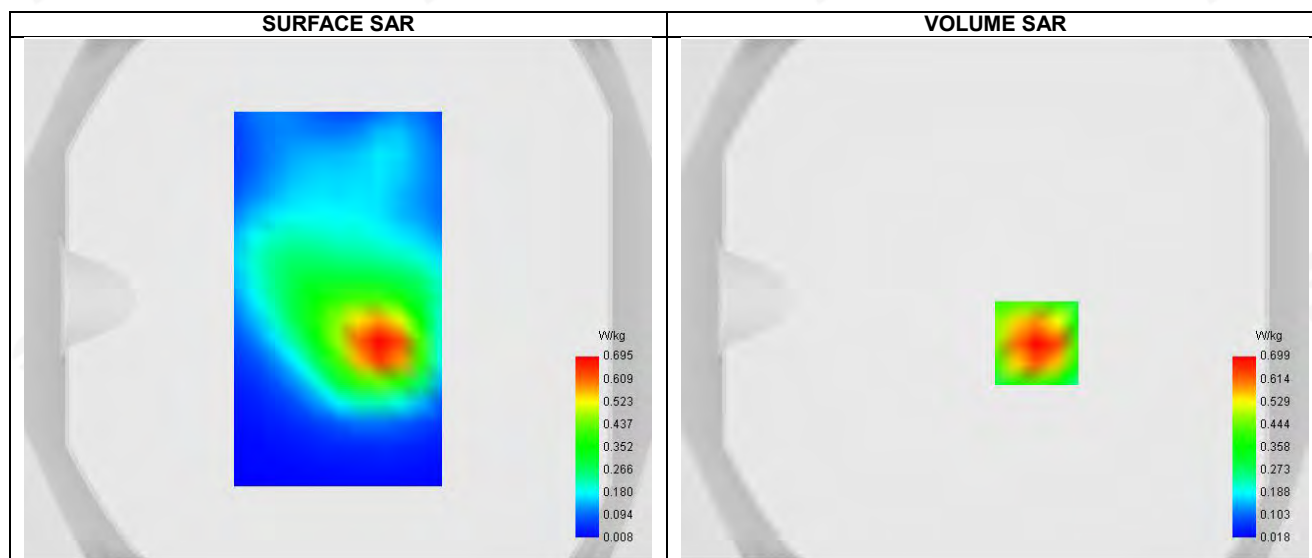


Maximum location: X=16.00, Y=-17.00 ; SAR Peak: 1.03 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.379
SAR 1g (W/Kg)	0.663
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	62.215155

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.006	0.699	0.435	0.273	0.167	0.104	0.064

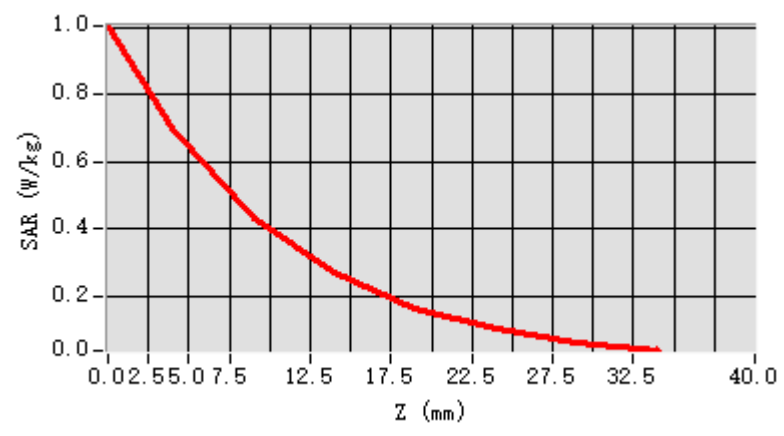


F. 3D Image

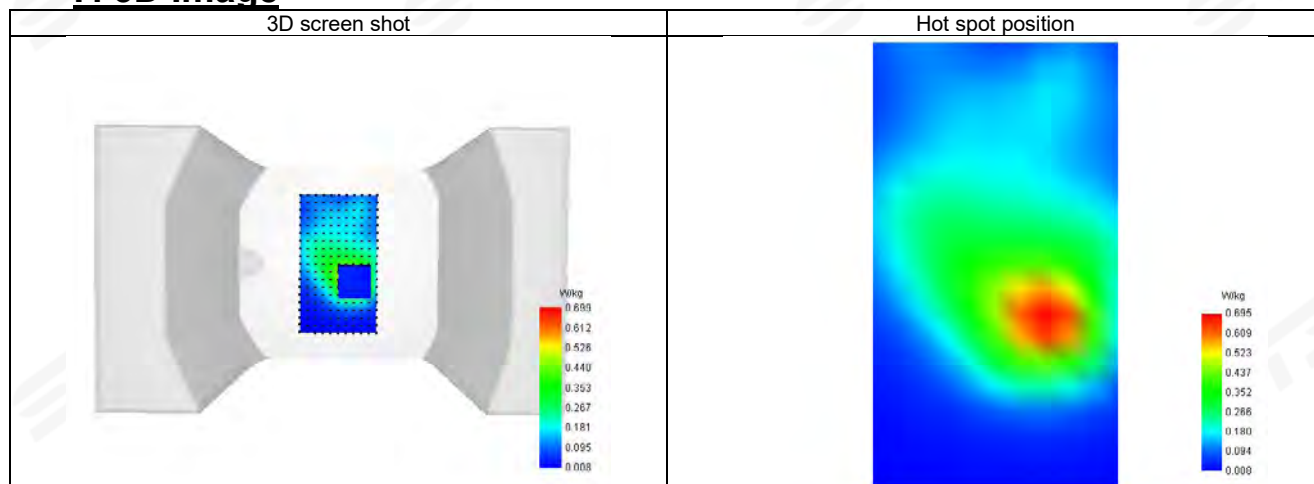

Plot 13: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829
Relative permittivity (real part)	42.46
Conductivity (S/m)	0.90

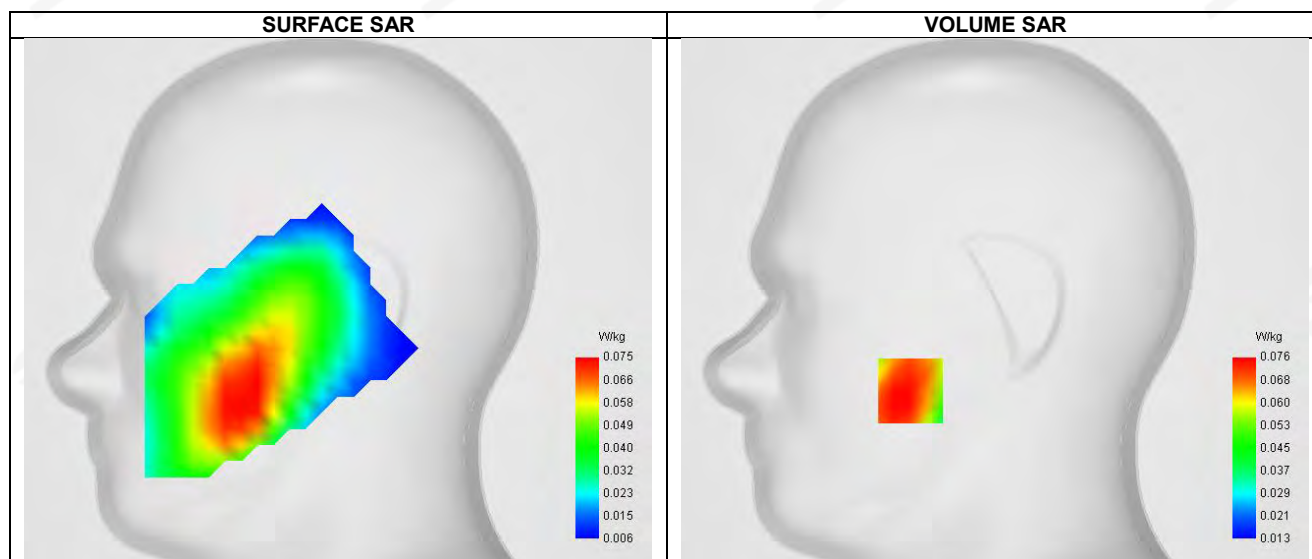


Maximum location: X=-42.00, Y=-45.00 ; SAR Peak: 0.10 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.059
SAR 1g (W/Kg)	0.077
Horizontal validation criteria: minimum distance (mm)	25.298221
Vertical validation criteria: SAR ratio M2/M1 (%)	80.618426

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.107	0.076	0.057	0.052	0.042	0.039	0.028

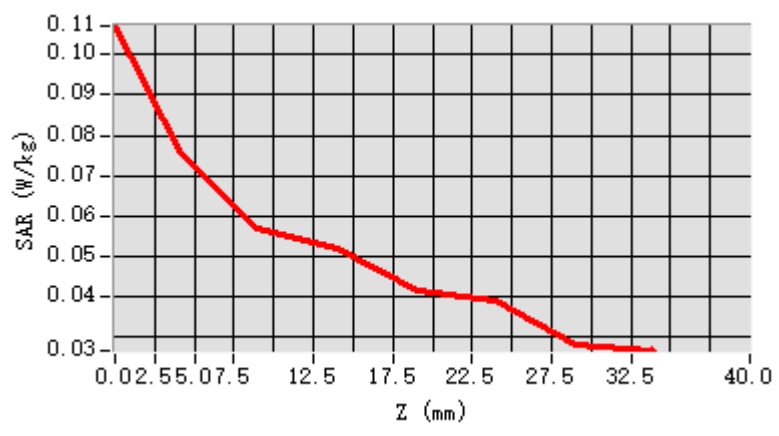


F. 3D Image

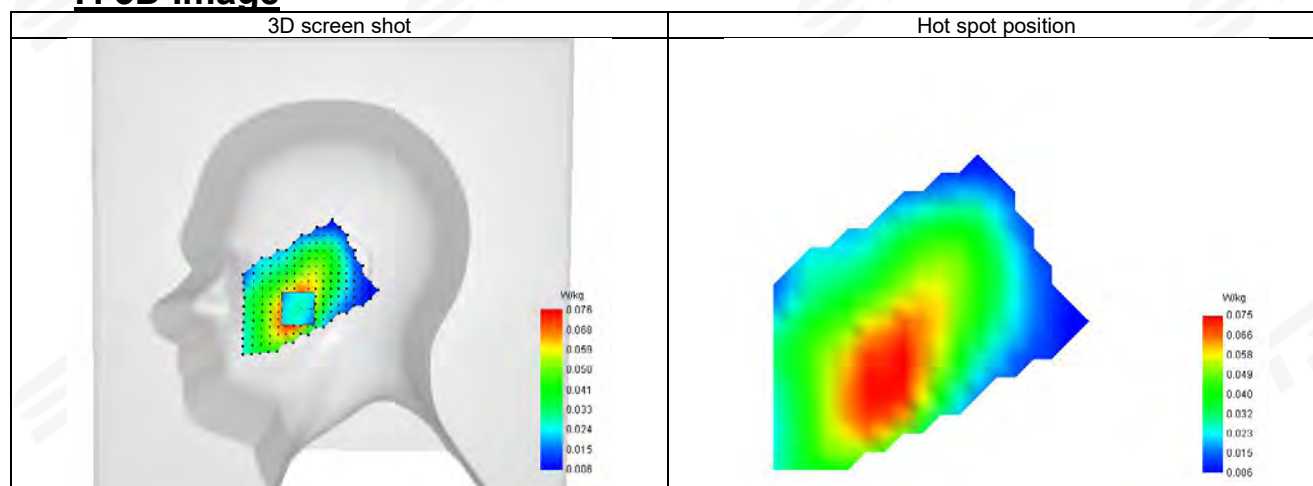

**Plot 14: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829
Relative permittivity (real part)	42.46
Conductivity (S/m)	0.90

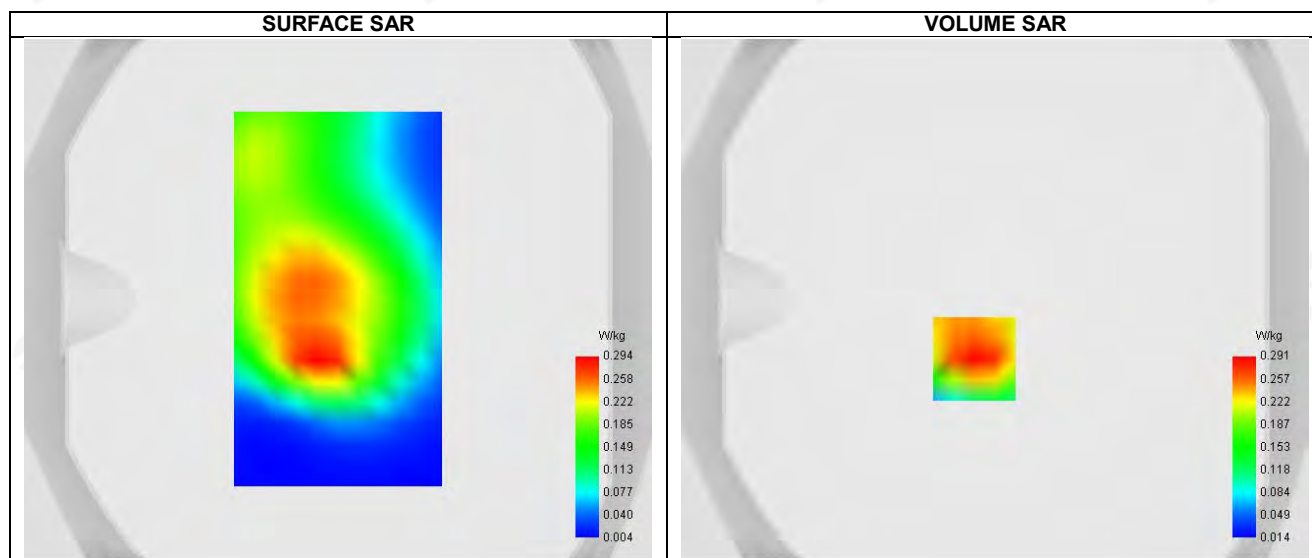


Maximum location: X=-8.00, Y=-23.00 ; SAR Peak: 0.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.277
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	63.067507

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.427	0.291	0.184	0.119	0.082	0.054	0.035

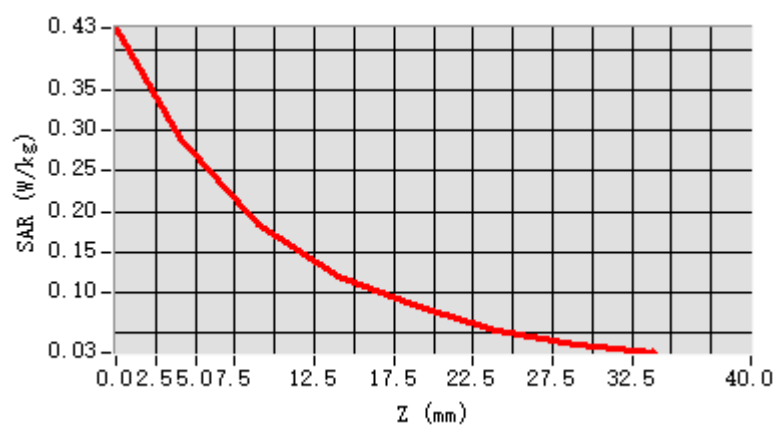


F. 3D Image

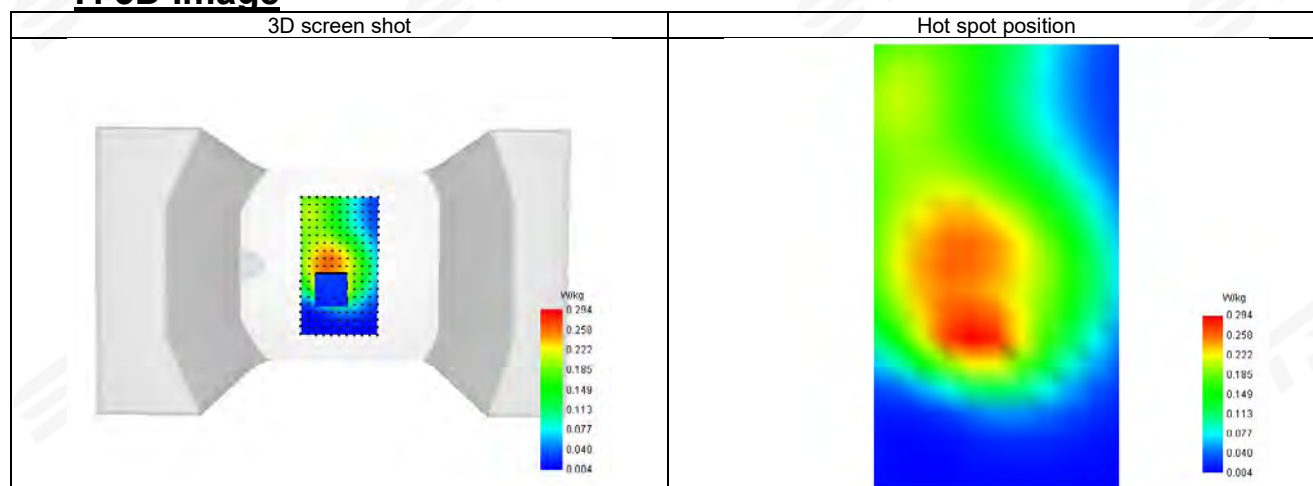

Plot 15: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2535
Relative permittivity (real part)	39.05
Conductivity (S/m)	1.89

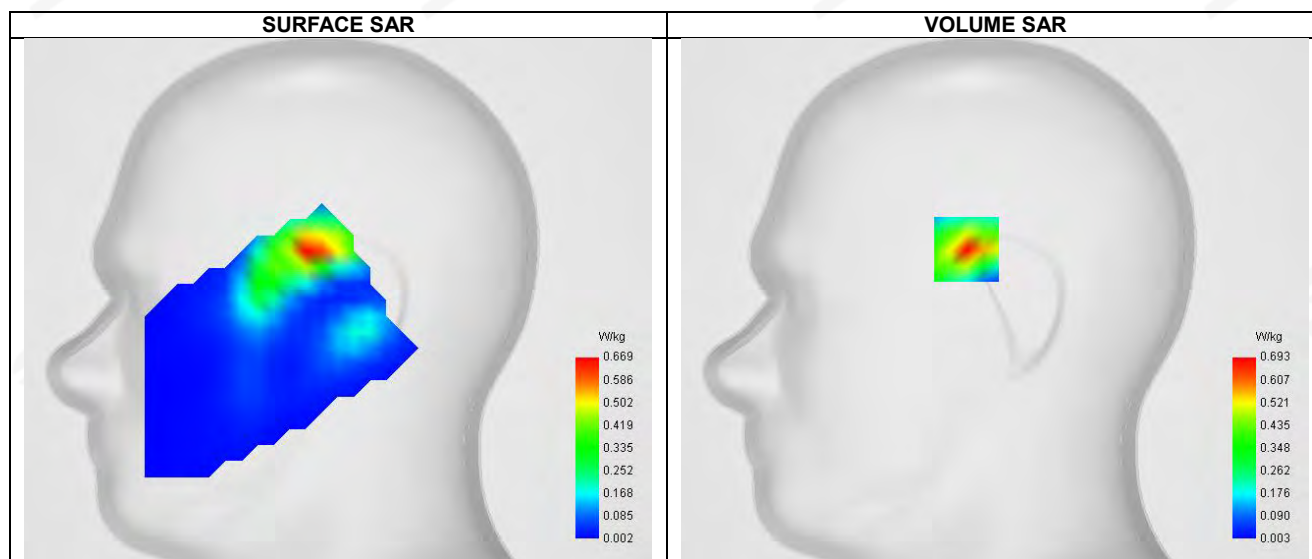


Maximum location: X=-14.00, Y=25.00 ; SAR Peak: 1.10 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.297
SAR 1g (W/Kg)	0.624
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	53.349383

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.107	0.693	0.370	0.193	0.101	0.053	0.028

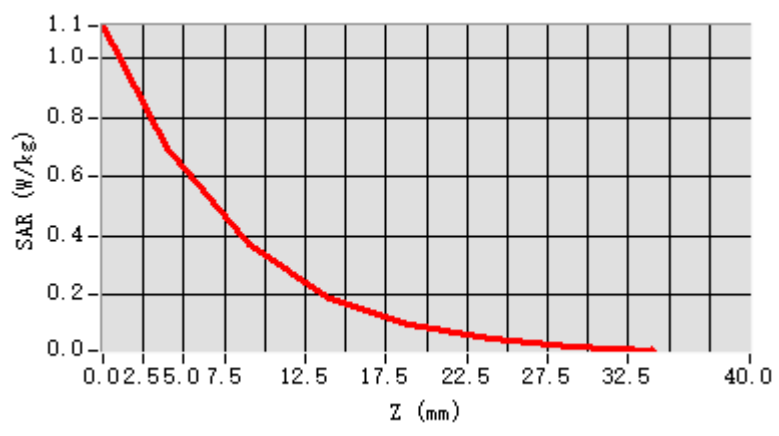


F. 3D Image

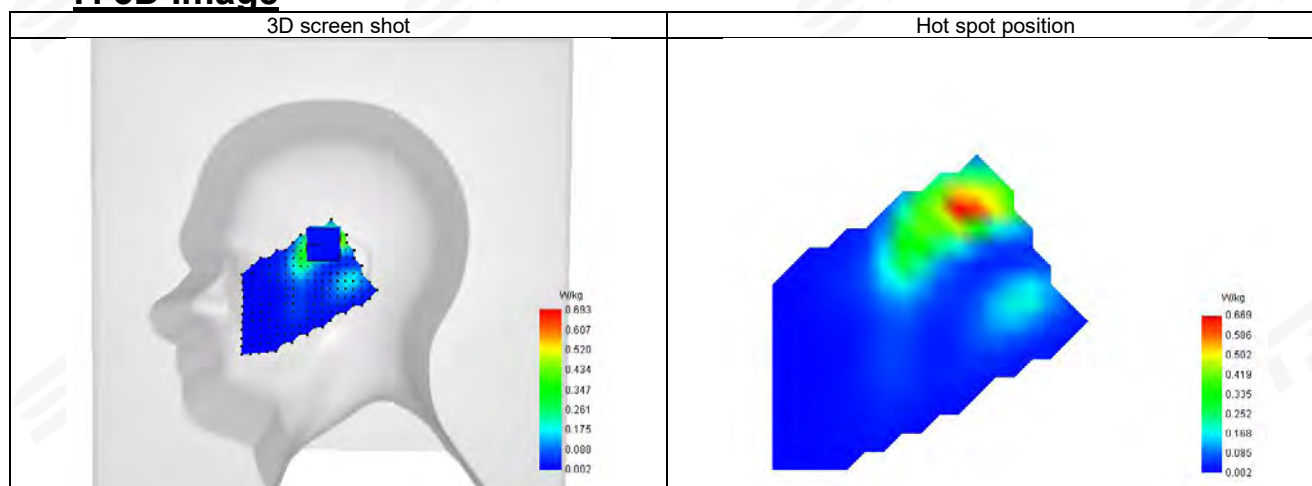

**Plot 16: DUT: Smart Phone; EUT Model: ROCK 2 Pro**


Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2535
Relative permittivity (real part)	39.05
Conductivity (S/m)	1.89

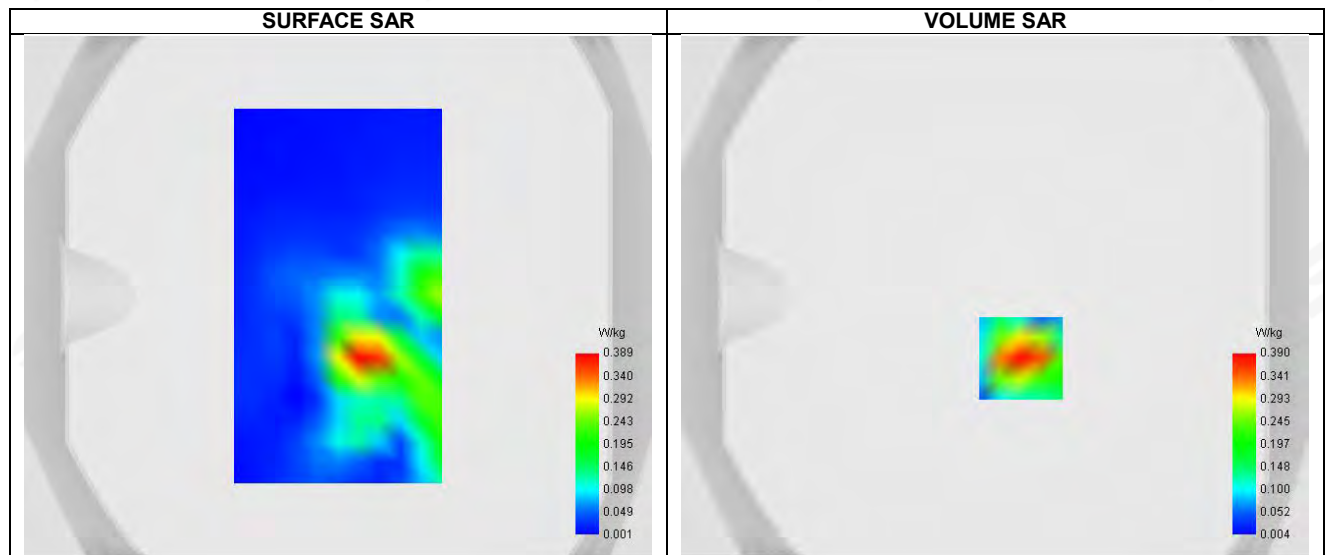**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.179
SAR 1g (W/Kg)	0.364
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.701599

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.594	0.390	0.225	0.127	0.074	0.043	0.025

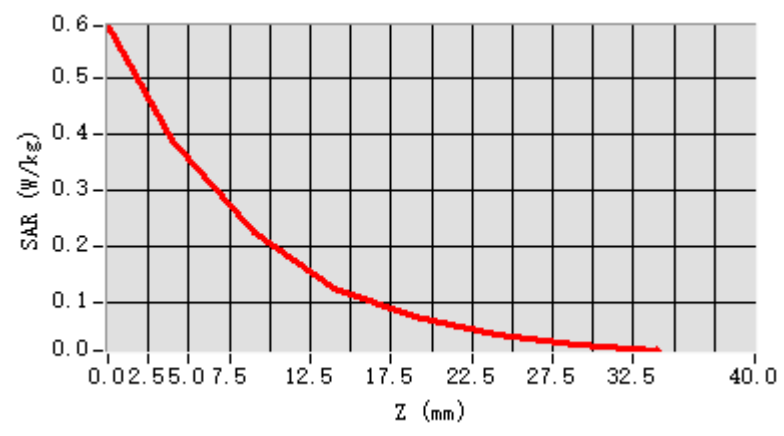


F. 3D Image

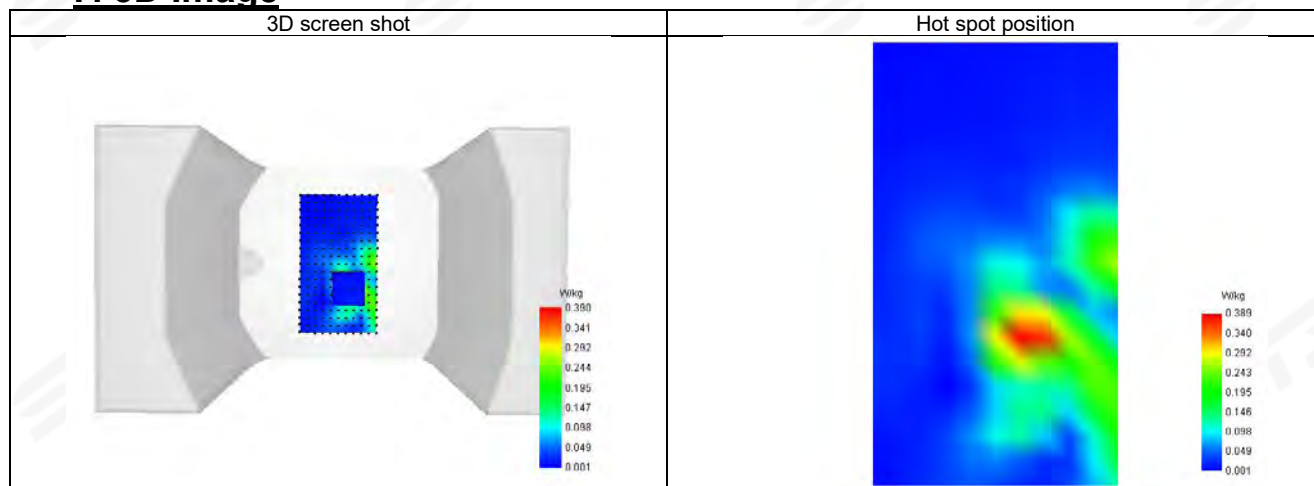

Plot 17: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-16
ConvF	1.51
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.06
Conductivity (S/m)	0.88

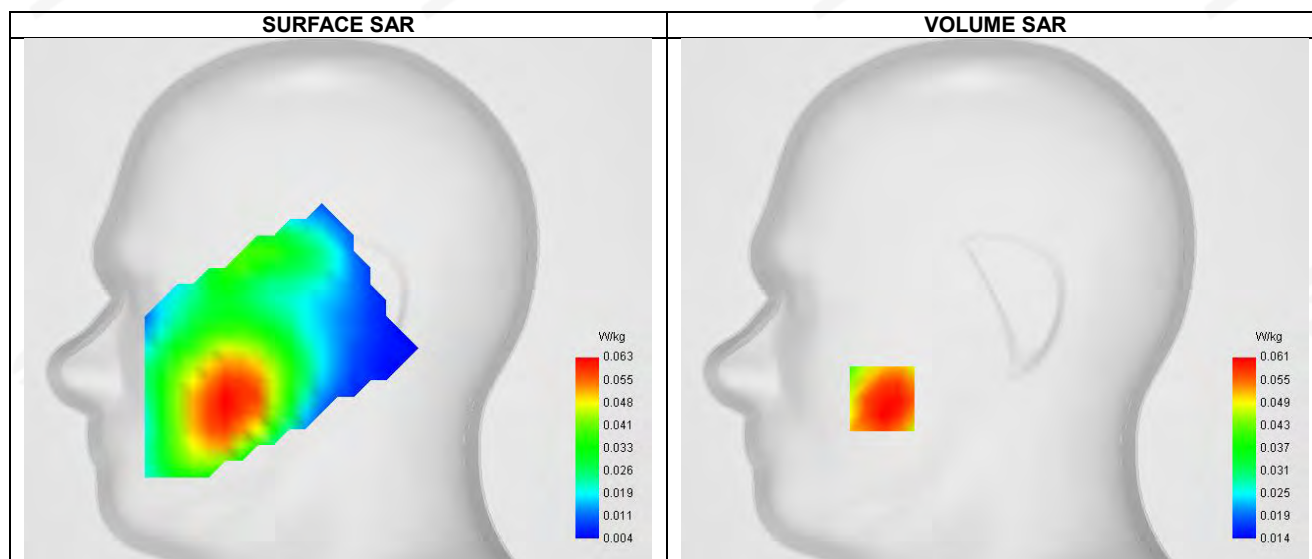


Maximum location: X=-56.00, Y=-49.00 ; SAR Peak: 0.07 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.061
Horizontal validation criteria: minimum distance (mm)	10.561912
Vertical validation criteria: SAR ratio M2/M1 (%)	78.688524

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.077	0.061	0.048	0.043	0.036	0.030	0.025

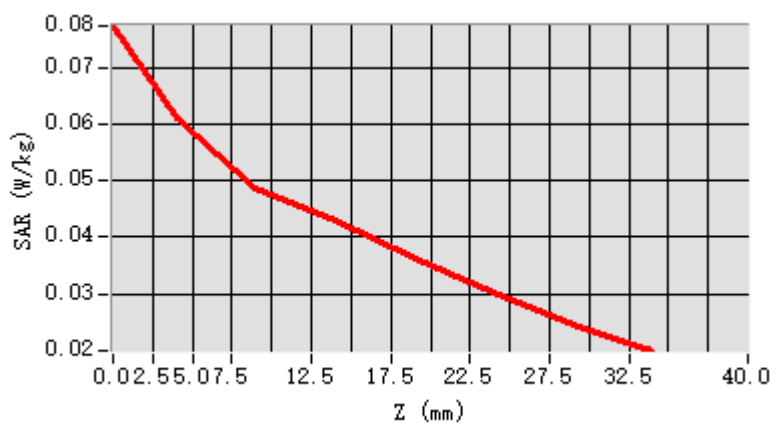


F. 3D Image

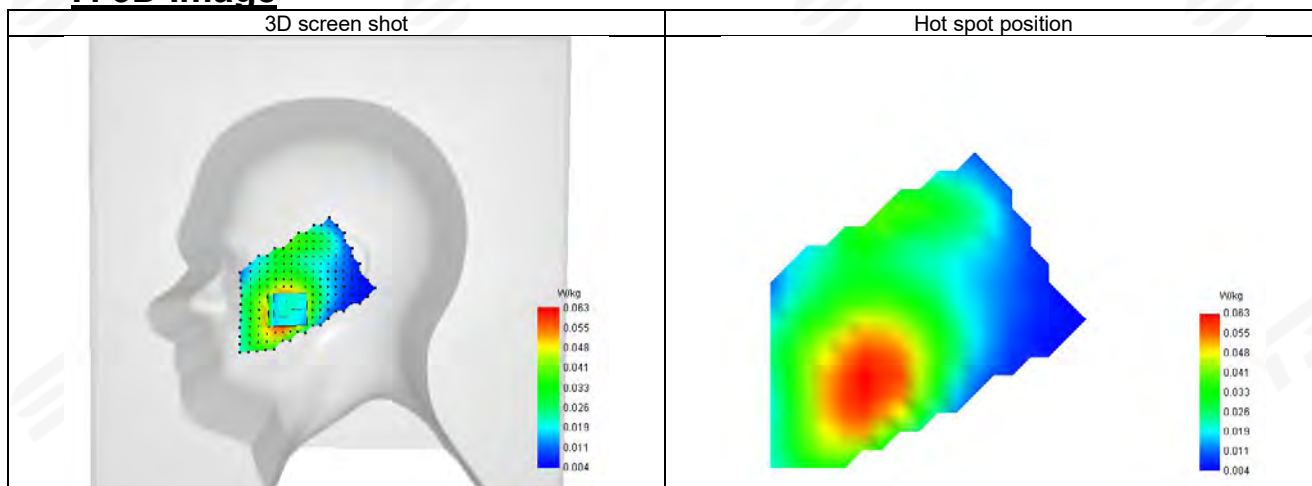

**Plot 18: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-16
ConvF	1.51
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.06
Conductivity (S/m)	0.88

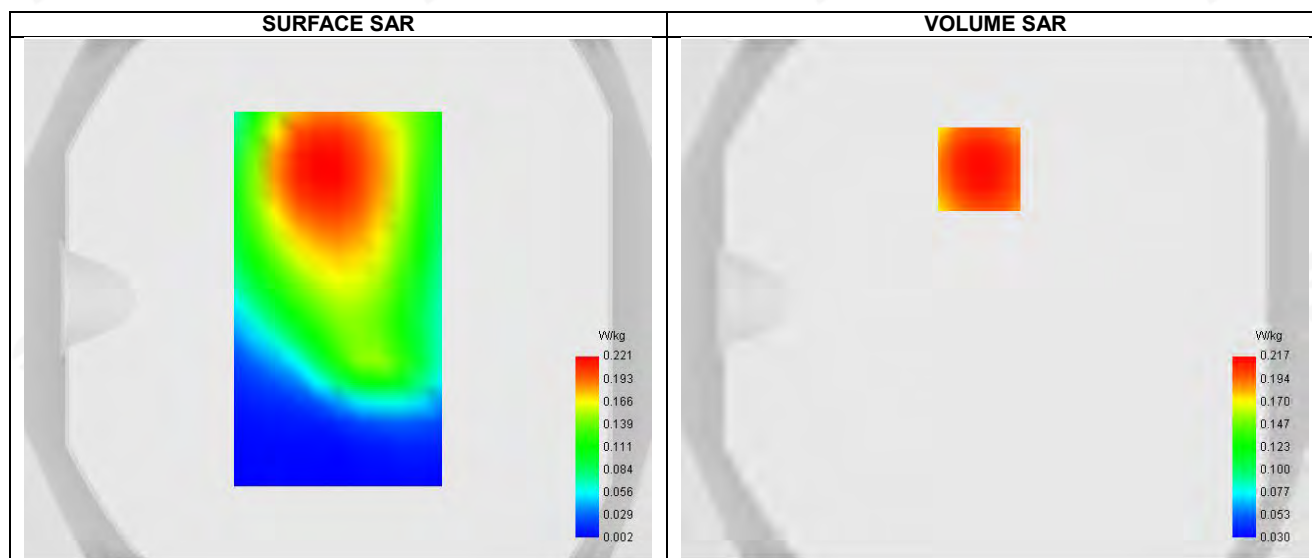


Maximum location: X=-6.00, Y=50.00 ; SAR Peak: 0.27 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.154
SAR 1g (W/Kg)	0.212
Horizontal validation criteria: minimum distance (mm)	12.310972
Vertical validation criteria: SAR ratio M2/M1 (%)	76.331360

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.267	0.217	0.169	0.129	0.099	0.072	0.053

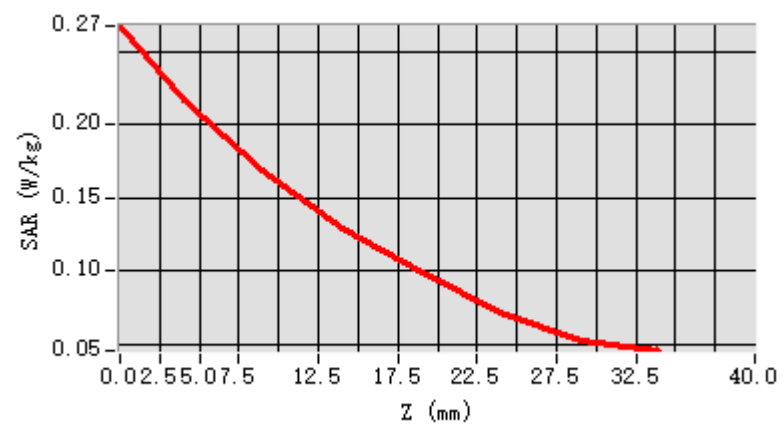


F. 3D Image

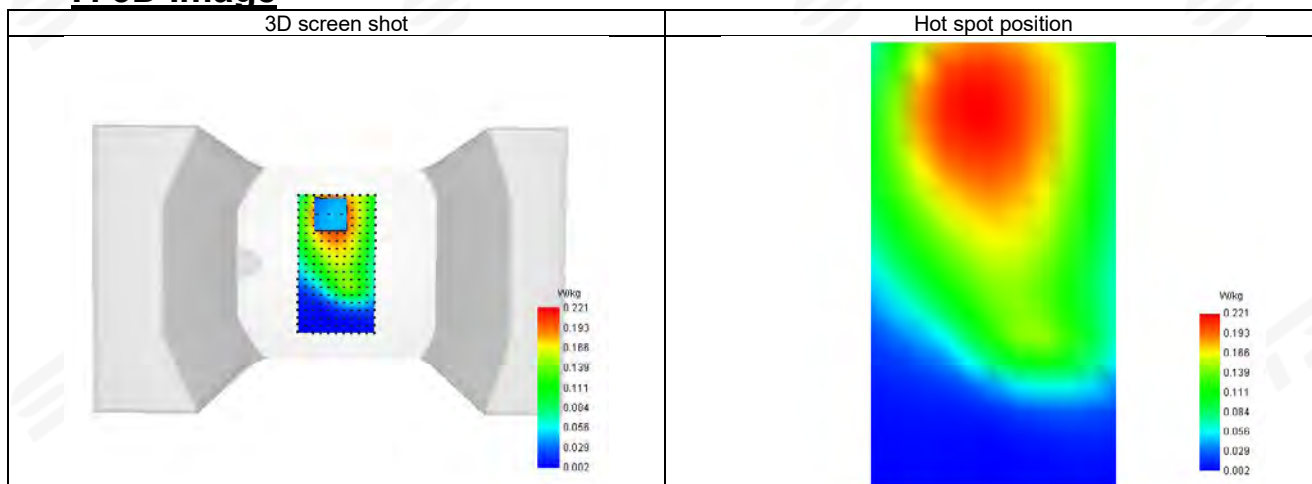

Plot 19: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-16
ConvF	1.51
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	710
Relative permittivity (real part)	42.50
Conductivity (S/m)	0.89

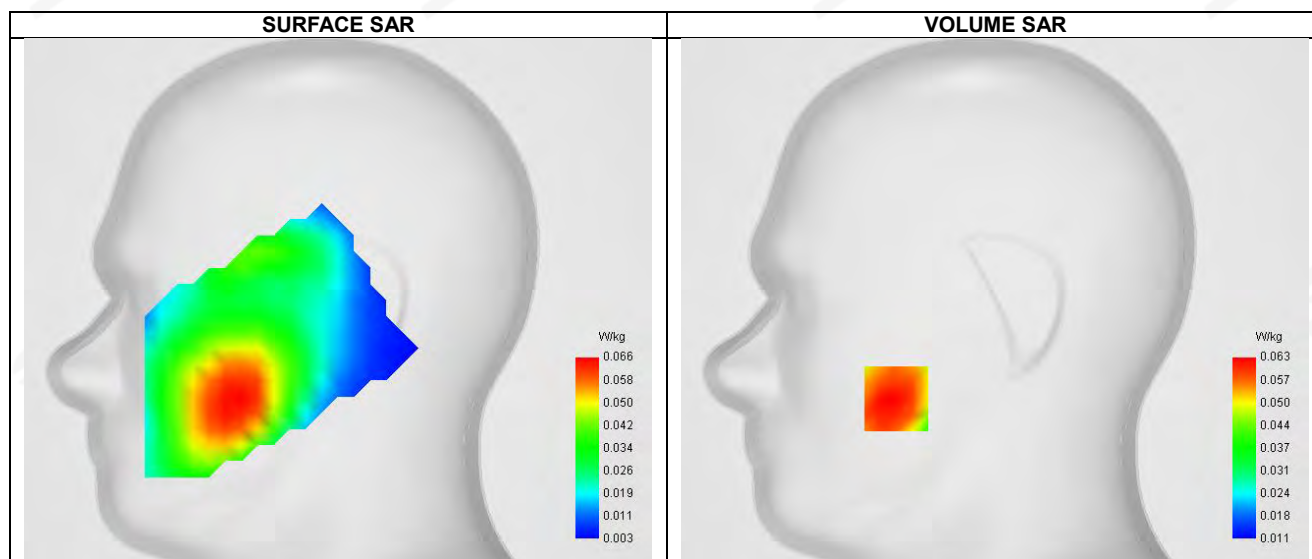


Maximum location: X=-49.00, Y=-49.00 ; SAR Peak: 0.08 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.062
Horizontal validation criteria: minimum distance (mm)	15.269120
Vertical validation criteria: SAR ratio M2/M1 (%)	85.714285

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.072	0.063	0.054	0.046	0.038	0.033	0.026

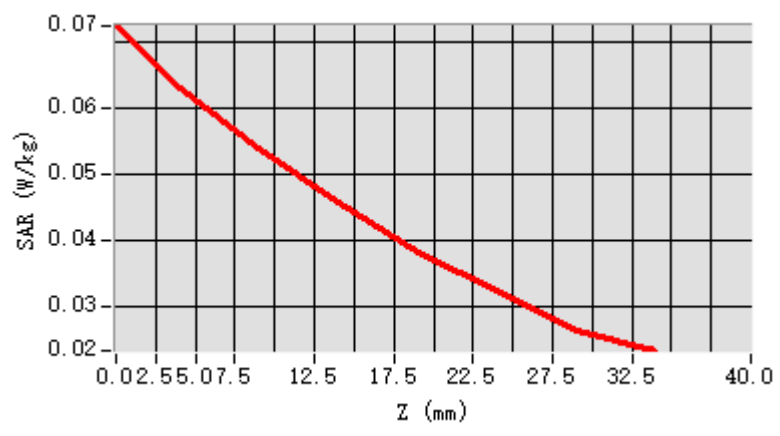


F. 3D Image

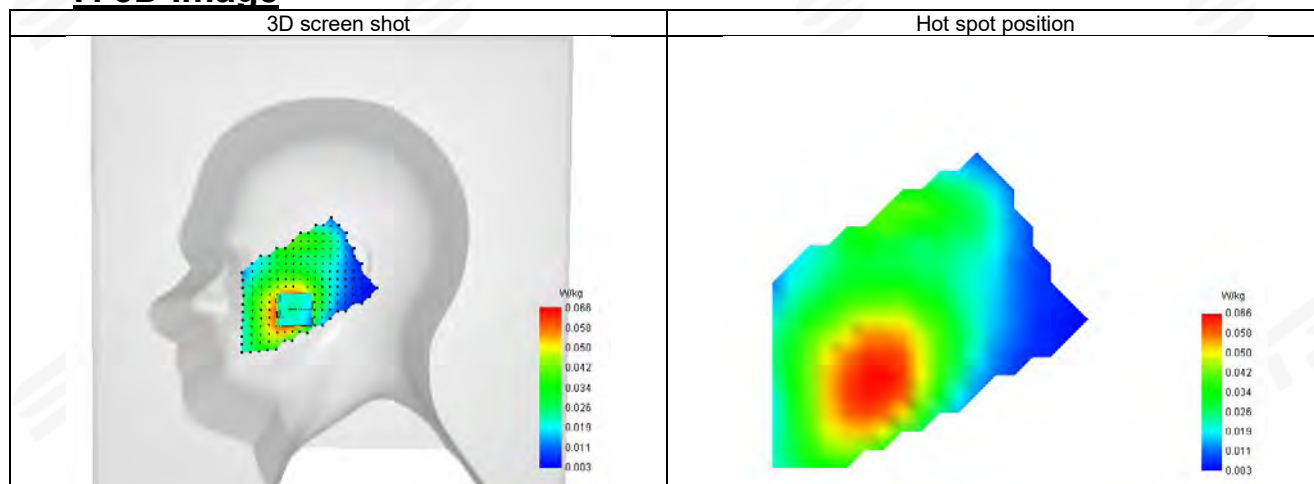

**Plot 20: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-16
ConvF	1.51
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	710
Relative permittivity (real part)	42.50
Conductivity (S/m)	0.89

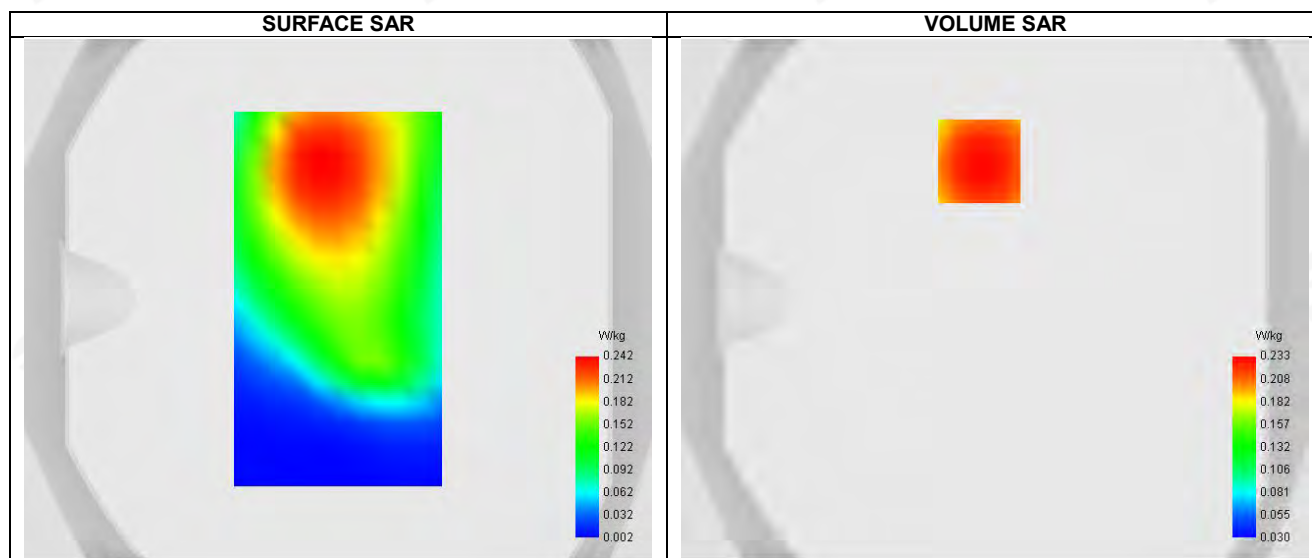


Maximum location: X=-6.00, Y=53.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.228
Horizontal validation criteria: minimum distance (mm)	10.329813
Vertical validation criteria: SAR ratio M2/M1 (%)	77.253218

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.288	0.233	0.180	0.138	0.103	0.073	0.054

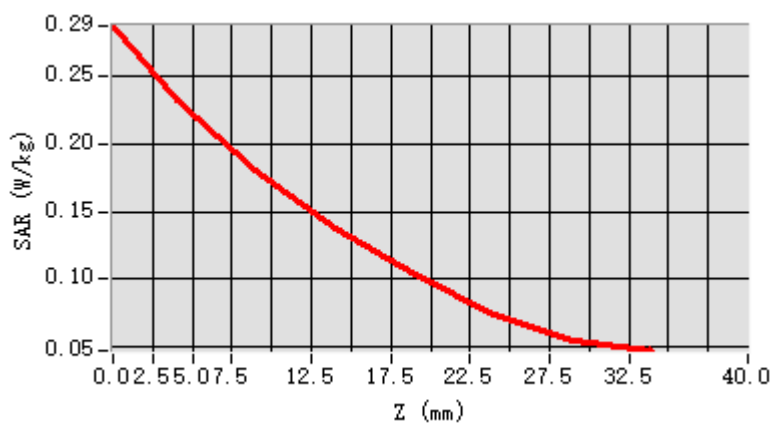


F. 3D Image

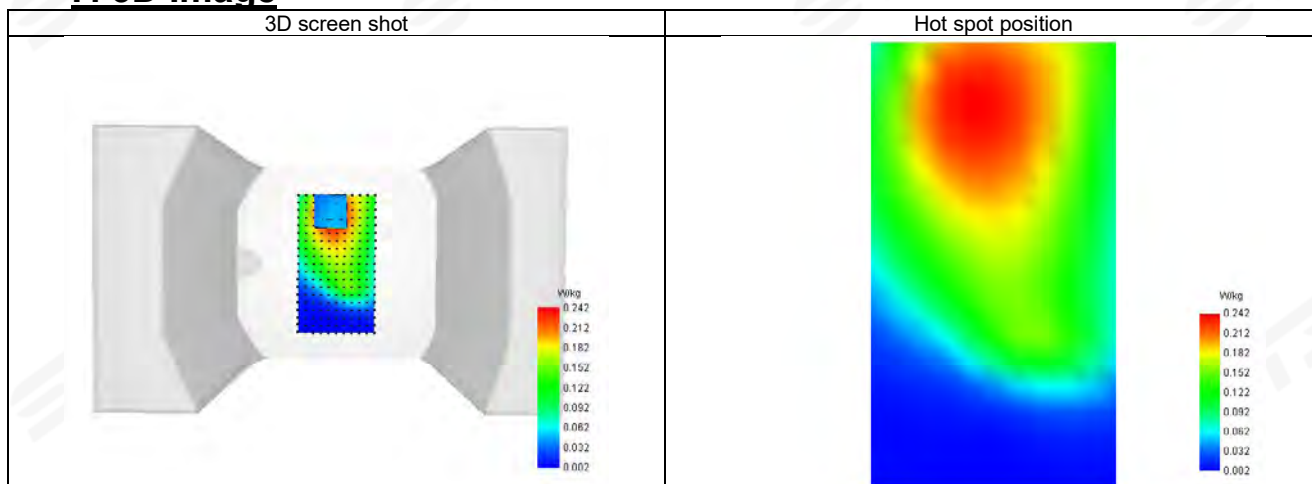

Plot 21: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 41(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2593
Relative permittivity (real part)	39.11
Conductivity (S/m)	1.86

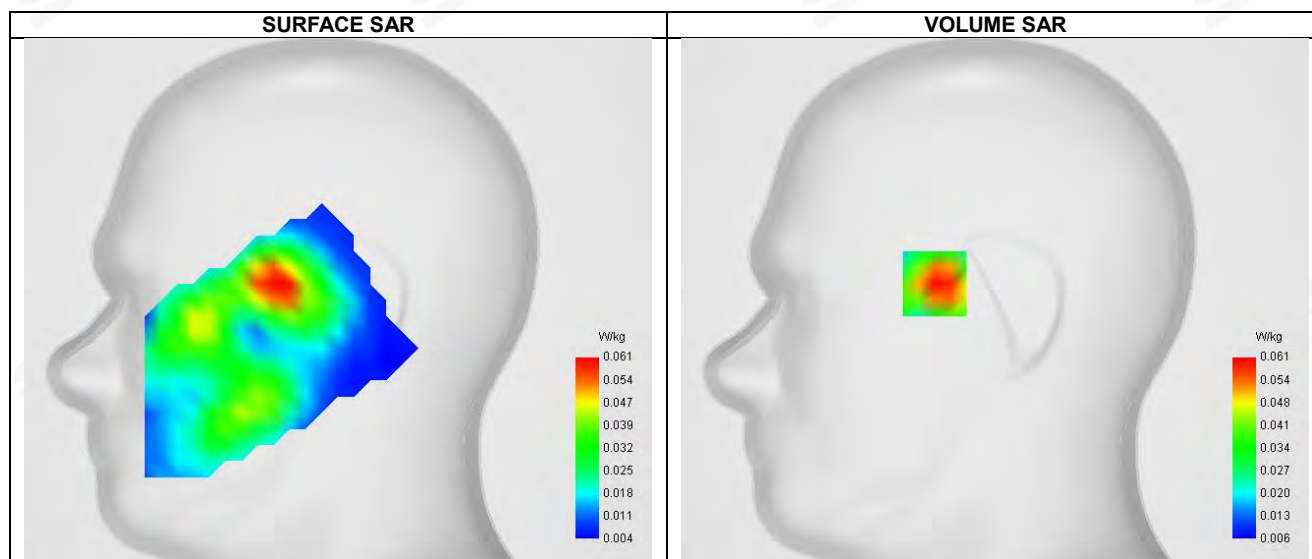


Maximum location: X=-30.00, Y=8.00 ; SAR Peak: 0.09 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.060
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	69.064540

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.085	0.061	0.042	0.031	0.023	0.017	0.012

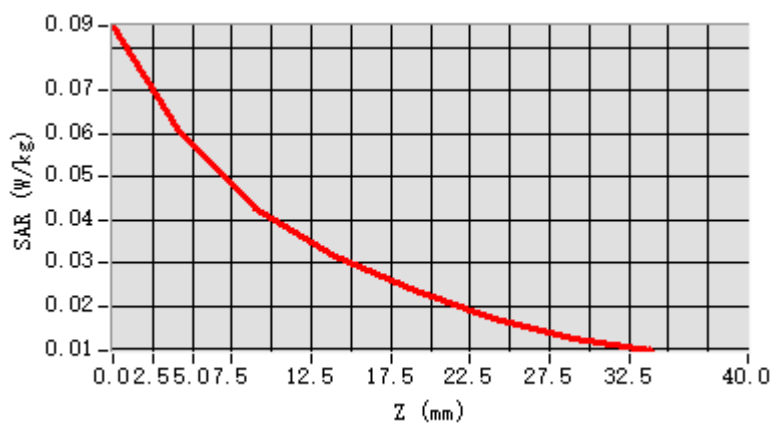


F. 3D Image

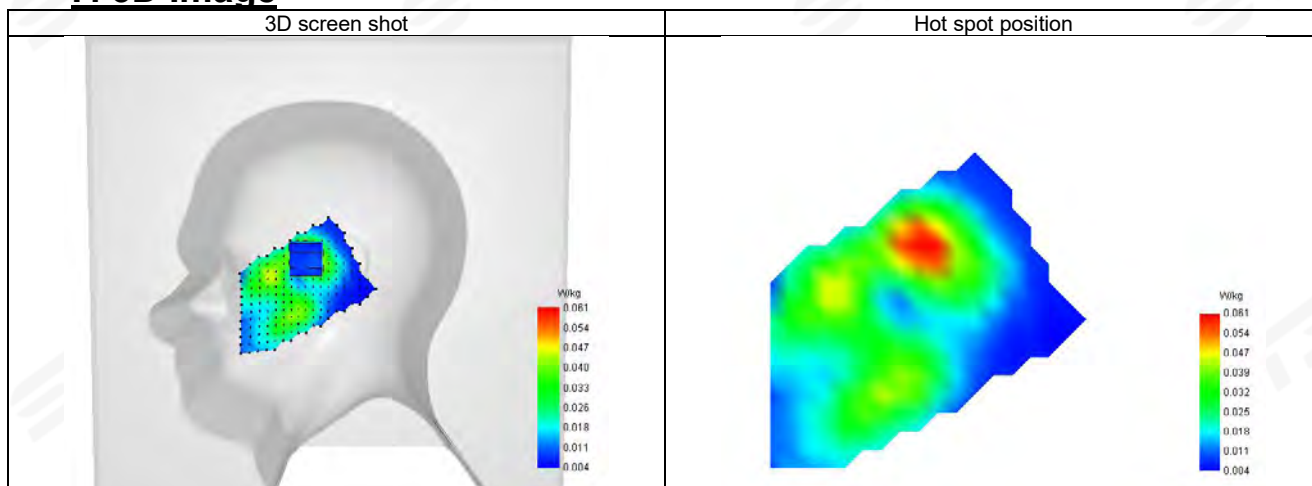

**Plot 22: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 41(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2593
Relative permittivity (real part)	39.11
Conductivity (S/m)	1.86

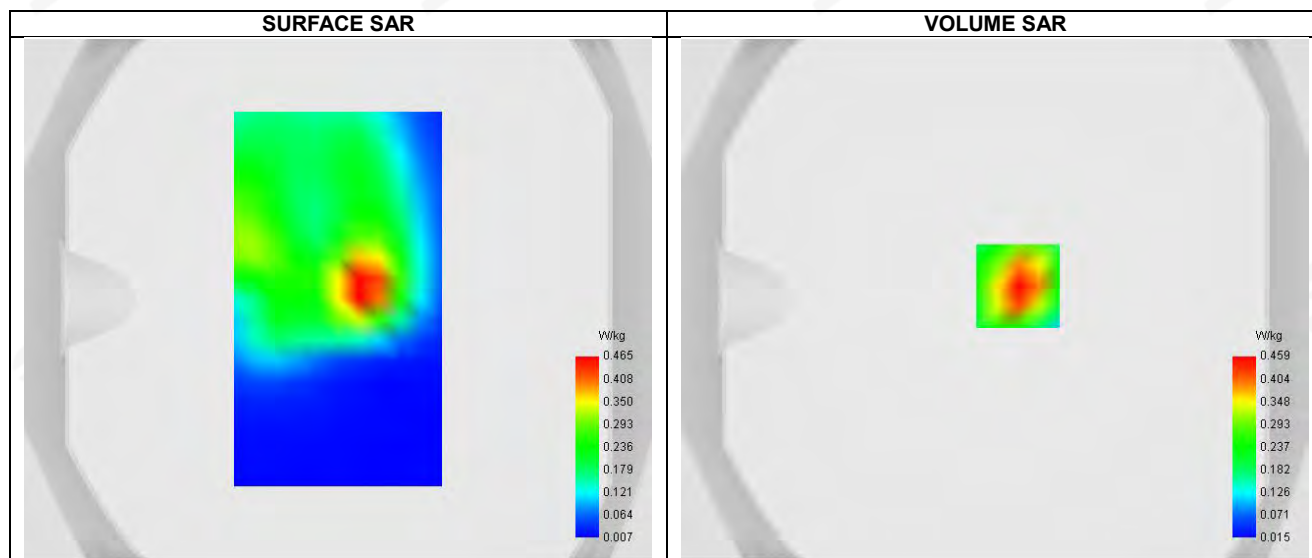


Maximum location: X=9.00, Y=5.00 ; SAR Peak: 0.71 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.237
SAR 1g (W/Kg)	0.435
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	58.017334

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.705	0.459	0.266	0.166	0.100	0.061	0.037

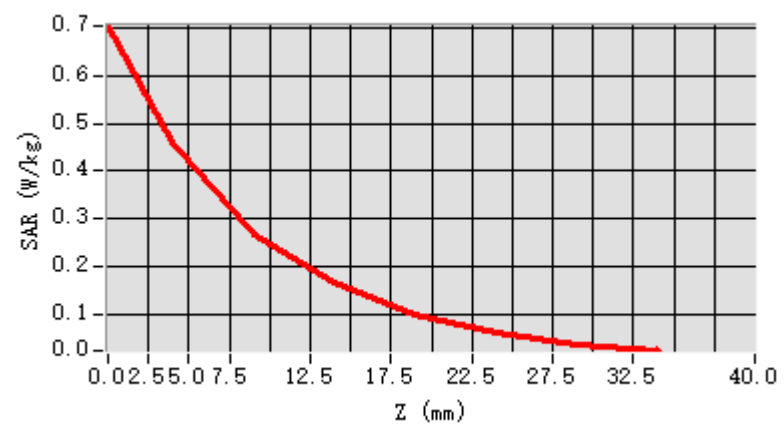


F. 3D Image

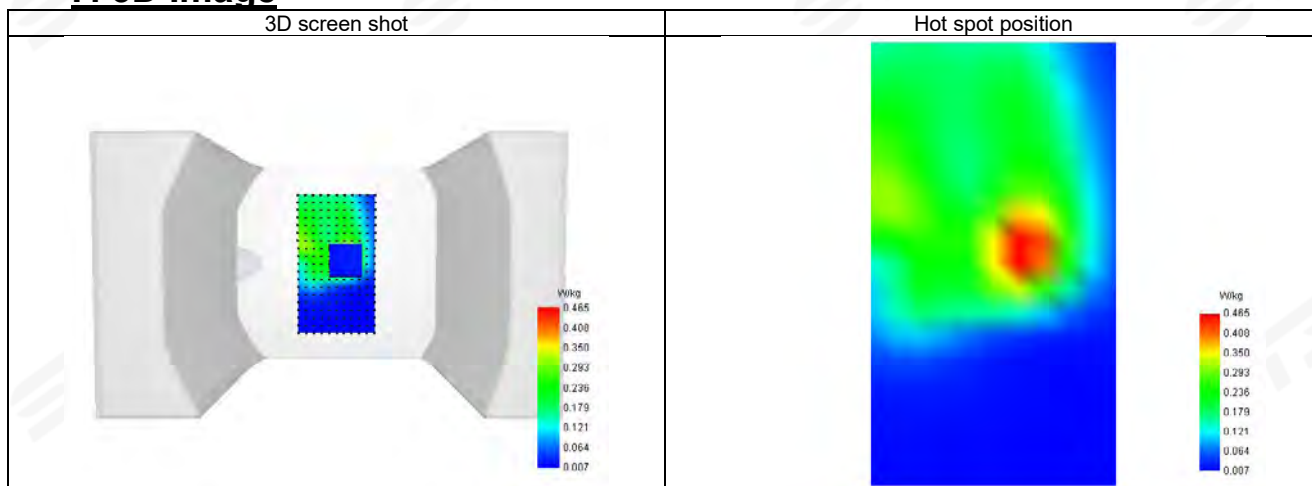

Plot 23: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720
Relative permittivity (real part)	39.66
Conductivity (S/m)	1.35

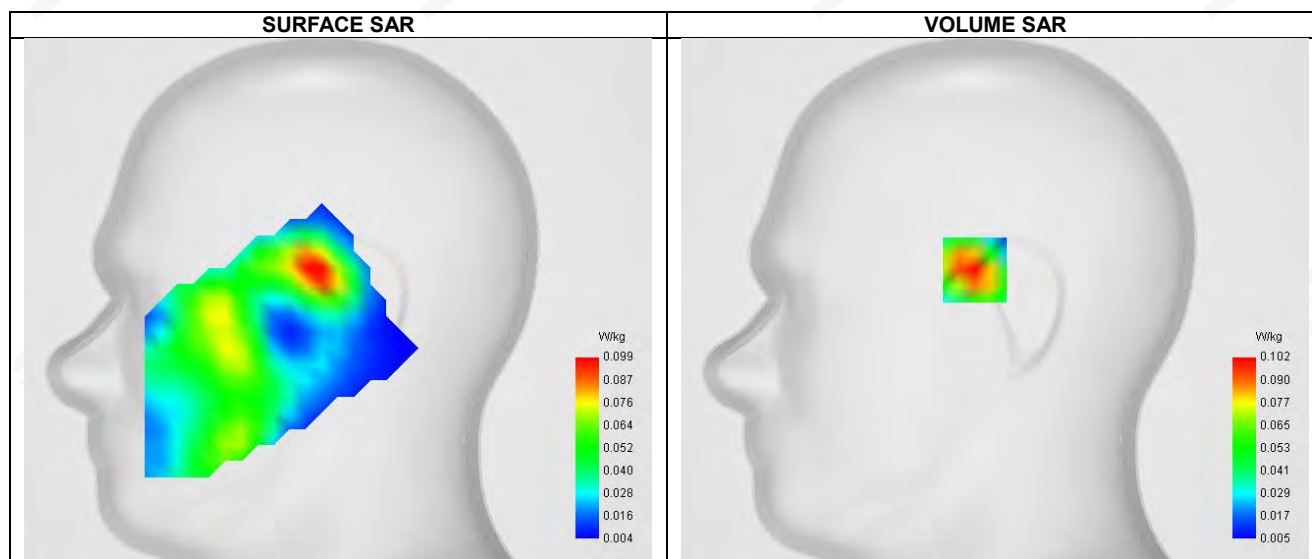


Maximum location: X=-10.00, Y=15.00 ; SAR Peak: 0.15 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.096
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	65.783341

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.145	0.102	0.067	0.045	0.032	0.022	0.015

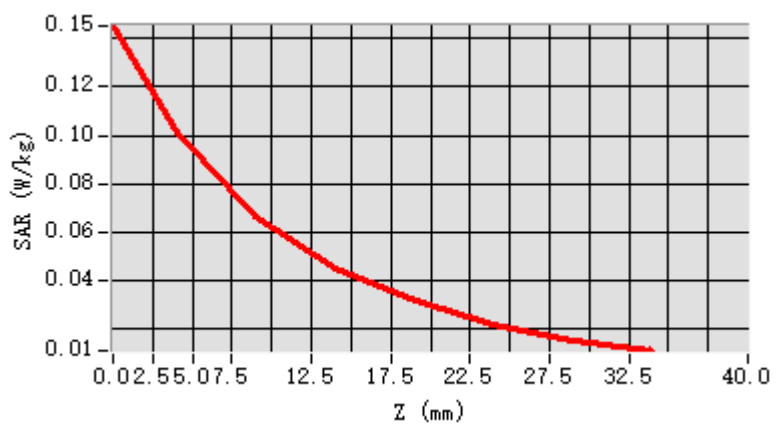


F. 3D Image

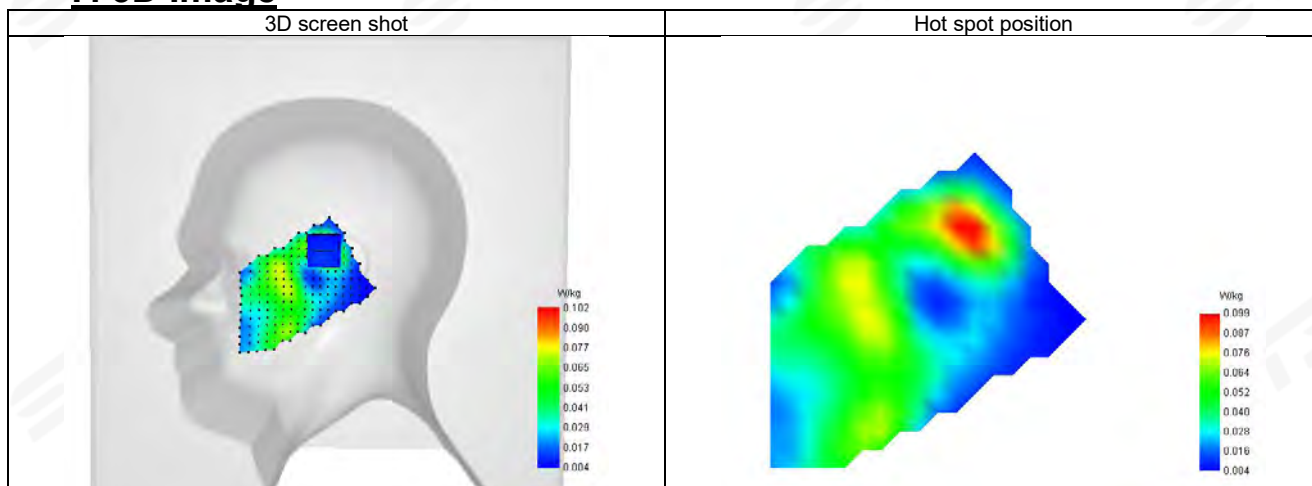

**Plot 24: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720
Relative permittivity (real part)	39.66
Conductivity (S/m)	1.35

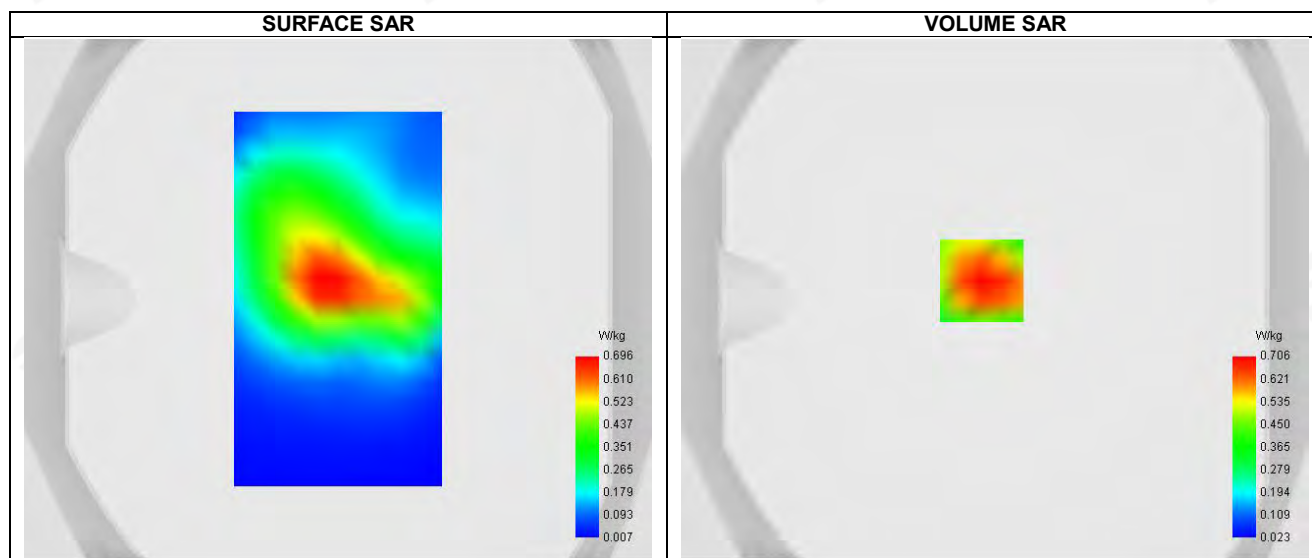


Maximum location: X=-5.00, Y=7.00 ; SAR Peak: 1.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.411
SAR 1g (W/Kg)	0.675
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	64.845390

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.987	0.706	0.458	0.297	0.191	0.123	0.080

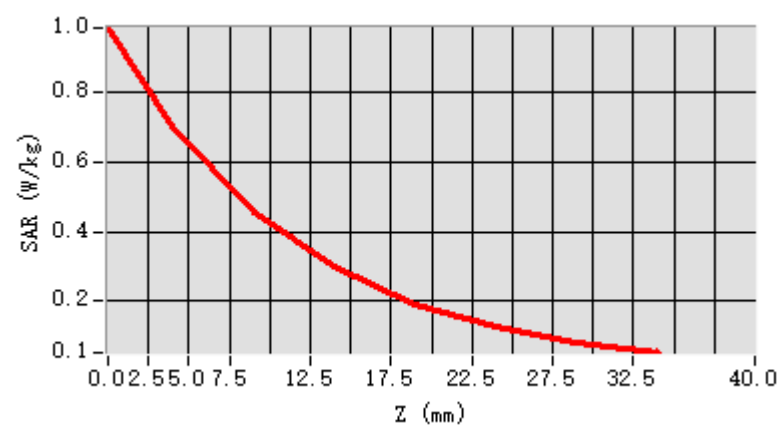


F. 3D Image

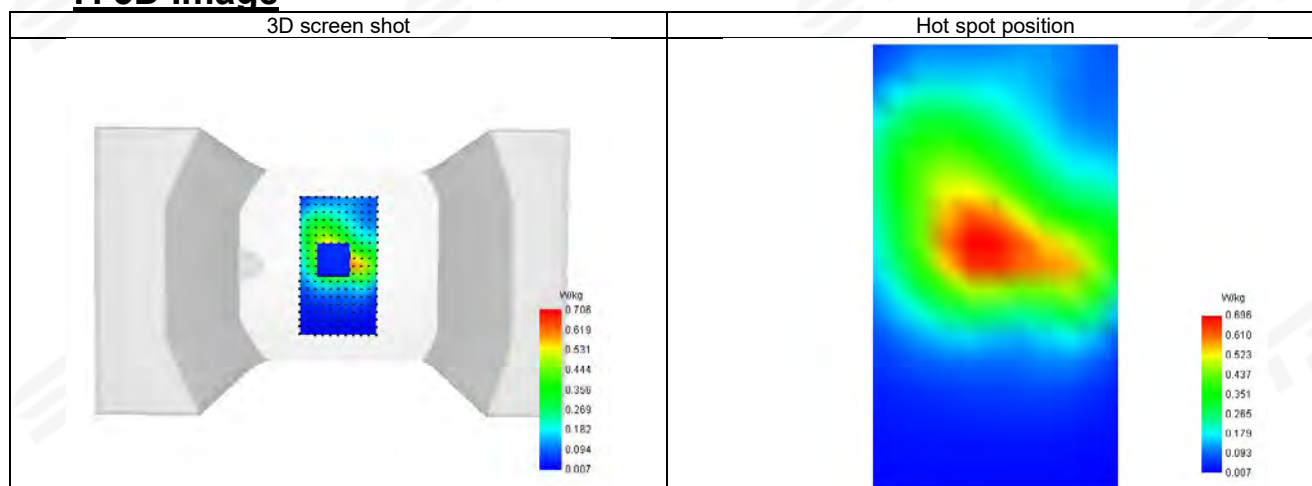

Plot 25: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-20
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N2
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	1860
Relative permittivity (real part)	39.87
Conductivity (S/m)	1.38

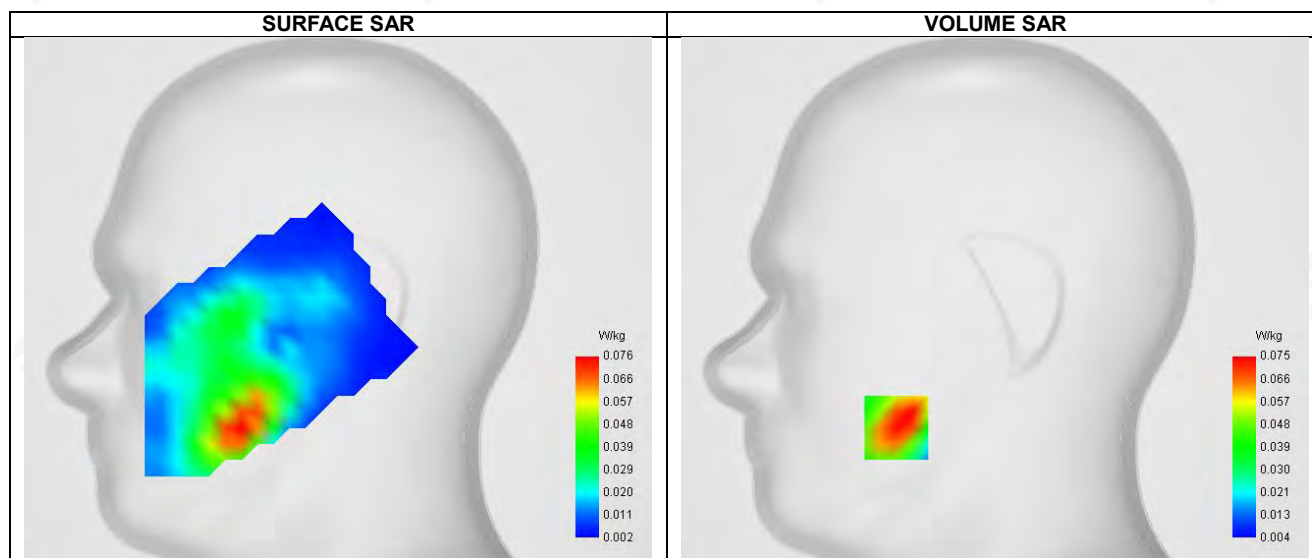


Maximum location: X=-49.00, Y=-64.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.044
SAR 1g (W/Kg)	0.073
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	69.110149

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.125	0.075	0.040	0.035	0.022	0.016	0.011

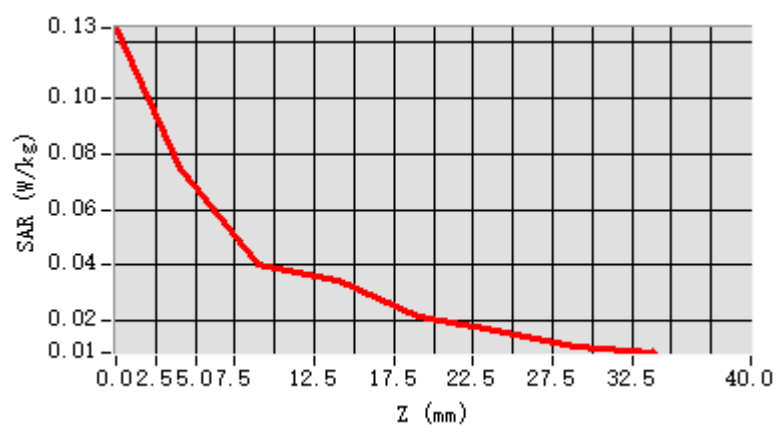


F. 3D Image

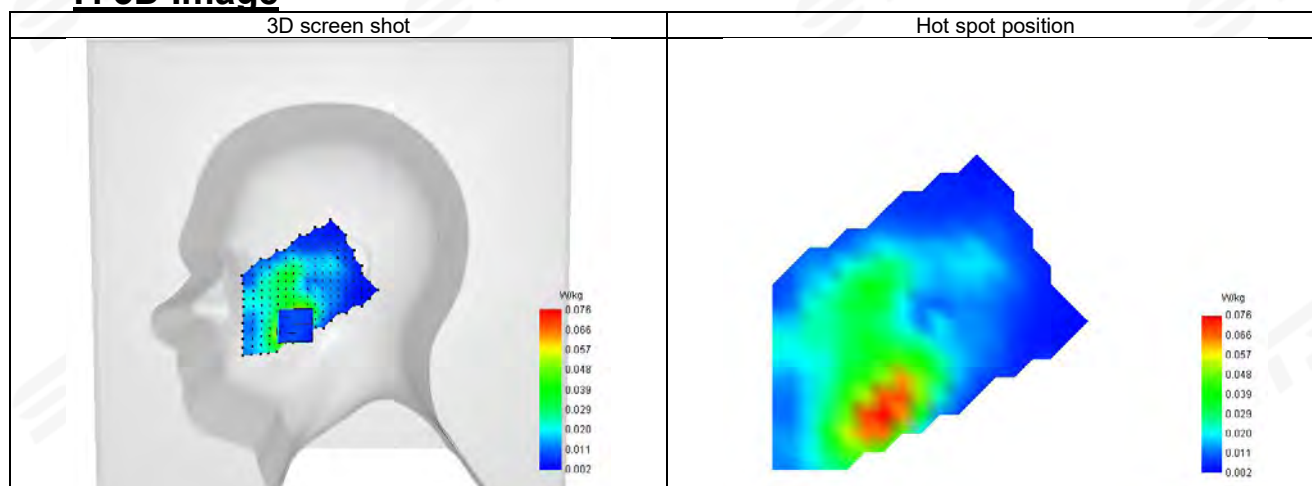

**Plot 26: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-20
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N2
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	1860
Relative permittivity (real part)	39.87
Conductivity (S/m)	1.38

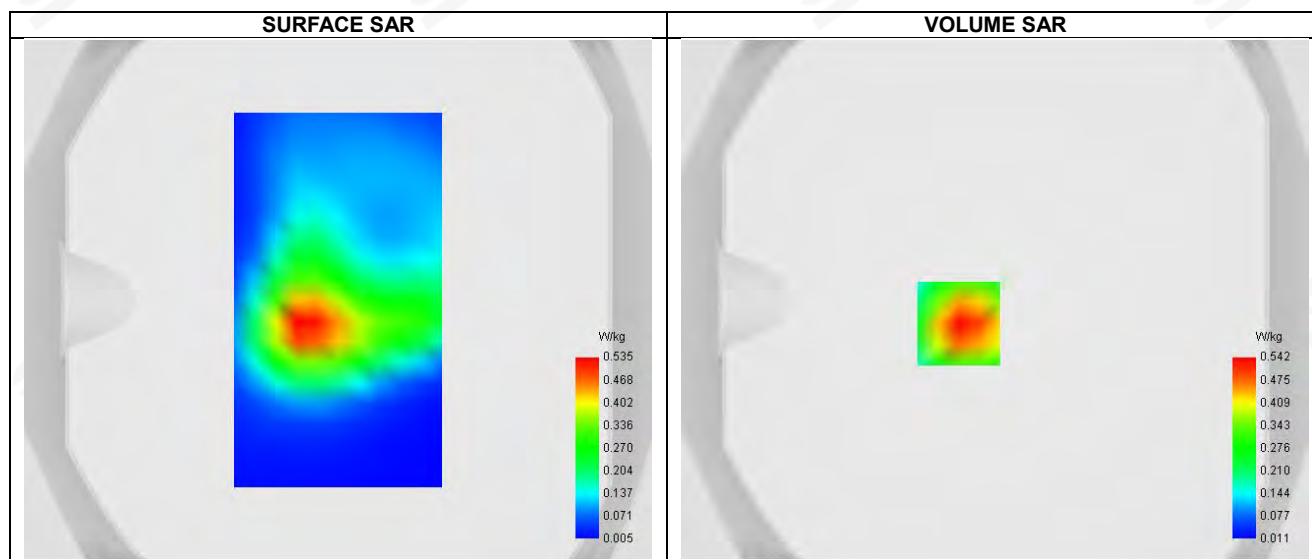


Maximum location: X=-14.00, Y=-9.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.270
SAR 1g (W/Kg)	0.516
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.284051

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.878	0.542	0.289	0.168	0.094	0.053	0.030

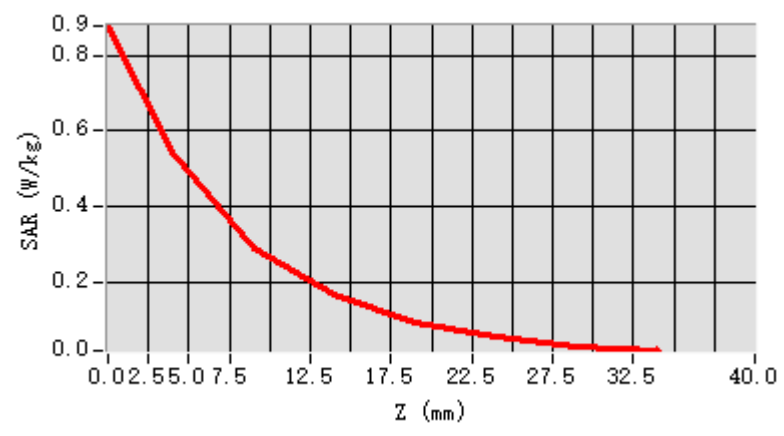


F. 3D Image

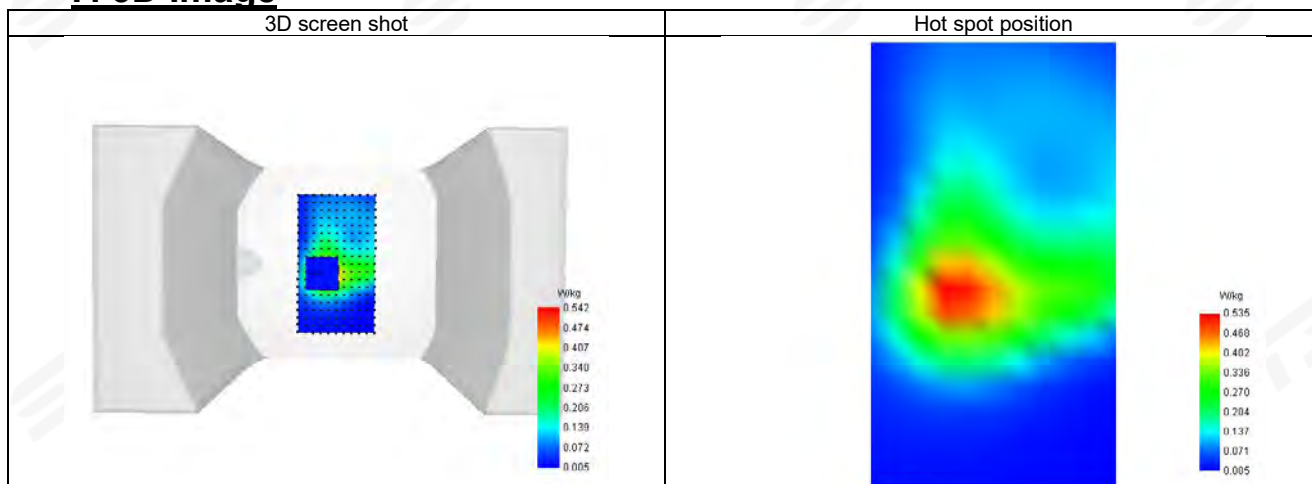

Plot 27: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N5
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	836.5
Relative permittivity (real part)	41.39
Conductivity (S/m)	0.89

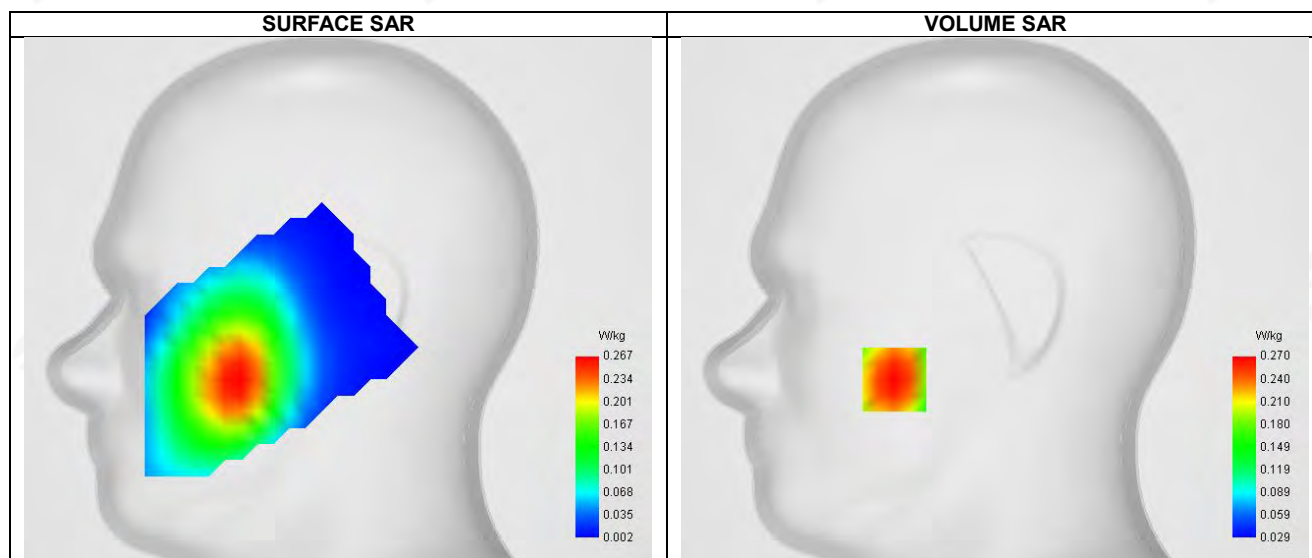


Maximum location: X=-50.00, Y=-40.00 ; SAR Peak: 0.34 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.192
SAR 1g (W/Kg)	0.263
Horizontal validation criteria: minimum distance (mm)	11.691208
Vertical validation criteria: SAR ratio M2/M1 (%)	78.773584

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.333	0.270	0.212	0.167	0.130	0.097	0.073

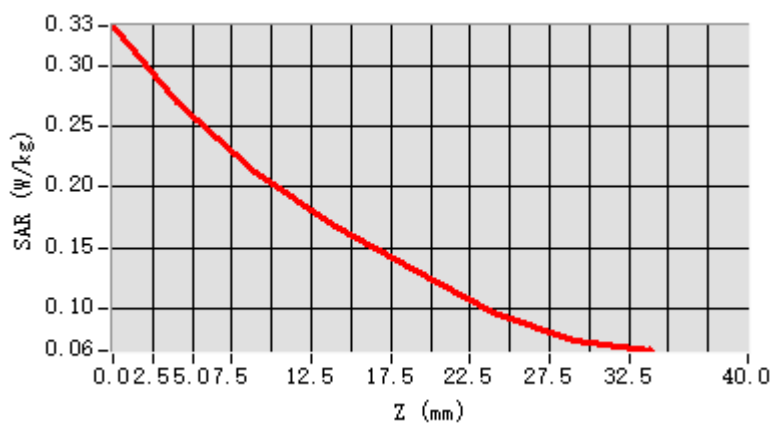


F. 3D Image

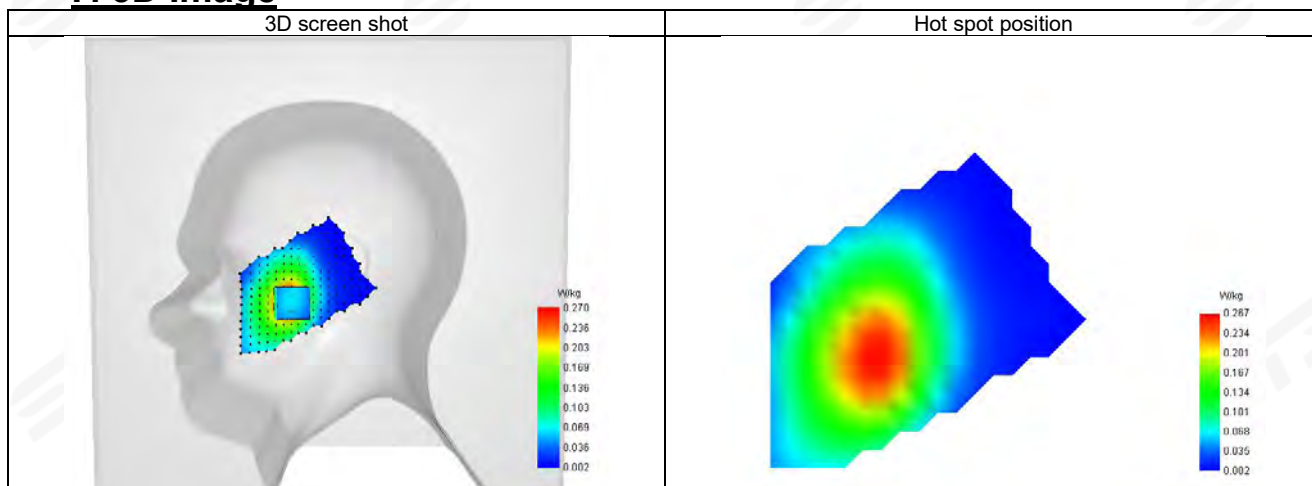

**Plot 28: DUT: Smart Phone; EUT Model: ROCK 2 Pro**


Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N5
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	836.5
Relative permittivity (real part)	41.39
Conductivity (S/m)	0.89

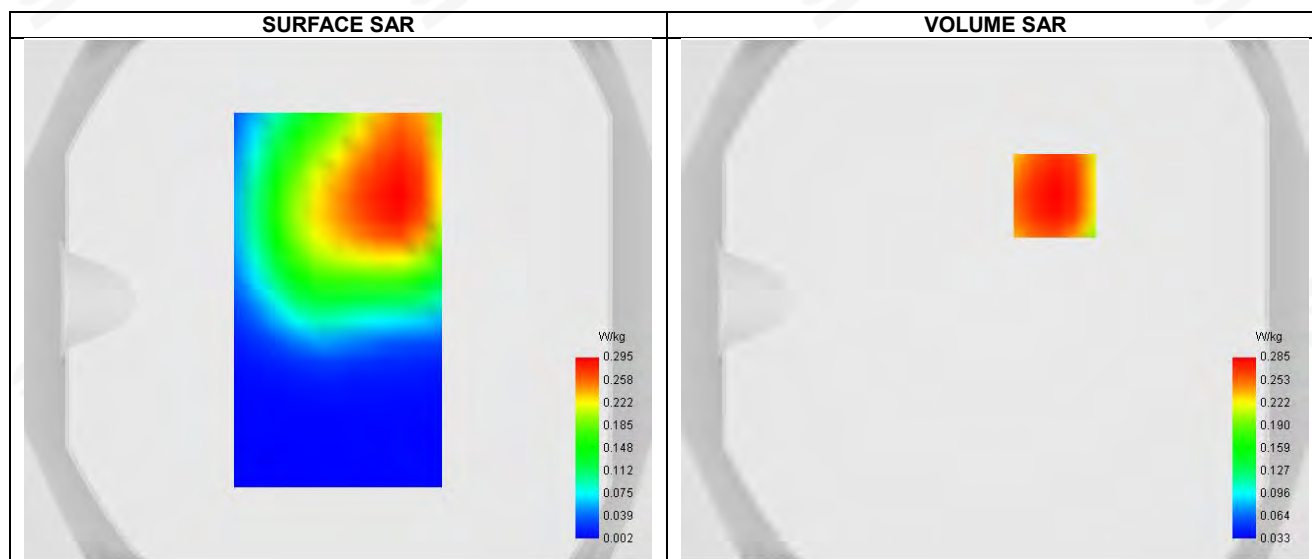**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.275
Horizontal validation criteria: minimum distance (mm)	10.625214
Vertical validation criteria: SAR ratio M2/M1 (%)	74.752144

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.355	0.285	0.216	0.162	0.123	0.093	0.070

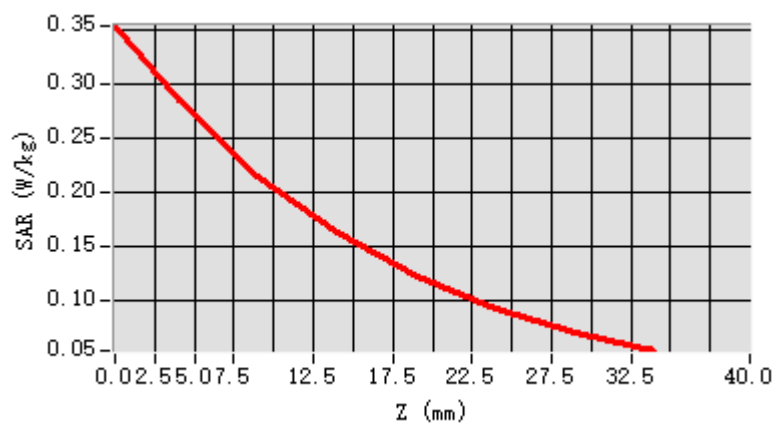


F. 3D Image

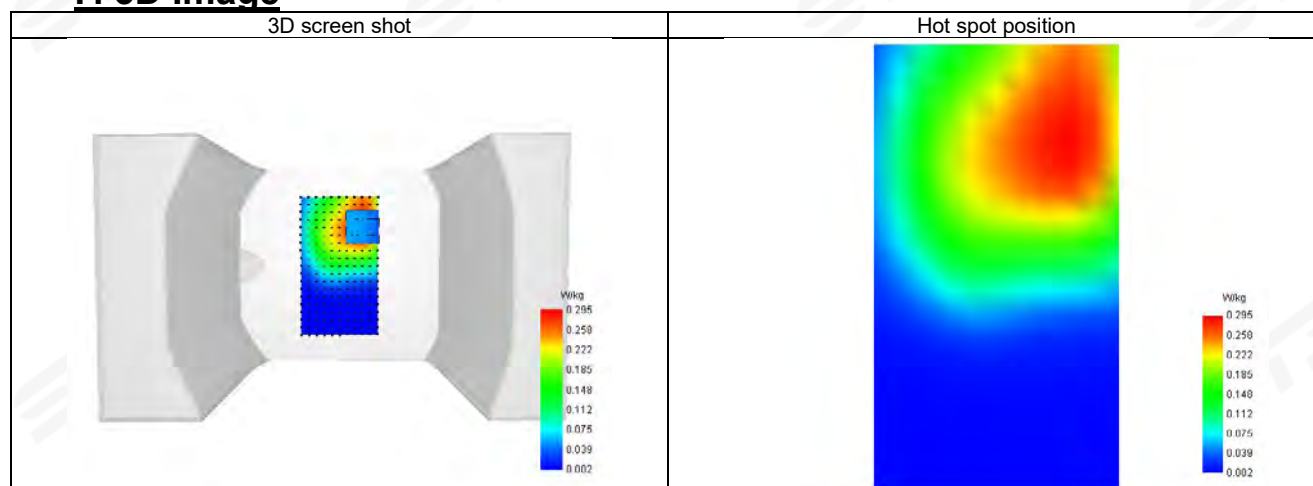

Plot 29: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N7
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	2535
Relative permittivity (real part)	39.05
Conductivity (S/m)	1.89

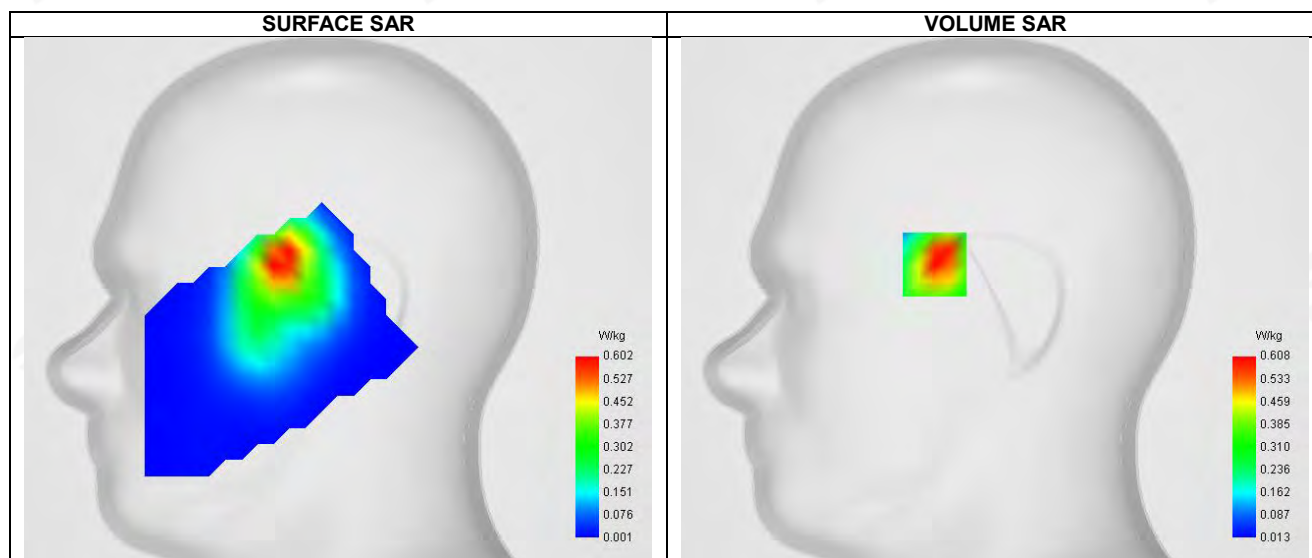


Maximum location: X=-30.00, Y=17.00 ; SAR Peak: 0.95 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.580
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	66.422211

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.816	0.608	0.404	0.238	0.150	0.094	0.058

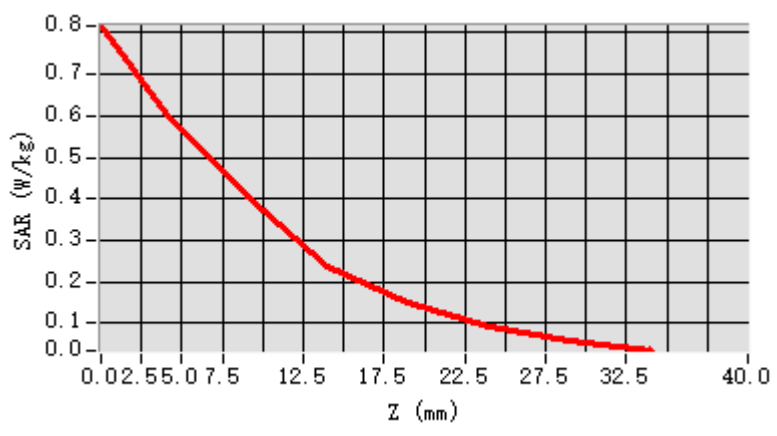


F. 3D Image

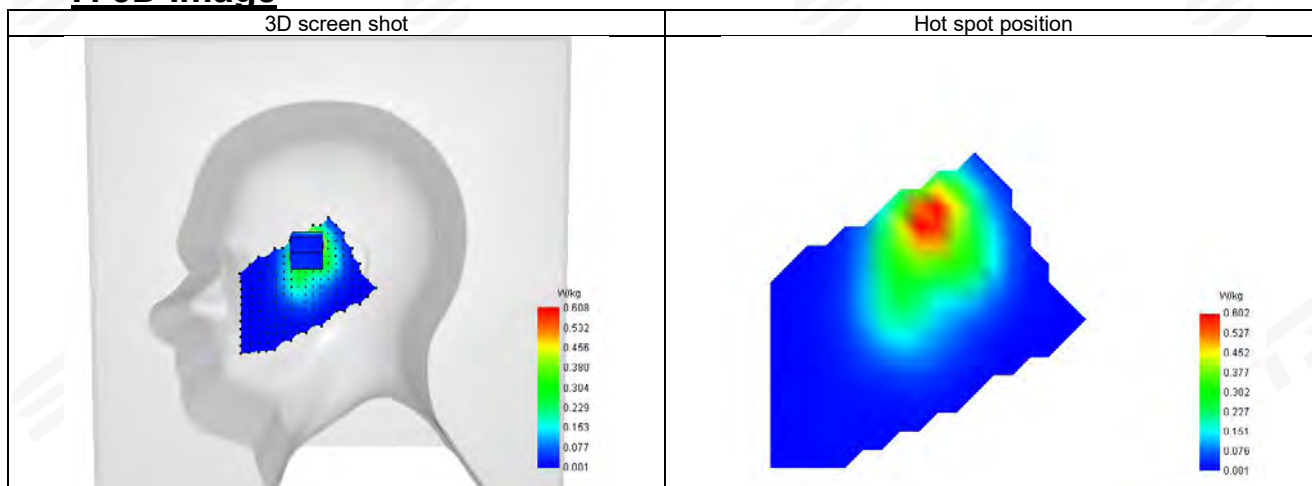

**Plot 30: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N7
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	2535
Relative permittivity (real part)	39.05
Conductivity (S/m)	1.89

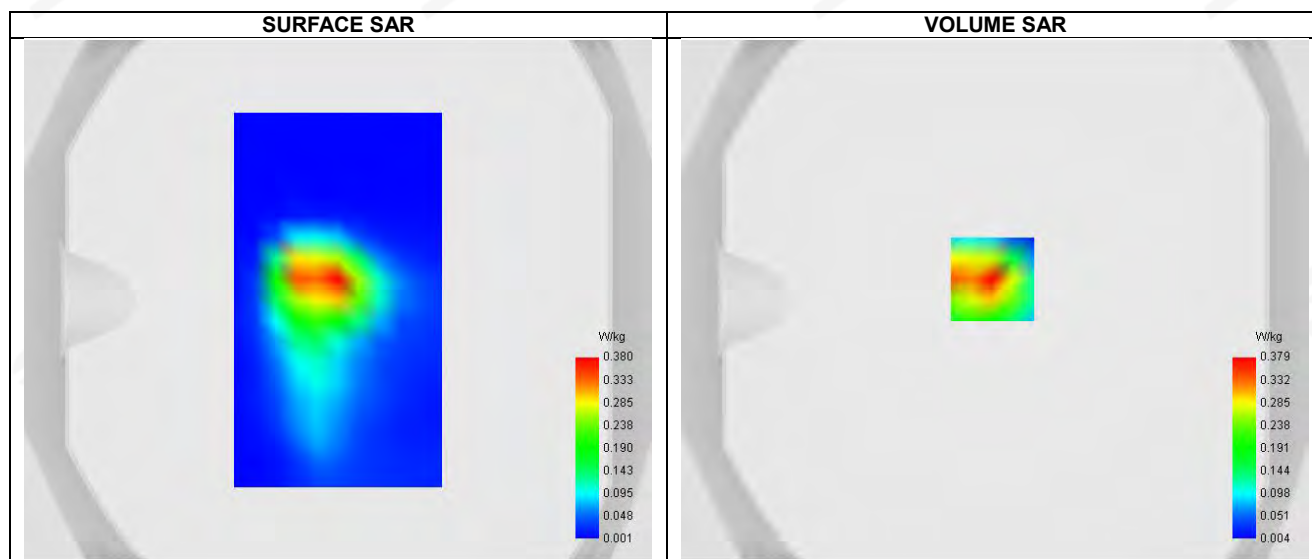


Maximum location: X=-1.00, Y=8.00 ; SAR Peak: 0.69 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.353
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	43.092970

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.698	0.379	0.162	0.086	0.042	0.020	0.010

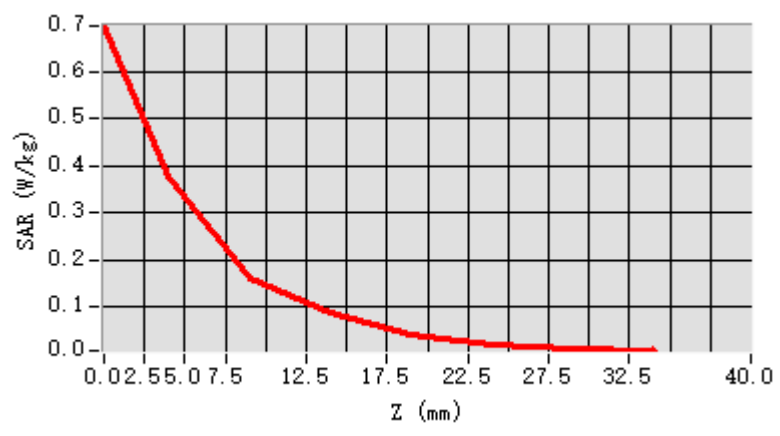


F. 3D Image

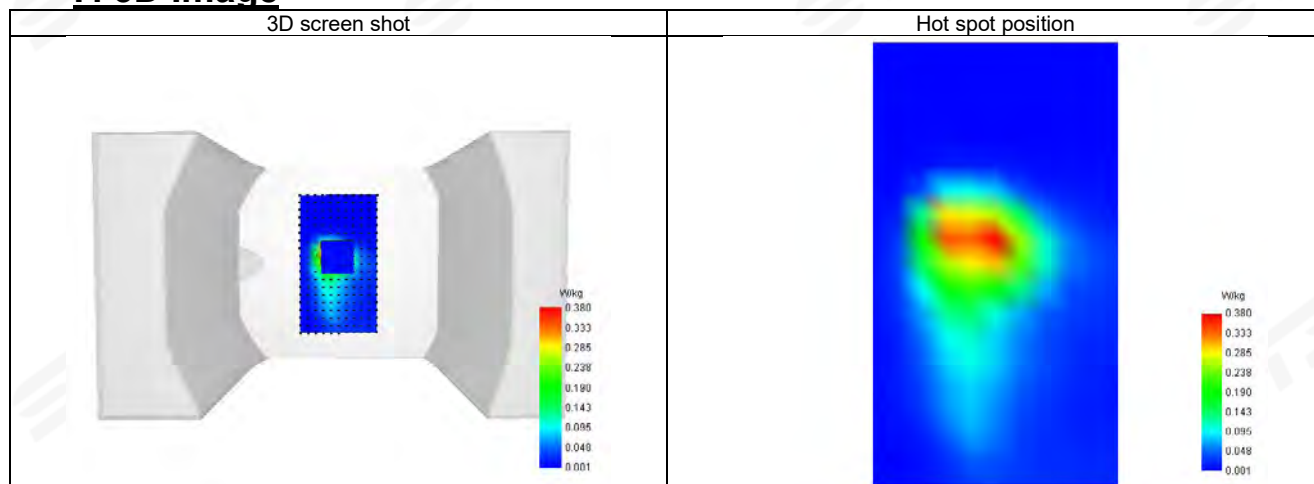

Plot 31: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N41
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	2640
Relative permittivity (real part)	40.08
Conductivity (S/m)	2.02

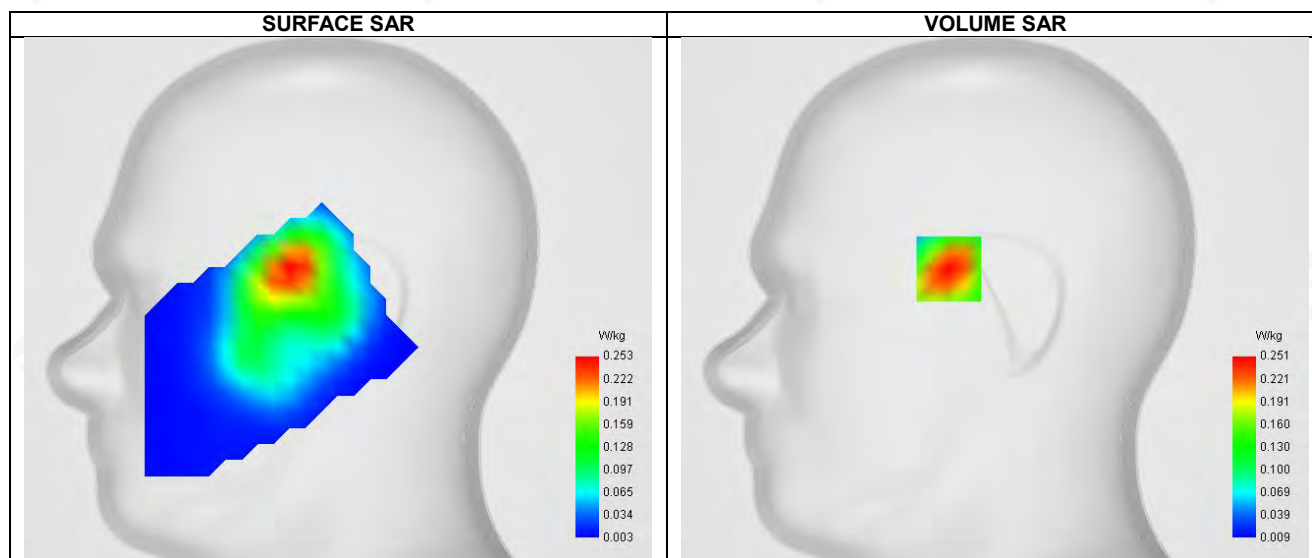


Maximum location: X=-23.00, Y=15.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.238
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	64.471283

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.355	0.251	0.162	0.103	0.067	0.044	0.028

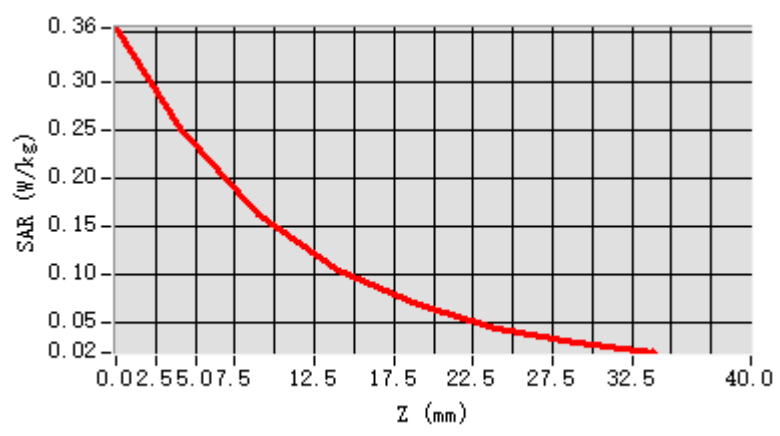


F. 3D Image

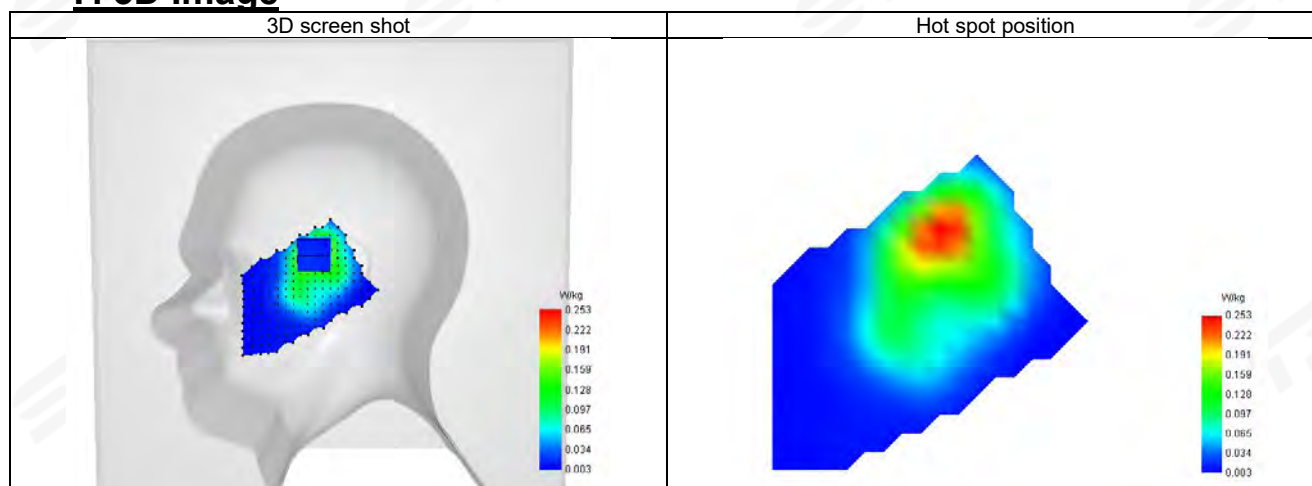

**Plot 32: DUT: Smart Phone; EUT Model: ROCK 2 Pro**


Test Date	2025-11-18
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N41
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	2640
Relative permittivity (real part)	40.08
Conductivity (S/m)	2.02

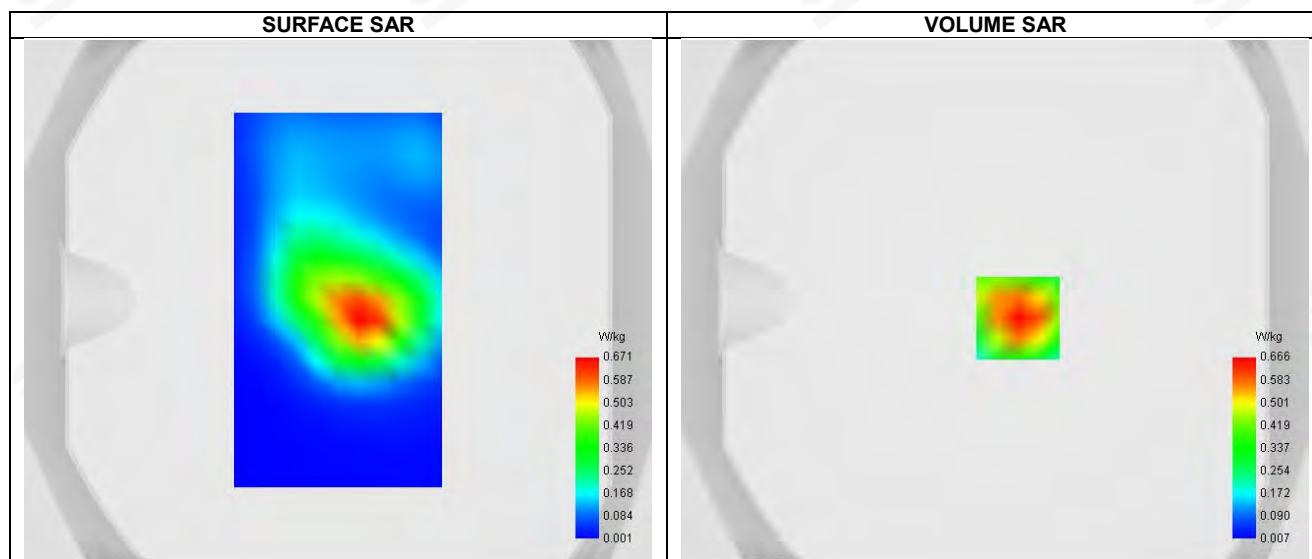**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.350
SAR 1g (W/Kg)	0.632
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	58.064526

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.013	0.666	0.387	0.229	0.135	0.080	0.047

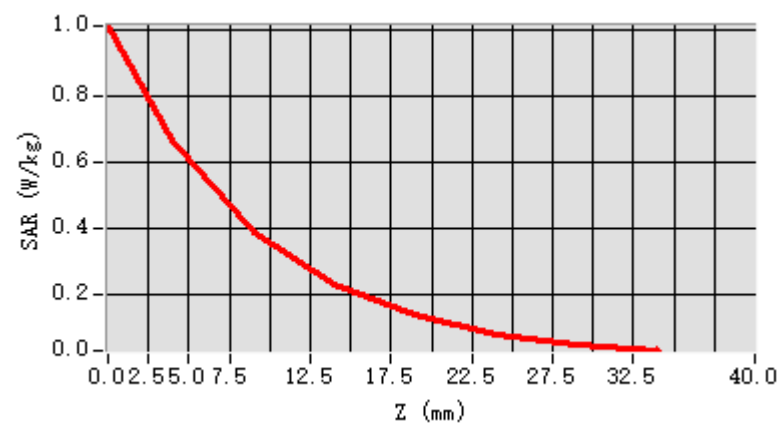


F. 3D Image

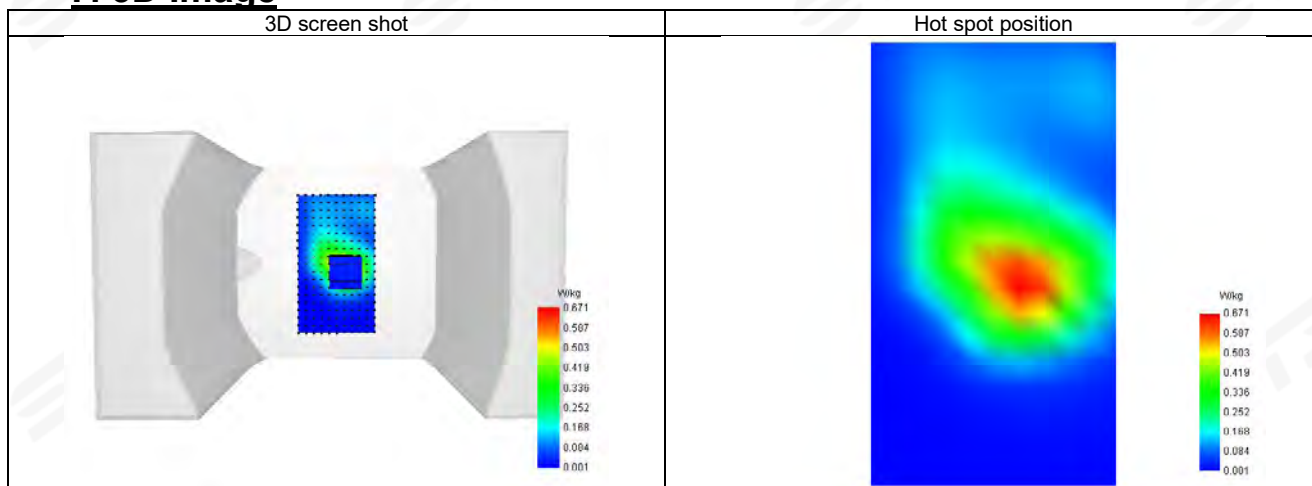

Plot 33: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N66
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	1747.5
Relative permittivity (real part)	40.47
Conductivity (S/m)	1.37

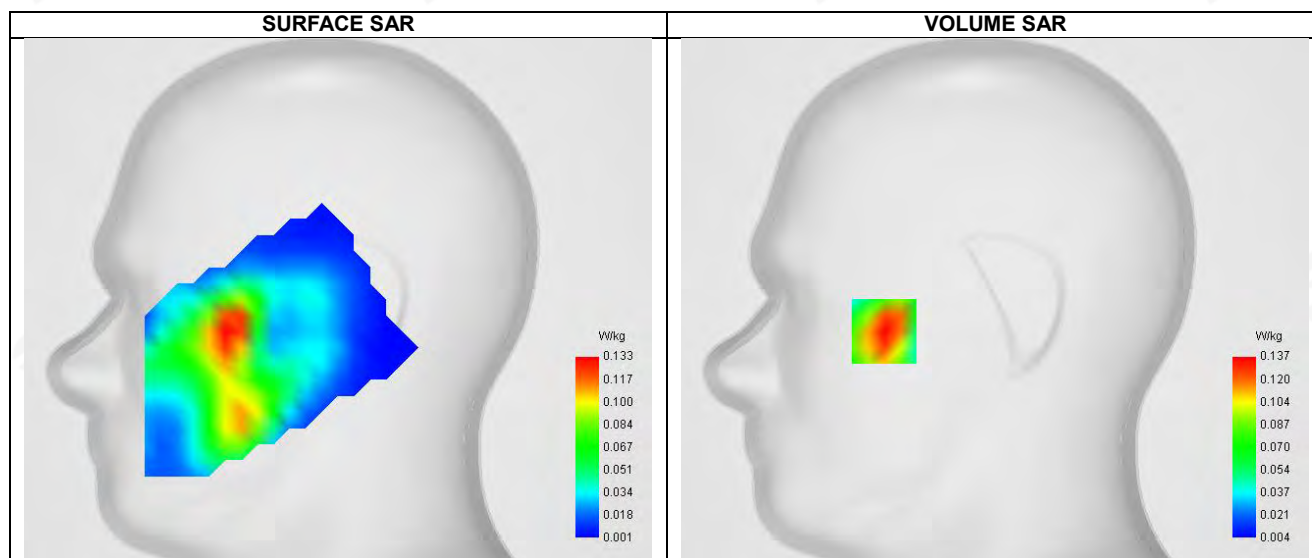


Maximum location: X=-55.00, Y=-16.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.130
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	66.970933

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.188	0.137	0.092	0.063	0.042	0.029	0.019

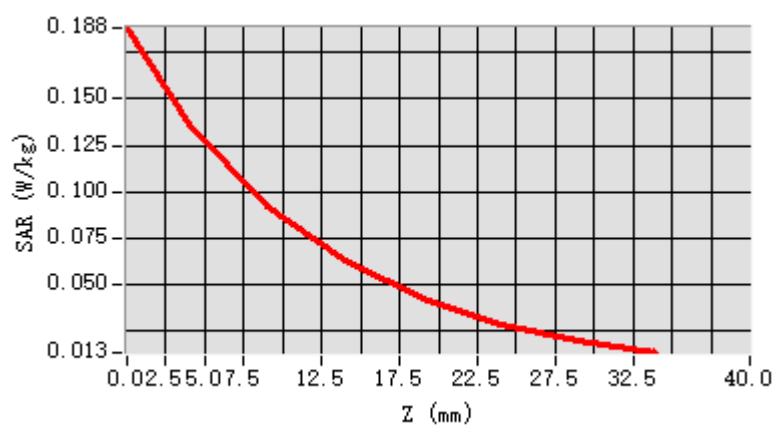


F. 3D Image

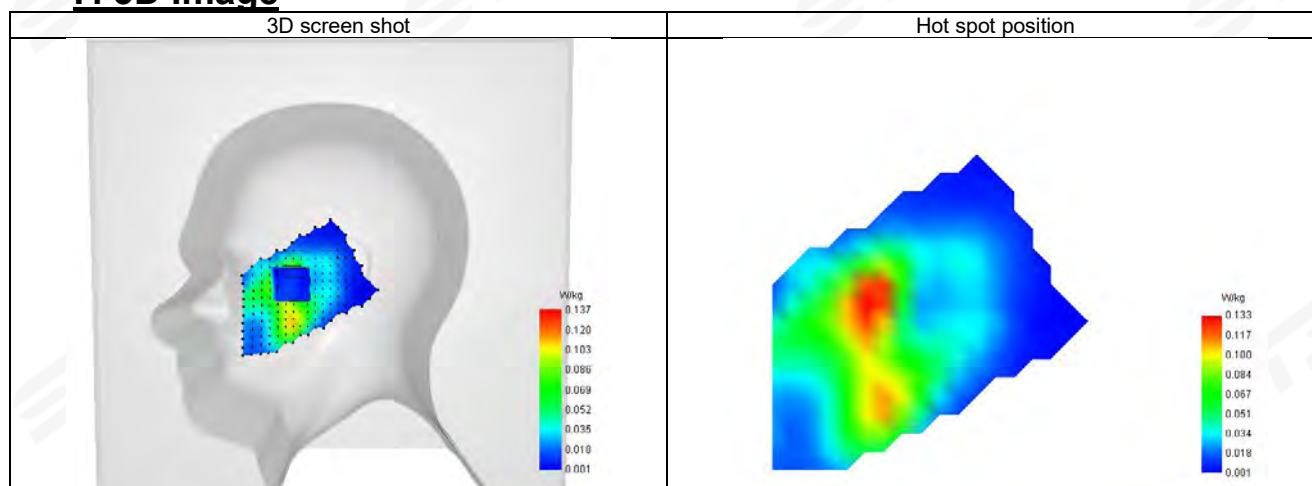

**Plot 34: DUT: Smart Phone; EUT Model: ROCK 2 Pro**


Test Date	2025-11-22
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N66
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	1747.5
Relative permittivity (real part)	40.47
Conductivity (S/m)	1.37

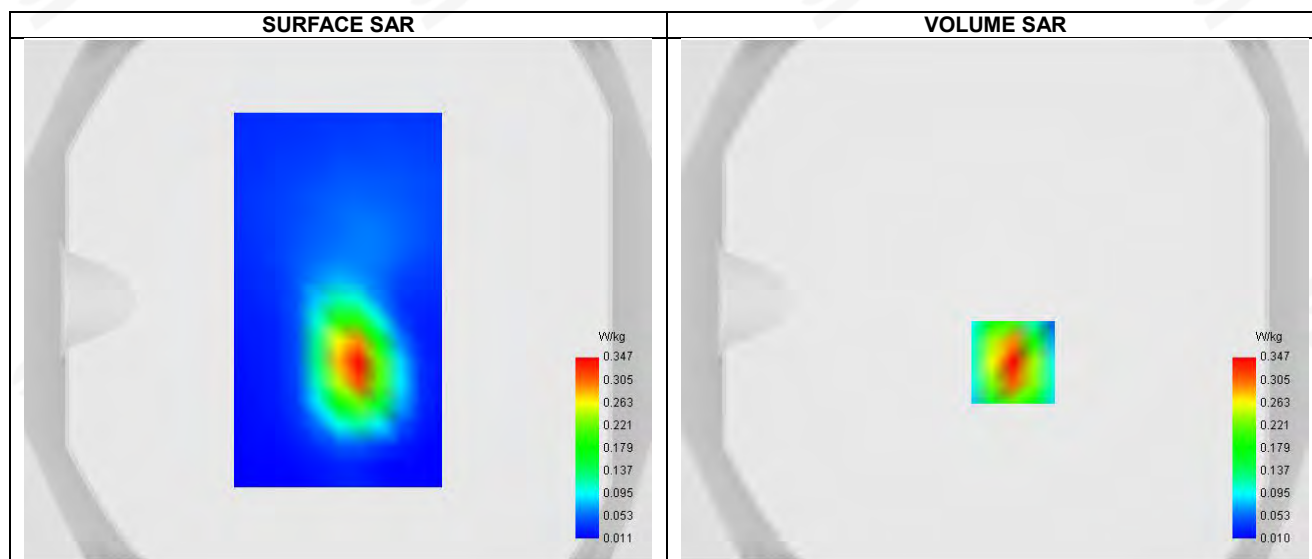**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.169
SAR 1g (W/Kg)	0.323
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	56.885591

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.544	0.347	0.197	0.119	0.075	0.045	0.027

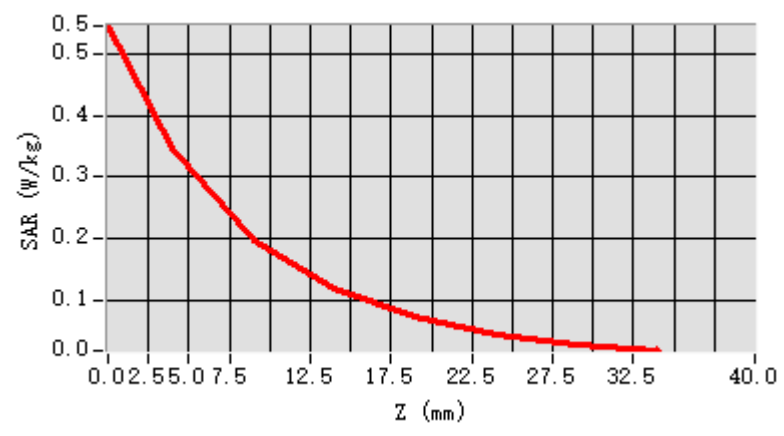


F. 3D Image

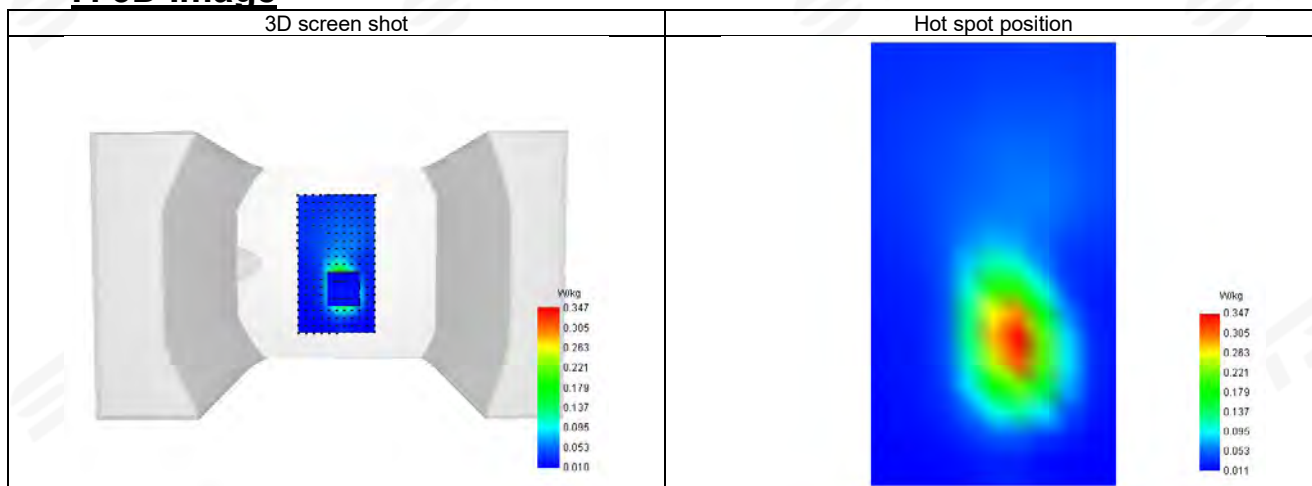

Plot 35: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-20
ConvF	1.33
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N77
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	3750
Relative permittivity (real part)	37.62
Conductivity (S/m)	3.15

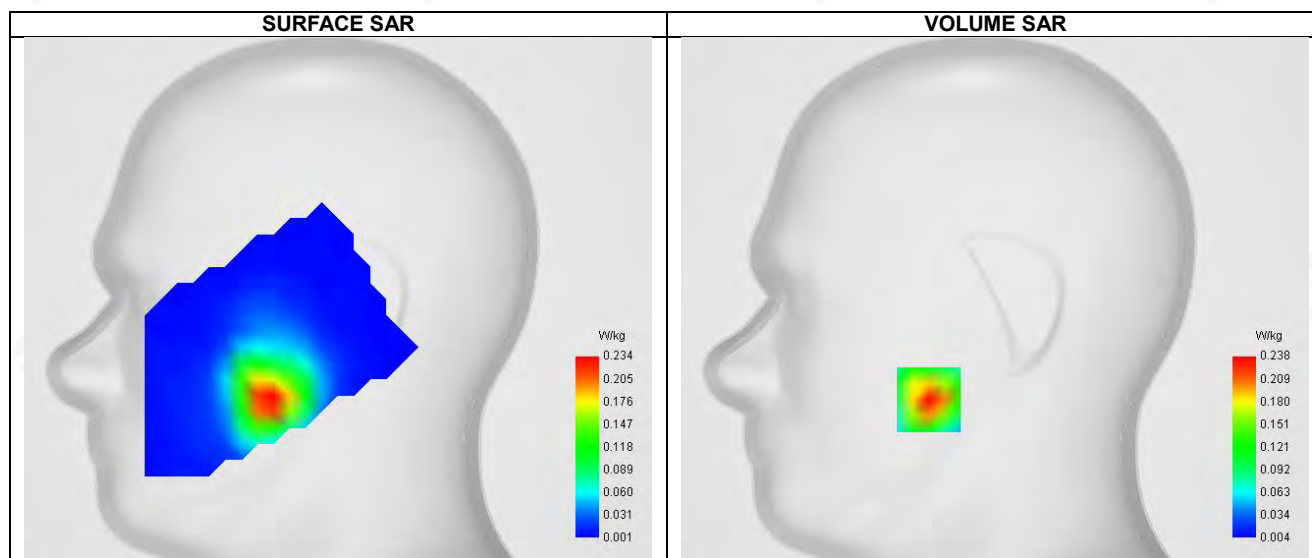


Maximum location: X=-33.00, Y=-50.00 ; SAR Peak: 0.35 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.222
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.009738

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.345	0.238	0.148	0.091	0.057	0.035	0.022

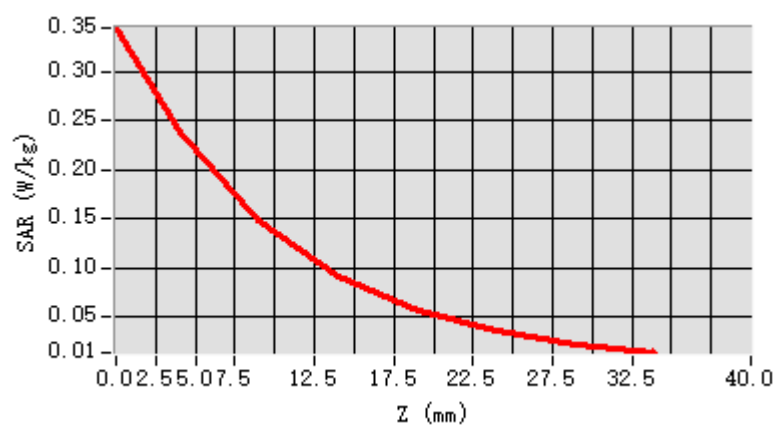


F. 3D Image

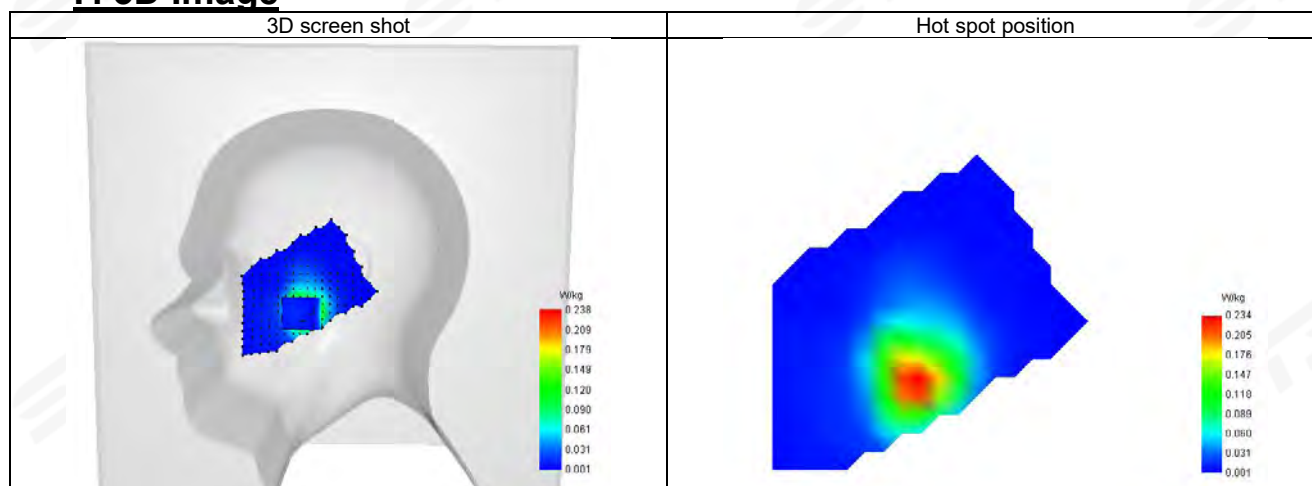

**Plot 36: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-10
ConvF	1.33
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N77
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	3750
Relative permittivity (real part)	37.62
Conductivity (S/m)	3.15

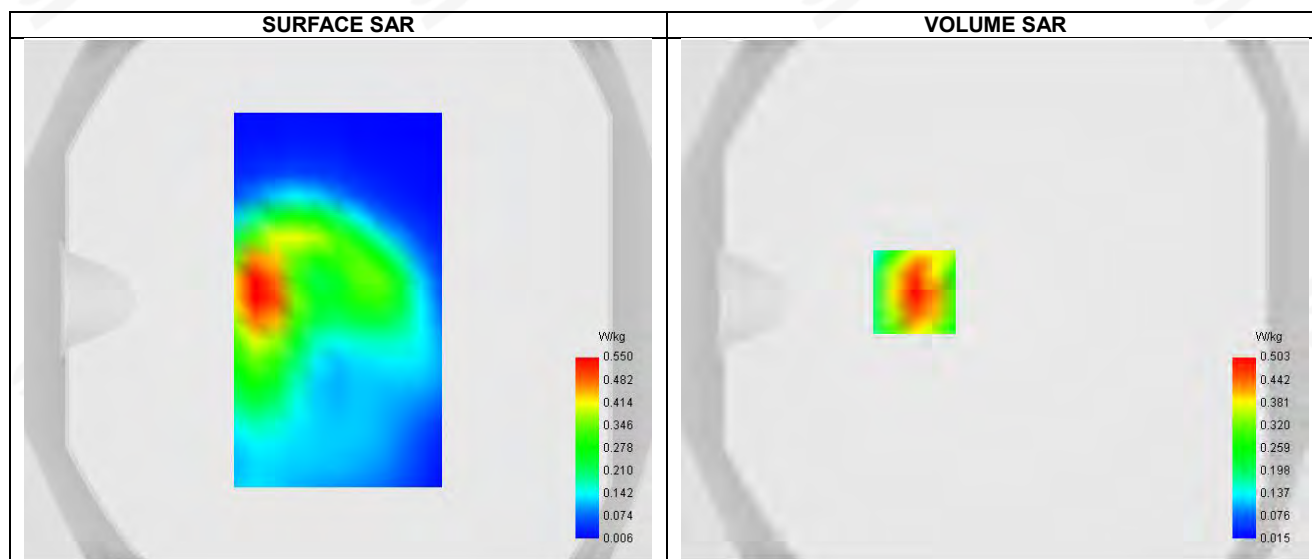


Maximum location: X=-31.00, Y=3.00 ; SAR Peak: 0.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.265
SAR 1g (W/Kg)	0.477
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.530525

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.776	0.503	0.290	0.177	0.106	0.063	0.038

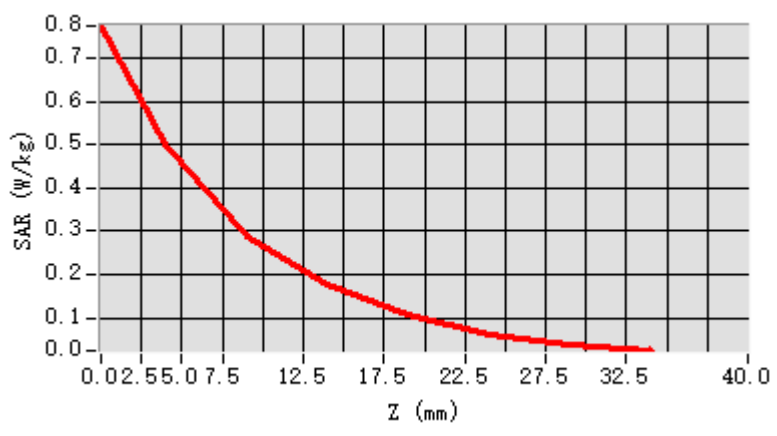


F. 3D Image

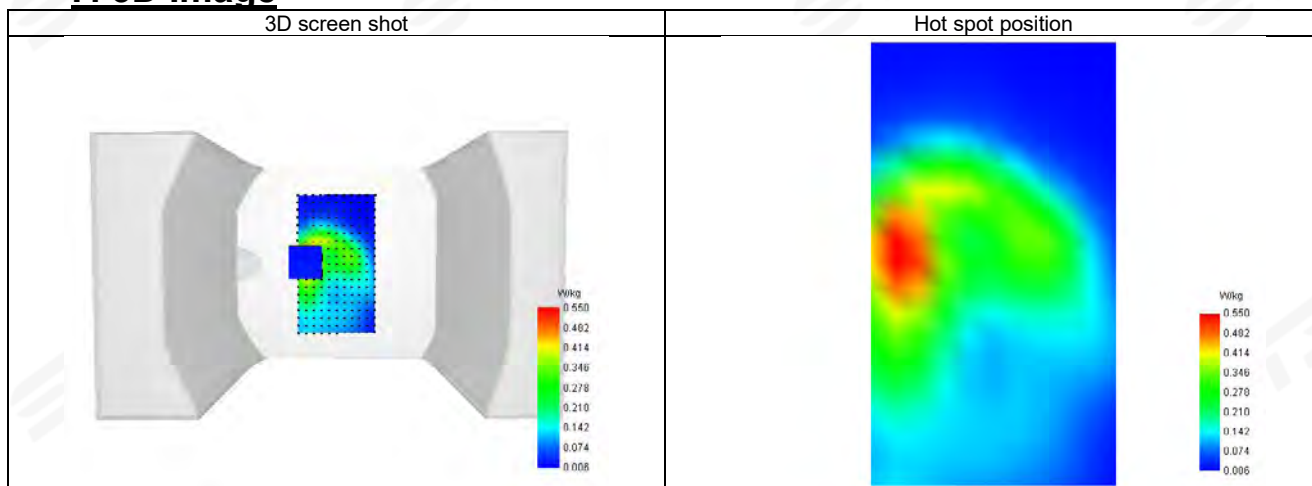

Plot 37: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-20
ConvF	1.33
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N78
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	3750
Relative permittivity (real part)	37.62
Conductivity (S/m)	3.15

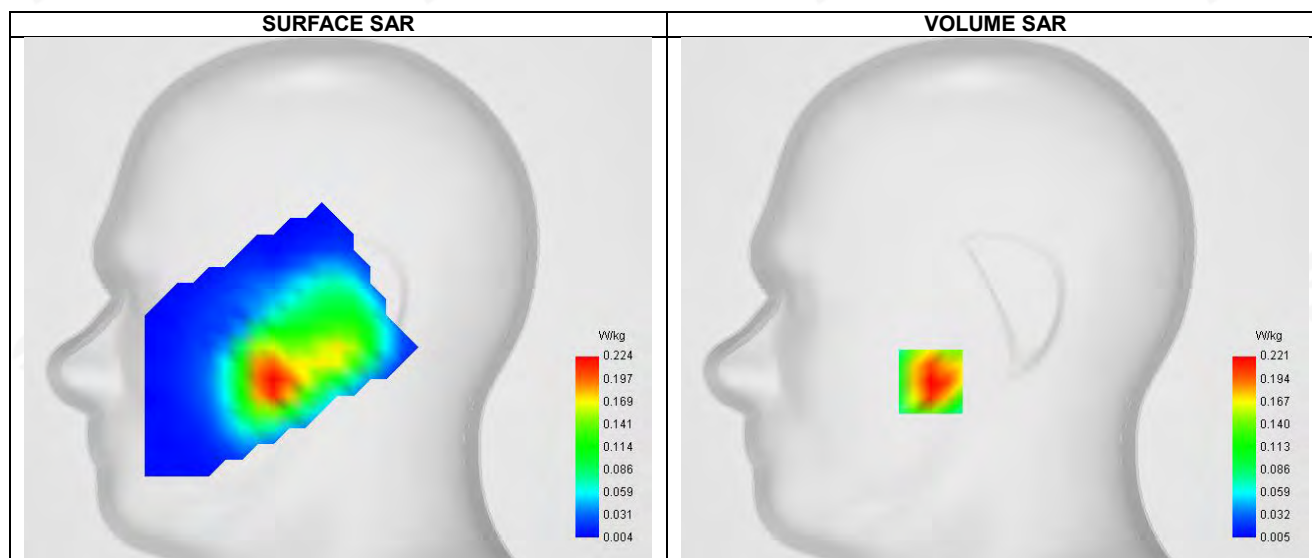


Maximum location: X=-32.00, Y=-41.00 ; SAR Peak: 0.33 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.212
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.134539

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.324	0.221	0.137	0.083	0.055	0.035	0.022

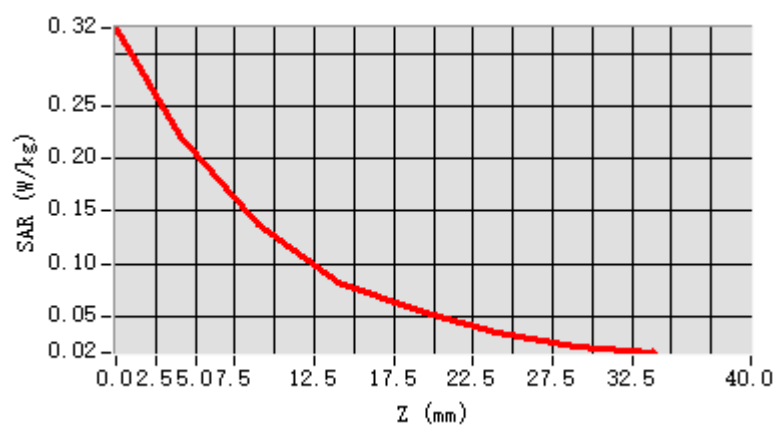


F. 3D Image

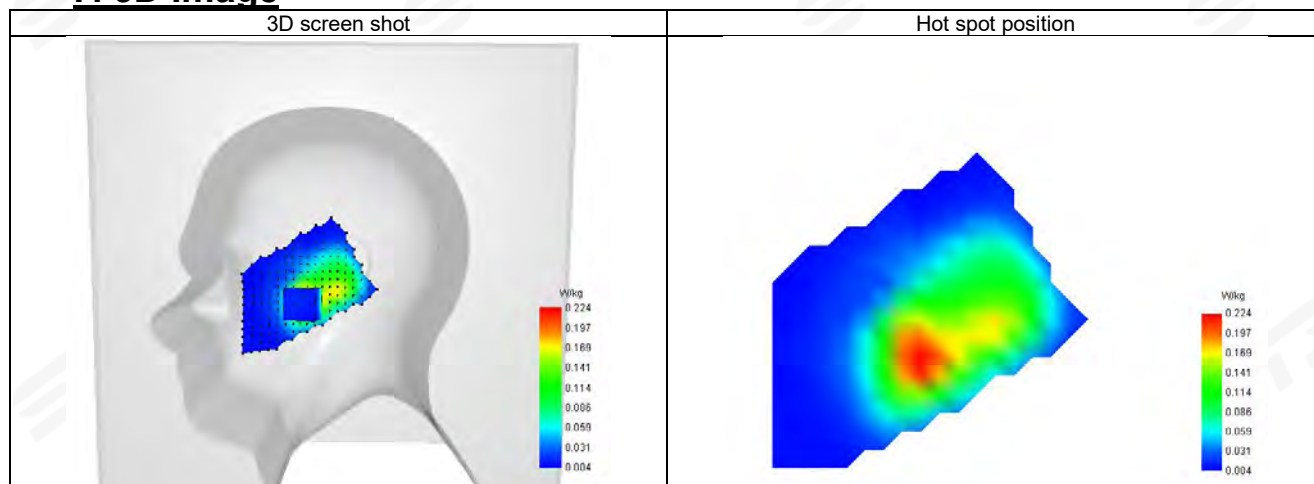

**Plot 38: DUT: Smart Phone; EUT Model: ROCK 2 Pro**


Test Date	2025-11-10
ConvF	1.33
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N78
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	3750
Relative permittivity (real part)	37.62
Conductivity (S/m)	3.15

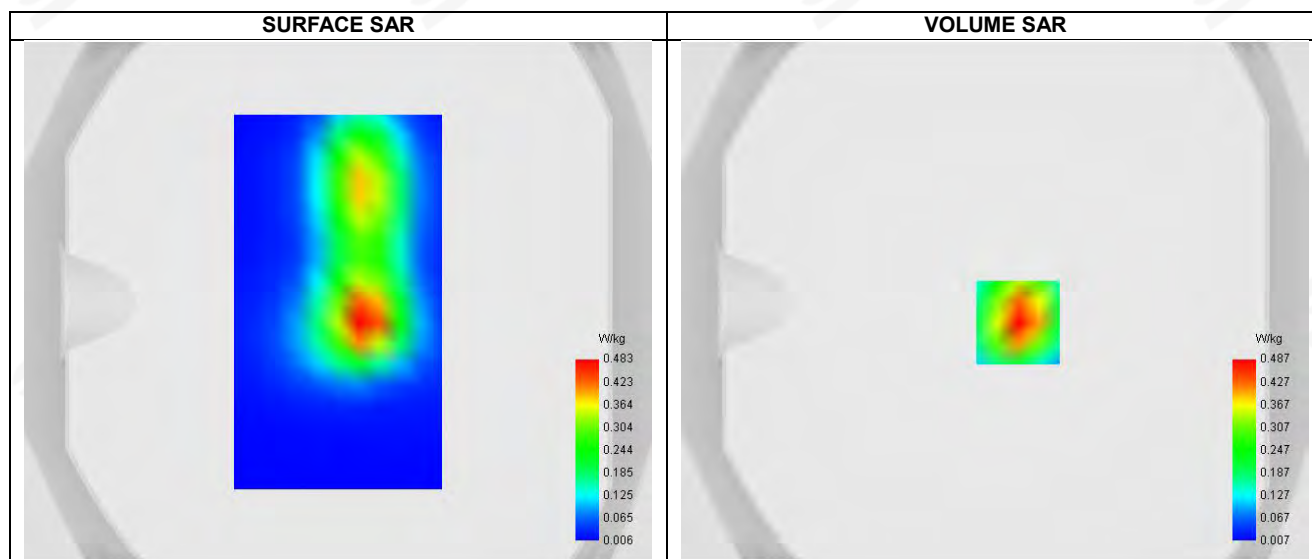**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.457
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.531539

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.772	0.487	0.266	0.149	0.082	0.046	0.025

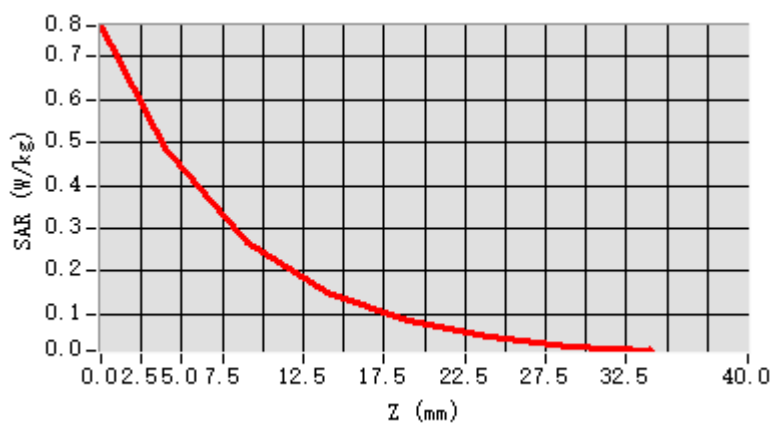


F. 3D Image

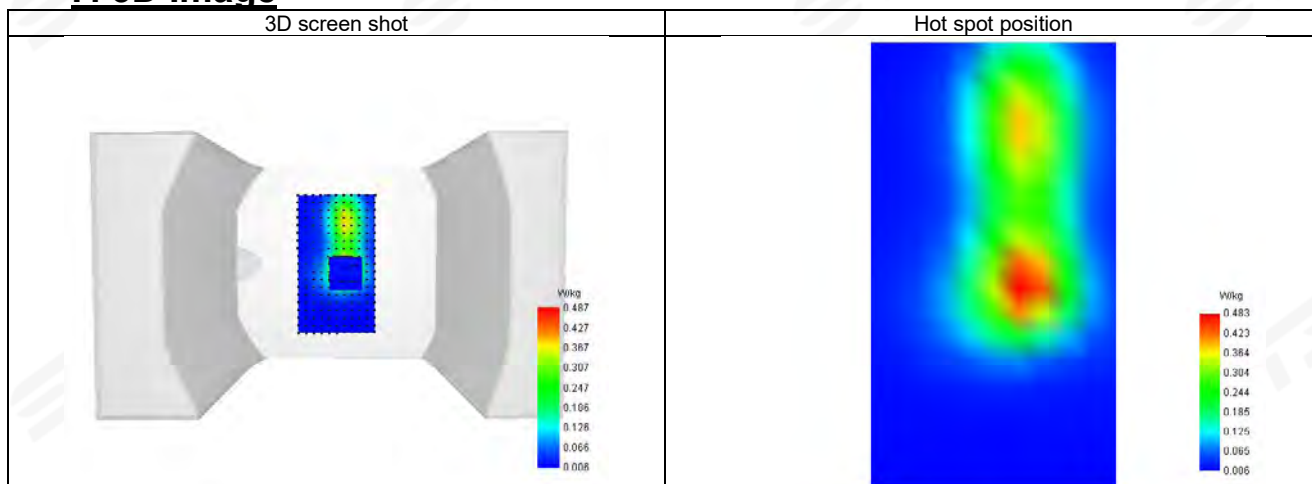

Plot 39: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-18
ConvF	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	38.98
Conductivity (S/m)	1.81

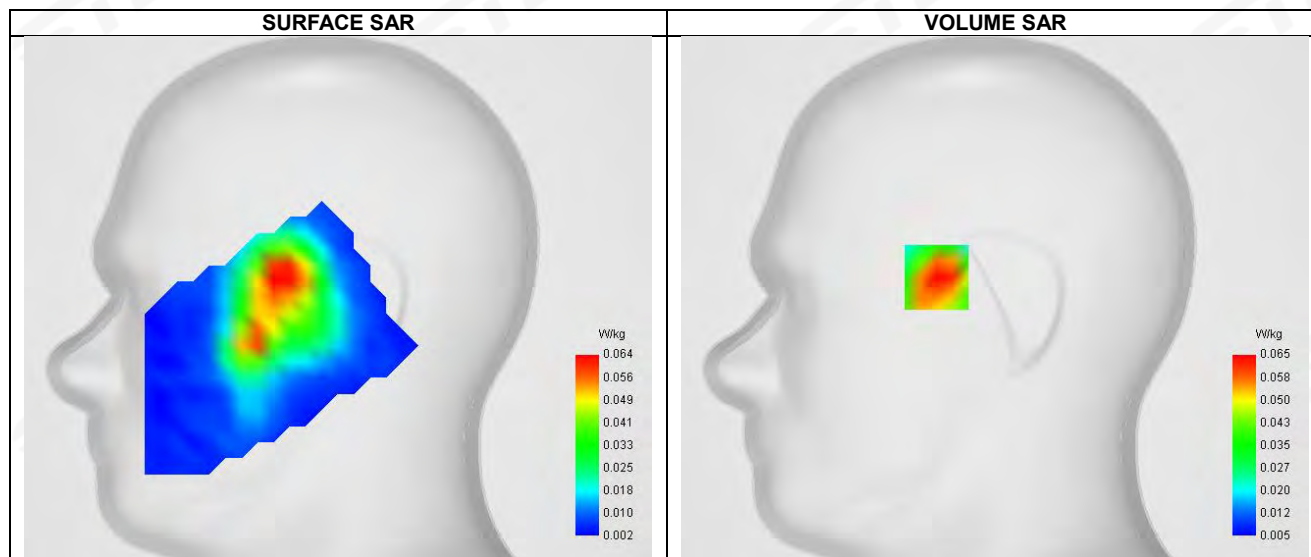


Maximum location: X=-29.00, Y=10.00 ; SAR Peak: 0.11 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.036
SAR 1g (W/Kg)	0.064
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	58.393814

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.106	0.065	0.038	0.022	0.019	0.013	0.009

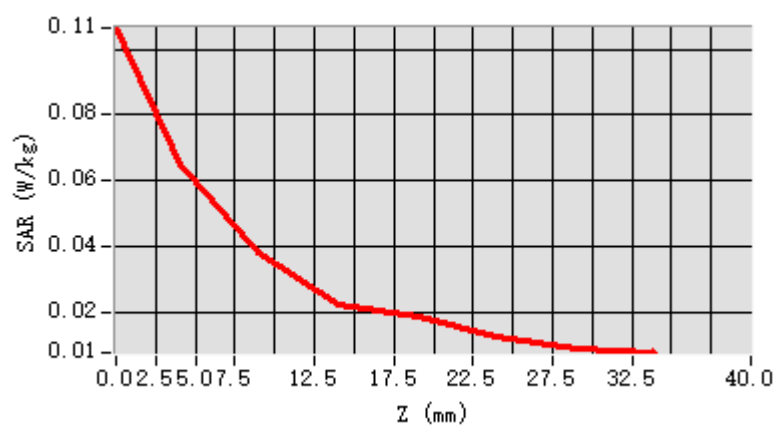


F. 3D Image

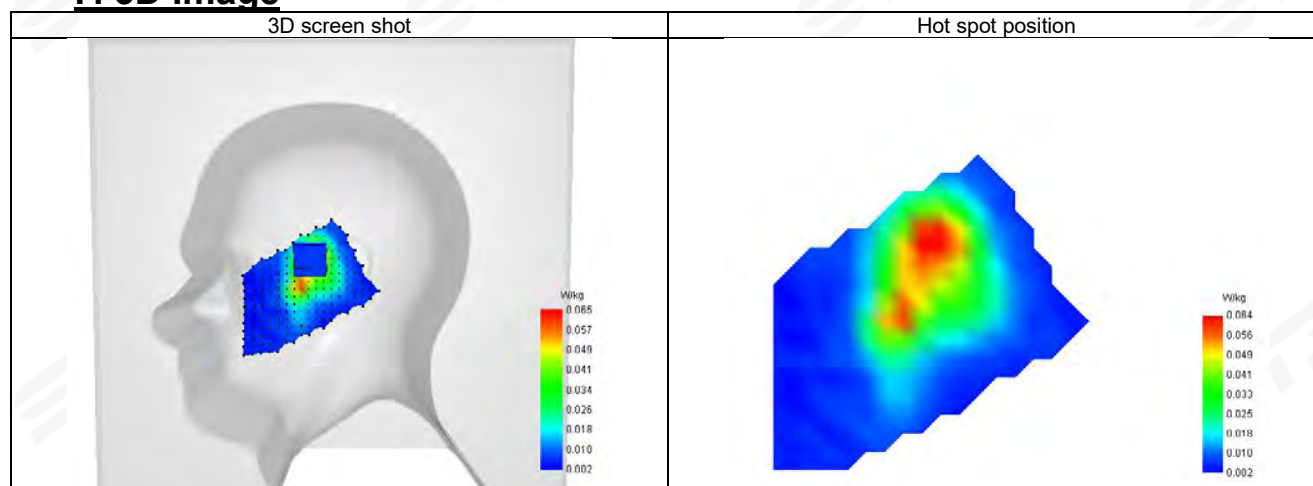

**Plot 40: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-18
ConvF	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	38.98
Conductivity (S/m)	1.81

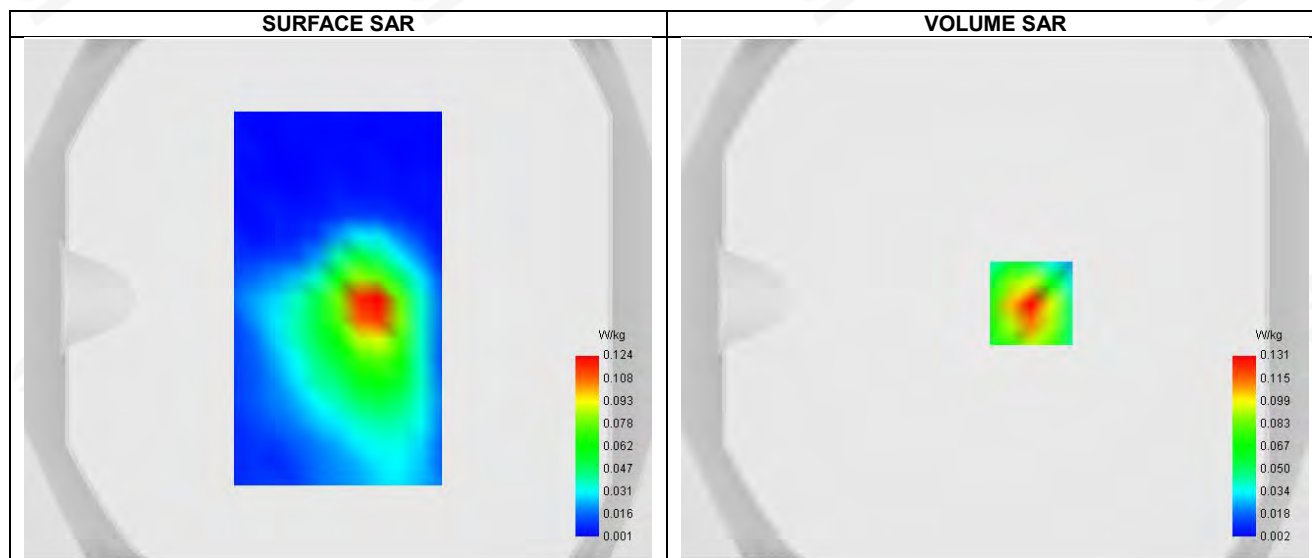


Maximum location: X=14.00, Y=-2.00 ; SAR Peak: 0.21 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.061
SAR 1g (W/Kg)	0.121
Variation (%)	1.010
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	53.746091
XM1	14.000000
YM1	-2.000000
ZM1	4.000000
XM2	14.000000
YM2	-2.000000
ZM2	9.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.211	0.131	0.071	0.040	0.022	0.012	0.007

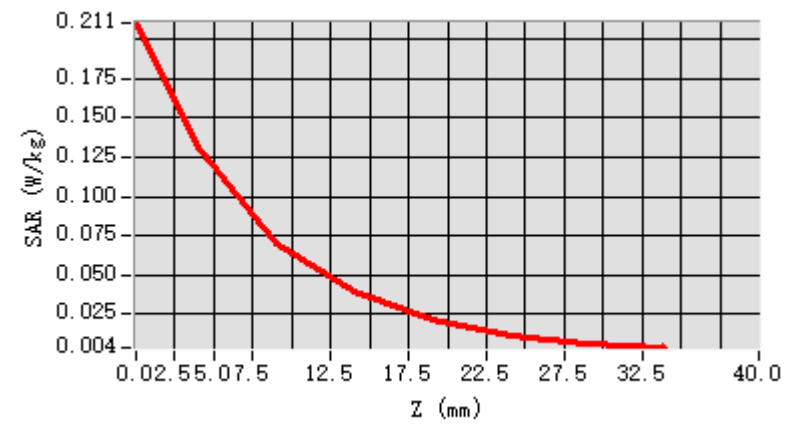


F. 3D Image

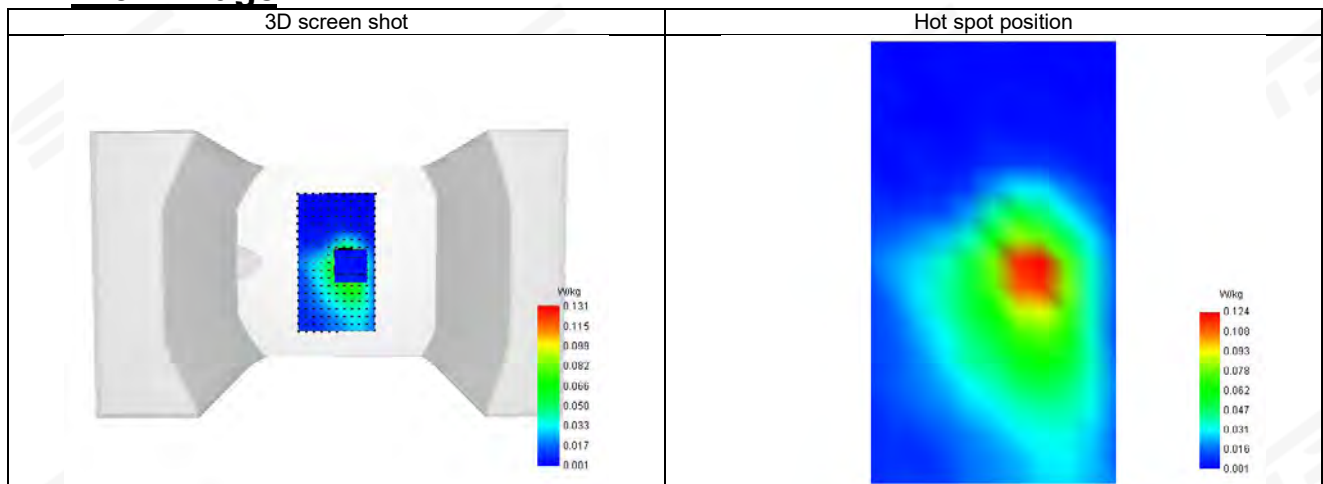

Plot 41: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-23
ConvF	1.37
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	802.11 n-HT20
Signal	802.11 n-HT20 (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.87
Conductivity (S/m)	4.65

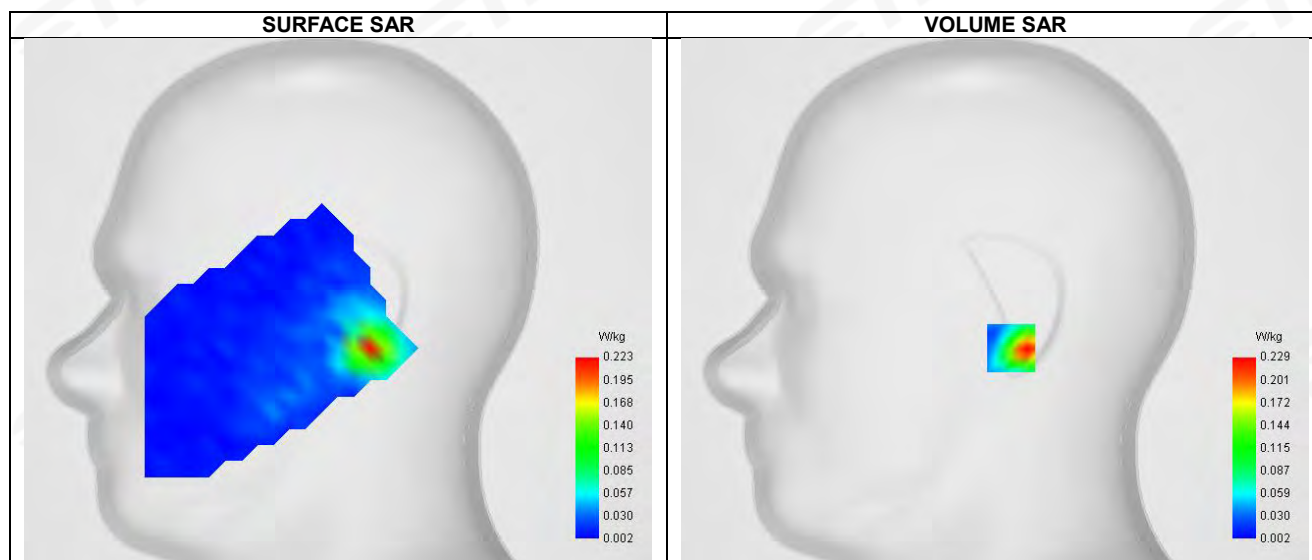


Maximum location: X=8.00, Y=-24.00 ; SAR Peak: 0.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.244
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	51.226548

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.392	0.229	0.035	0.084	0.020	0.033	0.012	0.013	0.007	0.005	0.004	0.004	0.002

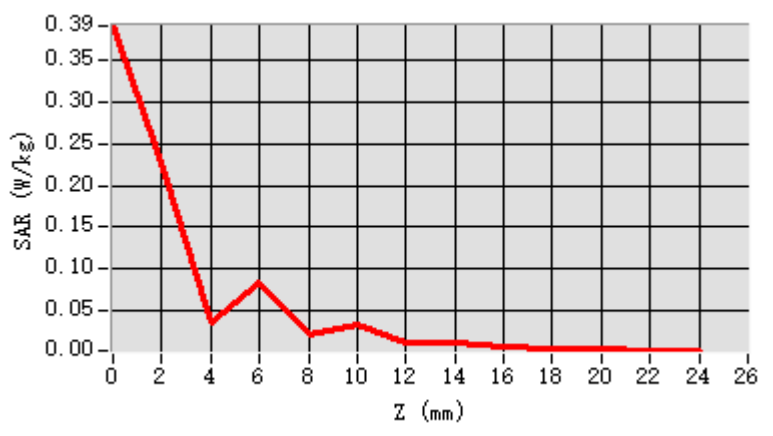


F. 3D Image

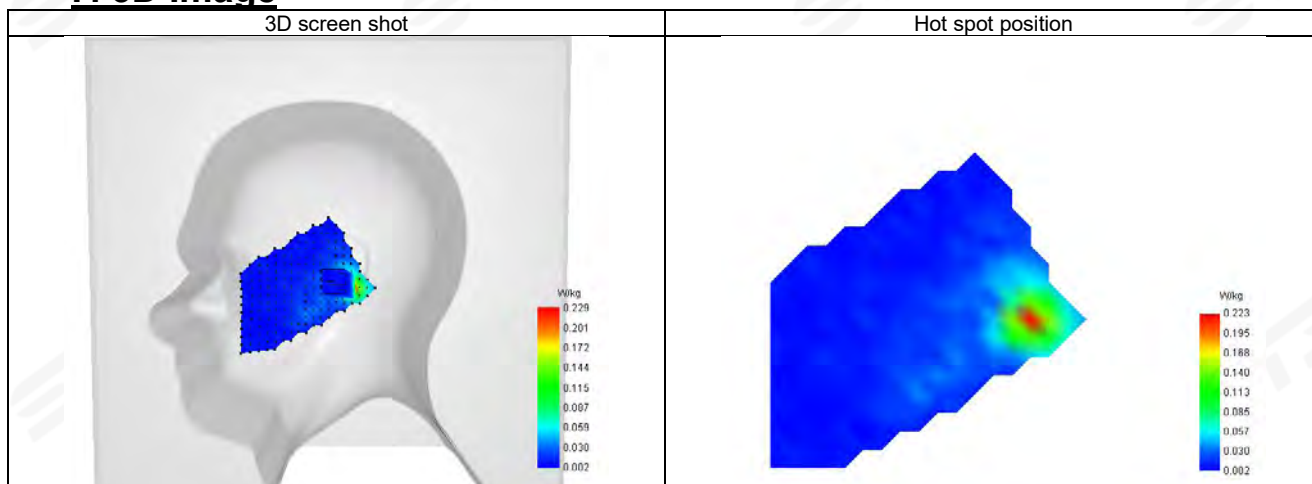



Plot 42: DUT: Smart Phone; EUT Model: ROCK 2 Pro


Test Date	2025-11-23
ConvF	1.37
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.87
Conductivity (S/m)	4.65

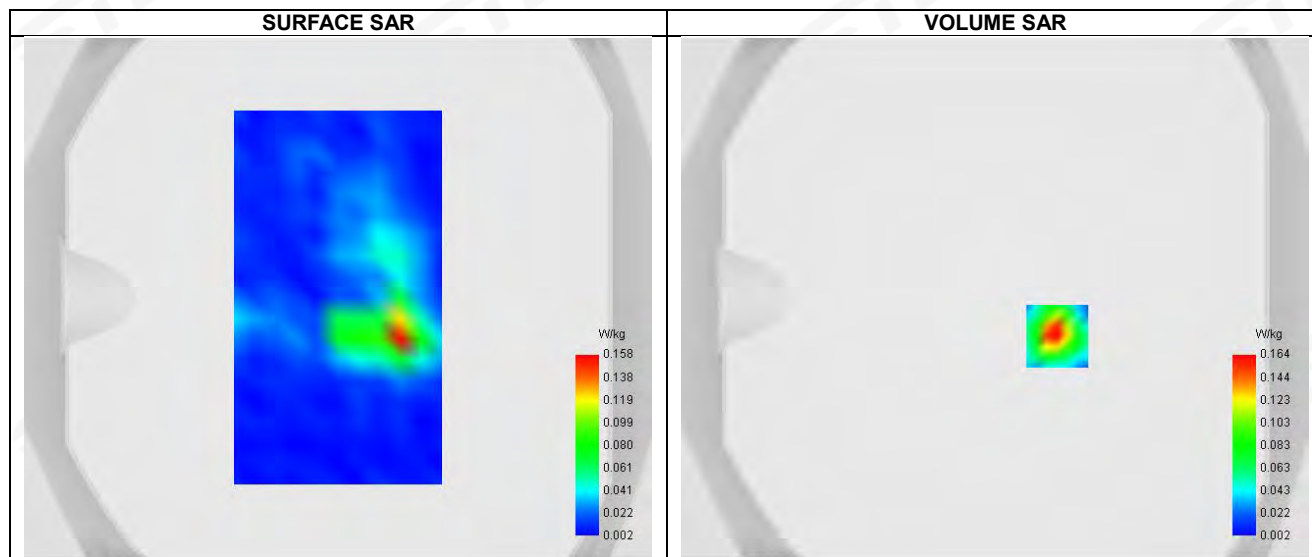**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.040
SAR 1g (W/Kg)	0.115
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.628766

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.235	0.164	0.088	0.082	0.061	0.045	0.034	0.025	0.019	0.014	0.010	0.008	0.008


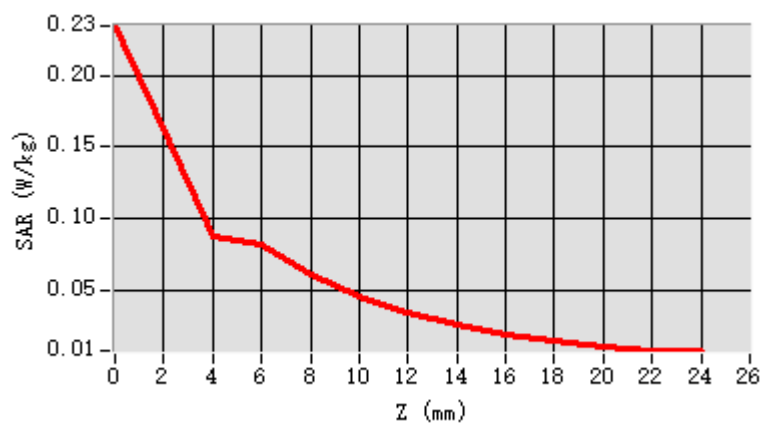


F. 3D Image

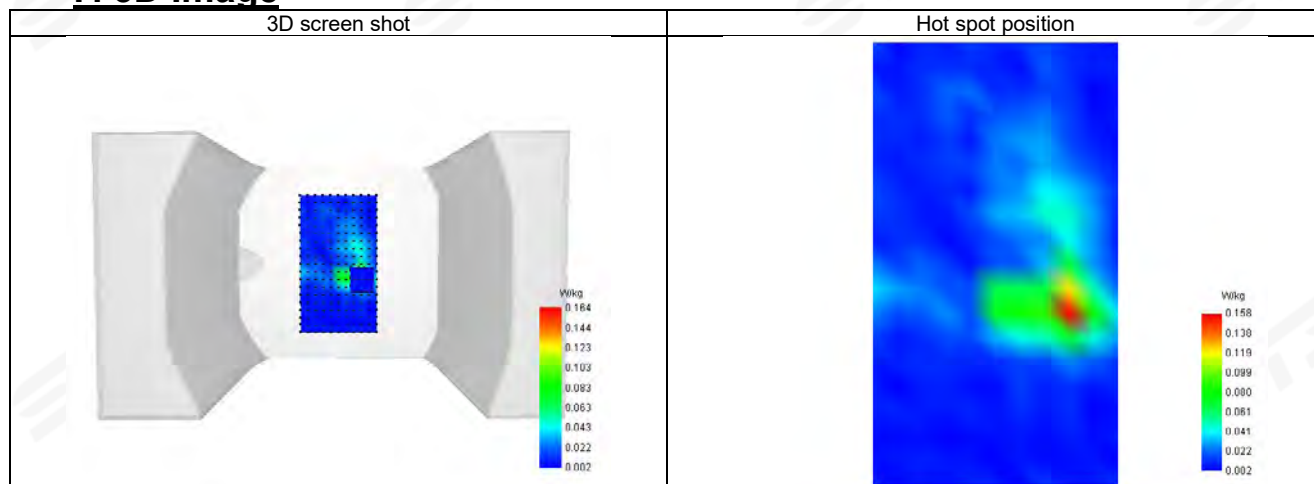



Plot 43: DUT: Smart Phone; EUT Model: ROCK 2 Pro

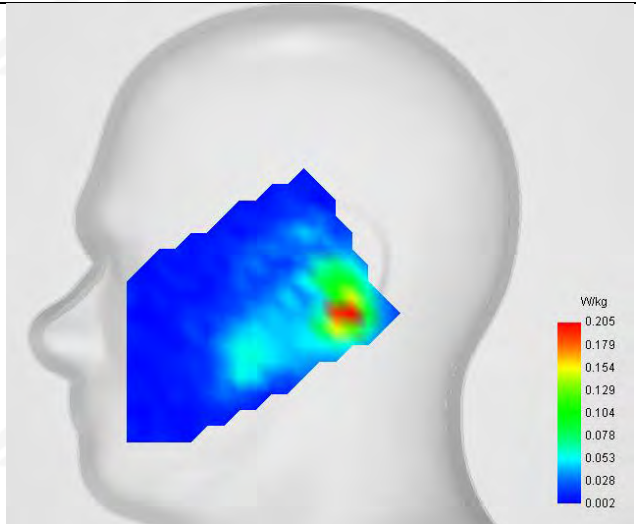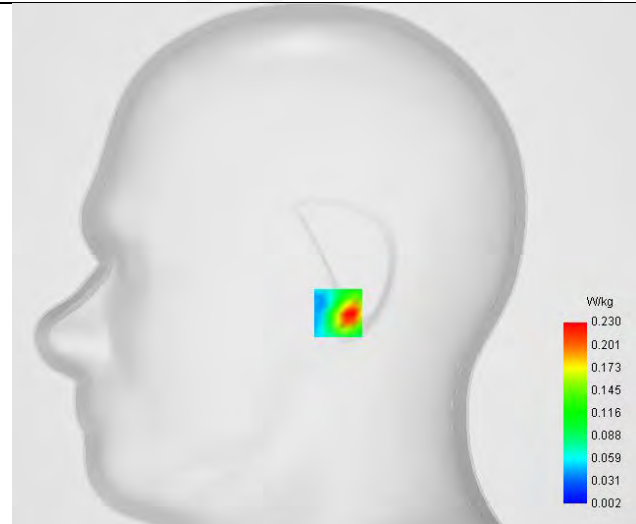Test Date	2025-11-23
ConvF	1.32
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	802.11 n-HT20
Signal	802.11 n-HT20 (Crest factor: 1.0)
Frequency (MHz)	5785
Relative permittivity (real part)	34.76
Conductivity (S/m)	5.24
SURFACE SAR	VOLUME SAR
	


Maximum location: X=6.00, Y=-24.00 ; SAR Peak: 0.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.239
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	57.664092

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.407	0.230	0.042	0.070	0.027	0.061	0.018	0.034	0.012	0.019	0.008	0.010	0.010

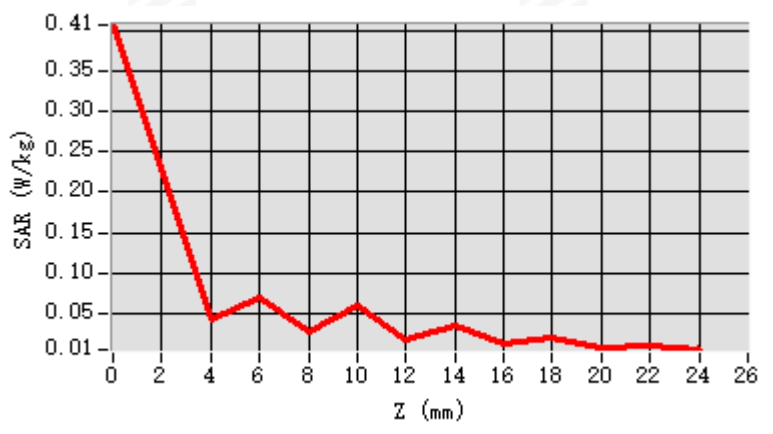


F. 3D Image

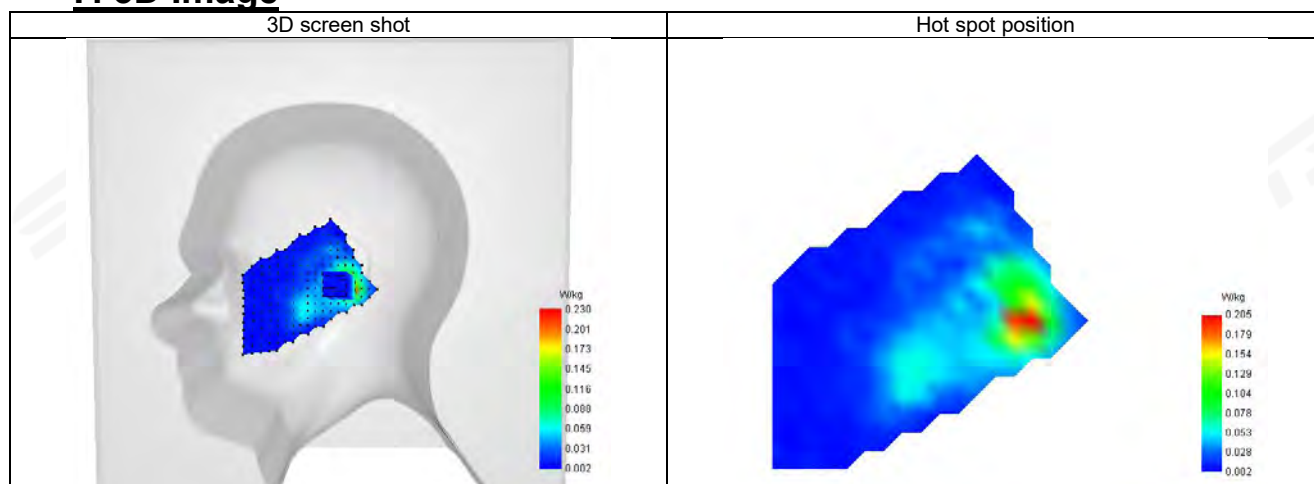



Plot 44: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-23
ConvF	1.32
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	802.11 n-HT20
Signal	802.11 n-HT20(Crest factor: 1.0)
Frequency (MHz)	5785
Relative permittivity (real part)	34.76
Conductivity (S/m)	5.24

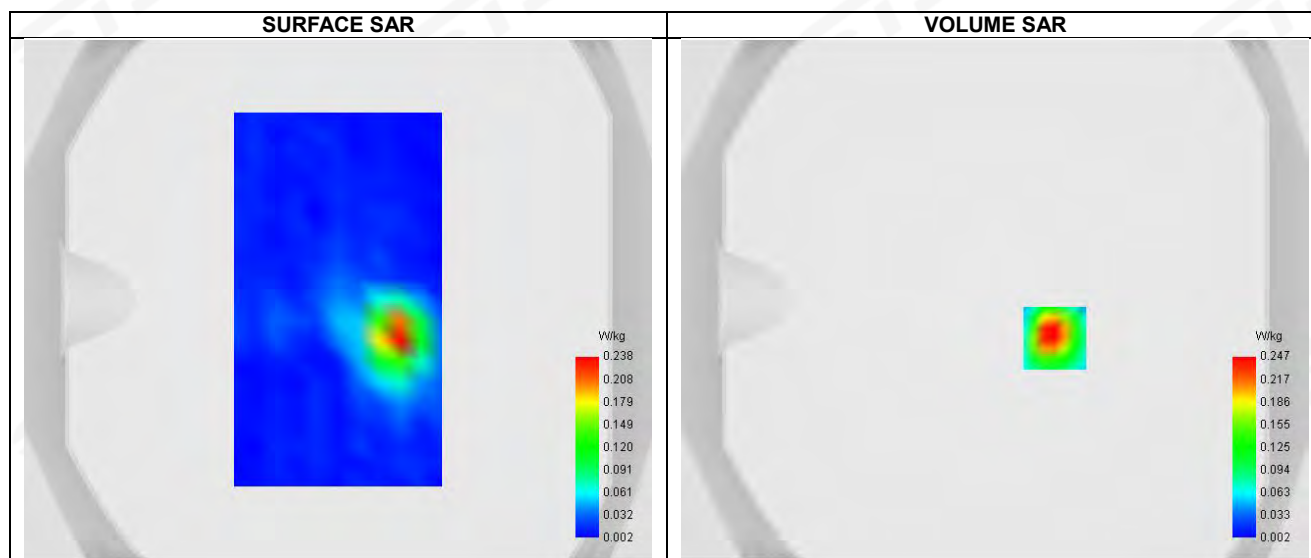

Maximum location: X=23.00, Y=-15.00 ; SAR Peak: 0.47 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.170
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.991991




E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.380	0.247	0.111	0.104	0.064	0.046	0.030	0.021	0.015	0.009	0.007	0.004

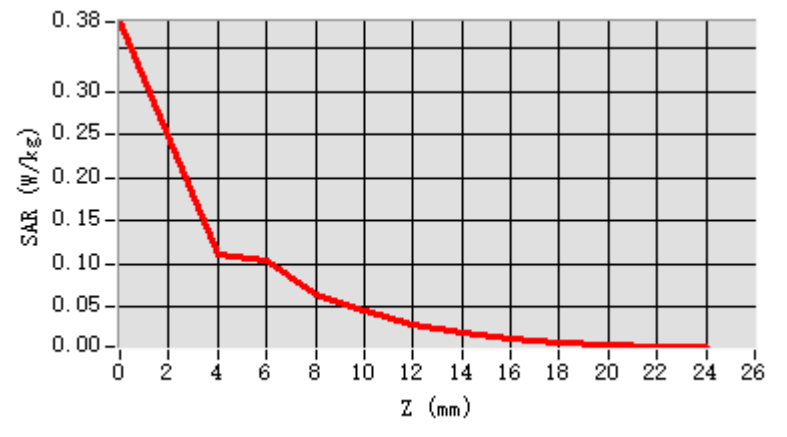


F. 3D Image

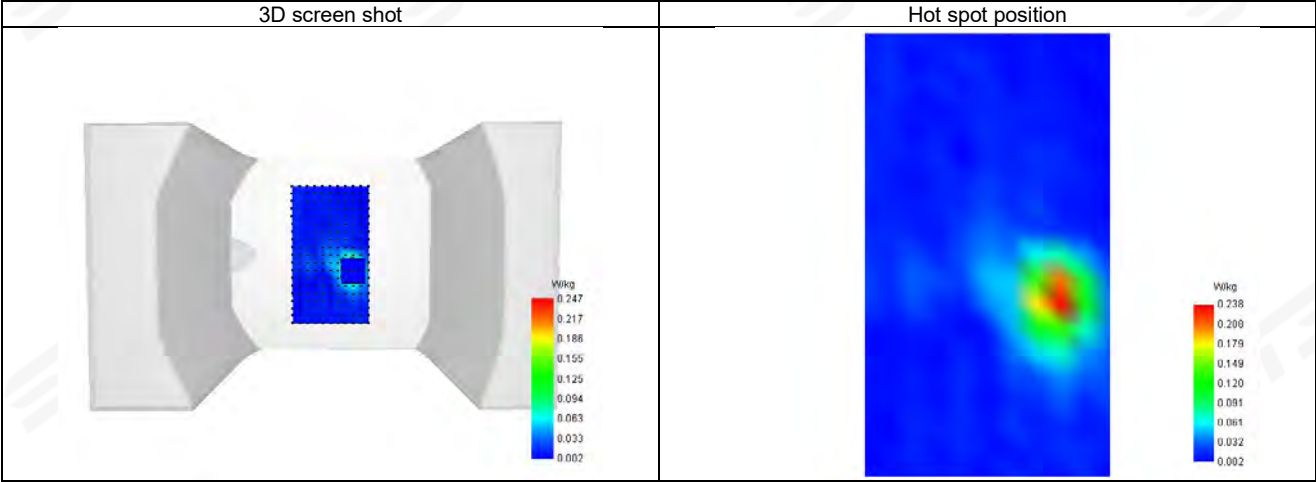

Plot 45: DUT: Smart Phone; EUT Model: ROCK 2 Pro

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	SA N26
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	831.5
Relative permittivity (real part)	42.22
Conductivity (S/m)	0.93

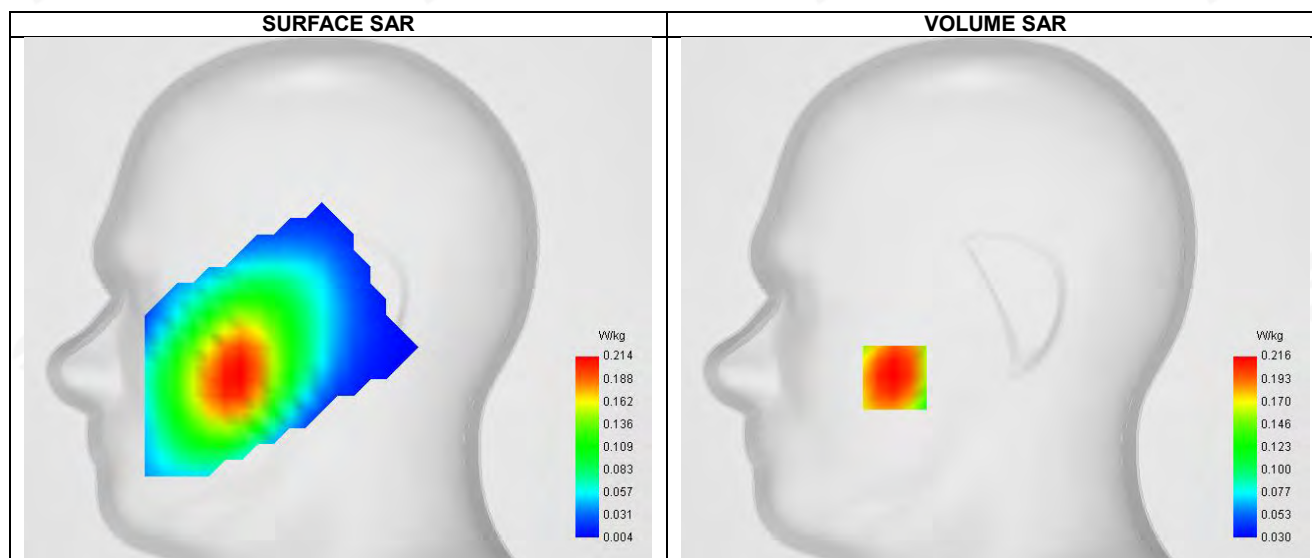


Maximum location: X=-50.00, Y=-39.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.161
SAR 1g (W/Kg)	0.210
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	81.081851

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.256	0.216	0.175	0.143	0.117	0.095	0.077

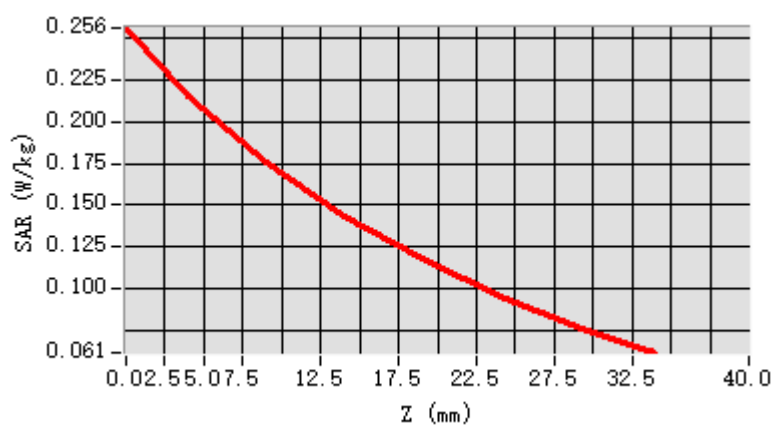


F. 3D Image

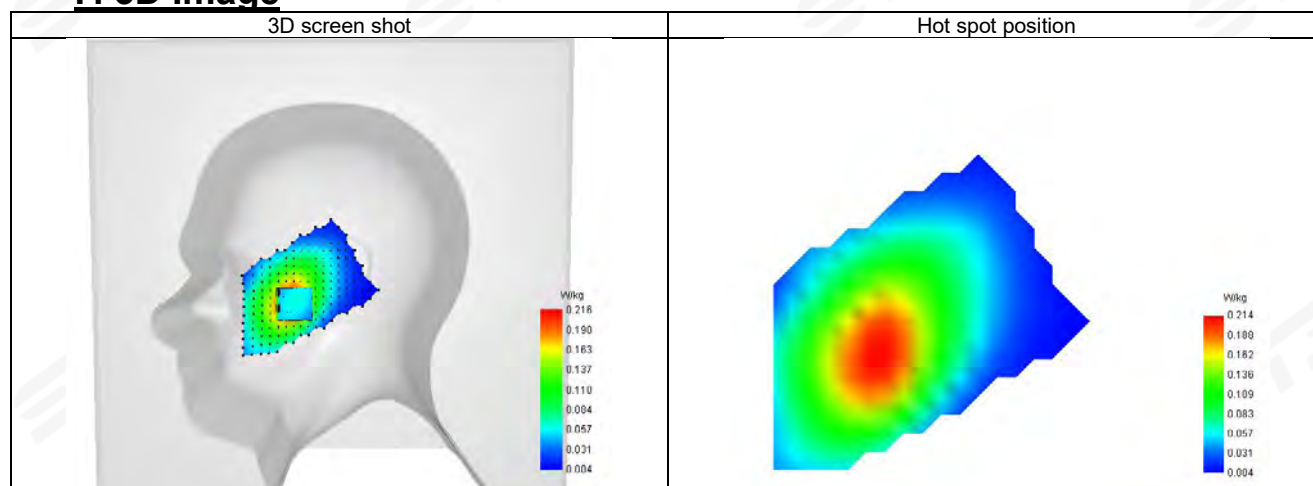

**Plot 46: DUT: Smart Phone; EUT Model: ROCK 2 Pro**

Test Date	2025-11-17
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	SA N26
Signal	SA (Crest factor: 1.0)
Frequency (MHz)	831.5
Relative permittivity (real part)	42.22
Conductivity (S/m)	0.93

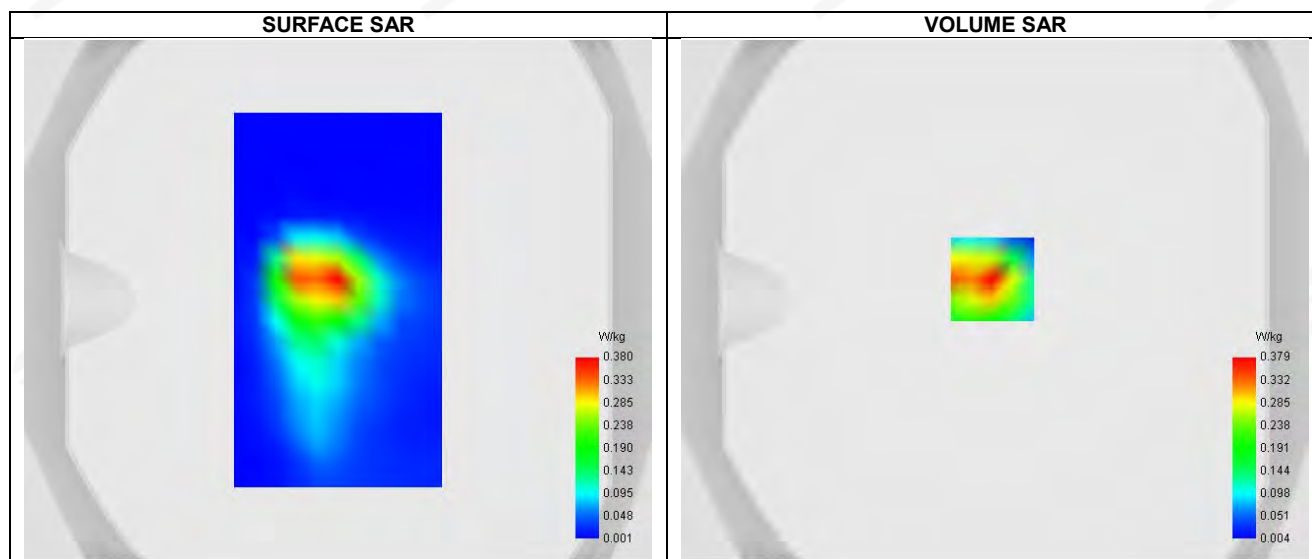


Maximum location: X=-1.00, Y=8.00 ; SAR Peak: 0.69 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.353
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	43.092970

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.698	0.379	0.162	0.086	0.042	0.020	0.010

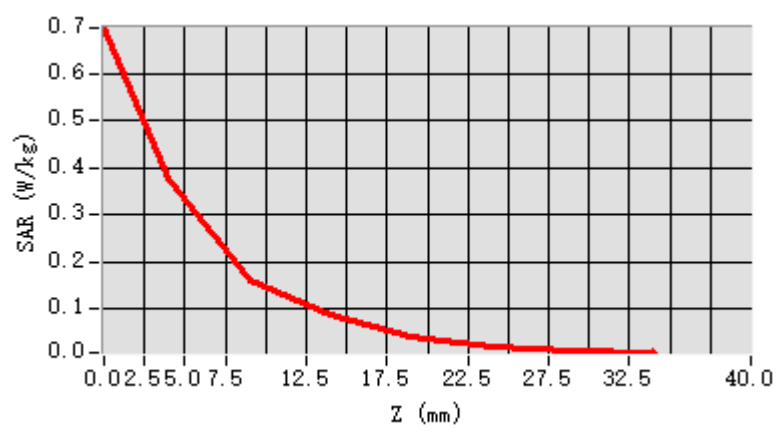

F. 3D Image

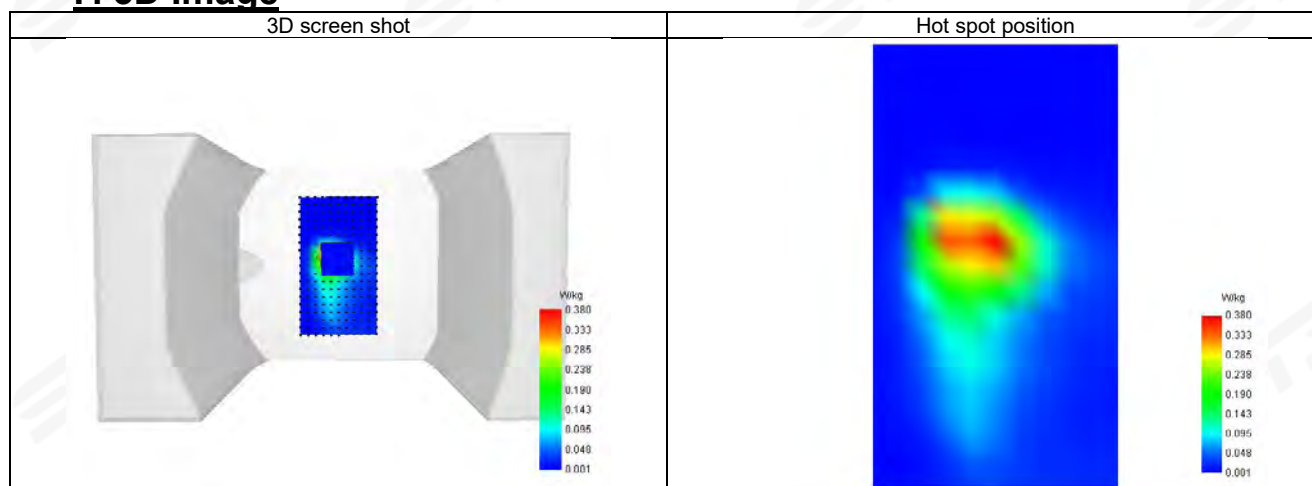



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※